



◎ P.C.B. THICKNESS: 1.6 mm

◎ HOLE IN P.C.B.: $\phi 3.4$

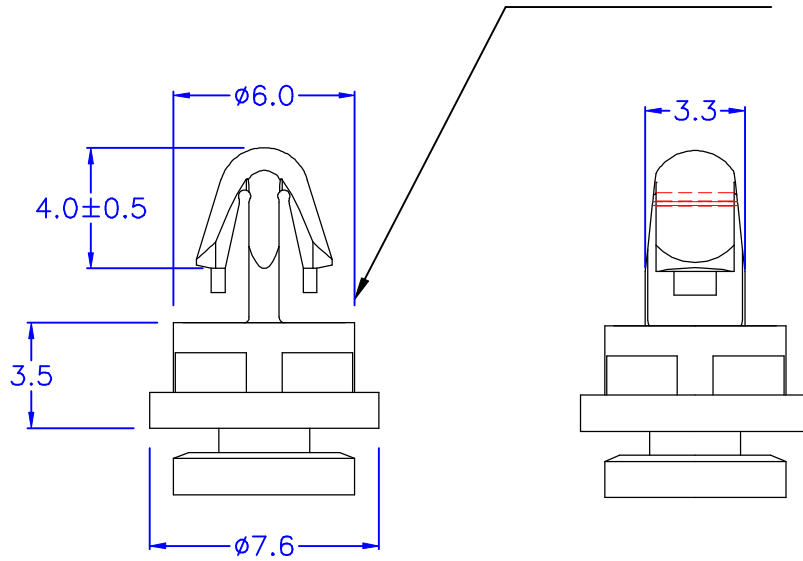

◎ HOLE IN P.C.B.:

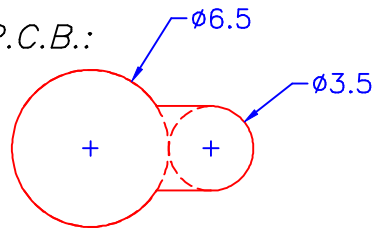

◎ P.C.B. THICKNESS: 0.6 mm

◎Halogen Free 低鹵

◎ROHS 2.0

◎ROHS 六項 compliant

DRAW NO. PGAS026460

GJS

| | |
|--------------------|------|
| PLASTIC TOLERANCE: | |
| L ≤ 10 | ±0.2 |
| 10 < L ≤ 30 | ±0.3 |
| 30 < L ≤ 50 | ±0.5 |
| 50 < L ≤ 100 | ±0.7 |
| 100 < L ≤ 250 | ±1.2 |
| ABOVE 250 | ±1.5 |

網頁圖示供參考, 最終以品固公司正式圖面為主
The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.

MATERIAL: N66 V2 or EQUIVALENT

PART NAME:

P.C. 板間隔柱
SPACER SUPPORT

A
SIZE

VERSION


2

COLOR: NATURAL

PART NO:

ACMS-3RK-N2W

SHEET 1 OF 1



| | |
|------|-------|
| UNIT | SCALE |
| mm | |