


◎ MAXIMUM THICKNESS: 1.3 mm

◎ HOLE IN CHASSIS:

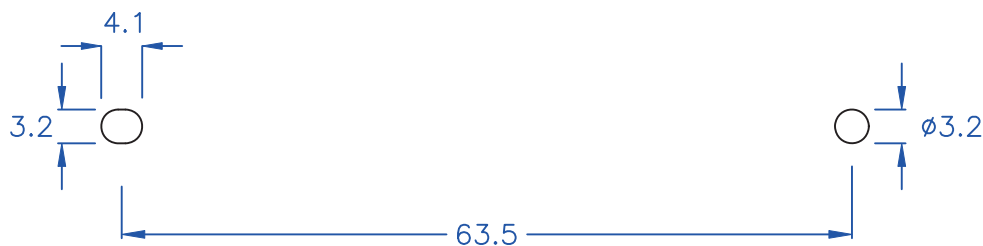

- ◎ Halogen Free 低鹵
- ◎ ROHS 2.0
- ◎ ROHS 六項 compliant

DRAW NO. PGAS031976 GJS

| | | |
|--|--|--|
| PLASTIC TOLERANCE: $L \leq 10$ ± 0.2 $10 < L \leq 30$ ± 0.3 $30 < L \leq 50$ ± 0.5 $50 < L \leq 100$ ± 0.7 $100 < L \leq 250$ ± 1.2 ABOVE 250 ± 1.5 | 網頁圖示供參考, 最終以品固公司正式圖面為主 The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD. | |
| | MATERIAL: N66 V2 or EQUIVALENT | |
| | COLOR: NATURAL | |
| | | |



品固企業股份有限公司
 品基電子(東莞)有限公司
 蘇州品基電子科技有限公司
 東莞市鑽隆商貿有限公司
 PINGOOD ENTERPRISE CO.,LTD.

| | | |
|--|--|--|
| PART NAME: 印刷電路板導槽 PCB GUIDE RAIL | | VERSION A SIZE 3B |
| PART NO: CG-7B | | |
| SHEET 1 OF 1 | | |

| | | |
|--|------|-------|
| | UNIT | SCALE |
| | mm | |