


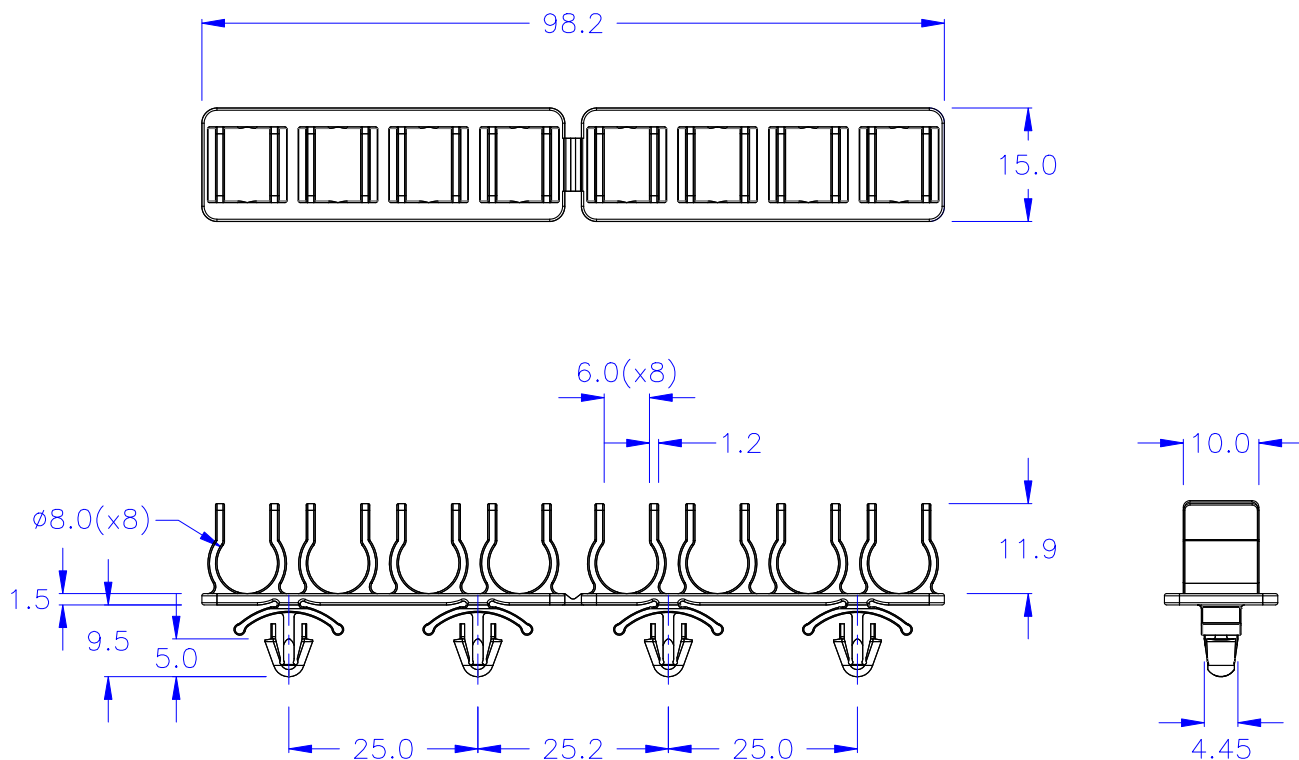

◎ HOLE IN CHASSIS: $\phi 4.6^{+0.05}_{-0}$ mm
 ○ CHASSIS THICKNESS: 1.2~2.0 mm

◎Halogen Free 低鹵
 ◎RoHS Compliant

DRAW NO. PGAS045519

GJS

PLASTIC TOLERANCE:

$L \leq 10 \pm 0.2$
 $10 < L \leq 30 \pm 0.3$
 $30 < L \leq 50 \pm 0.5$
 $50 < L \leq 100 \pm 0.7$
 $100 < L \leq 250 \pm 1.2$
 ABOVE 250 ± 1.5

網頁圖示供參考,最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: PA66(N66) V0 or EQUIVALENT

COLOR: BLACK



品固企業股份有限公司
 品基電子(東莞)有限公司
 蘇州品基電子科技有限公司
 東莞市鑽隆商貿有限公司
 鑽隆有限公司
 PINGOOD ENTERPRISE CO.,LTD.

PART NAME:


隔離束線座
 WIRE SADDLE

PART NO:

CTX-98A-NOB

A
 SIZE

VERSION



UNIT
 mm

SCALE