


PIN SIZE

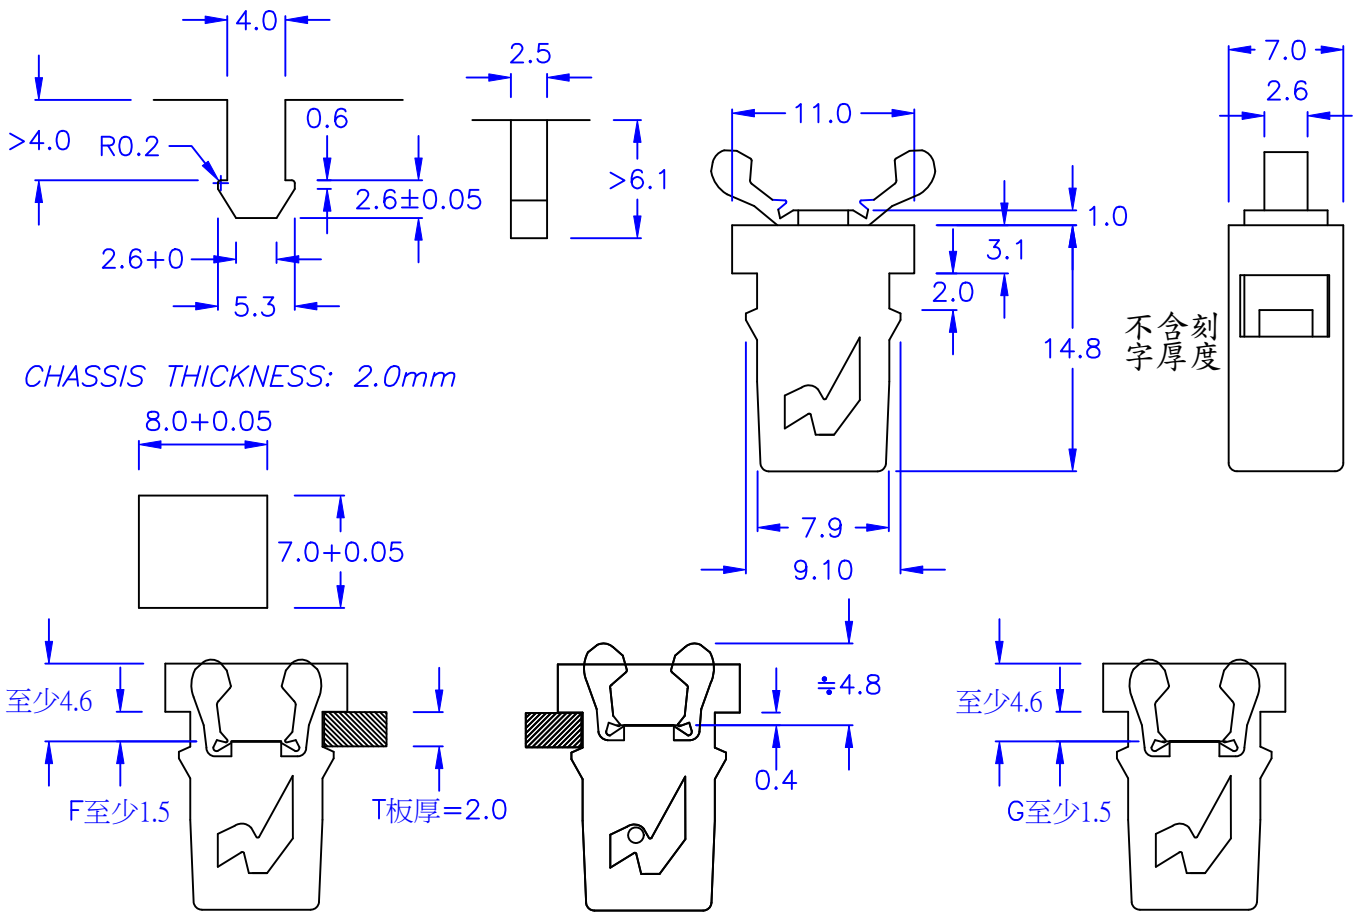

夾子欲下壓產生扣住功能時
行程距離卡板頂端衝程F至少需1.5mm
(F最大值1.8)

夾子扣住時
夾子頂端位置
距離卡板頂端0.4mm

夾子扣住後欲退出
夾子需再下壓解除扣住功能
行程距離卡板頂端衝程G至少需
1.5mm
(G最大值1.8)

◎常溫耐久承受力0.25kg

◎Halogen Free 低鹵

DRAW NO. PGAS029637

GJS

PLASTIC TOLERANCE:	
L ≤ 10	±0.2
10 < L ≤ 30	±0.3
30 < L ≤ 50	±0.5
50 < L ≤ 100	±0.7
100 < L ≤ 250	±1.2
ABOVE 250	±1.5

網頁圖示供參考,最終以品固公司正式圖面為主
The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
東莞市鑽隆商貿有限公司
PINGOOD ENTERPRISE CO.,LTD.


外殼材質: PC V2 or EQUIVALENT
夾子材質: N66 V2 or EQUIVALENT
COLOR: BLACK

PART NAME:
門扣
PUSH LATCH

A SIZE	VERSION
	5B

PART NO:
DL-400D

SHEET 1 OF 1



UNIT	SCALE
mm	