



◎ HOLE IN CHASSIS:  $\phi 3.4$  mm  
 ◎ CHASSIS THICKNESS: 0.8 mm

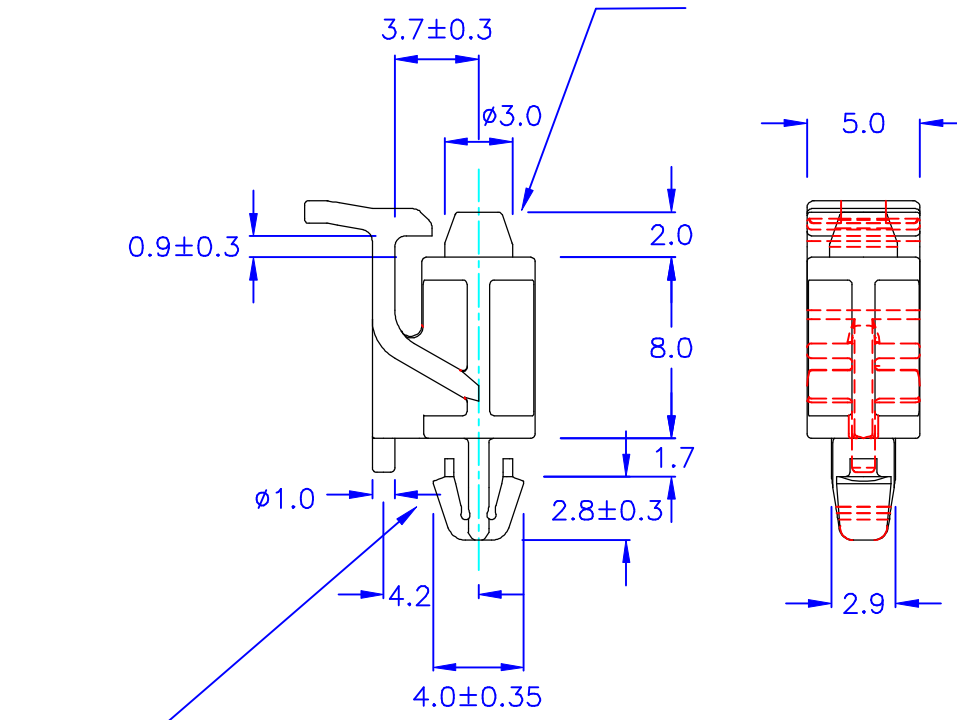

◎ HOLE IN CHASSIS:

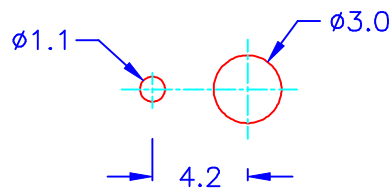

◎ CHASSIS THICKNESS: 1.6 mm

◎ Halogen Free 低鹵  
 ◎ ROHS 2.0  
 ◎ ROHS 六項 compliant

DRAW NO. PGAS022442 GJS

|                    |      |
|--------------------|------|
| PLASTIC TOLERANCE: |      |
| L ≤ 10             | ±0.2 |
| 10 < L ≤ 30        | ±0.3 |
| 30 < L ≤ 50        | ±0.5 |
| 50 < L ≤ 100       | ±0.7 |
| 100 < L ≤ 250      | ±1.2 |
| ABOVE 250          | ±1.5 |

網頁圖示供參考, 最終以品固公司正式圖面為主  
 The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.



品固企業股份有限公司  
 品基電子(東莞)有限公司  
 蘇州品基電子科技有限公司  
 鑽隆有限公司  
 PINGOOD ENTERPRISE CO.,LTD.

MATERIAL: N66 V2 or EQUIVALENT  
 COLOR: BLACK

PART NAME:  
 P.C. 板間隔柱  
 SPACER SUPPORT

|           |         |
|-----------|---------|
| A<br>SIZE | VERSION |
|           | 1       |

PART NO:  
 LMR-08-N2B

SHEET 1 OF 1

|  |      |       |
|--|------|-------|
|  | UNIT | SCALE |
|  | mm   |       |