


$\phi 3.2^{+0.05}_{-0}$
 ◎ HOLE IN P.C.B.:
 4.8 ± 0.05
 ◎ P.C.B. THICKNESS: $1.6^{+0}_{-0.05}$ mm

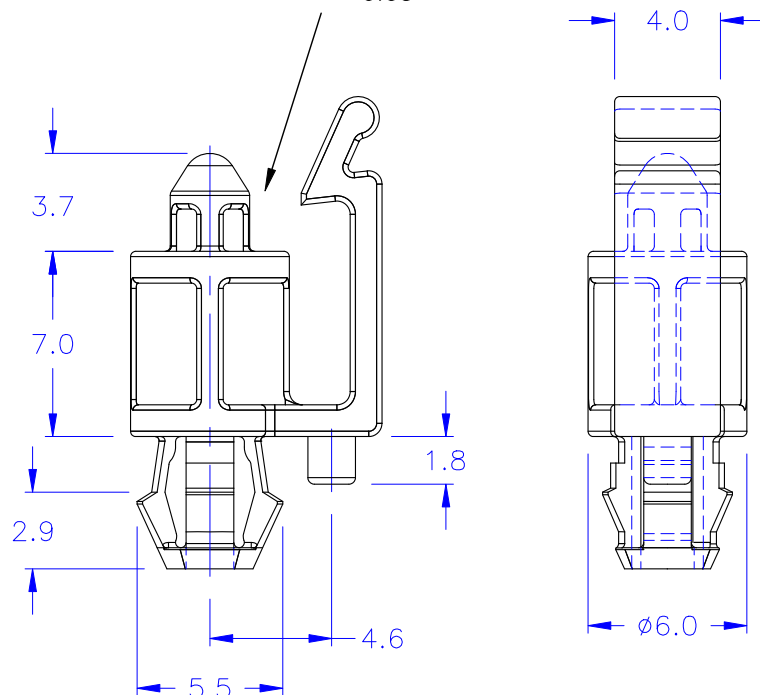

◎ HOLE IN P.C.B.:
 4.6 ± 0.05
 $\phi 4.2^{+0.05}_{-0}$
 $\phi 2.0^{+0.05}_{-0}$
 ◎ P.C.B. THICKNESS: $1.7^{+0}_{-0.05}$ OR $1.9^{+0}_{-0.05}$ mm

◎ Halogen Free 低鹵
 ◎ ROHS 2.0
 ◎ ROHS 六項 compliant

DRAW NO. PGAS038479 GJS

PLASTIC TOLERANCE:

$L \leq 10$	± 0.2
$10 < L \leq 30$	± 0.3
$30 < L \leq 50$	± 0.5
$50 < L \leq 100$	± 0.7
$100 < L \leq 250$	± 1.2
ABOVE 250	± 1.5

網頁圖示供參考,最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: N66 V2 or EQUIVALENT

COLOR: BLACK



品固企業股份有限公司
 品基電子(東莞)有限公司
 蘇州品基電子科技有限公司
 東莞市品隆商貿有限公司
 鑽隆有限公司
 PINGOOD ENTERPRISE CO.,LTD.

PART NAME:


P.C. 板間隔柱
 SPACER SUPPORT

PART NO:

LMW-07-N2B

A
 SIZE

VERSION



UNIT
 mm
 SCALE