





◎ HOLE IN P.C.B.:

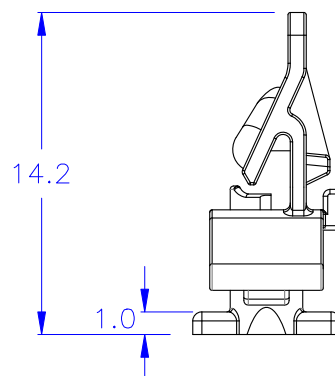

◎ P.C.B. THICKNESS:  $0.8 \pm 0.08$  mm

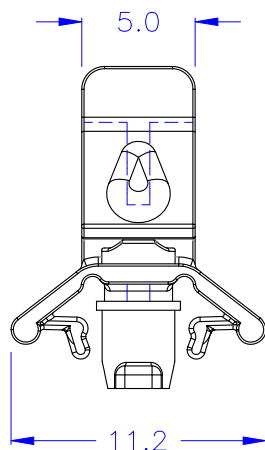

◎ HOLE IN P.C.B.:

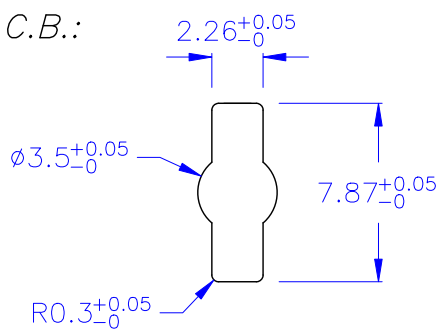

P.C.B. THICKNESS: 1.8~2.2 mm

◎Halogen Free 低鹵  
◎RoHS Compliant

DRAW NO. PGAS043457

GJS

PLASTIC TOLERANCE:

|                    |           |
|--------------------|-----------|
| $L \leq 10$        | $\pm 0.2$ |
| $10 < L \leq 30$   | $\pm 0.3$ |
| $30 < L \leq 50$   | $\pm 0.5$ |
| $50 < L \leq 100$  | $\pm 0.7$ |
| $100 < L \leq 250$ | $\pm 1.2$ |
| ABOVE 250          | $\pm 1.5$ |

網頁圖示供參考,最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: PA66(N66) V2 or EQUIVALENT

COLOR: BLUE(PANTONE:2393C)



品固企業股份有限公司  
品基電子(東莞)有限公司  
蘇州品基電子科技有限公司  
東莞市品隆商貿有限公司  
鑽隆有限公司  
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:


M. 2卡固定扣  
SPACER SUPPORT

PART NO:

LSZQ-2GF-N2Y

A  
SIZE

VERSION



UNIT  
mm

SCALE