



CLASSIFICATION: INVOLUTE GEAR
 STYLE: SPLINE
 PRESSURE ANGLE: 20°
 TOOTH NUMBER: 12
 PITCH DIAMETER: ϕ 12.0
 MODULE: 1.0

AVAILABLE TORQUE: 600±120 gf-cm (23°C)

THE ROTATION RATE: 15 RPM

OUTSIDE DIAMETER: ϕ 14.6

* The temperature and R.P.M
 will be affected the torque

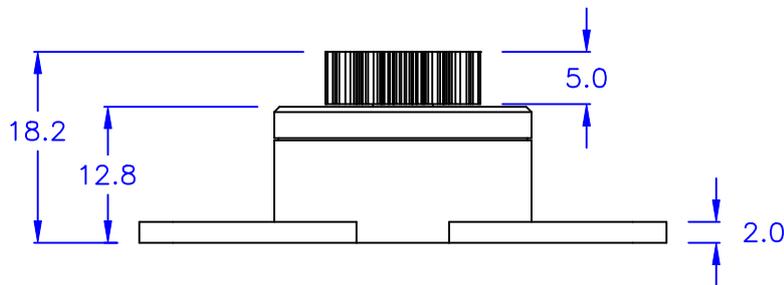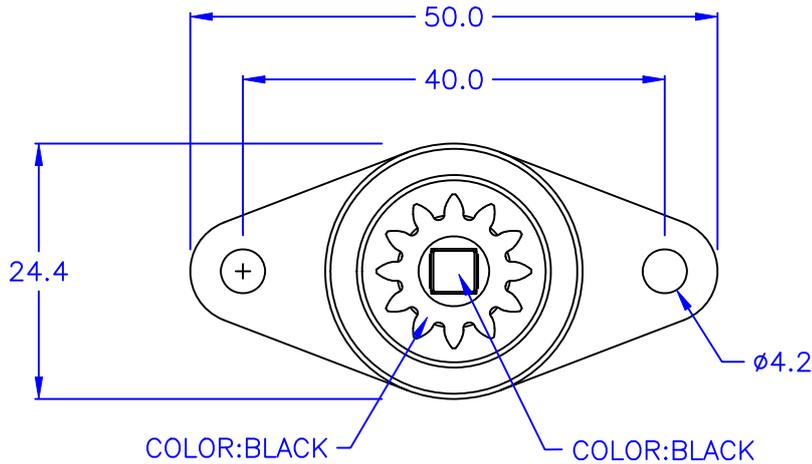

©Halogen

DRAW NO. PGAS030090

GJS

PLASTIC TOLERANCE:		
L ≤ 10	±0.2	
10 < L ≤ 30	±0.3	
30 < L ≤ 50	±0.5	
50 < L ≤ 100	±0.7	
100 < L ≤ 250	±1.2	
ABOVE 250	±1.5	

網頁圖示供參考，最終以品固公司正式圖面為主
 The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.



品固企業股份有限公司
 品基電子(東莞)有限公司
 蘇州品基電子科技有限公司
 東莞市鑽隆商貿有限公司
 PINGOOD ENTERPRISE CO.,LTD.

MATERIAL:
 POM 94HB or EQUIVALENT
 PC V2 or EQUIVALENT

PART NAME:
 ROTARY DAMPER

A SIZE	VERSION
	1

	UNIT	SCALE
	mm	

COLOR: BLACK

PART NO: PG-20-600B

SHEET 1 OF 1