PLASTIC ELECTRONIC PRODUCTS

電子電腦塑膠零件
固扣件專業設計製造廠

品固 品基

2026 45th PINGOOD

IATF 16949 ISO 9001 ISO 14001 QC080000



Pingood品固 塑膠固扣件

共同設計開發製造、共同設計服務製造 JDVM, JDSM

PINGOOD ENTERPRISE CO., LTD.
NO.8,ALLEY 1,LANE 768,SEC.4 PATEH RD.,NANGAN DIST.,TAIPEI,115027 TAIWAN
TEL: 886-2-27885767 FAX: 886-2-27885768 http://www.pingood.com.tw



蘇州品基電子科技有限公司
FACTORY: SUZHOU,CHINA



品固企業股份有限公司 台北總公司
HEADQUARTERS: TAIPEI,TAIWAN



品基電子 (東莞) 有限公司
FACTORY: DONGGUAN,CHINA



品固企業股份有限公司 中壢工廠
FACTORY: ZHONGLI,TAIWAN

公司簡介

公司名稱：品固企業股份有限公司
(品基東莞，蘇州品基)
設立時間：1982年6月15日 (成立45年)
資 本 額：新台幣126,000,000元
地　　址：台北市南港區八德路四段768巷1弄8號
電　　話：886-2-27885767
傳　　真：886-2-27885768
部門分類：業務部、研發部、財務部、生管部、模具製造部、品管部、MIS部門、ERP部門、總經理室、廠務部、資材部等。

Company Profile

Company：PINGOOD Enterprise Co.,Ltd.
Founded：June 15 th, 1982.
(45 th Anniversary)
Capital：US$4,200,000.00
Address：NO.8,ALLEY 1,LANE 768,Sec.4 Pateh Rd.,Nangan Dist.,Taipei 115027,Taiwan
Telephone：886-2-27885767
FAX：886-2-27885768
Department：Sales&Marketing, R&D, Finance, Production, Molding, Q.C, MIS, ERP…etc.

台北總公司面積： 2800 平方公尺
中壢工廠面積： 16000 平方公尺
中壢工廠地址： 桃園市中壢區東園路21號
品基東莞工廠面積： 36000 平方公尺
模具廠面積： 800 平方公尺
品基東莞工廠地址： 廣東省東莞市塘廈鎮果嶺路1號
蘇州品基工廠面積： 12000平方公尺
蘇州品基工廠地址： 江蘇省蘇州市吳中區橫涇街道天鵝蕩路2986號
設備： 射出成型機、CNC放電加工機、CNC線割機、CNC綜合加工機等。
實驗室儀器： 3D影像量測儀、X-Ray光譜儀、氣相色譜質譜聯用儀、環境實驗機、影像量測儀、顯微鏡投影機、繪圖機、萬能破壞機、拉力機、自動測試機等。
國內主要客戶： 各大股票上市上櫃之電腦電子產品製造廠及相關產品製造商。
國外主要客戶： DELL、HITACHI、SONY、HP、SHARP 等。
海外行銷： 本公司海外行銷遍及五大洲
產品認證： UL
公司認證： ISO9001、IATF 16949。
工廠認證： ISO9001、ISO14001、QC080000、IATF 16949。

***所有尺寸及規格均以本公司之產品承認書為主，目錄尺寸僅供參考**

*目錄產品未標示單位皆採 mm 公制單位
*如有其他顏色需求，歡迎來電詢問
*目錄建議裝配方式，僅供參考
*目錄之包裝數量，僅供參考
*標示 NEW ，★ 為新產品
*歡迎各界大鑒不吝來電賜教，本公司定當竭誠為您服務
***發行日期：**2025年12月31日

Taipei ,Taiwan HQ: 2,800 m²
Company Owned Factory :
Zhongli Dist,Taiwan : 16,000 m²
Dongguan ,China : 36,000 m²
Mold Factory Area: 800 m²
Suzhou ,China : 12,000 m²
Facilities: In-house Design, In-house tool shop, Injection line
Sales Territory: Worldwide
Certificate: UL, ISO9001, ISO14001, QC080000, IATF 16949

*This catalogue is only subsidiary for your reference; all the measurments and dimensions are according to the "DATA SHEET" issued by PINGOOD.
*All measures are in metric unit of "mm"scale except noted.
*If you have other color reguest, Kindly feel free to contant with US.
*Catalogue assembly methods for reference only.
*Catalogue package amounts for reference only.
*The marking NEW , ★ appearing on a new product.
*Detailed information will be provided upon request, please kindly contact us for the best customer service, information is available via email at pingood@pingood.com.tw.

Issue Date: Dec.31 , 2025

QC080000
IATF 16949 ISO 9001 ISO 14001

Our Strengths

We Can Offer fast services, efficient solution and High standard of reliable Quality.



Product:
More than 10,000 SKUs standard ready parts, Specialized in Custom parts as well.

Manufacture:
In-house total solution from Design & tooling to mass production to offer appropriate delivery.

Upgrade Facilities:
To meet compact design trend of small size product, Our mission to Provide the best equipment fulfill the customer's request.

Marketing support:
General Catalogue, E-catalogue; Resource website: High visibility on sourcing from PINGOOD website.

www.pingood.com.tw



品固企業環境管理物質沿革

自2006年起，本公司所有產品已全面導入符合歐盟RoHS指令的要求，環保檢測實驗室亦同時成立。

2009年起，因應國際綠色組織提出鹵素化合物對於人體及環境具有潛在危害的訴求，開始導入無鹵素(Halogen Free, HF)產品。

2009年起，歐盟REACH法規公布，開始與供應商合作調查產品中化學成分，確保產品中不含REACH法規中所規範的高關注物質(Substance of Very High Concern, SVHC)。

2010年，鑑於國際間關注非洲地區所開採之衝突礦產(錫、金、鉭、鎢)於電子電機產品中的使用狀況，品固企業產品中並不含上述成分，亦要求供應商需於材料承認階段，即承諾產品中不可使用衝突礦產。

ISO9001品質管理系統政策:

全員參與、客戶滿意、員工高興、永續經營

品固企業致力於品質持續改善的過程，以符合ISO 9001品質管理系統之需求，為此目標我們必須提供最優等的產品和服務品質，來實現海內外廣大客戶群品質滿意的保證。

ISO14001環境管理系統政策:

節省能源減少廢棄物、減低污染回收再利用

環境保護是品固企業身為地球公民一份子的重要責任。品固企業向其所有員工、客戶及社會大眾承諾，每一管理運作均以可靠的、符合環境保護的方式進行。製程中所產生的各項汙染、廢棄物的預防及減低，以及資源回收再利用，是我們對環境保護持續改善的主要方向。

QC 080000產品無有害物質管理系統政策:

符合法規預防汙染、綠色採購持續改善

面對當前全球環境保護趨勢及各項環境保護法令之持續要求，品固企業持續以最新的技術及不間斷之管理制度，善盡地球環境保護的一份心力，為社會及企業永續經營而努力，品固企業在設計初期便將環境管理物質納入設計規劃重點，嚴格要求供應鏈提供的原物料必須遵守國際相關環保法規，以及品固企業訂定的環境管理物質技術標準以及管制內容。

IATF 16949國際汽車品質管理系統:

客戶滿意、持續改善、預防生產、降低風險

確保品固展現對品質的承諾，達到持續性的改善，並以經濟高效的方式為客戶提供更優質的產品和服務，從產品設計、開發、生產到組裝，以達到汽車工業嚴格的品質檢驗標準。



品固企業對碳排放減量之承諾

品固企業深知氣候變遷是因人類活動產生大量溫室氣體，造成了地球溫度的上升，做為地球公民的一份子，必須要善盡社會責任!

建立有效的碳/溫室氣體排放量的盤查，從減碳思維更進一步提昇整體作業流程，每年可省62萬度的電力，在生產過程中減少約300公噸的碳排放，對廠內製程進行碳管理。

品固企業推動碳/溫室氣體減量及改善計畫，持續對環境保護盡一份心力，以提供環保、減碳的綠色產品給廣大的海內外客戶。

品固企業從2013推行節能至今，推動太陽能發電，對地球環保盡一份責任。

Milestone of Green procurement of sources

2006 Meet RoHS Compliant.

2009 Meet REACH Requirement & Implement to Halogen Free products.

2010 Commit not to use conflict minerals.

ISO9001 Quality Management System

We continue following the most effective quality management system to have continuous improvements in the quality of our product & service to achieve our domestic and global customers' satisfaction.

ISO14001 Environmental Management System

Environmental Protection is all our responsibilities. PINGOOD has also adopted the internal controls to have ISO 14001 compliance from the resources and production processes to meet energy saving, reduction in waste and consumption of resources and minimize the impact to the environmental for a long term viability of businesses.

QC 080000 Hazardous Substance Process Management System

Today, we are facing the ongoing global environmental protection requirements. PINGOOD has implemented with the latest technology and continuous improvement management system to meet the environmental friendly from the design phase, material from the supply chains, to mass production all comply with the updated global environmental regulations.

IATF 16949 International Automobile Quality Management System

Our stream-line solution from design to mass production are qualified the high standard quality control in automotive industry supply chain.

Carbon footprint Verification


In 2013, PINGOOD has conducted effective carbon/GHG emission verification to further enhance overall production process flow to reduce carbon emissions and done the extra environmental protection efforts toward a long term business goal.

By using solar energy we saved 620,000 kWh and reduced carbon emissions by 300 mt annually in Zhongli and Dongguan factory.

各項證書
Certificate



Certificate TW21/10406
The management system of
PINGOOD ENTERPRISE CO., LTD.
SGS
ISO 9001:2015
For the following activities
DESIGN, MANUFACTURE OF ENGINEERING PLASTIC INJECTION & METAL FASTENER ASSEMBLY


CERTIFICATE
DZCC
Hereby Grants To:
PinGood Enterprise (DongGuan) Co., Ltd.
Organization Credit Code: 91441900730487033N
Registered Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Business Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Has been assessed and found to be in accordance with the requirements of standard detailed below
GB/T 19001-2016/ISO 9001:2015
Scope
The Manufacture of Plastic Fittings for Electronic and Computer Equipment.
Certificate No.: 02/CN/2309016Q
Certificate Issue Date: 2023-11-07
Registration Expiration Date: 2026-11-10
The certified organization must pass surveillance audit to ensure the validity of the certificate.
IAF
IAS ACCREDITED
Authorized by :
MSCB-235

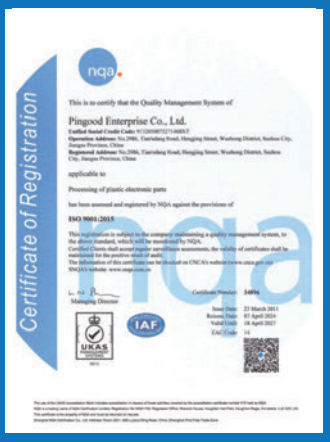
nqa
This is to certify that the Quality Management System of
Pingood Enterprise Co., Ltd.
applicable to
Processing of plastic electronic parts
has been assessed and registered by NQA against the provisions of
ISO 9001:2015
Certificate of Registration
IAF
UKAS


Certificate TW15/10786
The management system of
PINGOOD ENTERPRISE CO., LTD.
SGS
ISO 14001:2015
For the following activities
MANUFACTURE OF ENGINEERING PLASTIC INJECTION & METAL FASTENER ASSEMBLY


CERTIFICATE
DZCC
Hereby Grants To:
PinGood Enterprise (DongGuan) Co., Ltd.
Organization Credit Code: 91441900730487033N
Registered Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Business Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Has been assessed and found to be in accordance with the requirements of standard detailed below
GB/T 24001-2016/ISO 14001:2015
Scope
The Manufacture of Plastic Fittings for Electronic and Computer Equipment and Management of Related Environmental Aspects.
Certificate No.: 02/CN/2309016E
Certificate Issue Date: 2023-11-07
Registration Expiration Date: 2026-11-10
The certified organization must pass surveillance audit to ensure the validity of the certificate.
IAF
IAS ACCREDITED
Authorized by :
MSCB-235

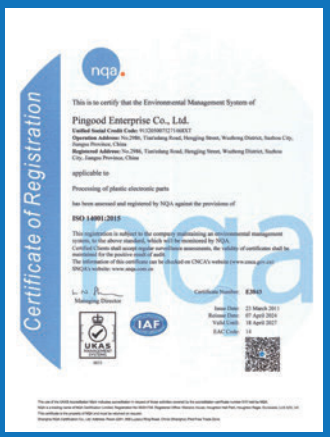
nqa
This is to certify that the Environmental Management System of
Pingood Enterprise Co., Ltd.
applicable to
Processing of plastic electronic parts
has been assessed and registered by NQA against the provisions of
ISO 14001:2015
Certificate of Registration
IAF
UKAS


Certificate IATF 0531538
Certificate TW21/10406
The management system of
PINGOOD ENTERPRISE CO., LTD.
SGS
IATF 16949:2016
For the following Scope
DESIGN AND MANUFACTURE OF ENGINEERING PLASTIC INJECTION & METAL FASTENER ASSEMBLY
EXCLUSIONS : None


IEC QUALITY ASSESSMENT SYSTEM (IECQ)
IECQ Certificate of Conformity
Hazardous Substance Process Management
Applicable to:
Customer specified requirements
PINGOOD ENTERPRISE (DONGGUAN) CO., LTD.
Building 6, Building 7,
Building 8, No.1, Guoling Road,
Tangxia Town,Dongguan City, Guangdong Province,
China
This Certificate is applicable for the following scope of activity:
Manufacture of plastic parts for electronic products
Issued by the Certification Body: NQA
Warwick House, Houghton Hall Park,
Houghton Regis, Dunstable,
Bedfordshire, LU5 5ZX
United Kingdom
Authorised person:
Laura Fletcher


IEC QUALITY ASSESSMENT SYSTEM (IECQ)
IECQ Certificate of Conformity
Hazardous Substance Process Management
Applicable to:
Customer specified requirements
Pingood Enterprise Co., Ltd.
No.2986, Tianxiang Road,
Hengjing Street, Wusheng District,
Suzhou City, Jiangsu Province,
China
This Certificate is applicable for the following scope of activity:
Processing of plastic electronic parts
Issued by the Certification Body: NQA
Warwick House, Houghton Hall Park,
Houghton Regis, Dunstable,
Bedfordshire, LU5 5ZX
United Kingdom
Authorised person:
Laura Fletcher


Certificate of Registration
This is to certify that the Quality Management System of
PINGOOD ENTERPRISE (DONGGUAN) CO., LTD.
Building 6, Building 7, Building 8, No. 1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, 523726, China
(IATF UID: GB05.MRO)
applicable to:
The design and manufacture of plastic injection moulded parts (fastener parts)
has been assessed and registered by NQA, Warwick House, Houghton Hall Park, Houghton Regis, Dunstable, LU5 5ZX, UK
against the provisions of:
IATF 16949:2016
This registration is subject to the company maintaining a quality management system to the above standard, which will be monitored by NQA.
Managing Director

產品開發 Product Development


Customer proposal ▶ Design Discuss Evaluation ▶ Drawing ▶ Customer confirmation ▶ Mockup ▶ Making mold ▶ Injection molding ▶ Verification acceptance



Sales and Marketing Division



Sales and Marketing Division

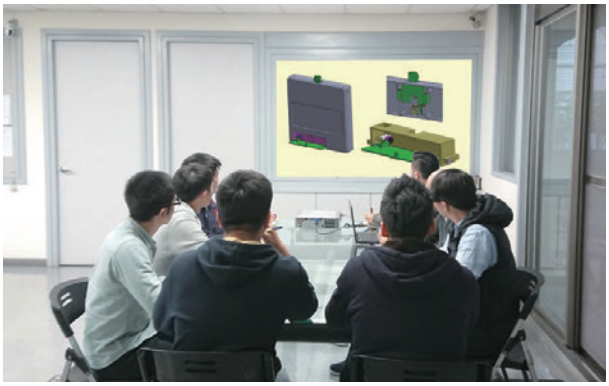

R&D Division



Reliability Verification




3D Printer



3D Printer



3D Printer Sample

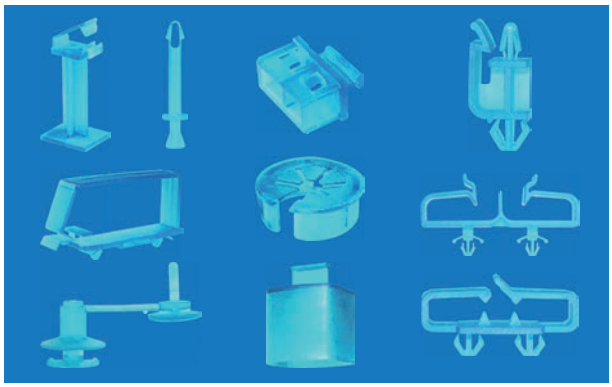

3D Printer Sample

模具部 Molding Division



Tooling DFM




Mold Assembly and Fitting



CNC Machining



FANUC CNC Machining

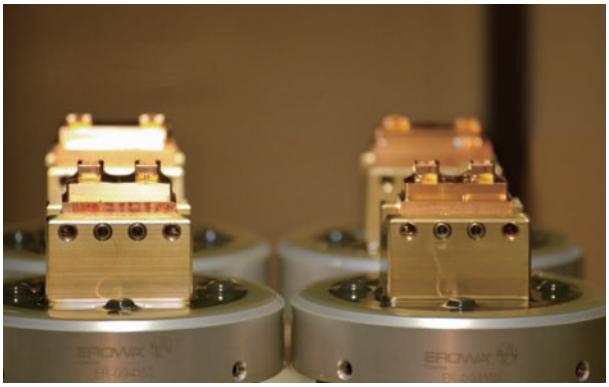

EROWA EDM SINKING SYS



Sodick CNC Electric Discharge Machine



Seibu Slow Wire Cutting Machine



Seibu Slow Wire Cutting Machine

成型部 Injection Division



Japan TOYO Fully Electric Injection Molding Machine



Japan TOYO Fully Electric Injection Molding Machine



Japan TOYO Fully Electric Injection Molding Machine



Japan TOYO Fully Electric Injection Molding Machine



Japan TOYO Fully Electric Injection Molding Machine



Japan TOYO Fully Electric Injection Molding Machine



Robotic Arm for Injection Molding Machine




RHCM Machine

RoHS laboratory (GC-MS) Analysis Process


Scraping the sample and weighing ▶ Rotate Evaporator ▶ Add Solvent Extraction ▶ Purification of filtered sample ▶ GC-MS: To examine the content of organic solvents (PBB、PBDE、 Phthalates)




RoHS laboratory (X-Ray) Inspection Process

Sample ▶ Homogeneous Material ▶ HITACHI EA1000AIII X-Ray examine sample meets RoHS、As、Sb。

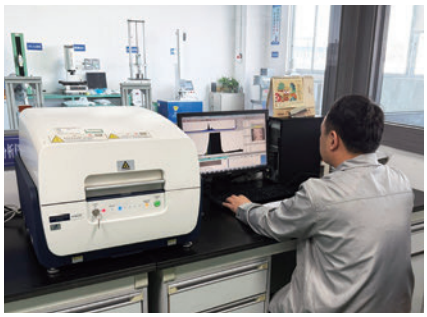

In order to fulfill the responsibility for environmental protection,the environmental friendly substances are tested and checked.

The HITACHI EA1000A III X-ray Fluorescence Analyzer: Meet the EU RoHS Directive and the rapid detection and analysis of hazardous substances in electrical and electronic product, e.g.: Cd、Pb、Hg、Cr、Br、As、Sb, etc. Complying with Halogen free requirement, we use XRF (X-ray Fluorescence Spectrometer) to analysis the content to meet customer requirement. GC-MS (Gas chromatography–mass spectrometry) for the detection of PBB, PBDE, Phthalates in organic solvents.

實驗室儀器 Laboratory Equipment



Flame Test Equipment



Moisture Analyzer



Melt Flow Indexer




Programmable Temperature and Humidity Chamber

設備儀器 Equipment and Instruments



Tensile Test Equipment

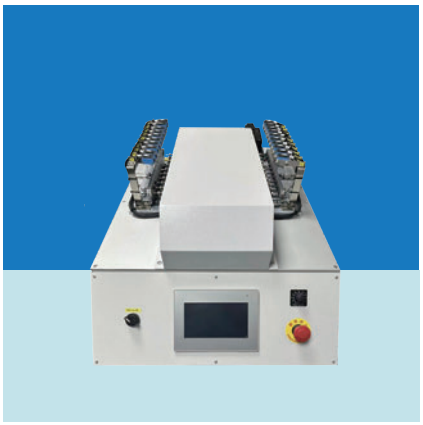

Life Cycle Test Machine



Digimatic Height Gage



Image Dimension Measurement System



2.5D Non-Contact Video Measuring System



Micro-vu 3D Measuring System

自動設備與自動倉儲



Automatic Packaging Machine



Auto Optical Inspection



Automatic Storage System



Automatic Storage System


客戶對我們的肯定與鼓勵
Appreciation and Encouragement from Customers






專利
Patent



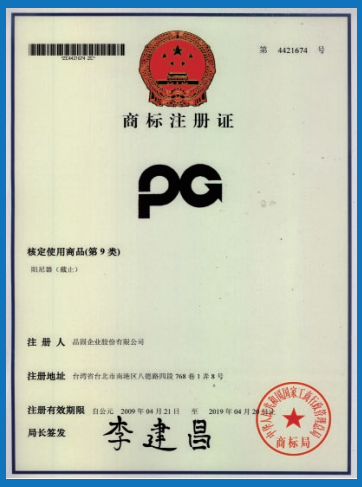



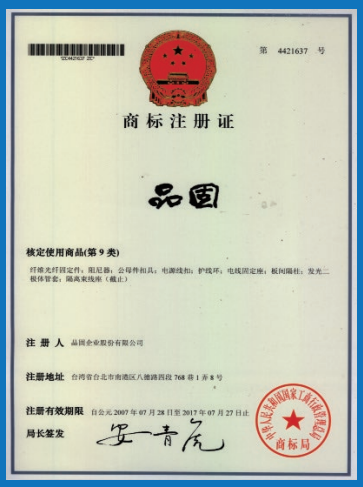

* 以上已完成商標註冊續展證明

門扣，阻尼器，導光棒 LATCH, DAMPER, LIGHT PIPE

PINGOOD

1-2



1-3



1-4



1-5



1-6



1-7



1-8



1-9



1-10



1-11



1-12



1-13



1-14



1-15




1-16



1-17



1-18



1-19



1-20



1-21



1-22



1-23



1-24



1-25



1-26



1-27



1-28



1-29



門扣，阻尼器，導光棒 LATCH, DAMPER, LIGHT PIPE

PINGOOD

1-30



1-31



1-32



1-33



1-34



1-35



1-36



1-37



1-38



1-39



1-40



1-41



1-42



1-43



1-44



扣環，護線環，塞環 BUSHING,SNAP BUSHING

PINGOOD

2-2



2-3



2-4



2-5



2-6



2-7



2-8



2-9



扣環，護線環，塞環 BUSHING,SNAP BUSHING

PINGOOD

2-10



2-11



2-12



2-13



2-14



2-15



2-16



2-17



2-18



2-19



2-20



2-21



2-22



2-23



2-24



2-25




2-26



2-27



2-28



P.C. 板間隔柱 SPACER SUPPORT

PINGOOD

3-2



3-3



3-4



3-5



P.C. 板間隔柱 SPACER SUPPORT

PINGOOD

3-6



3-7



3-8



3-9



3-10



3-11



3-12



3-13



3-14



3-15



3-16




3-17



3-18



3-19



3-20



3-21



3-22




3-23




3-24



3-25



3-26




3-27



3-28




3-29



3-30



3-31



3-32




3-33




P.C. 板間隔柱 SPACER SUPPORT

PINGOOD

3-34




3-35



3-36




3-37




3-38



3-39




3-40




3-41



3-42



3-43



3-44



3-45



3-46



3-47



3-48



3-49



3-50



3-51



3-52



3-53




3-54



3-55



3-56



3-57



3-58



3-59



3-60



3-61



PINGOOD

3-62



3-63



3-64




3-65



3-66



3-67



3-68



3-69



3-70



3-71



3-72



3-73



3-74



3-75



3-76



3-77



3-78



3-79



3-80



3-81



3-82



3-83



3-84



3-85



3-86



3-87



3-88



3-89



P.C. 板間隔柱 SPACER SUPPORT

PINGOOD

3-90



3-91



3-92



3-93



3-94



3-95



3-96



3-97



3-98



3-99



3-100



3-101



3-102



3-103



3-104



3-105



3-106



3-107



3-108



3-109



3-110



3-111



3-112



3-113



3-114



3-115



3-116



3-117



P.C. 板間隔柱 SPACER SUPPORT

PINGOOD

3-118



3-119



3-120



3-121



3-122




3-123




3-124



3-125



3-126



3-127



3-128



3-129



3-130




熱情服務，轉變觀念

增強知識，迎接挑戰


LED 套 ,LED 座 LED HOLDER, LED, HOUSING

PINGOOD


4-2




4-3




4-4



4-5




4-6




4-7



4-8



4-9



4-10



4-11




4-12



4-13




4-14



4-15



4-16



4-17



4-18



4-19




4-20



4-21




4-22



4-23




4-24



4-25



4-26



4-27



4-28



4-29



4-30



4-31



4-32



4-33



4-34



4-35



4-36



4-37



PINGOOD

4-38



4-39



4-40




4-41



4-42



4-43



4-44




4-45



4-46




4-47



4-48



4-49



4-50



4-51




4-52




4-53




4-54




4-55




4-56



4-57




4-58




4-59



4-60



4-61



4-62



勤思巧幹，精益求精

逆勢而上，昂揚前行

5-2



5-3



5-4



5-5



5-6



5-7



5-8



5-9



5-10



5-11



5-12



5-13



5-14



5-15



5-16



5-17



5-18



5-19



5-20



5-21



5-22



5-23



5-24



5-25



5-26



5-27



5-28



5-29



5-30



5-31



5-32




5-33



5-34



5-35



5-36



5-37



5-38



5-39



5-40



5-41



5-42



5-43



5-44



5-45



5-46



5-47



5-48



5-49



5-50



5-51



5-52



5-53



5-54



5-55



5-56



5-57



鉚釘，螺絲，螺帽，扣具 PLASTIC FASTENER

PINGOOD

5-58



5-59



5-60



5-61



5-62



5-63



5-64



5-65



5-66



品質為本，技術為根
精工細作，穩健致遠

線材固定，線材隔離 CABLE CLAMP,SADDLE

PINGOOD

6-2



6-3



6-4



6-5



6-6



6-7



6-8



6-9



6-10



6-11



6-12



6-13



6-14



6-15



6-16



6-17



6-18




6-19



6-20



6-21




6-22



6-23




6-24



6-25



6-26



6-27



6-28



6-29



6-30



6-31



6-32



6-33



6-34



6-35




6-36



6-37



6-38



6-39



6-40



6-41



線材固定，線材隔離 CABLE CLAMP,SADDLE

PINGOOD


6-42



6-43



6-44




6-45



6-46



6-47



6-48




6-49



6-50




6-51



6-52



6-53



6-54



6-55



6-56



6-57



6-58



6-59



6-60



6-61



6-62



6-63



6-64



6-65



6-66



6-67



6-68



6-69



6-70



6-71



6-72



6-73



6-74



6-75




6-76



6-77



6-78



6-79



6-80



6-81



6-82



6-83



6-84



6-85



6-86



6-87



6-88



6-89



6-90



6-91



6-92



6-93



6-94



6-95



6-96



6-97



線材固定，線材隔離 CABLE CLAMP,SADDLE

PINGOOD

6-98




6-99



6-100



6-101



6-102



6-103



6-104



6-105




6-106




6-107



6-108



6-109



6-110




6-111



6-112



6-113



6-114



6-115



6-116



6-117



6-118



6-119



6-120



6-121



6-122



6-123



6-124



6-125



PINGOOD

6-126



6-127



6-128



6-129



6-130



6-131



6-132



6-133



6-134



6-135



6-136



6-137



6-138



6-139



6-140



6-141



6-142



6-143



6-144



6-145



6-146



6-147



6-148




6-149



6-150



6-151



積累成底蘊

踏實鑄榮光

EMI 扣 SLEEVE FERRITE CLAMP

PINGOOD

7-2



響應綠環保
推動減碳程

電子零配件 PCB ASSEMBLY COMPONENTS

PINGOOD

8-2



8-3



8-4



8-5



8-6



8-7



8-8



8-9



8-10



8-11



8-12



8-13



8-14



8-15



8-16



8-17



8-18



8-19



8-20



8-21



PINGOOD

8-22



8-23



8-24



8-25



8-26



8-27



8-28



8-29



8-30




8-31



8-32



8-33



8-34



8-35



8-36



8-37



8-38



8-39



8-40



8-41



8-42



8-43



8-44



8-45



8-46



8-47



8-48



8-49



PINGOOD

8-50



8-51



8-52



8-53



8-54



8-55



8-56



8-57



8-58



8-59



8-60



8-61



8-62



8-63



8-64



8-65



8-66



8-67




8-68



8-69



8-70



8-71



8-72



卓越的效能，優質的團隊

頂尖的創意，專業的服務

腳墊，燙金腳墊，墊座 PLASTIC RUBBER FOOT

PINGOOD

9-2



9-3



9-4



9-5



9-6




9-7




9-8



9-9



9-10



9-11



9-12



9-13



拉柄 CIRCUIT BOARD EJECTOR

PINGOOD

10-2



10-3



10-4



10-5



導槽 P.C.B GUIDE RAIL

PINGOOD

11-2



11-3



11-4



11-5



導槽 P.C.B GUIDE RAIL

PINGOOD

11-6



11-7



11-8



11-9



11-10



11-11



11-12



11-13



11-14



11-15



11-16



11-17



11-18



11-19



11-20



11-21



11-22




科技驅動，創新突破
優化效能，智造未來

束線帶 CABLE TIES

PINGOOD

12-2



12-3



12-4




12-5



束線帶 CABLE TIES

PINGOOD

12-6



12-7



12-8



12-9



12-10



12-11



12-12



12-13



12-14




12-15




12-16




12-17



12-18



12-19



12-20



其他塑膠製品 HANDLE,HOUSING,COVER

PINGOOD

13-2



13-3



13-4




13-5



13-6



13-7



13-8



13-9



其他塑膠製品 HANDLE,HOUSING,COVER

PINGOOD

13-10



13-11



13-12



13-13



13-14



13-15



13-16



13-17



13-18



13-19



13-20



13-21



13-22



13-23



13-24



13-25



13-26



13-27



13-28



13-29



13-30



13-31



13-32



13-33



13-34



13-35



13-36



13-37



PINGOOD

13-38



13-39



13-40



13-41



13-42



13-43




13-44



13-45



13-46



13-47



13-48



13-49



13-50



13-51




13-52



13-53



13-54



13-55



13-56



13-57



13-58



13-59



13-60



13-61



13-62



13-63



13-64



13-65



PINGOOD

13-66



13-67



13-68



13-69



13-70



13-71



13-72



13-73



13-74



13-75



13-76



13-77



13-78



13-79



13-80



13-81



13-82



13-83



13-84



13-85



13-86



13-87



13-88



13-89



13-90



13-91



13-92



13-93



其他塑膠製品 HANDLE,HOUSING,COVER

PINGOOD

13-94



13-95



13-96



13-97




13-98



13-99




13-100



13-101



13-102



13-103



13-104



13-105



端子附件，五金 HARDWARE

PINGOOD

14-2



14-3



14-4



14-5



14-6



14-7



研新競發展
群策育良才

企業的成功來自於每位員工的付出
誠信為基、服務為根、傳承人才、敬業榮群

索引 INDEX

【數字】
101A~112NP 3-116
103C~115MC 3-115
201~338 3-117
2A 6-113
2CH 6-144
2CS 6-50
2LEA 4-8
2LED 4-53~4-55
2RF 2-2,2-4
3CH 6-145
3LED 4-55~4-57
3LEL 4-57
3RF 2-2
304K~9634C 3-108
3-114~3-115,3-118
40M 8-50
4LED 4-58~4-59
4LEL 4-57~4-58
4RF 2-2
5LED 4-60~4-61
5LEL 4-60
5R 2-2~2-3
5RF 2-2~2-3
601~901,60* 8-49,8-50~8-53
6FW-10 6-2
6FW-11 6-114
6LED 4-61
6R 2-2,2-4
7R 2-2,2-4
8LED 4-61
8R 2-2~2-3
9R 2-2
10LED 4-62
15LED 4-62

【A】
A 6-113
AAA 3-69
AB 6-3~6-5 6-9~6-11 6-13,6-15~6-16
AB-1* 6-117
ABD 6-14
ABF 6-16~6-17
ABGX 6-143
ABH 6-13
ABK 6-17
ABL 6-117
ABP 6-135
ABT 6-5
AC 3-5
ACBK 3-5
ACBS 3-3~3-5
ACK 5-40
ACMS 3-3
ACT 3-5
AD 3-108,3-111
ADA 3-112
ADF 3-109
ADGF 3-113
ADH 3-108
ADHM 3-112
ADJ 3-110
ADK 3-108
ADM 3-112
ADP 3-109
ADQ 3-109
ADW 3-108
AF 3-5
AG 3-112
AVI 13-51

【B】
BAK 6-67
BAR 6-116
BCBS 3-62
BCMS 3-63
BFA 13-93
BFN 12-18
BH 2-18~2-19
BH-5~7 13-26~13-27
BHA 2-18
BHB 1-36
BHR 13-63
BJA 13-5
BSA 13-2~13-4
BSC 13-2
BSG 13-2
BSHC 13-3
BSQ 12-20
BSR 6-74
BST 12-2~12-3 12-14~12-20
BSTH 12-2
BSW 12-3~12-4
BSX 12-3
BWA 13-4
BWD 13-5
BWF 13-4
BWH 13-4
BWK 13-2
BWN 13-3
BXR 12-18

【C】
C 系列墊座 9-9
CAC 6-56
CAF 6-143
CAM 6-14
CAP 8-50
CAR 6-13
CBD 3-125
CBG 6-52
CBL 3-126~3-127
CBLA 3-126
CBPA 3-128
CBS 3-44
CC 6-67
CCA 6-68
CCD 6-67
CCF 6-71
CD 6-65
CDA 13-11
CDF 6-65
CDS 13-5~13-11
CDT 13-12
CDY 13-11
CF 11-2
CFK 6-60
CFKA 6-61
CFP 13-57
CG 11-2~11-15
CGB 11-18
CGD 11-9
CGH 11-21
CGJ 11-14
CGL 11-13
CGM 11-20~11-21
CGR 13-84
CGT 11-15
CGU 11-10
CGW 11-16
CGZ 11-16~11-17
CGZA 11-17,11-19
CGZD 11-19
CGZF 11-18
CGZH 11-18
CH 6-43~6-45 6-47~6-49 6-53,6-59
CH-04*,06*,09* 6-49,6-66
CH-08*,10K 3-81,6-63
CH-05~30 6-55~6-58
CH-38,48 6-145
CHA 6-113
CHAD 6-11
CHB 6-103
CHF 6-11 6-125~6-126
CHF-7* 6-123
CHFA 6-12
CHFB 6-126
CHFD 6-14
CHFG 6-135
CHFK 6-128
CHFM 6-126
CHFN 6-132
CHFQ 6-12
CHFR 6-12
CHFT 6-14
CHFW 6-129
CHFY 6-135
CHFZ 6-12
CHG 6-122
CHH 6-114
CHJ 6-59
CHK 6-60
CHL 6-56
CHLA 6-57
CHM 6-53
CHN 6-67
CHP 6-72
CHQ 6-104
CHR 6-46
CHST 6-112
CHT 6-43
CHU 6-18
CHW 6-7~6-9
CHX 6-68
CIC 6-69
CID 6-42
CIK 6-70
CIM 6-112
CIS 6-69~6-70
CJA 6-44
CK 6-59
CKA 6-105
CKB 6-104
CKF 6-73
CKFA 6-134
CKFB 6-134
CKFC 6-131
CKFM 6-141
CKFN 6-141
CKH 6-63
CKHA 6-63
CKIM 6-71
CKK 6-75~6-77
CKK-02 6-109
CKKS 6-86
CKL 6-71
CKM 6-19~6-20
CKMA 6-20
CKMH 6-13
CKMY 6-142
CKMZ 6-142
CKN 6-105
CKP 6-74
CKQ 6-73
CKR 6-114
CKS 6-58
CKT 6-106~6-107
CKTW 6-121
CKW 6-20
CKX 6-82
CKY 6-105
CKZ 6-19
CKZA 6-20
CLA 4-39
CLED 4-29 4-31~4-38
CM 6-56
CMA 6-45
CMB 6-64
CMBF 6-65

索引 INDEX

CMC	6-43	CQ	13-14	CWZ	8-3	CZW	6-18	DSH	2-16
CMD	6-137	CQA	3-119	CXK	6-80	CZX	6-48	DSW	2-12
CMG	6-106	CRC	6-85	CXR	6-83	CZY	6-54	DUA	13-103
CMGA	6-106	CRN	6-84	CXT	6-109	【D】		DVI	13-73~13-74
CMF	6-17	CS	6-49~6-50	CYA	6-76	D-0710	13-31	DXA	8-9~8-11
CMK	6-52		6-68	CYAA	6-77	DAB	13-19~13-20	DXC	8-12
CML	6-14	CSA	6-50	CYB	6-83	DAG	3-98	DXD	8-12
CMLA	6-15	CSF	6-42	CYC	6-83	DAGH	3-99	DXF	8-11
CMM	6-107	CSK	6-57	CYD	6-85	DAGK	3-98	DXGF	13-89
CMP	6-144	CST	8-72	CYF	3-75	DAH	13-37	DXH	8-12
CMQ	6-108	CT	2-18	CYFG	3-76	DAP	13-19	DXJ	8-9
CMR	6-2~6-3	CTK	6-86	CYFJ	3-76	DC	13-99~13-101	DXK	8-9
CMRT	6-44	CTM	6-87	CYFK	3-76	DCBS	3-50~3-51	DXM	8-9
CMRW	6-43	CTR	6-107	CYFQ	3-76	DCC	13-52	DXP	8-10
CMRZ	6-44	CTT	6-128	CYFT	3-77	DCJ	13-52	DXS	8-11
CMS	6-128	CTX	6-51	CYHG	6-64	DCMS	3-57	DXW	8-23
CMW	6-84	CU	6-26	CYG	6-77	DCQ	13-27	DXZB	8-13
CMX	6-3		6-61~6-62	CYH	6-64	DCR	3-128	DXZC	8-13
CMY	6-2	CU-06A	6-69	CYJ	6-91	DCRJ	3-128	【E】	
CMZ	6-50	CU-07*	6-93	CYK	6-64	DDS	2-11~2-12	E3S	13-49
CNA	6-66	CUA	6-61	CYL	6-84	DDS-04	2-19	ECW	4-48
CND	6-72	CUD	6-92	CYM	6-85	DFA	6-110	EDA	4-23
CNF	6-126~6-127	CUH	6-53	CYP	6-86	DFB	6-151	EDC	4-21
CNFA	6-127	CUG	6-53	CYQ	6-84	DFG	6-117	EDD	4-47
CNFK	6-126	CUK	6-52	CYR	6-85	DFK	6-116	EDE	4-7
CNL	6-17	CW	8-2~8-3,8-13	CYS	6-65	DFQ	6-151	EDF	4-7
CNG	6-71	CWA	8-16	CYW	6-60	DHD	13-52	EDG	4-47~4-48
CNH	6-132	CWB	8-5	CYWF	6-61	DHM	13-103	EDH	4-3
CNHA	6-137	CWC	8-6	CYWK	6-67	DL-001~20*		EDJ	4-20
CNHB	6-134	CWD	8-7~8-8	CYX	6-143		1-2~1-8	EDK	1-24~1-26
CNHD	6-133	CWF	8-4~8-5	CZA	6-47	DL-100*~700*		EDL	4-21
CNJ	6-142	CWFK	8-6	CZB	6-47		1-8~1-12	EDM	4-23
CNK	6-127	CWG	8-6	CZC	6-45	DLA	1-2	EDN	1-21~1-22
CNQ	6-129	CWH	8-7	CZD	6-121	DLB	1-6	EDN-05,5C	1-26
CNR	6-128	CWHA	8-7	CZF	6-48	DLC	1-5	EDP	4-47
CNTF	6-127	CWJ	8-8	CZG	6-139	DLF	1-5	EDQ	4-27
CNW		CWL	8-8	CZH	6-46	DLK	1-6~1-7	EDR	4-9
	6-129~6-130	CWM	8-4	CZJ	6-9	DLM	1-5	EDT	4-16
CNWA	6-130	CWP	8-12	CZK	6-18	DMI	13-72~13-73	EDW	4-17
CNWB		CWQ	8-4,8-12	CZL	6-52	DMK	3-25	EDZ	1-22~1-24
	6-130,6-132	CWR	8-16	CZM	6-54	DP	13-77~13-78	EEA	4-39
CNWF	6-130	CWS	8-6	CZP	6-54	DPM	13-25	EEB	4-26
CNWG	6-131	CWT	8-8	CZPA	6-54	DPS	13-25	EEC	4-20
CNWH	6-131	CWTD	8-8	CZQ	6-9	DPX	3-124	EED	13-12
CNWK	6-136	CWU	8-17	CZR	6-48	DS	2-11	EEF	4-27
CNWZ	6-131	CWW	8-17	CZS	6-50		2-13~2-17	EEG	4-48
CNZA	13-86	CWX	8-2	CZSA	6-83	DSC	2-17	EEH	4-20
CP	10-2~10-5	CWY	8-9	CZT	6-18	DSF	2-12	EEJ	4-27

索引 INDEX

EEK 4-21
EEL 4-9
EEM 4-20
EEN 4-16
EEP 4-48
EES 4-7
EET 4-46
EEW 4-13
EKB 4-22
EKC 4-17
EKF 4-15
EKL 4-8
EKM 4-26
EKN 4-21
EKT 4-22
ELA 4-12
EMQ 7-2
EMR 7-2
EQA 4-42~4-43
EQC 4-40
EQF 4-43
EQH 4-43

【F】

FAA 6-78~6-79
FAB 6-76
FAC 6-123~6-124
FAF 6-124
FAG 6-124
FAK 6-138
FAKT 6-138~6-139
FAM 6-108
FAP 6-125
FAS 6-107
FB 6-38
FBA 13-13
FBC 6-94
FBF 6-42
FBM 6-94
FC 6-37~6-38
FC-27N 6-96
FC-45N 6-96
FCA 6-91
FCAT 6-91
FCB 3-8
FCC 6-40
6-77,6-79,6-95
FCD 6-39~6-41
FCE 6-137,6-139
FCF 6-41
FCFA 6-42
FCG 6-95
FCH 6-115
FCJ 6-95
FCJK 6-138
FCJS 6-138
FCK 6-92
FCM 6-38~6-39
6-89
FCM-01 6-137
FCM-20* 6-115
FCM-35* 6-116
FCMW 6-80
FCNQ 6-128
FCP 6-5
FCQ 6-81~6-82
FCR 6-38
FCS 6-78
FCSD 6-78
FCT 3-8
FCTA 3-9
FCW 6-34~6-36
FCWA 6-91
FCWB 6-139
FCWC 6-140
FCWG 6-140
FCWT 6-36
FCWY 6-140
FCX 6-80~6-81
FCY 6-37
FCZ 6-80
FDD 6-32
FDH 6-88
FDK 6-27
FDM 6-27
FDP 6-94
FDQ 6-39
FDW 6-25~6-26
FDX 6-27
FFR 3-9
FGH 6-9
FH 13-32
FIB 13-78
FJH 3-129
FJW 3-127
FK 3-8
FKC 3-75
FKD 3-74
FKJ 3-77
FKJD 3-77
FKJR 3-77
FKK 3-102
FKM 3-74
FLA 6-109
FLED 4-38
FMG 3-130
FMQ 3-130
FMT 6-140
FMY 3-129~3-130
FN 14-6~14-7
FQA 13-101
FQC 6-115
FQCM 6-84
FRAC 6-20
FS 6-5
FSA 6-122
FSB 6-122
FSC 6-27
FSD 6-30
FSK 6-123
FSL 6-27
FTHM 13-27
FU 6-6
FUA 6-6
FUM 6-6
FUS 6-6
FW 6-21~6-25
6-28~6-33
FW-08A,12C
6-128
FW-24 6-87
FW-24CM 6-88
FW-CD30 6-31
FWA 6-33
FWB 6-30
FWC 6-69
FWD 6-68
FWF 6-6~6-7
FWG 6-30~6-31
FWGA 6-31
FWGH 6-29
FWH 6-74
FWI 6-124
FWJ 6-30
FWK 6-121
FWM 12-11
FWP 6-33
FWQ 6-87
FWR 6-88
FWS 6-60
FWT 6-36~6-37
FWTA 6-74~6-75
FWW 6-87
FWX 6-34
FWY 6-41
FWZ 6-32
FXA 3-127
FYA 12-11
FYB 12-10
FYC 6-92~6-93
FYCA 6-93
FYCB 6-132
FYCD 6-133
FYCG 6-122
FYCH 6-133
FYCS 6-125
FYD,FYDA 12-12
FYH 6-86
FYK 6-28
FYL 12-12
FYM 6-28
FYS 6-24
FZA 3-128

【G】

GCA 13-102
GL 9-2~9-4
GLA 9-4~9-5
GLC 9-12
GLD 9-13
GLE 9-6
GLED 4-34
GLH 8-40
GLQ 9-11~9-12
GMC 9-6
GQH 8-41
GSA 8-42~8-44
GSB 8-45
GSD 8-42
GSE 8-43
GSG 8-40
GSH 8-42
GSK 8-41
GSM 8-44
GSP 9-13
GSQ 8-41
GTT 9-12
GXA 9-13

【H】

H,H2M,H4
3-120~3-121
HB 13-50~13-51
HBA 13-57
HBC 13-55
HBF 13-55
HBK 13-51
HC-0~18* 13-52
13-58~13-60,13-63
HC-21*~51
13-49~13-50
13-60~13-62
HCA 13-39~13-40
HCD 13-64
HCG 11-21~11-22
HCGT 11-22
HCHA 13-98
HCK 13-67
HCKA 13-55
HCKB 13-55
HCKC 13-56
HCKF 13-56
HCL 13-56
HCM 13-58~13-59
HCP 13-64
HCQ 13-50
HCR 13-63~13-64
HCS 13-65,13-78
HCW 13-56
HCWT 13-62
HCX 13-65
HCXK 13-77
HCZ 13-56
HD 13-30~13-31
HDA 13-30
HDB 13-72
HDD 13-61
HDE 13-61
HDJ 13-66
HDK 13-61
HDL 13-65
HDP 13-91
HDQ 13-66

索引 INDEX

HDTC	13-66	HUP	8-23	LCA2	3-23	LED3	4-41	LEZD	1-30
HDT	13-65	HUQ	8-57	LCA3	3-26		4-43~4-46	LFC	6-96
HDU	13-66	HUT	8-56	LCA35	3-34~3-35	LEDX	4-40	LFD	6-89
HDY	13-72	HUX	8-16	LCA4	3-40	LEE	4-23	LFE	6-70
HDZ	13-60	HWH	3-120	LCAS	3-39	LEF	4-13	LFK	6-70
HDZA	13-60	【I】		LCB3	3-30	LEF5	4-13	LFN	6-89~6-90
HF	13-66	ICA	8-56	LCBA	3-30	LEFD	1-34~1-35	LFW	6-31
HFC	13-13	ICC	8-56	LCBS	3-42~3-43	LEG3	4-19	LFZ	6-90
HFK	13-67	IRK	14-7	LCBS-48	3-39	LEGD	1-41~1-42	LFZN	6-90
HFX	13-105	【J】		LCC	3-43~3-44	LEH5	4-10	LGA	9-6
HHB	3-120	JFW	14-6	LCD	3-40		4-16,4-20	LH	5-53~5-55
HHJ	3-120	JG	14-7	LCF	3-36	LEHD	1-30	LHA	5-55
HHP	1-27	JH	14-4	LCFA	3-39	LEI	4-17	LHG	5-56
HHQ	1-35	JLED	4-39	LCG	3-58	LEJ	4-3	LHJ	5-56
HJA	8-55	JP	14-4~14-5	LCH	3-30	LEJD	1-38	LHK	5-15
HKA	13-57	JT	14-2~14-3	LCJ	3-24	LEK2	4-23	LHM	5-55
HLED	4-31	【K】		LCK	3-43		4-25,4-28	LHP	13-90
HP	13-15	KCA	3-38	LCM*	13-23	LEK4	4-23	LHQ	5-16
HPA	13-25	KDD	3-9	LCQ	3-33		4-25~4-26	LHY	5-56
HPM	13-85	KDH	3-9	LCR	3-24	LEK5	4-22	LHZ	13-72
HS	13-32~13-38	KDM	3-10	LCS	3-32	LEKC	4-22	LJA	4-11
HSA	13-32	KFD	3-125	LCX	3-25	LELD	1-39	LJD	4-18
HSD	13-37	KFDX	3-130	LCWS	3-42	LEM*	4-16~4-17	LKB	3-82
HSF	13-38~13-39	KFJ	3-126	LCY	3-23	LEMD	1-32~1-33	LKC	3-83
HSL	13-37	KFL	3-126	LCZ	3-83	LEMK	1-34	LKN	3-83
HSM	13-35	KHA	3-20	LD	3-103~3-104	LEN	4-28	LLS	3-41
HSQ	13-33	KLED	4-29~4-30	LDA	9-13	LEND	1-41	LMA	3-35
HSW	13-37	KPD	3-73	LDAD	1-43	LEQ	4-2	LMB	3-90
HTA	13-67	KWT	3-115~3-116	LDHD	1-43	LEQD	1-40	LMD	4-13
HTD	13-49	KYA	6-143	LDMD	1-27	LER	4-22	LMF	3-86
HTH	3-124	KYC	6-110	LEA	4-8,4-24	LERD	1-41	LMG	3-89~3-90
HU	8-14~8-15	KYF	6-110~6-111	LEAD	1-28~1-32	LERS	1-41	LMGA	3-91
	8-17~8-22	KYH	6-112		1-36~1-40	LES	4-40	LMH	3-86
HU-07T	8-54	KYK	6-110		1-42,1-44	LESD	1-38	LMJ	3-87
HU-19,19*		KYM	6-111	LEC	4-26	LET*	4-13~4-15	LMK	3-86
	8-53~8-54	KYR	6-111	LECD	1-40	LETD	1--38	LMM	3-85,3-87
HU4,HU6	3-121	KYT	6-111~6-112	LED	4-41~4-42	LEU	4-25	LMP	3-88
HUA	8-22	KYW	6-112	LED-2F~10Y		LEUD	1-33	LMQ	3-89
HUC	8-22~8-23	【L】			4-9~4-12	LEVD	1-37	LMR	3-89
HUD	8-22	L 系列墊座		LED-2x10	4-2	LEW	4-17,4-29	LMX	3-87
HUDK	8-21		9-10	LED-3.8,4A	4-45	LEWA	1-40	LMW	3-91
HUF	8-62	L-9A	3-45	LED-13.5	4-2	LEWD	1-37	LMWY	3-83
HUG	8-14	L-16*	3-45	LED-3x*	4-4	LEWF	1-43	LPL	13-102
HUH	8-21	LBB	3-45	LED-*x3		LEX	4-17	LQC	13-26
HUJ	8-54~8-56	LBC	3-33~3-34		4-3,4-51~4-52	LEXD	1-43	LRA	13-102
HUK	8-54	LBCM	3-30	LED-*x3A	4-51	LEY	4-25	LS	3-100~3-102
HUL	8-22	LBD	3-28	LED-**T	4-18	LEYD	1-34	LSA	3-2
HUM	8-23	LBK	3-21	LED3x4	4-3	LEZ	4-40	LSB	3-82

索引 INDEX

LSC	3-72~3-73	【M】		MCN	3-29	MGMA	13-22	MNS	8-17
LSD	3-2~3-3,3-6	M	2-22~2-23	MCP	3-32	MGMB	13-22	MNW	13-79
LSF	3-71	M3*,M4*	8-29	MCQ	3-29	MGS	13-99	MPB	13-93~13-97
LSH	3-71	MA	3-73	MCQA	3-36	MGW	13-103	MPBH	13-98
LSJ	3-71	MAA	5-24	MCR	3-37	MGX	13-87~13-88	MPBL	13-98
LSK	3-88~3-89	MAB	5-25	MCS	3-20	MGZ	13-23	MPBT	13-99
LSL	3-105	MAF	2-26	MCT	12-14	MH	13-28~13-29	MPG	13-92
LSN	3-91	MAH	13-20	MCU	3-32	MHG	2-24~2-26	MPL	1-7,2-25,2-27
LSNT	3-91	MB	5-33~5-49	MCW	3-35	MHG-3A	5-37	MPLA	2-27
LSP	3-92	MBB	5-37	MCX	3-31	MHG-05	3-74	MPR-01	13-89
LSQ	3-101	MBC	5-40	MCY	3-26	MHL	13-40~13-48	MPR-05	8-57
LSR	3-93	MBDA	5-50	MCZ	3-31	MHLA	13-49	MPT	8-55
LSS	3-74	MBDG	6-117	MD	13-15~13-16	MHLF	13-49	MPV	13-104
LST	12-19	MBE	5-35		13-90~13-91	MHLG	10-5	MPW	13-102
LSY	3-103	MBF	2-24,2-27	MDA	13-16	MHM	13-28	MPZ	2-25
LSZ	3-92	MBH	5-46	MDB	13-17	MHMK	13-28	MQB	3-58
LSZQ	3-92	MBJ	13-51	MDC	13-89	MHT	3-113	MQC	3-31
LT	3-41~3-42	MBK	5-39	MDD	13-103	MHTK	13-81	MQD	3-22
LTA3	3-28	MBL	5-33~5-34	MDJ	13-16	MHW	13-28	MQF	3-29
LTBS	3-43	MBM	5-38	MDK	13-19	MHY	13-86	MQG	3-82
LTD	3-6~3-7	MBP	5-41	MDL	13-21	MIA	8-38	MQT	3-39
LTEL	3-84	MBQ	5-39	MDP	5-56	MIR	13-79	MQW	3-40
LTER	3-85	MBR	5-38	MDV	13-15	MJB	13-15	MQY	3-28
LTF	3-99	MBT	5-47	MDW	13-91	MJC	13-31	MRA	13-21
LTG	3-41	MBTB	5-49	MEA	3-20	MJGP	13-84	MRAT	13-86
LTH	3-88	MBTH	5-49	MEC	5-51	MJKT	13-31	MRH	13-82~13-83
LTK	3-100	MBTR	5-49	MEG	3-21~3-22	MJQB	13-80	MRHA	13-82
LTKL	3-84	MBS	5-37	MEH	3-23	MKK	13-90	MRM	13-83
LTKR	3-84	MBSK	5-41	MEK	5-42	MKL	10-2	MRN	13-30
LTN	3-85,3-88	MBU	5-40	MEL	5-51	MKP	13-89	MRQ	13-81
LTQ	3-92	MBY	5-48	MEP	5-51	MLA	8-7	MRR	13-81
LTQB	3-40	MBZ	5-46	MF	3-56~3-57	MLED	4-31	MRT	5-57
LTQM	3-43	MC	3-61~3-62	MFC	3-54	MLW	13-84	MRU	13-83
LTQR	3-93	MCA	3-21	MFD	3-53	MMCA	13-87	MRX	13-84
LTR	3-99	MCB	3-36~3-38	MFG	13-21	MMCB	6-142	MRY	13-84
LTRC	3-93	MCB3	3-27	MFH	13-32	MMD	2-24	MRZ	13-79
LTS	3-102	MCC	3-59	MFKA	3-63	MMF	13-85	MS	3-70
LTU	3-41	MCD2	3-22	MFQ	3-57	MMFA	13-85	MSA	3-68
LTW	3-99	MCE	3-34	MFR	3-53	MMH	8-5	MSB	3-69
LTX	3-7	MCF	3-27	MFRK	3-53	MMJA	13-93	MSBA	3-69
LTY	3-82	MCFA	3-27	MFS	3-60	MML	13-24	MSC	3-69
LTZ	3-84	MCH	3-26	MFW	3-63	MMQ	2-26	MSD	3-71
LW	3-104	MCI	3-29	MGF	13-24	MMR	13-24	MSF	3-70
LWC	3-104	MCJ	3-21,3-110	MGK	13-25	MMS	13-86	MSH	3-70
LWH	3-105	MCJA	3-109	MGKH	13-26	MMW	13-23	MSK	3-66~3-67
LWP	3-104	MCK	3-21	MGL-04	13-23	MMX	13-30	MSLQ	3-67
LXC	3-97	MCL	3-19,3-25	MGL-26A	13-86	MNA	13-79	MSP	3-69
LXCG	3-98	MCM	3-25	MGM	13-22	MNK	13-80	MSQ	3-68

索引 INDEX

MSR 3-67
MSS 3-68
MST 3-68
MSY 3-70
MSZ 3-67
MTB 13-22
MTC 3-103
MTD 4-51
MTG 3-103
MTH 13-18
MTJ 13-19
MTN 13-18
MTQ 13-20
MTQA 13-80
MTU 8-23~8-24
MTX 4-53
MTY 13-91~13-92
MTZ 8-5
MU 2-24
MVA 13-16
MVJ 13-105
MWC 13-25
MWF 3-74
MWJ 13-92
MWZ 13-23
MXF 13-104
MXR 2-26
MXT 2-27
MYC 8-28
MZT 13-87

【N】

NBB 13-12
NBC 13-13
NBR 13-12
NBT 13-13
NEA 13-76
NEC 13-53~13-54
NEF 13-53
NEG 13-76
NEK 13-54
NEM 13-54
NEP 13-53
NEQ 13-77
NER 13-57
NES 13-76~13-77
NET 13-74~13-75
NEX 13-74
NEY 13-54
NSA 13-53
NWT 8-31

【O】

OIL 8-28
OPW 8-28

【P】

P-1,5 13-87
P-2* 14-2
PAC 6-18
PACA 6-136
PACB 6-135
PACD 6-133
PACF 6-136
PAD10 6-19
PAD11 6-19
PAK11 6-19
PC 6-96 6-146~6-147
PCA 3-48
PCBS 3-110
PCC 3-48
PCE 3-46~3-47
PCF 3-52
PCG 6-146
PCIE 13-75
PCJ 3-50
PCK 3-48~3-49
PCM 3-59
PCN 3-53
PCQ 3-58
PCR 3-46
PCS 6-45~6-46
PCS-2A 3-50
PCT 6-150
PCU 6-150
PCW 6-151
PCX 6-31
PCY 3-47
PDB 6-145
PDT 6-108
PEB 13-67
PED 13-24
PF 12-20
PG 1-13~1-21
PH 13-14
PHA 3-48
PIN 13-92
PL 6-148
PLA 6-149
PLB 6-149
PLC 6-149
PLD 6-148
PSA 12-4~12-5
PSF 12-8
PSK 12-8
PST 12-19
PTC 8-13

【Q】

Q系列墊座 9-11
QBE 4-52
QBF 4-41
QBK 4-53
QBT 4-24
QBU 4-49
QDC 8-5
QLA 4-16
QLB 4-6
QLC 4-10,4-15
QLD 4-60
QLE 4-4~4-5
QLED 4-38
QLEH 4-5
QLF 4-51
QLG 4-4
QLH 4-50
QLJ 4-11
QLK 4-6
QLL 8-62
QLM 4-50
QLP 4-50
QLQ 4-6
QLR 4-50
QLS 4-49
QLT 4-24
QLU 4-24
QLW 4-49
QLX 4-15
QLY 4-29
QPI 13-62
QQA 4-49
QQD 4-11
QQR 4-21
QRN 1-42

【R】

R系列墊座 9-8,9-9
RJ 13-76
RL 3-114
RMF 3-106~3-107
RMG 3-107
RMJ 3-107
RMK 3-107
RMT 3-107
RS 3-114
RX* 9-9

【S】

S系列墊座 9-7
S系列螺帽 5-65~5-66
S系列螺絲 5-57~5-63,5-65
SA 2-8~2-9
SAQ 2-16
SB 2-6~2-8,2-10
SBD 2-5
SBK 2-5
SC 2-9
SCA 3-19
SCB 3-16
SCC 3-15~3-17
SCD 3-13,3-17
SCE 3-11
SCF 3-17
SCG 3-11
SCK 3-11~3-12
SCL 3-19
SCM 3-18~3-19
SCN 3-18
SCP 3-18
SCQ 3-10
SCS 3-13
SCT 3-14~3-15
SCTA 3-15
SCTMS 3-70
SCU 3-13
SCW 3-12
SCX 3-12
SCY 3-14
SCZ 3-12
SDA 3-18
SDC 3-55
SDF 3-54
SDH 13-80
SDM 3-55
SDN 3-55
SDS 3-55
SDT 3-56
SF 5-61
SG 2-4~2-5
SH 3-112~3-113
SHB 3-113
SHC 8-27
SK 3-10
SL 2-5
SLED 4-3
SLM 2-5
SM 5-64~5-65
SMA4,SMA6 5-66
SMC4 5-66
SN4 5-61
SNT 5-58
SP 13-26
SQ 3-119
SQA 5-60
SQR 5-17
SQRC 5-17
SQRD 5-21
SR 5-5,5-9~5-11 5-13,5-15~5-33 5-52~5-53
SRBK 5-14
SRCK 5-6~5-7 5-13~5-14
SRCM 5-12
SRCQ 5-3
SRD 5-5~5-12 5-14~5-15
SRDK 5-5
SRDM 5-4
SRDW 5-32
SRF 5-2
SRFK 5-30~5-31
SRG 5-6
SRH 5-7
SRJ 5-2
SRL 5-12
SRM 5-4
SRMD 5-32
SRMF 5-24
SRMQ 5-26
SRMR 5-23
SRMS 5-23
SRMT 5-24

索引 INDEX

SRN	5-19	T9A	13-102	TF8	6-98	TU14	6-103	UWM	8-36
SRNT	5-19	TA,TA*	6-97~6-99	TG12	6-100	TUA	6-100	UWQ	8-35
SRQ	5-33	TAA	3-7~3-8	TGB	13-91	TUT	6-103	UWS	8-36
SRQA	5-2	TAH	3-119	TH,TH2,TH4		TX11	6-102	UWT	8-25
SRQB	5-2	TAJ	3-64		3-122~3-123	【U】		UWX	8-28
SRQF	5-2	TAK	3-54	TH4F	3-124	U 系列墊座	9-7	UWXC	8-37
SRQM	5-32	TAN	3-60	THB	3-123	U 系列華司		【V】	
SRS*	3-111	TAX	3-52	THC	3-123		8-24~8-27,8-31	VCK	13-53
SRTA	3-93	TB	3-105~3-106	THK	3-123	UA	3-80	VCP	13-58
SRTB	3-96	TB8,TB20	6-98	THM	3-123	UAC	13-85	VCQ	13-57
SRTC	3-94	TBK	3-72	THT	3-124	UB	3-78~3-80	VFA	13-89
SRTD	3-96	TBW	3-73	THU4,THU6	3-122	UBA	13-20	VKW	5-66
SRTF	3-94	TC20	6-103	TH3F	3-124	UBC	3-80	VTU	2-27~2-28
SRTH	3-94	TCA	3-64~3-65	THU6-712F	3-124	UBL	3-80	VVC	13-104
SRTK	3-95	TCBS	3-65	TK6	6-101	UCB	3-36,3-39	【W】	
SRTL	3-97	TCBK	3-72	TN16	6-98	UCC	3-24	WC	14-6
SRTM	3-96	TCBR	3-61	TO	8-72	UCD	3-32	WCB	3-45
SRTP	3-97	TCC	3-58	TPW	13-93	UCF	3-24	WCC	8-29
SRTQ	3-94	TCD	3-58	TQ	8-2	UCH	3-37	WCD	5-48
SRTR	3-95	TCF	3-52	TQA	8-72	UCK	3-32	WHT	9-5
SRTY	3-95	TCG	3-72	TQJ	8-47	UCX	3-22	WRA	8-25
SRU	5-51~5-52	TCH	3-54	TQP	8-47	UN4,UN6	5-65	WRB	8-36
SRX	5-25	TCJ	3-60	TR-01~10**		UN6K	8-29	WRC	8-33
SRXD	5-25	TCK	3-59		8-57~8-70	UN10	5-66	WRD	8-34
SRXM	5-16	TCKY	3-10	TRA	8-47	UNB	3-81	WRF	8-36
SRY	5-3	TCL	3-66	TRC	8-45~8-47	UNC	3-81	WRK	8-33
SRYC	5-3	TCM3	3-66	TRE	8-65	UNG	3-81	WRP	8-34
SRYD	5-4	TCN	3-59	TRJ	8-69	US	2-22	WRX	9-7
SRYK	5-3	TCP	3-73	TRJP	8-70	USB	13-67~13-71	WS	8-27,8-30
SRZ	5-4	TCQ	3-54	TRJQ	8-70	USC	2-21		8-33~8-34
SS	2-10	TCR	3-65	TRJW	8-70	USCF	2-21	WSA	8-35~8-36
SSA	3-56	TCS	3-59	TRK	8-60	USF	13-71	WSB	8-38
SSBS*	3-56	TCT	3-71	TRL	8-61	USJ	13-71	WSC	8-37
SSK	2-10	TCU	3-33	TRM	8-69	USK	2-20	WSE	8-49
SSR	3-110	TCW	3-53	TRN	8-61	USM	2-20~2-21	WSEA	8-50
STR	5-32	TCX	3-60	TRNC	8-62	USQ	13-72	WSF	8-32~8-33
SU	5-57	TCY	3-63	TRQ	8-71	UST	2-20~2-21	WSG	8-47~8-49
SU2,SU6	5-62	TCYA	3-64	TRR	8-57	UTF	6-120	WSGB	8-48
SU6A	5-59	TD*	6-100	TRT	8-60	UTU	2-28	WSGT	8-48
SUN4,SUN6	5-60	TDA	6-49	TRW	8-60	UW	1-25	WSH	8-35
SUP	3-127	TDD	6-47	TRX	8-69		13-17~13-18	WSI	8-48
SW4,SW5	5-63	TDF	6-47	TRY	8-61	UWA	8-24	WSJ	8-38
SWA	8-45	TDH	6-72	TRZ	8-59	UWB	8-24	WSL	8-38
SY	2-9	TDR16	6-101	TS	3-105	UWC	8-25	WSM	8-39
SYB	2-9	TDY8	6-101	TSA	3-105	UWD	8-32,8-35	WSN	8-40
SZ	5-50	TDY11	6-101	TSC	3-106	UWF	8-36	WSNA	8-50
【T】		TE21	6-102	TSD	3-106	UWJ	8-32	WSP	2-6
T 系列墊座	9-11	TEY4	6-102	TT15	6-102	UWK	8-32	WSQ	8-39

索引 INDEX

WSR	8-28				
WSS	8-41				
WST	8-38				
WSU	8-28,8-39				
WSX	8-34				
WSZ	2-6				
WU	8-39				
WUS	8-39				
WWA	8-49				
WWD	8-4				
WWF	8-37				
WWK	8-35				
【Y】					
YAA	12-13				
YAD	12-4				
YAK	12-17				
YAKS	12-17				
YAM	12-14				
YAT	12-12				
YJ	12-2				
	12-13~12-14				
YJA	12-5				
YJB	12-9				
YJC	12-6				
YJD	12-16				
YJF	12-8				
YJG	12-17				
YJH	12-10				
YJK	12-9				
YJL	12-9				
YJM	12-10				
YJP	12-6				
YJQ	12-7				
YJR	12-5				
YJS	12-7				
YJW	12-7				
YL	6-118,6-120				
YLA	6-119				
YLB	6-119				
YLC	6-118				
YLED	4-34				
YLF	6-119				
【其他】					
熱收縮套管	8-72				



01


門扣
MAGNET LATCH, STRIKER LATCH, PUSH LATCH

塑膠阻尼器
ROTARY DAMPER




導光棒
LIGHT PIPE





扣具 MAGNET LATCH(磁鐵式) 1-2-1

- MATERIAL: NYLON 66(UL)+STEEL
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

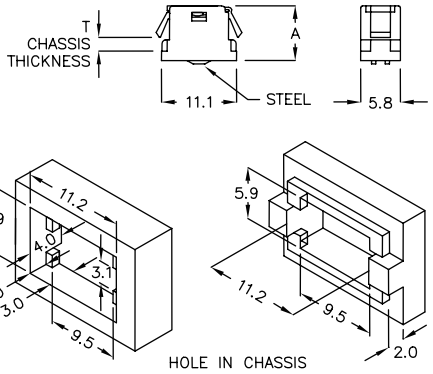


PART NO	A	T CHASSIS THICKNESS	PACKAGE
DLA-01	8.4	2.0	1000



扣具 MAGNET LATCH(磁鐵式) 1-2-2

- MATERIAL: NYLON 66(UL)+STEEL
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	T CHASSIS THICKNESS	PACKAGE
DLA-02	10.2	1.9	1000

HOLE IN CHASSIS SAME AS DLA-01 (Page 1-2-1)




扣具 MAGNET LATCH(磁鐵式) 1-2-3

- MATERIAL: NYLON 66(UL)+STEEL
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

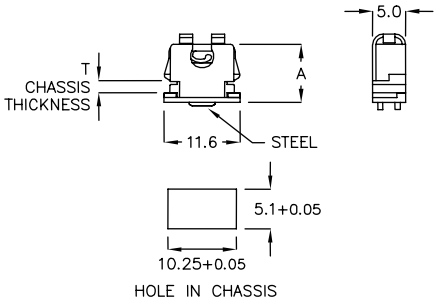


PART NO	A	T CHASSIS THICKNESS	PACKAGE
DLA-03	8.9	2.0	1000



扣具 STRIKER 1-2-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

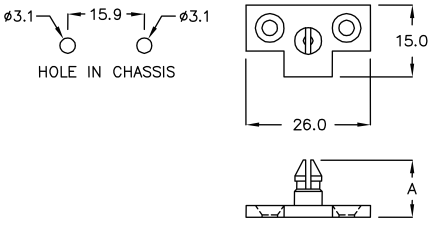

PART NO	A	PACKAGE
DL-10A	12.0	500


TO BE USED WITH P.G. PART DL-10 , DL-10F (Page 1-3-3 , 1-3-2)

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



扣具 STRIKER 1-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

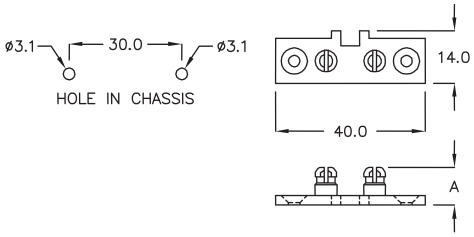


PART NO	A	PACKAGE
DL-10K	10.1	500

TO BE USED WITH P.G. PART DL-10H (Page 1-3-4)



扣具 LATCH 1-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	PACKAGE
DL-10	8.5	1.4	500

TO BE USED WITH P.G. PART DL-10A (Page 1-2-4)




扣具 LATCH 1-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	PACKAGE
DL-10F	8.5	1.2~1.6	500

TO BE USED WITH P.G. PART DL-10A (Page 1-2-4)



扣具 LATCH 1-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS : 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T CHASSIS THICKNESS	PACKAGE
DL-10H	8.5	1.4~1.6	500


TO BE USED WITH P.G. PART DL-10K (Page 1-3-1)

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



扣具 LATCH 1-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

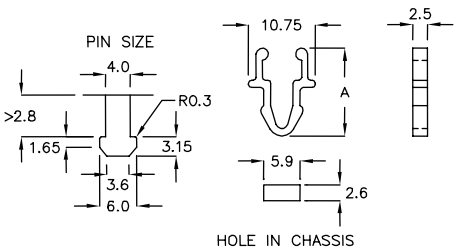


PART NO	A	PACKAGE
DL-2	14.7	1000




扣具 STRIKER 1-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
DL-008	13.0	1.5	9.9	18.0	1000
DL-8DK	8.0	2.0	8.7	15.2	

DL-8DK TO BE USED WITH P.G. PART DL-9DK (Page 1-4-4)
DL-008 TO BE USED WITH P.G. PART DL-009 ,
DL-9KA , DLC-14 (Page 1-4-3 , 1-5-1)




扣具 LATCH 1-4-3

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

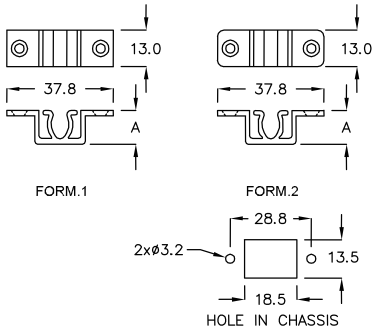


PART NO	A	FORM	PACKAGE
DL-009	12.1	1	200
DL-9KA	12.0	2	

TO BE USED WITH P.G. PART DL-008 (Page 1-4-2)



扣具 LATCH 1-4-4


- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW



PART NO	A	PACKAGE
DL-9DK	10.8	200


TO BE USED WITH P.G. PART DL-8DK (Page 1-4-2)

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



扣具 LATCH 1-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x4 TAPPING SCREW




PART NO	A	PACKAGE
DLC−14	13.7	500

TO BE USED WITH P.G. PART DL-008 (Page 1-4-2)



扣具 LATCH 1-5-2

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

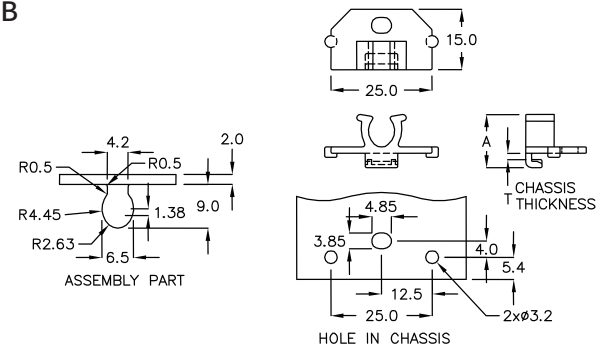


PART NO	A	T CHASSIS THICKNESS	PACKAGE
DLM−06	13.15	1.5	2000



扣具 LATCH 1-5-3

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

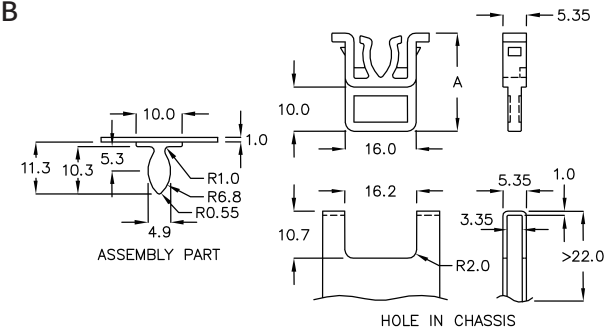


PART NO	A	PACKAGE
DLF−22QT	22.2	200




扣具 STRIKER 1-5-4

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL




PART NO	A	PACKAGE
DL−20A	20.6	500

TO BE USED WITH P.G. PART DL-20 (Page 1-6-1)




扣具 LATCH 1-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- METAL MATERIAL: SK7 BLUE ZINE PLASTED
- COLOR: NATURAL




PART NO	A	PACKAGE
DL-20	14.9	500


TO BE USED WITH P.G. PART DL-20A (Page 1-5-4)



扣具 LATCH 1-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

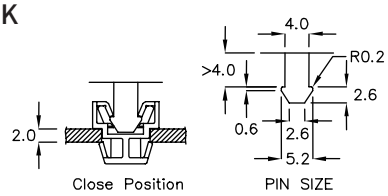




PART NO	A	PACKAGE
DLB-4A	10.2	1000



扣具 LATCH 1-6-3

- MATERIAL: PP(UL),NYLON 6(UL)
- COLOR: BLACK




PART NO	MATERIAL	A	PACKAGE
DLK-01	PP V0	ø6.0	500
DLK-02	N6 V2	ø5.85	

TO BE USED WITH P.G. MALE PART DLK-1A (Page 1-6-4)



扣具 STRIKER 1-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	D SCREW	PACKAGE
DLK-1A	18.0	4.0	M6	500


TO BE USED WITH P.G. FEMALE PART DLK-01 , DLK-02 (Page 1-6-3)

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



扣具 STRIKER 1-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

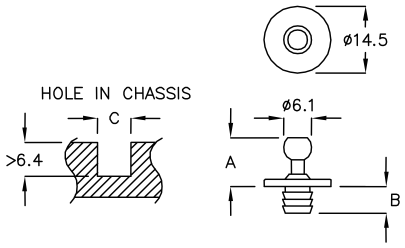


PART NO	A	B	C HOLE IN CHASSIS	PACKAGE
DLK-2A	10.6	5.8	ø6.1	500

TO BE USED WITH P.G. FEMALE PART MPL-02 , MPL-04 (Page 1-7-3)



扣具 STRIKER 1-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

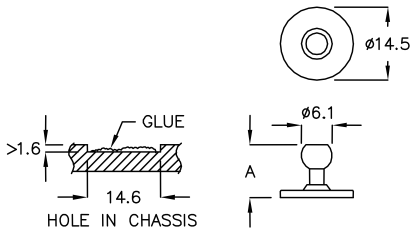


PART NO	A	PACKAGE
DLK-2C	10.6	500

TO BE USED WITH P.G. FEMALE PART MPL-02 , MPL-04 (Page 1-7-3)



固定座 LATCH 1-7-3

- MATERIAL: TPE
- COLOR: BLACK

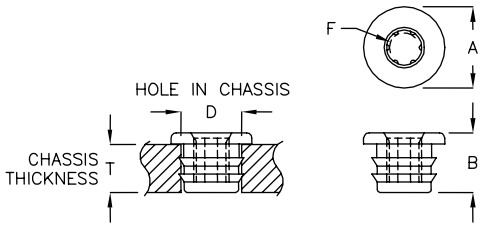


PART NO	A	B	F	T CHASSIS THICKNESS	D HOLE IN CHASSIS	MATERIAL	PACKAGE
MPL-01	ø15.0	10.8	ø6.0	10.0	ø10.0	TPE 55°	500
					ø10.5	TPE 70°	
MPL-02	ø15.0	11.0	ø5.5	10.0	ø10.0	TPE 55°	
					ø10.5	TPE 70°	
MPL-04	ø14.0	10.5	ø5.9	9.5	ø10.0	TPE 55°	
					ø10.5	TPE 70°	



扣具 PUSH LATCH STRIKER 1-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

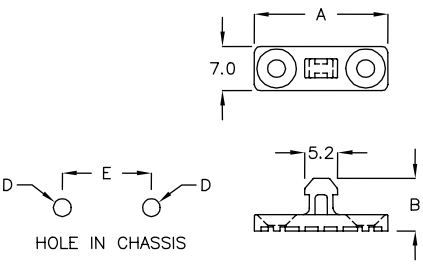

PART NO	A	B	D	E	SUITABLE PUSH LATCH WITH P.G. PART	PACKAGE
DL-03C	21.0	8.3	ø2.8	14.0	DL-150C, DL-400D	1000


TO BE USED WITH P.G. PART DL-SERIES (Page 1-11-1 , 1-11-3)


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




扣具 PUSH LATCH STRIKER 1-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW








PART NO	A	B	C	D	SUITABLE PUSH LATCH WITH P.G. PART	PACKAGE
DL-001	25.0	10.1	ø3.2	15.0	DL-100B, DL-400D	1000
DL-003	21.0	7.7	ø2.8	14.0	DL-100C, DL-150C DL-400D	
DL-07SK	25.0	10.1	ø3.2	15.0	DL-700F	


TO BE USED WITH P.G. PART DL-SERIES (Page 1-10-2 , 1-11-3 , 1-10-3 , 1-11-1 , 1-12-2)




扣具 PUSH LATCH STRIKER 1-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW








PART NO	A	B	D	E	SUITABLE PUSH LATCH WITH P.G. PART	PACKAGE
DL-002	25.0	11.0	ø3.2	15.0	DL-100A, DL-100C DL-150C, DL-400D	1000

TO BE USED WITH P.G. PART DL-SERIES (Page 1-10-1 , 1-10-3 , 1-11-1 , 1-11-3)




門扣 PUSH LATCH 1-8-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: STEEL,SPRING





夾子欲下壓產生扣住功能時
行程距離卡板頂端衝程
3.0mm
Maximum Push-IN Position





夾子扣住時
夾子頂端位置
距離卡板頂端
4.5mm
Close Position

PART NO	A	PACKAGE
DL-250	19.2	1000










提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



門扣 PUSH LATCH 1-9-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: STEEL,SPRING

PART NO	A	PACKAGE
DL-220C	2.95	2000

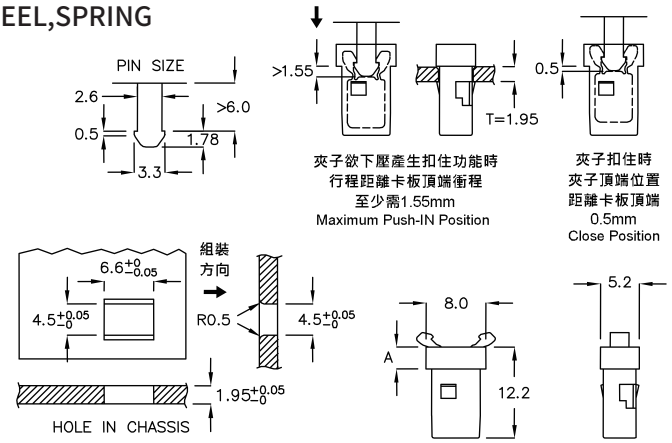





門扣 PUSH LATCH 1-9-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

PART NO	A	PACKAGE
DL-550	5.0	1000

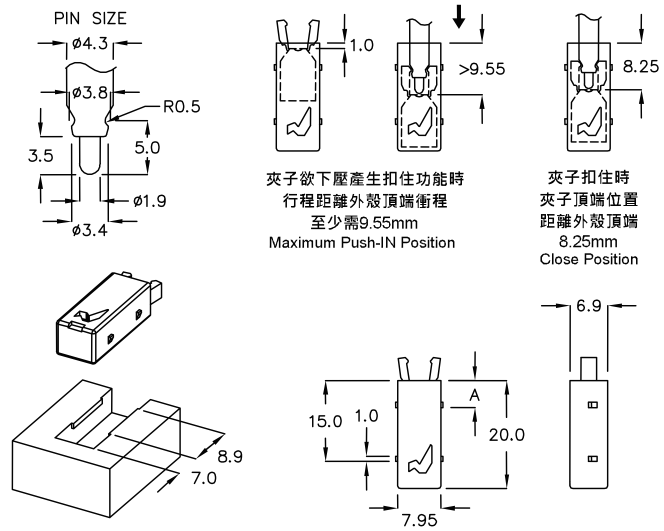





門扣 PUSH LATCH 1-9-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: STEEL,SPRING

PART NO	A	PACKAGE
DL-650C	2.9	1000

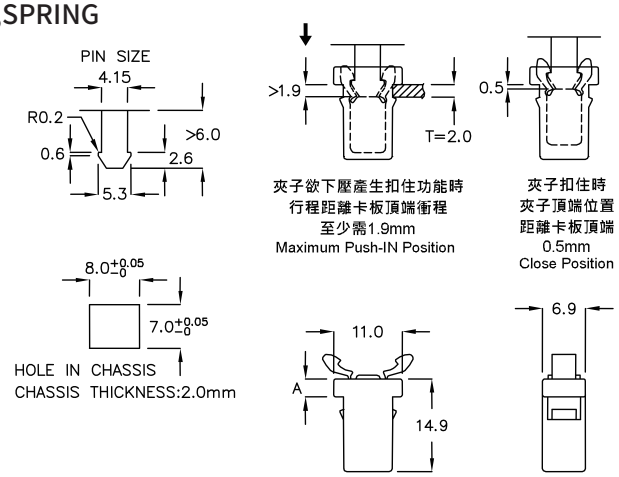





PART NO	A	PACKAGE
DL-100A	2.9	1000

門扣 PUSH LATCH 1-10-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- MATERIAL: POM,SPRING

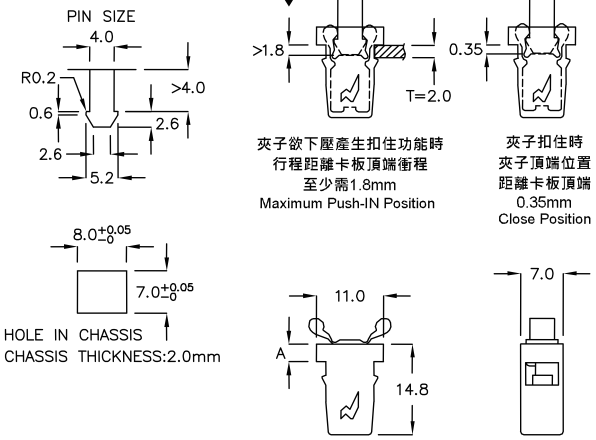




PART NO	A	PACKAGE
DL-100B	2.9	1000

門扣 PUSH LATCH 1-10-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

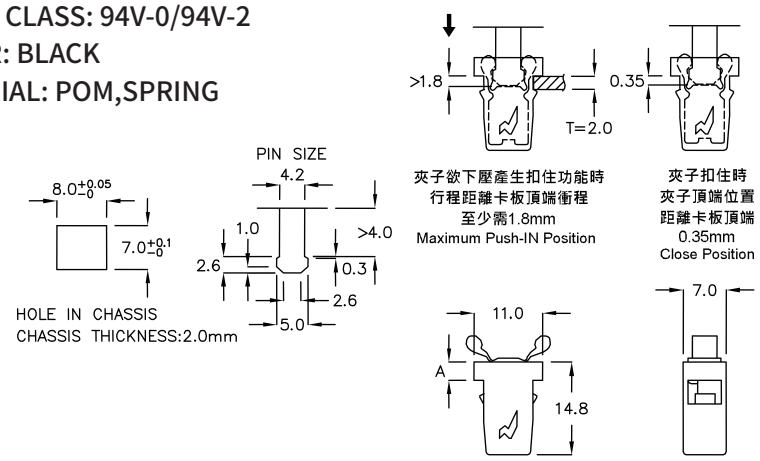





PART NO	A	PACKAGE
DL-100C	2.9	1000

門扣 PUSH LATCH 1-10-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

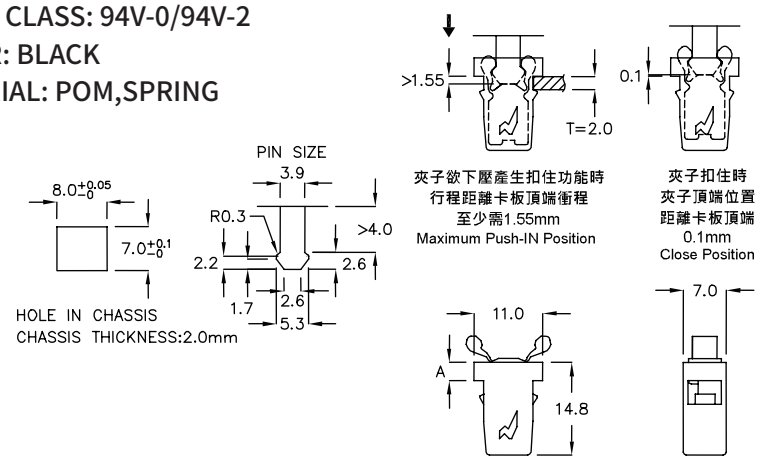


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




門扣 PUSH LATCH 1-11-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

PART NO	A	PACKAGE
DL-150C	2.9	1000

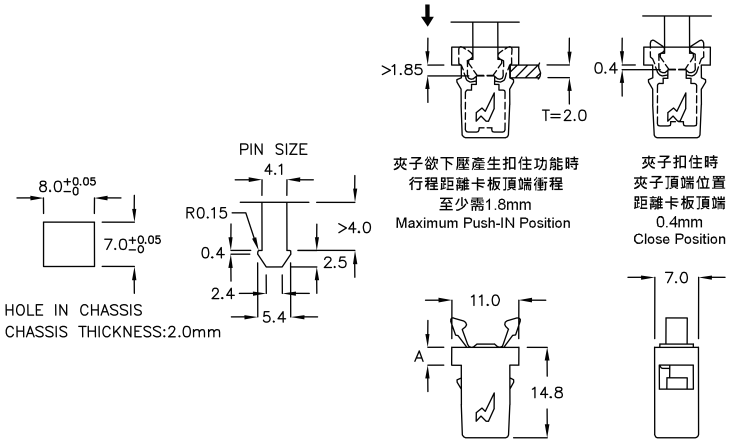





門扣 PUSH LATCH 1-11-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

PART NO	A	PACKAGE
DL-150F	2.9	1000

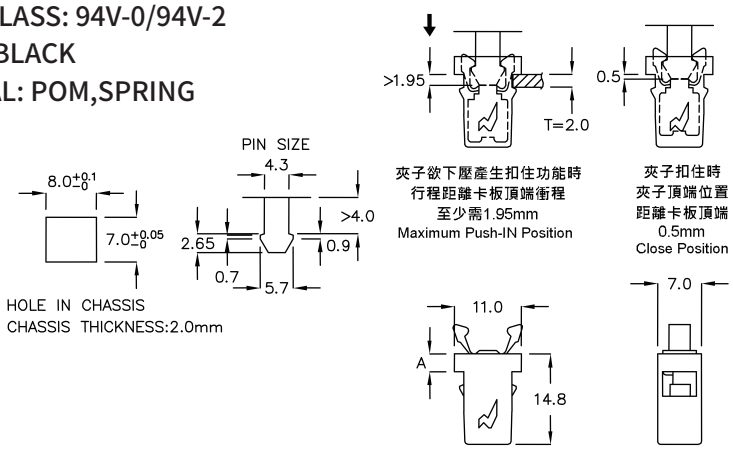




門扣 PUSH LATCH 1-11-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- MATERIAL: POM,SPRING

PART NO	A	PACKAGE
DL-400D	3.1	1000

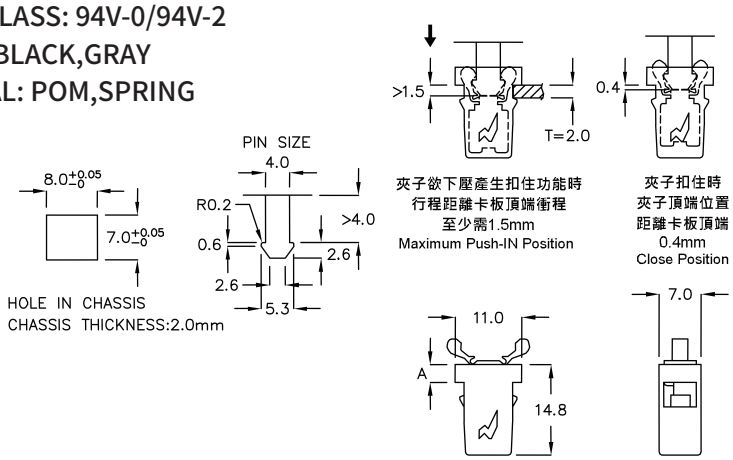


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



PART NO	A	PACKAGE
DL-400H	3.1	1000

門扣 PUSH LATCH 1-12-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

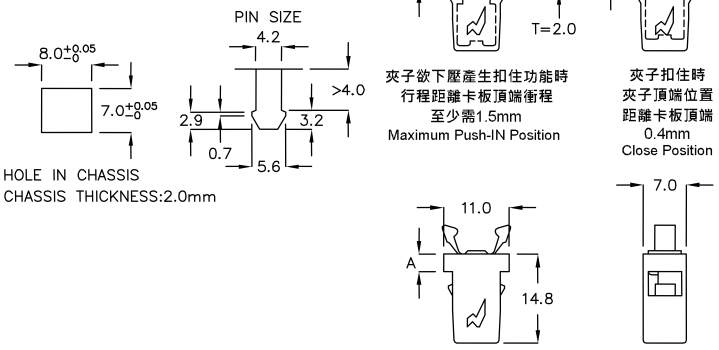




PART NO	A	PACKAGE
DL-700F	2.9	1000

門扣 PUSH LATCH 1-12-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

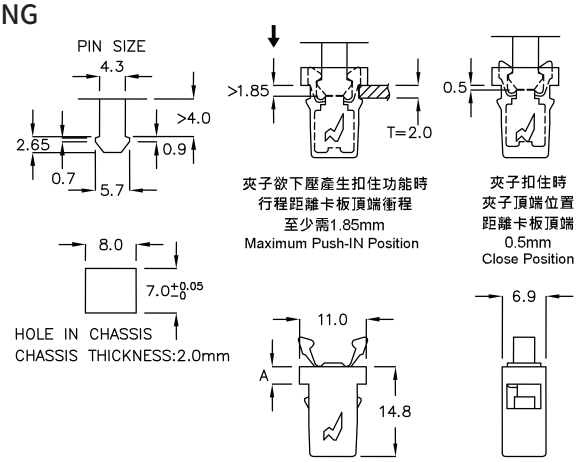





PART NO	A	PACKAGE
DL-400P	3.1	1000

門扣 PUSH LATCH 1-12-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- MATERIAL: POM,SPRING

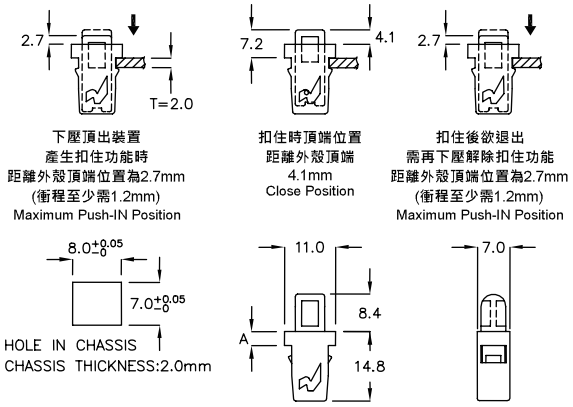


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




塑膠阻尼器 ROTARY DAMPER 1-13-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

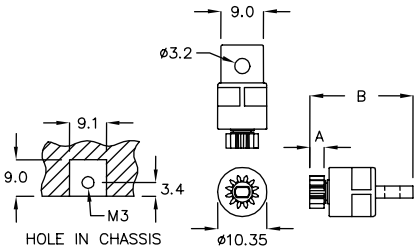


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-10	ø6.0	0.5	12	20°	3.0	21.7	10~30	500

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-13-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

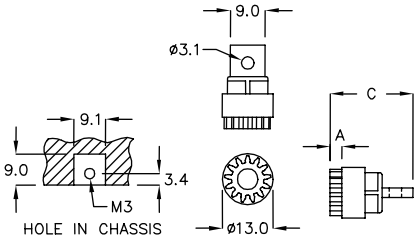


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	C	TORQUE (gf-cm)	PACKAGE
PG-01K	ø8.8	0.8	11	20°	3.0	21.7	23,38,63	500
PG-01A	ø10.4	0.8	13	20°	3.2	21.9		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-13-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-04K	ø6.0	0.5	12	20°	1.8	5.7	7~30	1000

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-13-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK



PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-07S	ø6.0	0.6	10	20°	3.0	6.1	10~75	1000


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-14-1

- MATERIAL: ABS,POM
- FLAME CLASS: 94HB
- COLOR: BLACK






PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	C	D	E	TORQUE (gf-cm)	PACKAGE
PG-7MK	ø6.6	0.6	11	20°	2.45	5.1	16.5	ø2.15	5.0	15,25 45,60	1000
PG-7CN	ø6.6	0.6	11	20°	3.45	6.1	16.5	ø2.15	5.0		


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-14-2

- MATERIAL: ABS,POM
- FLAME CLASS: 94HB
- COLOR: BLACK






PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-7BP	ø6.6	0.6	11	20°	2.45	5.1	15,25,45,60	1000

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-14-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-3AS	ø8.8	0.8	11	20°	3.55	7.5	15	500
PG-3MS	ø10.4	0.8	13	20°	3.55	7.5		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-14-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK



PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-13	ø8.8	0.8	11	20°	3.0	7.7	45,70,100,130 150,200,230,270	500
PG-13M	ø10.4	0.8	13	20°	3.0	7.7		


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-15-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-13QR	ø8.8	0.8	11	20°	3.0	7.5	15~175	500
PG-13YP	ø10.4	0.8	13	20°	3.0	7.5		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-15-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	C	TORQUE (gf-cm)	PACKAGE
PG-13DF	ø8.8	0.8	11	20°	5.6	10.0	24.0	40~280	500
PG-13HJ	ø8.8	0.8	11	20°	5.6	10.0	25.5		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-15-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-13PC	ø8.8	0.8	11	20°	3.0	6.15	45~155	500
PG-13PL	ø10.4	0.8	13	20°	3.0	6.15		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-15-4


- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK



PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-21	ø12.8	0.8	16	20°	3.0	6.8	12,25	500


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-16-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-8CS	ø8.8	0.8	11	20°	3.0	7.85	15,45 100,130	500
PG-8FS	ø10.4	0.8	13	20°	3.0	7.85		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-16-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-08H	ø8.8	0.8	11	20°	3.0	7.8	60,110,190	500

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND




塑膠阻尼器 ROTARY DAMPER 1-16-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: GRAY




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-15	ø7.0	0.5	14	20°	3.0	6.4	25~110	500

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-16-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: GRAY



PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-15A	ø8.8	0.8	11	20°	3.0	6.4	25~110	500


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-17-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-8AS	ø8.8	0.8	11	20°	3.0	8.0	15,45 100,130	500
PG-8MS	ø10.4	0.8	13	20°	3.0	8.0		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-17-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

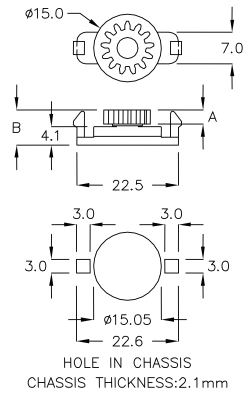


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-8LS	ø8.8	0.8	11	20°	3.0	7.6	15,45 100,130	500
PG-8DS	ø10.4	0.8	13	20°	3.0	7.6		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-17-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

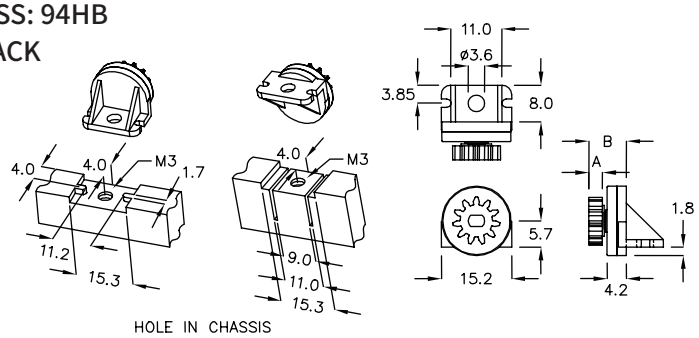

PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-5AS	ø8.8	0.8	11	20°	3.0	7.6	15	500
PG-5MS	ø10.4	0.8	13	20°	3.0	7.6		


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-18-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

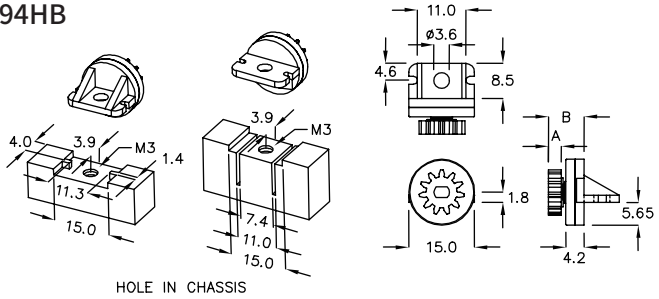


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-5CS	ø8.8	0.8	11	20°	3.0	7.6	15,45 100,130	500
PG-5LS	ø10.4	0.8	13	20°	3.0	7.6		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-18-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

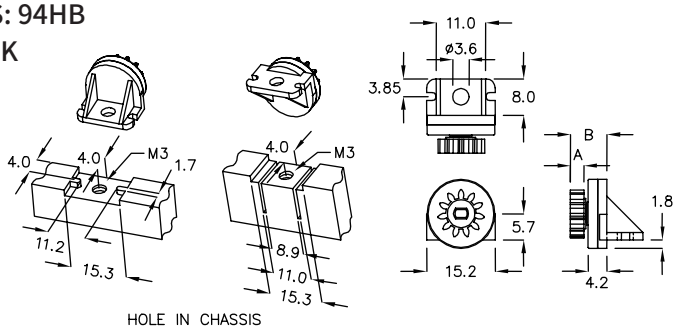


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-12	ø8.8	0.8	11	20°	3.0	7.6	45,70,100,130 150,200,230,270	500
PG-12M	ø10.4	0.8	13	20°	3.0	7.6		

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-18-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

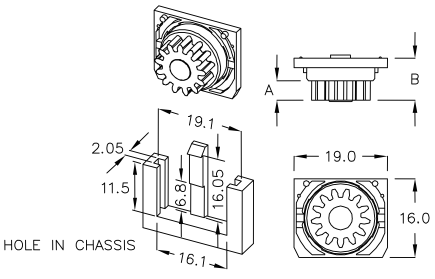

PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-06A	ø10.4	0.8	13	20°	4.0	8.9	45,85	500


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND
INSTALLATION: IS JAMED BY THE CLIP

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-19-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

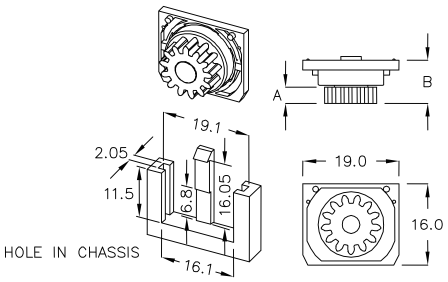


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-06C	ø10.4	0.8	13	20°	3.2	8.55	25,37,65	500

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND
INSTALLATION: IS JAMED BY THE CLIP



塑膠阻尼器 ROTARY DAMPER 1-19-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-16D	ø8.8	0.8	11	20°	5.5	14.0	60~500	500

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-19-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

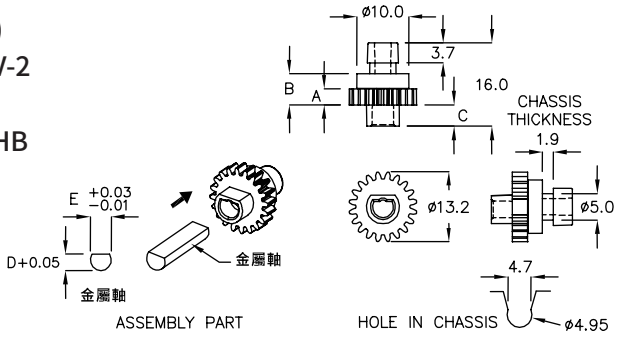


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	C	D	E	TORQUE (gf-cm)	PACKAGE
PG-17	ø12.0	0.6	20	20°	3.0	6.2	4.0	3.05	ø4.05	13	500
PG-18	ø12.0	0.6	20	20°	3.0	7.2	3.0	3.7	ø4.7	25	

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-19-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

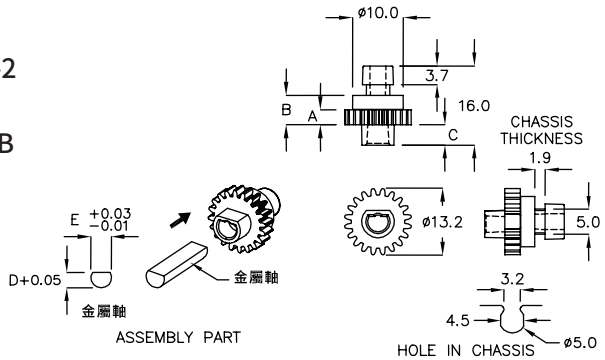

PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	C	D	E	TORQUE (gf-cm)	PACKAGE
PG-17MD	ø12.0	0.6	20	20°	3.0	6.2	4.0	3.05	ø4.05	13	500


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-20-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-22	ø8.8	0.8	11	20°	4.5	13.85	220	500

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-20-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-20	ø12.0	1.0	12	20°	5.0	18.2	500	64


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-20-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK






PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	TORQUE(gf-cm)		PACKAGE
					withershin	clockwise	
PG-30-600	ø12.0	1.0	12	20°	600	100	64
PG-30-1400	ø12.0	1.0	12	20°	1400	100	


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-20-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK





PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	TORQUE(gf-cm)		TYPE OF GEARS	PACKAGE
					withershin	clockwise		
PG-50-600	ø12.0	1.0	12	20°	600	100	SPUR GEARS	64
PG-50-1400	ø12.0	1.0	12	20°	1400	100		


TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠阻尼器 ROTARY DAMPER 1-21-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

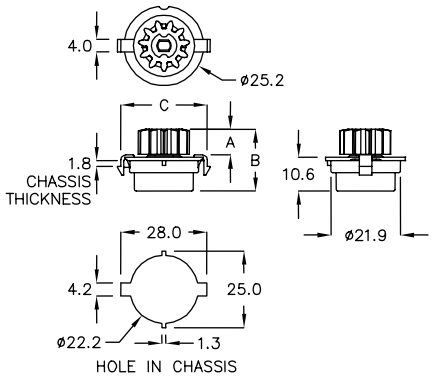


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	C	TORQUE (gf-cm)	PACKAGE
PG-27	ø13.75	1.25	11	20°	7.9	19.5	27.3	100	200

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-21-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

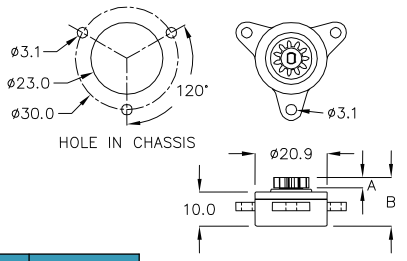


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	A	B	TORQUE (gf-cm)	PACKAGE
PG-40	ø8.8	0.8	11	20°	3.0	14.3	400	200

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



塑膠阻尼器 ROTARY DAMPER 1-21-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

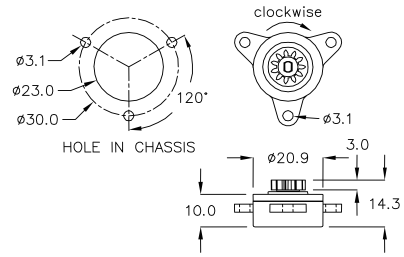


PART NO	PITCH DIAMETER	MODULE	TOOTH NUMBER	PRESSURE ANGLE	TORQUE(gf-cm)		PACKAGE
					withershin	clockwise	
PG-45-380	ø8.8	0.8	11	20°	380	140	200
PG-45-700	ø8.8	0.8	11	20°	700	200	

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



導光罩 LIGHT TRANSPORTER 1-21-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

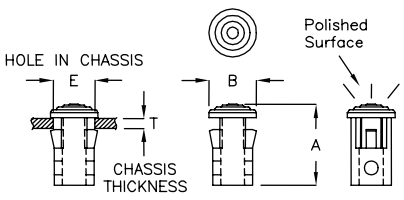

搭配 ∅2 導光光纖使用


PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	SUITABLE FIBER DIAMETER	PACKAGE
EDN-03	6.9	ø4.1	ø3.5	1.0	ø2.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光罩 LIGHT TRANSPORTER 1-22-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

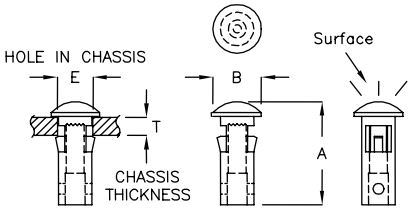


搭配 ∅2、∅3 導光光纖使用

PART NO	Surface	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	SUITABLE FIBER DIAMETER	PACKAGE
EDN-3C	Matt	11.6	ø5.0	ø3.55	3.0	ø2.0	1000
EDN-5A	Polished	6.9	ø5.1	ø4.5	1.0	ø3.0	



導光罩 LIGHT TRANSPORTER 1-22-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

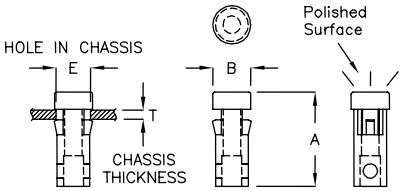


搭配 ∅2 導光光纖使用

PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	SUITABLE FIBER DIAMETER	PACKAGE
EDN-3K	9.8	ø4.0	ø3.5	1.0	ø2.0	1000



導光罩 LIGHT TRANSPORTER 1-22-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

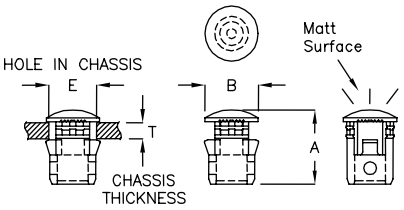


搭配 ∅3 導光光纖使用

PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	SUITABLE FIBER DIAMETER	PACKAGE
EDN-5SP	ø6.9	ø5.1	ø4.5	1.6	ø3.0	1000



SMD 座 SMD HOUSING 1-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

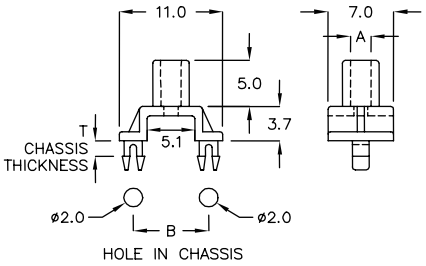

搭配 ∅2、∅3 導光光纖使用

FOR SMD LED					
PART NO	A	B	T CHASSIS THICKNESS	SUITABLE FIBER DIAMETER	PACKAGE
EDZ-01	ø2.2	8.0	1.6	ø2.0	1000
EDZ-2F	ø3.0	8.0	1.6	ø3.0	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 1-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

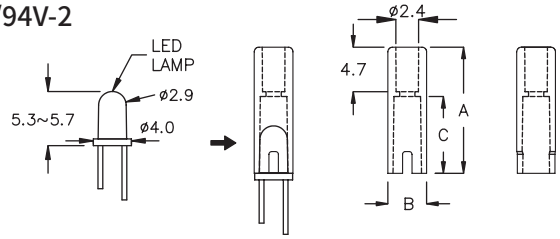


搭配 ∅2 導光光纖使用

FOR ø3 2PIN LED					
PART NO	A	B	C	SUITABLE FIBER DIAMETER	PACKAGE
★ EDZ-13C	13.3	ø4.1	8.1	ø2.0	1000



LED 座 LED HOUSING 1-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

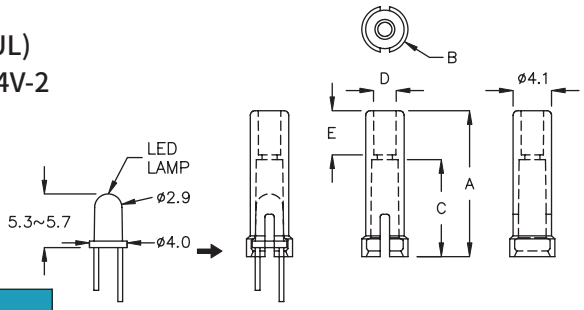


搭配 ∅2 導光光纖使用

FOR ø3 2PIN LED							
PART NO	A	B	C	D	E	SUITABLE FIBER DIAMETER	PACKAGE
EDZ-3A	12.5	ø4.9	7.0	ø2.1	5.0	ø2.0	1000
EDZ-15F	15.5	ø4.9	10.3	ø2.4	4.7	ø2.0	



LED 座 LED HOUSING 1-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

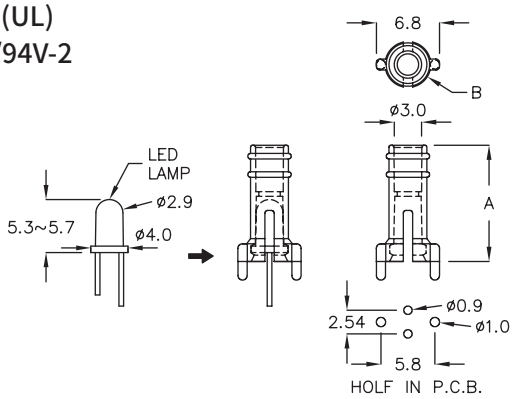


搭配 ∅3 導光光纖使用

FOR ø3 2PIN LED				
PART NO	A	B	SUITABLE FIBER DIAMETER	PACKAGE
EDZ-2A	12.5	ø4.9	ø3.0	1000



LED 座 LED HOUSING 1-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

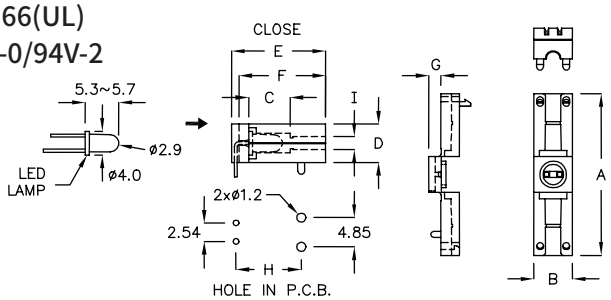

搭配 ∅2、∅3 導光光纖使用


FOR ø3 2PIN LED											
PART NO	A	B	C	D	E	F	G	H	I	FIBER DIAMETER	PACKAGE
EDZ-03	32.8	6.0	7.0	7.0	15.9	14.6	2.9	11.05	2.2	ø2.0	500
EDZ-2C	31.6	7.5	6.0	7.2	14.8	13.5	2.4	10.05	3.0	ø3.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 1-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

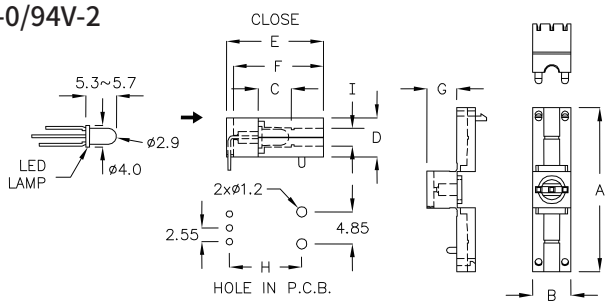


搭配 ∅3 導光光纖使用

FOR ø3 3PIN LED											
PART NO	A	B	C	D	E	F	G	H	I	FIBER DIAMETER	PACKAGE
EDZ-04	31.5	7.5	6.0	7.2	18.15	16.9	5.8	13.5	3.05	ø3.0	500



LED 導光罩 LED CAP 1-24-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

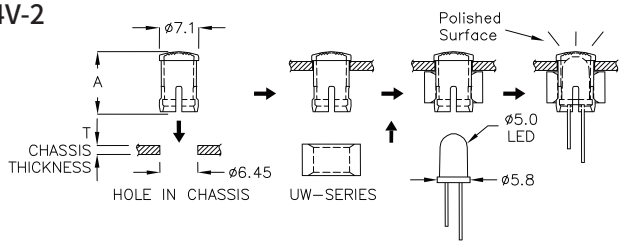


FOR ø5 2PIN LED				
PART NO	A	T CHASSIS THICKNESS	SUITABLE HOLDER	PACKAGE
EDK-01	10.8	0.8	UW-07C	1000
		1.0	UW-07A	
		1.2	UW-06C	
		1.6	UW-06A	
		2.0	UW-05C	
		2.5	UW-05A	
		3.0	UW-04C	
		6.7		

ALSO CAN ASSEMBLE WITH UW-SERIES (Page 1-25-1)



LED 導光罩 LED CAP 1-24-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

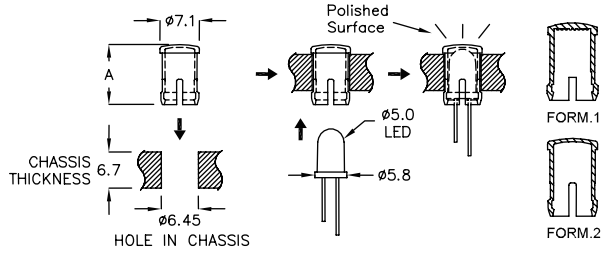


FOR ø5 2PIN LED			
PART NO	A	FORM	PACKAGE
EDK-1C	10.9	1	1000
EDK-1TP	10.8	2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 LAMP HOLDER 1-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
UW-04C	4.5	2000
UW-05A	5.0	
UW-05C	5.5	
UW-06A	5.9	1000
UW-06C	6.3	
UW-07A	6.5	
UW-07C	6.7	

ALSO CAN ASSEMBLE WITH EDK-01 (Page 1-24-2)



LED 導光罩 LED CAP 1-25-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

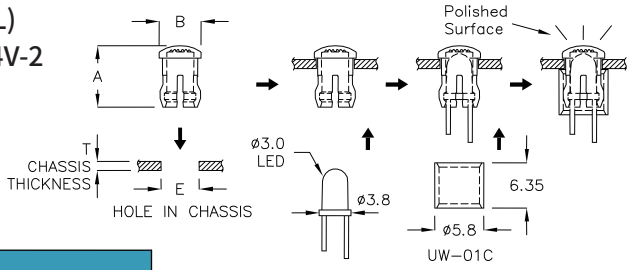


FOR ø3 2PIN LED						
PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	SUITABLE HOLDER	PACKAGE
EDK-02	7.3	ø5.0	ø4.3	0.8~2.8	UW-01C	1000

ALSO CAN ASSEMBLE WITH UW-SERIES (Page 13-17-5)



LED 導光罩 LED CAP 1-25-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

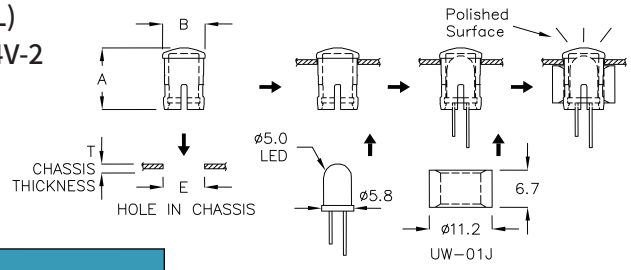


FOR ø5 2PIN LED						
PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	SUITABLE HOLDER	PACKAGE
EDK-03	11.1	ø7.6	ø7.2	0.8	UW-01J	1000

ALSO CAN ASSEMBLE WITH UW-SERIES (Page 13-17-5)



LED 導光罩 LED CAP 1-25-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

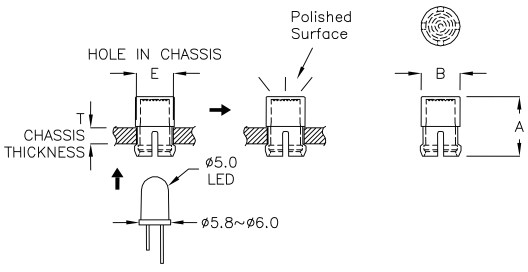


FOR ø5 2PIN LED					
PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
EDK-1A	10.9	ø7.15	ø6.4	3.2	1000



LED 導光罩 LED CAP 1-26-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

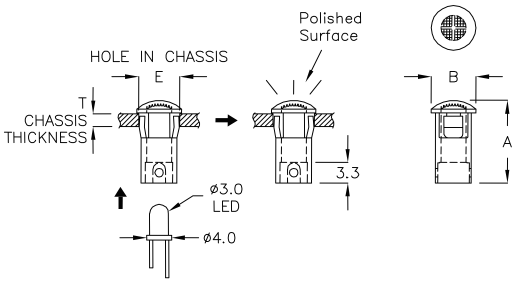


FOR ø3 2PIN LED					
PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
EDN-05	13.2	ø7.1	ø6.0	1.6~2.0	1000



LED 導光罩 LED CAP 1-26-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

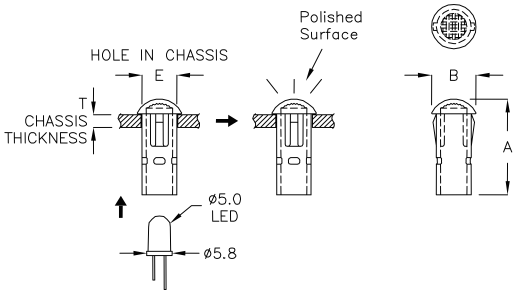


FOR ø5 2PIN LED					
PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
EDN-5C	24.2	ø10.1	ø8.5	2.0	500



LED 導光罩 LED CAP 1-26-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

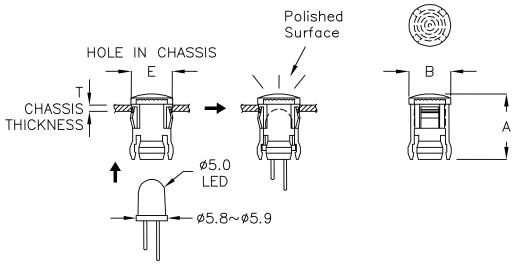


FOR ø5 2PIN LED					
PART NO	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
EDK-5A	10.9	ø7.0	ø6.4	0.8	1000



LED 導光罩 LED CAP 1-26-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

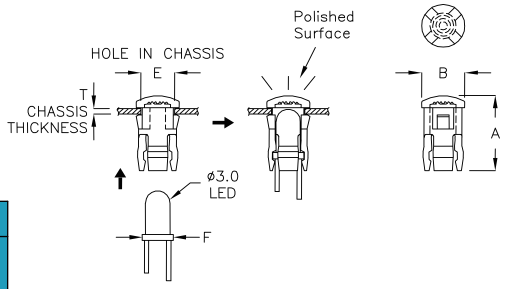


FOR ø3 2PIN LED						
PART NO	A	B	E HOLE IN CHASSIS	F	T CHASSIS THICKNESS	PACKAGE
EDK-3F	9.1	ø5.0	ø4.3	ø3.8	1.1	1000
EDK-3HW	9.3	ø5.3	ø4.8	ø3.9	0.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-27-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

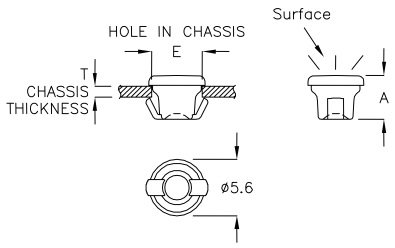


PART NO	Surface	A	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
HHP-04	Polished	4.5	ø5.0	1.0	1000
HHP-4A	Polished	4.9	ø5.0	1.2	
HHP-4F	Polished	3.8	ø5.0	0.8	
HHP-4JP	Matt	3.8	ø5.0	0.8	



導光柱 LIGHT PIPE 1-27-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

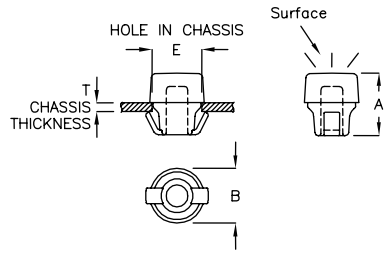


PART NO	SURFACE	A	B	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
HHP-4C	Polished	6.4	ø5.6	ø5.0	0.8	1000
HHP-11JC	Matt	10.8	ø10.0	ø8.5	2.0	



導光柱 LIGHT PIPE 1-27-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: CLEAR

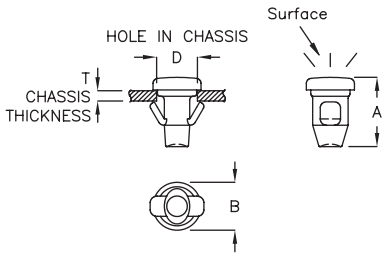



PART NO	SURFACE	A	B	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
★ HHP-6BC	Polished	6.0	ø5.6	ø5.0	1.2	1000
HHP-09	Polished	5.5	ø3.8	ø3.2	0.8	
HHP-9AC	Matt	9.0	ø5.0	ø4.3	0.8	
HHP-13F	Matt	13.9	ø5.0	ø4.3	0.8	



導光柱 LIGHT PIPE 1-27-4


- MATERIAL：PC(UL)
- COLOR：CLEAR



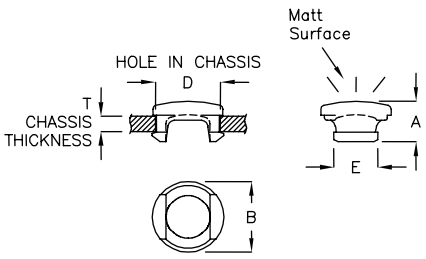


PART NO	A	B	D HOLE IN CHASSIS	E	T CHASSIS THICKNESS	PACKAGE
LDMD-3A	2.7	ø4.0	ø3.0	2.6	1.0	2000
LDMD-4A	2.9	ø5.25	ø4.2	3.8	1.0	
LDMD-5A	3.2	ø5.6	ø5.0	3.5	1.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-28-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

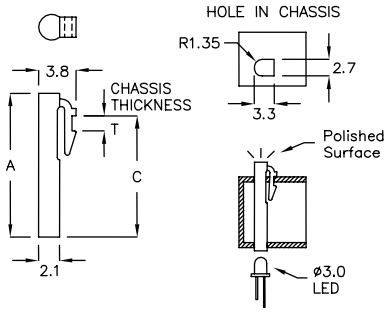


PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
LEAD−14	14.4	12.15	1.2	2000




導光柱 LIGHT PIPE 1-28-2

- MATERIAL: PMMA
- FLAME CLASS: 94HB
- COLOR: CLEAR

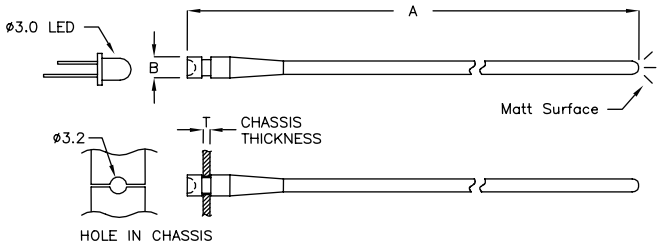


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
LEAD−15	223.2	ø4.0	1.5	100




導光柱 LIGHT PIPE 1-28-3

- MATERIAL: PC、NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR、BLACK

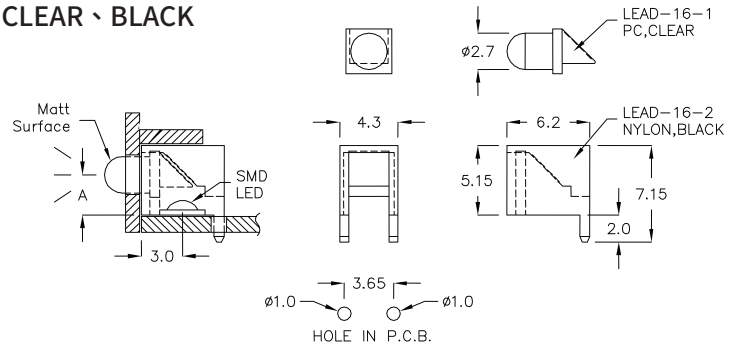


PART NO	A	PACKAGE
LEAD−16	3.0	1000



導光柱 LIGHT PIPE 1-28-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

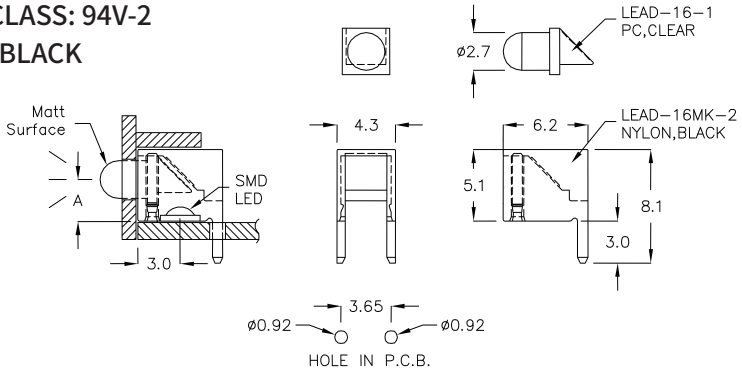


PART NO	A	PACKAGE
LEAD−16MK	3.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-29-1

- MATERIAL: PMMA
- COLOR: CLEAR




PART NO	A	B	C	PACKAGE
LEAD−17	15.0	6.0	3.0	1000



導光柱 LIGHT PIPE 1-29-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

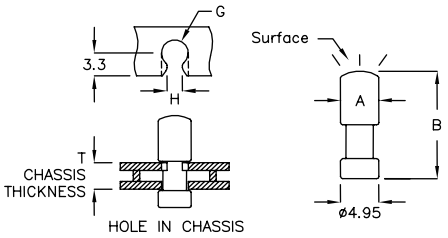


PART NO	A	B	G HOLE IN CHASSIS	H	T CHASSIS THICKNESS	Surface	PACKAGE
LEAD−20	ø4.95	14.1	ø3.65	3.45	4.2	Matt	2000
LEAD−20AC	ø4.95	15.8	ø3.55	3.35	4.3	Polished	




導光柱 LIGHT PIPE 1-29-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

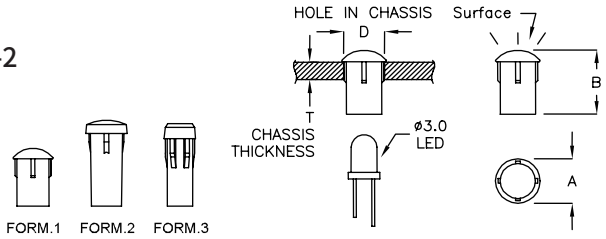


PART NO	A	B	D HOLE IN CHASSIS	T CHASSIS THICKNESS	SURFACE	FORM	PACKAGE
LEAD−3TM	ø3.3	3.95	ø2.85	>1.0	Matt	1	2000
LEAD−9HP	ø3.3	8.55	ø2.95	>1.8	Polished	3	
LEAD−18KT	ø3.8	5.5	ø3.1	>1.6	Polished	1	
LEAD−18	ø3.8	5.5	ø3.2	>1.8	Matt	1	
LEAD−30	ø3.8	4.1	ø3.1	>1.4	Matt	1	
LEAD−30FQ	ø3.8	3.5	ø3.1	>1.4	Matt	1	
LEAD−30M	ø3.8	9.7	ø3.1	>1.0	Polished	2	
LEAD−39	ø3.8	24.8	ø3.1	>1.0	Matt	2	1000



導光柱 LIGHT PIPE 1-29-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

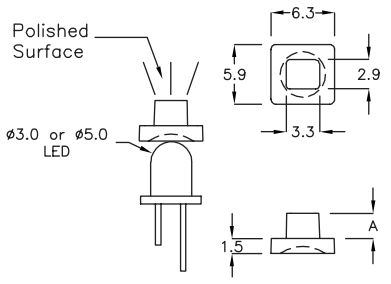


PART NO	A	PACKAGE
LEAD−29	2.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-30-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

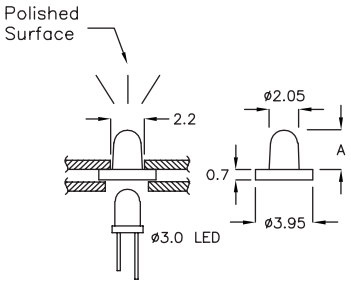


PART NO	A	PACKAGE
LEAD-3FK	2.75	2000



導光柱 LIGHT PIPE 1-30-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




PART NO	A	PACKAGE
LEAD-35	6.0	2000



導光柱 LIGHT PIPE 1-30-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

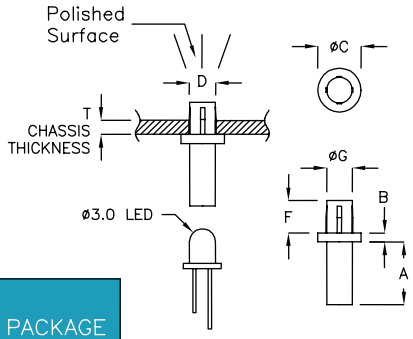


PART NO	A	B	C	D HOLE IN CHASSIS	F	G	T CHASSIS THICKNESS	PACKAGE
LEHD-5Q	1.4	1.3	3.8	ø3.0	2.3	2.6	1.4	2000
LEHD-12F	7.0	1.0	4.9	ø3.0	3.6	2.9	1.6	



導光柱 LIGHT PIPE 1-30-4

- MATERIAL: PMMA
- COLOR: CLEAR

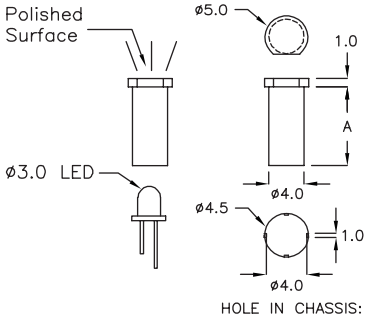


PART NO	A	PACKAGE
LEZD-10	9.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




導光柱 LIGHT PIPE 1-31-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

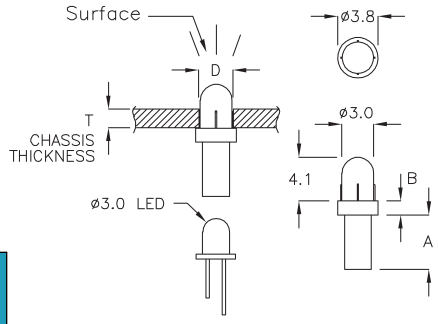


PART NO	A	B	D HOLE IN CHASSIS	T CHASSIS THICKNESS	SURFACE	PACKAGE
LEAD-36	5.1	1.3	ø3.1	1.6	Matt	1000
LEAD-36PQ	5.1	1.3	ø3.0	1.6	Polished	
LEAD-37	1.9	1.3	ø3.1	1.6	Matt	



導光柱 LIGHT PIPE 1-31-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

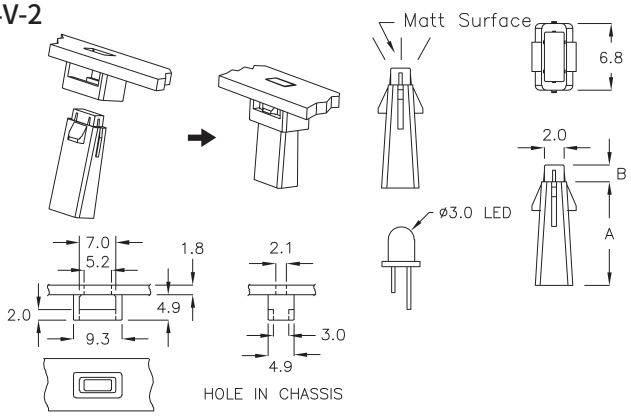


PART NO	A	B	PACKAGE
LEAD-52MK	14.2	1.7	2000




導光柱 LIGHT PIPE 1-31-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

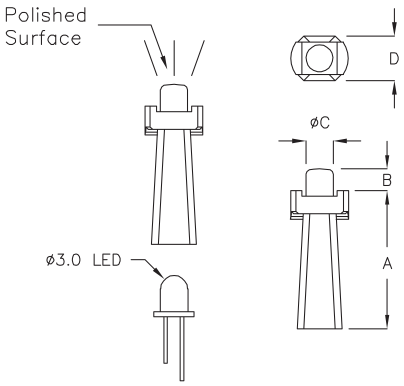


PART NO	A	B	C	D	PACKAGE
LEAD-40	10.1	2.0	2.5	3.0	2000
LEAD-51	12.6	2.0	2.5	4.1	
LEAD-51K	13.5	2.0	1.6	3.0	




導光柱 LIGHT PIPE 1-31-4

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

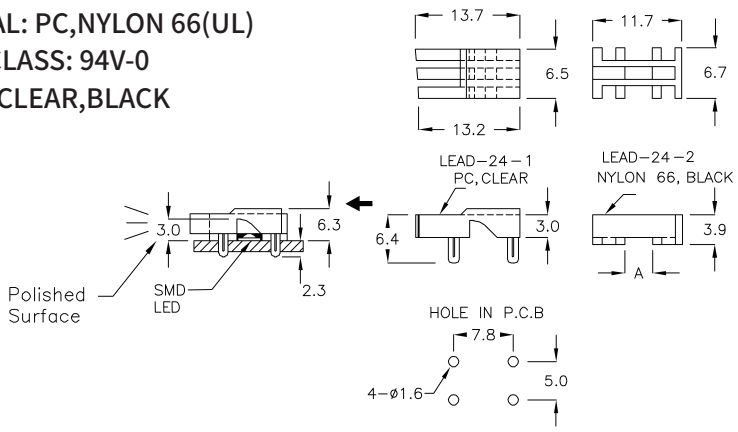

PART NO	A	PACKAGE
LEAD-24	3.6	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




導光柱 LIGHT PIPE 1-32-1

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR,BLACK

PART NO	A	P.C.B. THICKNESS	PACKAGE
LEAD−12JC	4.0	1.6	1000

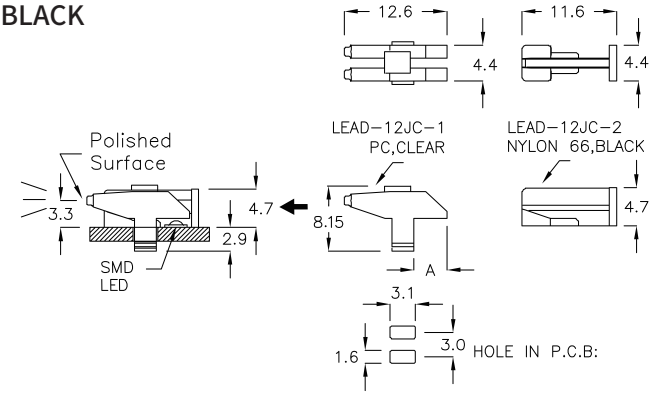




導光柱 LIGHT PIPE 1-32-2

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

PART NO	A	PACKAGE
LEMD−42A	42.8	200

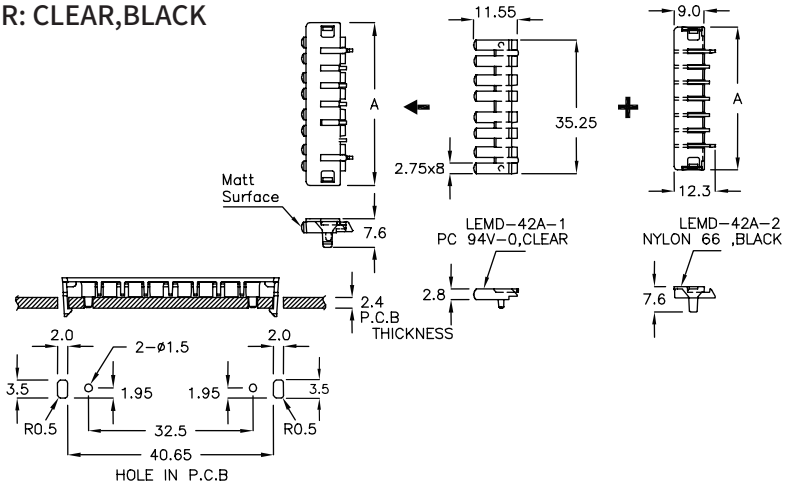





導光柱 LIGHT PIPE 1-32-3

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

PART NO	A	PACKAGE
LEMD−42RT	42.8	200

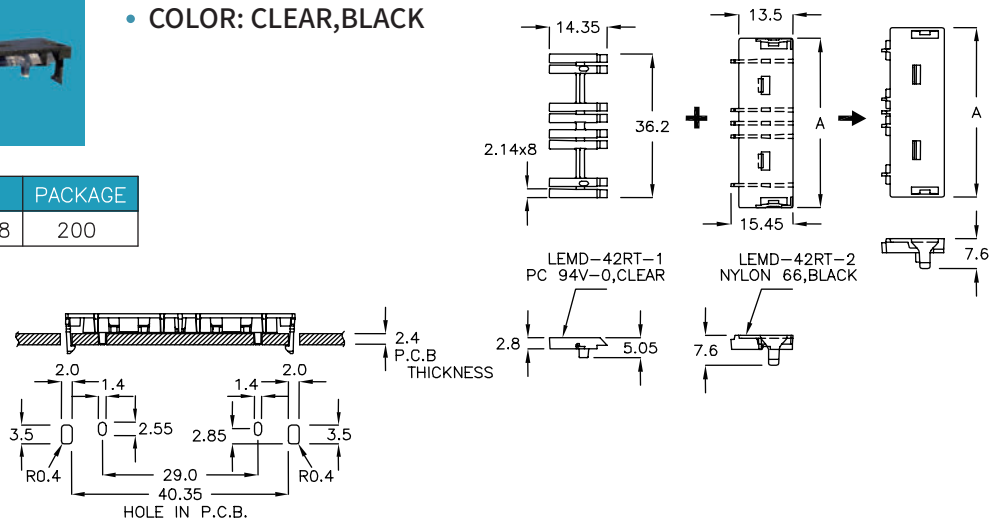


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




導光柱 LIGHT PIPE 1-33-1

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

PART NO	A	PACKAGE
LEMD-61FA	61.8	200

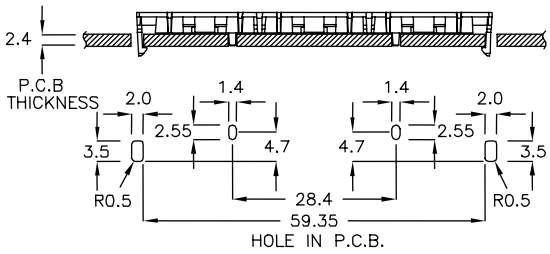

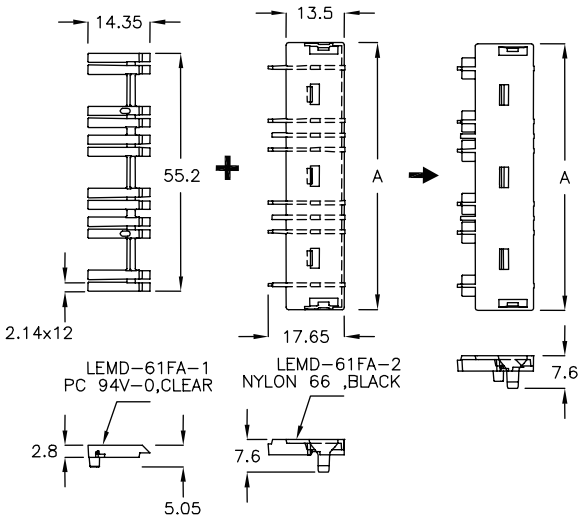





導光柱 LIGHT PIPE 1-33-2

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

PART NO	A	PACKAGE
LEUD-60JH	60.15	200

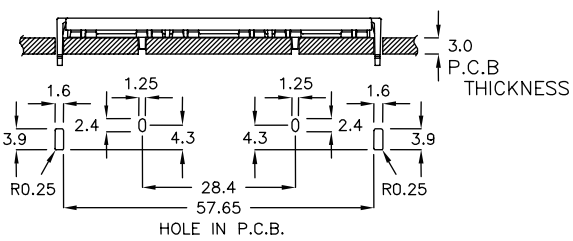

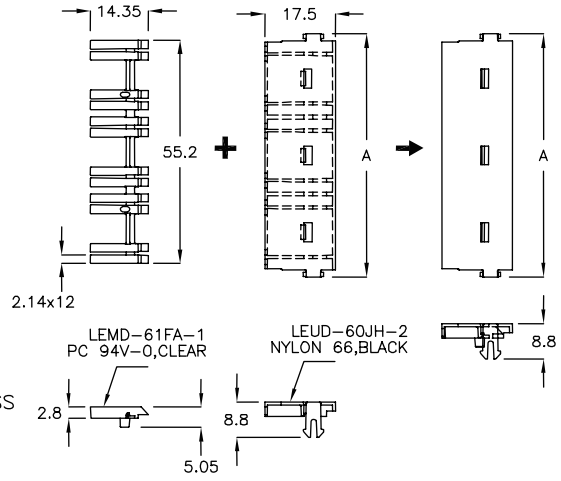






導光柱 LIGHT PIPE 1-34-1

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

PART NO	A	PACKAGE
LEYD-24BG	24.7	200

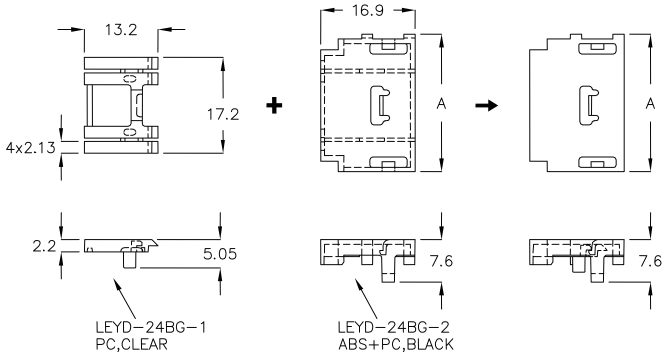

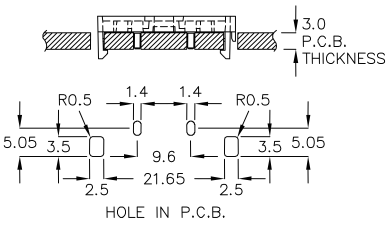




導光柱 LIGHT PIPE 1-34-2

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

PART NO	A	PACKAGE
LEMK-31A	31.9	500

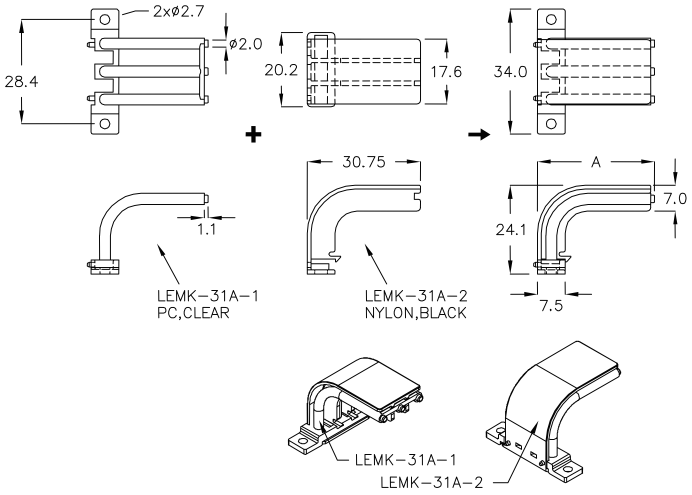





導光柱 LIGHT PIPE 1-34-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

PART NO	A	PACKAGE
LEFD-4A	4.7	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




導光柱 LIGHT PIPE 1-35-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

PART NO	A	PACKAGE
LEFD-4RZ	4.65	1000







導光柱 LIGHT PIPE 1-35-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

PART NO	A	PACKAGE
LEFD-9DK	9.7	1000

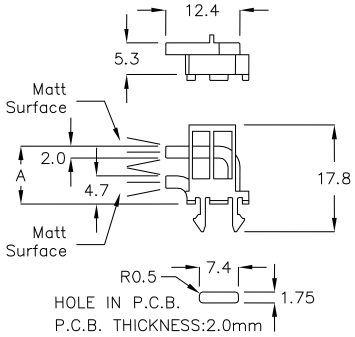




導光柱 LIGHT PIPE 1-35-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

PART NO	A	PACKAGE
LEFD-9MQ	9.7	1000

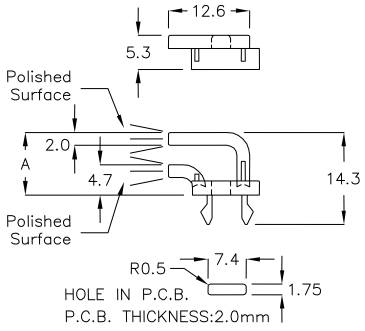




導光柱 LIGHT PIPE 1-35-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	B	C	PACKAGE
HHQ-01	ø5.0	ø3.3	9.2	2000

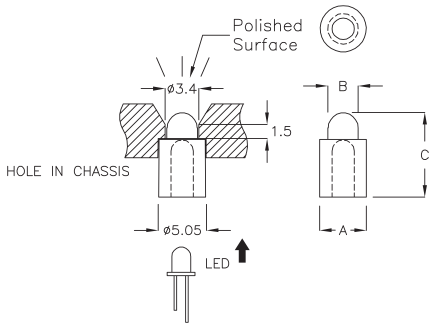




保護蓋 COVER 1-36-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	B	PACKAGE
BHB-06	6.0	2.5	2000






導光柱 LIGHT PIPE 1-36-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

PART NO	A	B	C	PACKAGE
LEAD-43KT	43.2	40.5	ø2.9	200

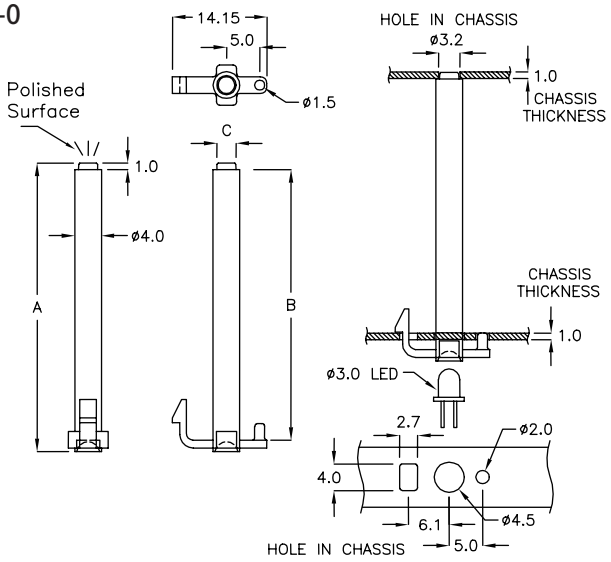




導光柱 LIGHT PIPE 1-36-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	B	C	PACKAGE
LEAD-25	29.7	26.2	16.0	500

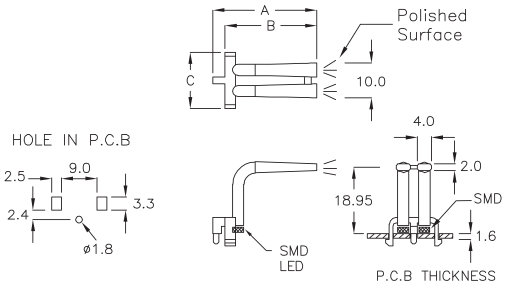




導光柱 LIGHT PIPE 1-36-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	B	C	PACKAGE
LEAD-26	29.7	26.2	16.0	500

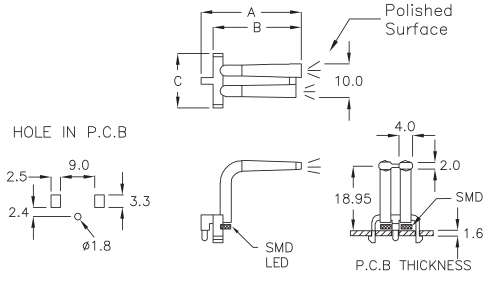


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-37-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

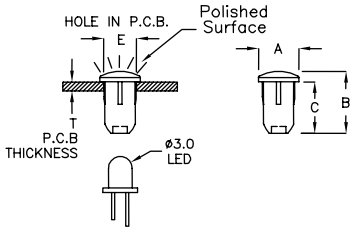


PART NO	A	B	C	E HOLE IN P.C.B.	T P.C.B. THICKNESS	PACKAGE
LEAD-7QS	ø5.0	7.7	6.4	ø3.9	≥2.0	2000



導光柱 LIGHT PIPE 1-37-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

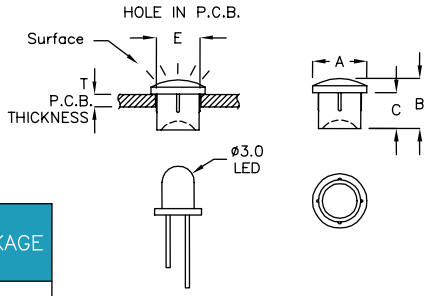


PART NO	A	B	C	E HOLE IN P.C.B.	T P.C.B. THICKNESS	SURFACE	PACKAGE
LEAD-4RK	ø3.8	3.95	2.95	ø3.1	≧1.4	Matt	2000
LEAD-28	ø5.0	4.6	3.3	ø3.96	≧1.6	Matt	
LEAD-28AM	ø5.0	4.6	3.3	ø3.96	≧1.6	Polished	



導光柱 LIGHT PIPE 1-37-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

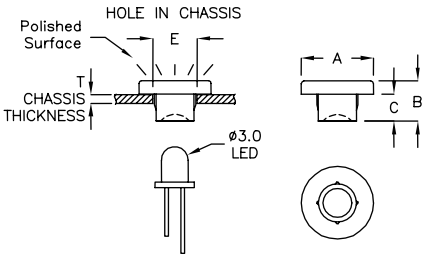


PART NO	A	B	C	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
LEVD-5GS	ø5.5	3.05	2.05	ø3.0	≧2.0	2000



導光柱 LIGHT PIPE 1-37-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

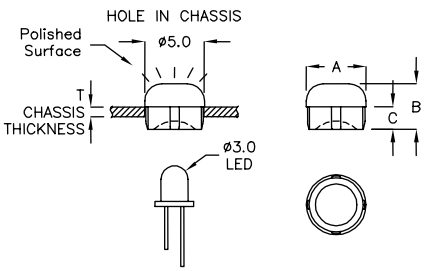


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
LEWD-04	ø5.25	4.0	2.0	≧0.8	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-38-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

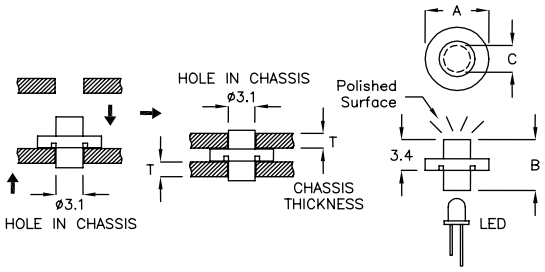


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
LEAD−5A	ø7.0	5.6	ø2.95	2.0	2000



導光柱 LIGHT PIPE 1-38-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL

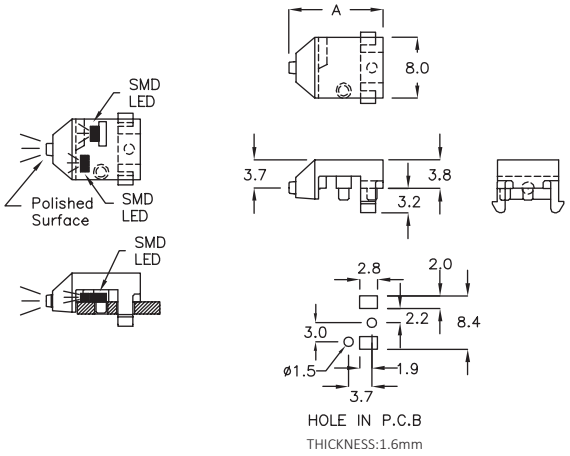


PART NO	A	P.C.B. THICKNESS	PACKAGE
LESD−12K	12.4	1.6	1000



導光柱 LIGHT PIPE 1-38-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

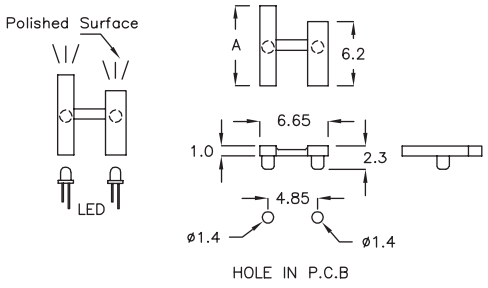


PART NO	A	P.C.B. THICKNESS	PACKAGE
LETD−6K	7.75	1.6	2000




導光柱 LIGHT PIPE 1-38-4

- MATERIAL: PC
- FLAME CLASS: 94V-0
- COLOR: CLEAR

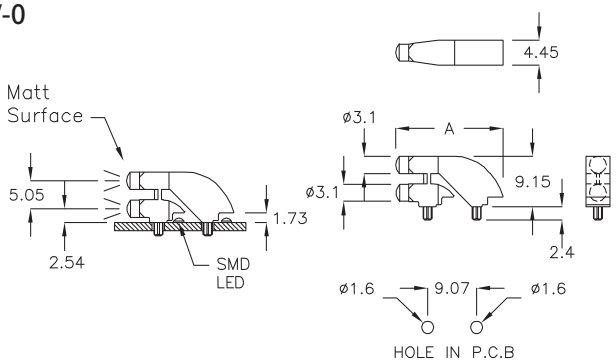

PART NO	A	P.C.B. THICKNESS	PACKAGE
LEJD−19K	19.85	1.6	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




導光柱 LIGHT PIPE 1-39-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- WITH M3 SCREW

PART NO	A	PACKAGE
LEAD-29CT	30.5	500

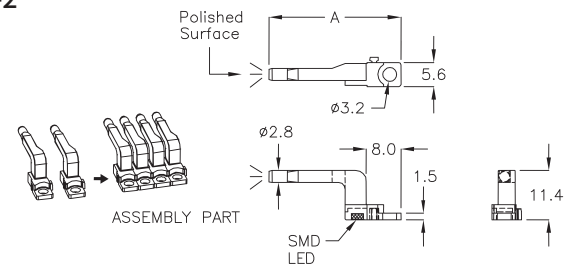




導光柱 LIGHT PIPE 1-39-2

- MATERIAL: PC(UL)
- COLOR: NATURAL

NEW

PART NO	A	B	C	PACKAGE
★ LELD-17A	17.8	6.3	4.5	500

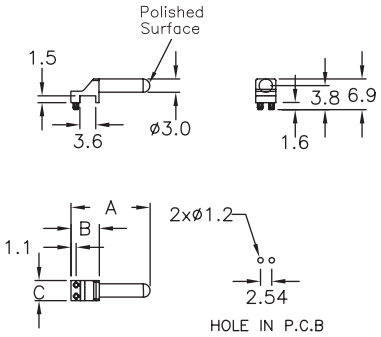





導光柱 LIGHT PIPE 1-39-3

- MATERIAL: PMMA
- COLOR: CLEAR

PART NO	A	PACKAGE
LEAD-2	37.5	500

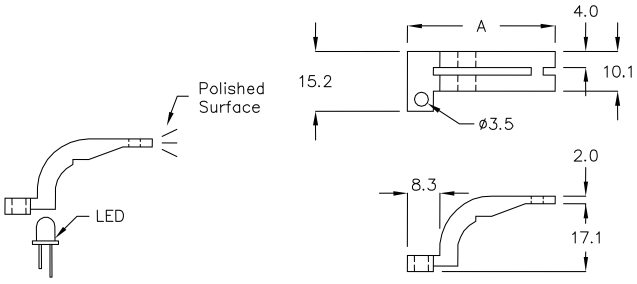





導光柱 LIGHT PIPE 1-39-4

- MATERIAL: PMMA
- COLOR: CLEAR

PART NO	A	PACKAGE
LEAD-8	37.5	100

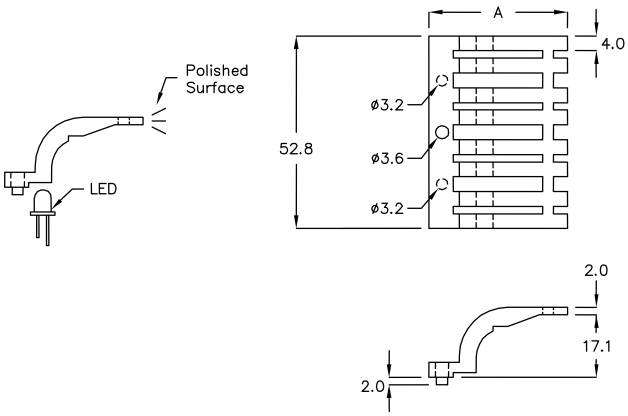


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-40-1

- MATERIAL: PMMA
- COLOR: CLEAR

PART NO	A	B	PACKAGE
LEAD-10	41.5	23.3	500
LEAD-11	45.5	23.3	
LEAD-12	76.5	23.3	

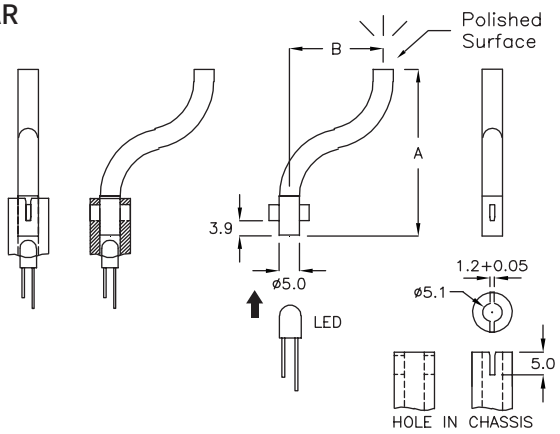




導光柱 LIGHT PIPE 1-40-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	PACKAGE
LEQD-13K	13.5	2000

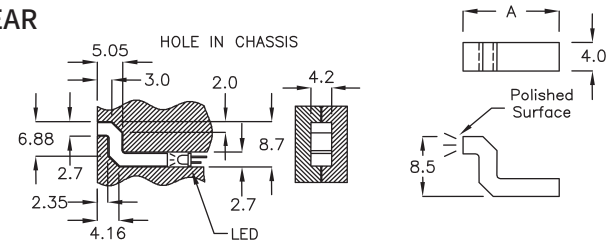





導光柱 LIGHT PIPE 1-40-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	PACKAGE
LECD-3K	3.0	1000

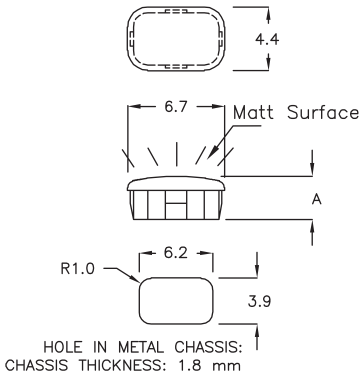




導光柱 LIGHT PIPE 1-40-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
LEWA-17C	8.2	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-41-1

- MATERIAL: PMMA
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

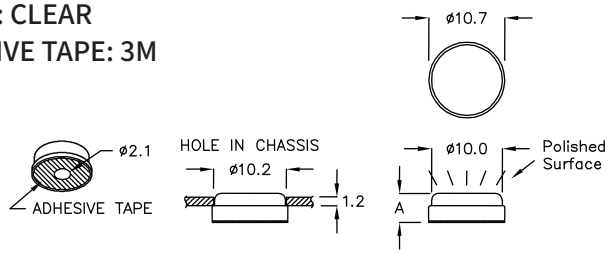


PART NO	A	PACKAGE
LERD-3K	4.03	2000



導光柱 LIGHT PIPE 1-41-2

- MATERIAL: PC
- FLAME CLASS: 94V-2
- COLOR: NATURAL

NEW




PART NO	A	PACKAGE
★ LERS-15A	4.45	500




導光柱 LIGHT PIPE 1-41-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

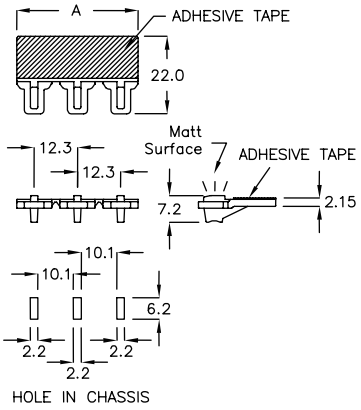


PART NO	A	PACKAGE
LEND-22A	34.6	200



導光柱 LIGHT PIPE 1-41-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

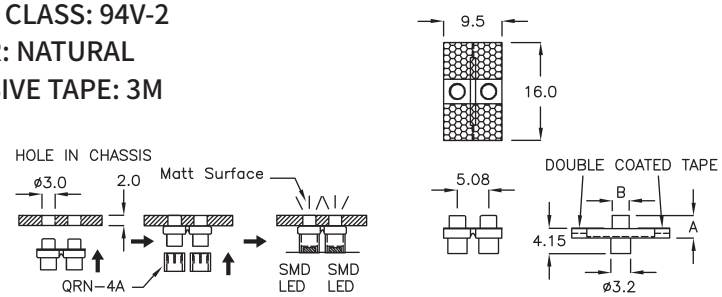


PART NO	A	B	PACKAGE
LEGD-2A	3.7	2xø2.7	1000
LEGD-2KM	3.3	2xø2.7	



導光柱 LIGHT PIPE 1-42-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

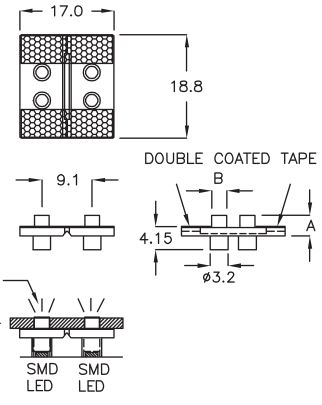


PART NO	A	B	PACKAGE
LEGD−4C	3.7	4xø2.7	1000
LEGD−4QN	3.3	4xø2.7	



遮光罩 LIGHT COVER 1-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
QRN−4A	4.7	ø5.0	ø4.0	2000




導光柱 LIGHT PIPE 1-42-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

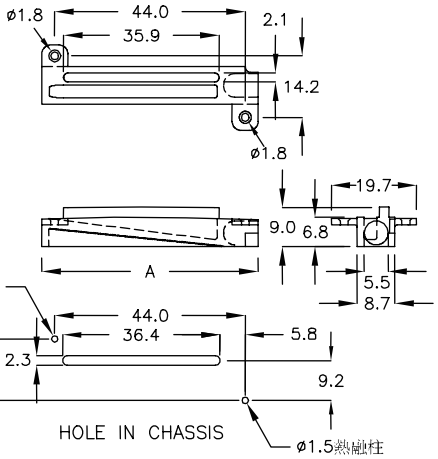


PART NO	A	PACKAGE
LEAD−1KC	50.0	500






導光柱 LIGHT PIPE 1-42-4


- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

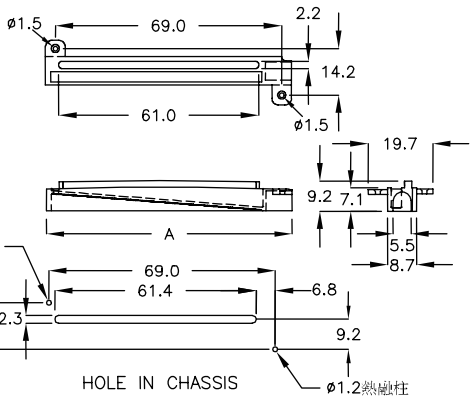

PART NO	A	PACKAGE
LEAD−1NJ	75.0	100

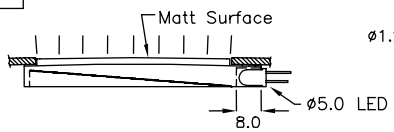


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 導光罩 LED CAP 1-43-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

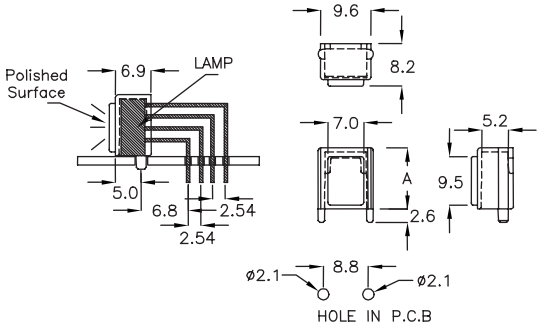


PART NO	A	PACKAGE
LDHD-12MG	11.9	1000



導光柱 LIGHT PIPE 1-43-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL

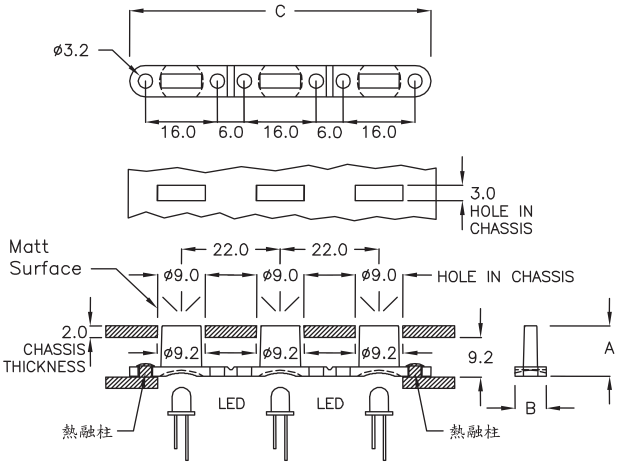


PART NO	A	B	C	PACKAGE
LEXD-67D	11.2	7.0	67.0	200



導光棒 LIGHT PIPE 1-43-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

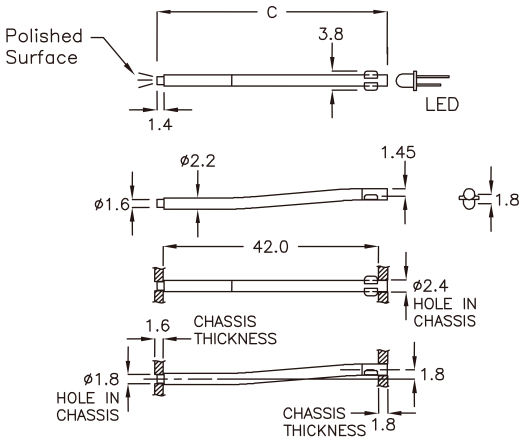


PART NO	C	PACKAGE
LDAD-45AT	44.9	2000



導光柱 LIGHT PIPE 1-43-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

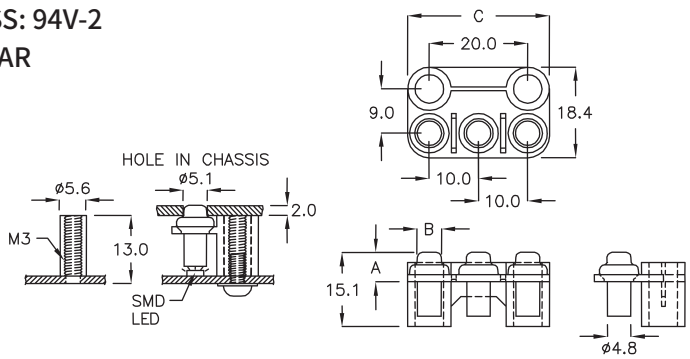

PART NO	A	B	C	PACKAGE
LEWF-28HS	6.0	ø4.95	28.8	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



導光柱 LIGHT PIPE 1-44-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

NEW




PART NO	A	B	C	PACKAGE
★ LEAD-45PCW	41.0	ø3.4	2.8	1000




導光柱 LIGHT PIPE 1-44-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

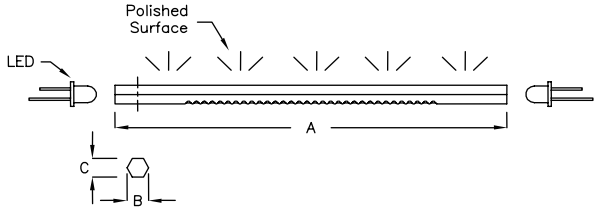


PART NO	A	B	C	PACKAGE
LEAD-50	113.0	2.75	2.38	200




導光柱 LIGHT PIPE 1-44-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




PART NO	A	B	PACKAGE
LEAD-81	81.0	ø3.0	500



導光柱 LIGHT PIPE 1-44-4

- MATERIAL: PC(UL)
- COLOR: CLEAR

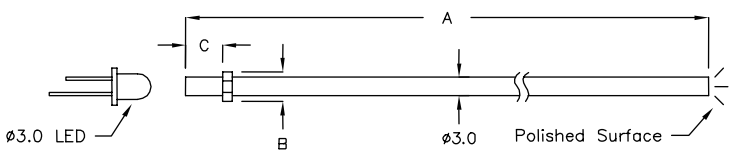

PART NO	A	B	C	PACKAGE
LEAD-102C	101.9	4.8	5.9	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

02



塞環
HOLE PLUG

護線環
SNAP BUSHING




線扣
BUSHING





電源線扣 STRAIN RELIEF BUSHING — 2-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

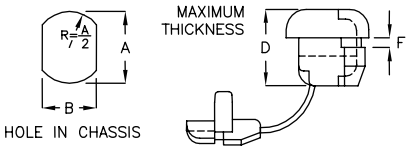

PG Cord Bushings are the easy and low-cost way to insulate and protect your AC Cords. Provide non-slip grip and will not damage the insulation of AC Cord.


E88476

PART NO	SUITABLE CABLE TYPE & DIMENSIONS OF CHASSIS						D PART LENGTH	UL	PACKAGE
	CROSS SECTION SHAPE	WIRE ACCOMMODATED	SIZE	A	B TO PREVENT ROTATION	F MAXIMUM THICKNESS			
2RF-2	FLAT	SPT-1	2.8x5.3	9.5	8.7	3.2	10.8	UL	500
3RF-1	FLAT	SPT-2	3.0x5.6	11.1	9.9	2.6	10.3		
3RF-2	FLAT	SPT-2	3.0x5.6	11.1	10.1	1.6	10.3	UL	
4RF-4	FLAT	SPT-2	3.0x5.6	12.7	11.5	2.5	11.2	UL	
4RF-5	FLAT	SPT-2	3.8x7.6	12.7	11.8	1.6	10.4	UL	
4RF-6	FLAT	SPT-2	3.0x6.5	12.5	11.6	2.7	10.5	UL	
5R-2	ROUND	SVI	7.6	12.7	11.5	1.6	11.3		
5R-4	ROUND	SV,SVT	6.4	12.7	11.5	1.6	11.3	UL	
5R-4A	ROUND	SV,SVT	6.4	12.7	11.5	2.5	11.0	UL	
5RF-4	FLAT	SPT-2	3.8x8.9	14.3	13.4	1.6	15.45	UL	200
		SPT-3	5.0x10.0						
6R-4	ROUND	SVI	7.6	15.9	14.0	1.6	14.9	UL	
6R-6	ROUND	SJ,SJT	8.2	15.9	14.0	1.6	14.5	UL	
6R-6A	ROUND	SJ,SJT	8.2	15.9	14.0	3.2	14.5		
7R-2	ROUND	S,ST	9.2-10.5	19.0	16.8	1.6	19.0	UL	100
			11.0	19.8					
7R-2A	ROUND	S,ST	9.2-10.5	19.0	16.8	3.2	19.0	UL	
			11.0	19.8					
7R-2LT	ROUND	SJT	9.6-10.0	19.0	16.8	1.0	15.0		
8R-2	ROUND	SJT	13.5-15.2	22.2	21.5	3.2	20.0	UL	
8R-2A	ROUND	SJT	13.5	23.0	22.0	2.0	19.9		
9R-2	ROUND	SJT	15.2-16.3	28.0	25.2	2.4	25.6		50
			17.5	30.2	25.2	6.7			
9R-2A	ROUND	SJT	15.5	28.0	25.2	2.4	14.5		100
9R-2B	ROUND	SJT	18.2	28.0	25.2	2.4	23.9		50



電源線扣 STRAIN RELIEF BUSHING — 2-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

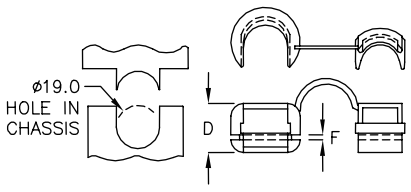

E88476


PART NO	SUITABLE CABLE TYPE & DIMENSIONS OF CHASSIS				D PART LENGTH	UL	PACKAGE
	CROSS SECTION SHAPE	WIRE ACCOMMODATED	SIZE	F MAXIMUM THICKNESS			
7R-7	ROUND	S.P.S	14.0	1.6	17.6	UL	100
7R-7B	ROUND	S.P.S	12.5	1.3	17.5		
7R-7C	ROUND	S.P.S	13.5	1.3	17.6		
7R-7E	ROUND	S.P.S	12.0	1.6	17.7		

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線扣 STRAIN RELIEF BUSHING 2-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

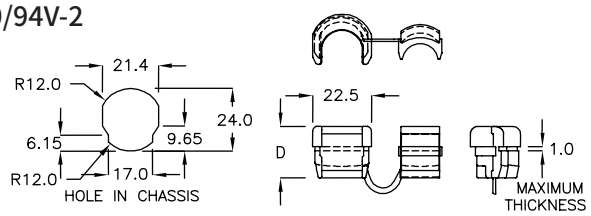


PART NO	D	WIRE ACCOMMODATED	PACKAGE
8R−2QT	19.8	ø15.0	100



電源線扣 STRAIN RELIEF BUSHING 2-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

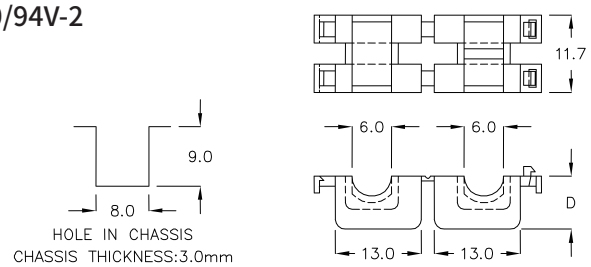


PART NO	D	PACKAGE
5R−1	8.0	200



電源線扣 STRAIN RELIEF BUSHING 2-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

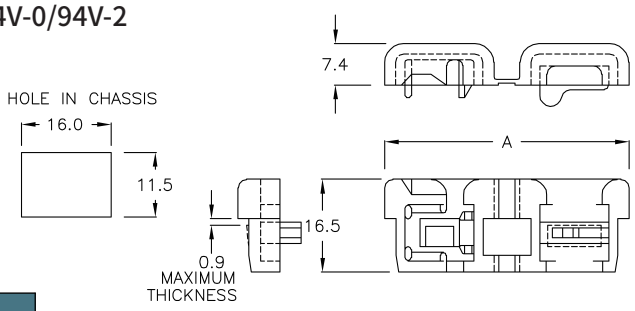


E88476

PART NO	A	WIRE ACCOMMODATED	UL	PACKAGE
5RF−5A	42.6	SPT−2	UL	200
5RF−5B	42.8	SPT−2	UL	
5RF−5D	42.8	SPT−2		



電源線扣 STRAIN RELIEF BUSHING 2-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



E88476


PART NO	WIRE ACCOMMODATED	MAXIMUM THICKNESS	A	UL	PACKAGE
5R−6	SPT−2(3x6.6)	2.5	17.6	UL	200
5R−7	SV(ø6)	2.5	17.7	UL	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線扣 STRAIN RELIEF BUSHING — 2-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

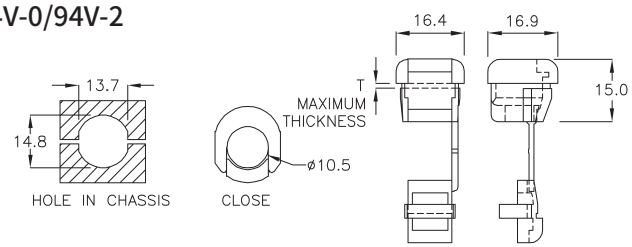


PART NO	MAXIMUM THICKNESS:T	PACKAGE
7R−2D	1.0	100



電源線扣 STRAIN RELIEF BUSHING — 2-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: GRAY,BLACK

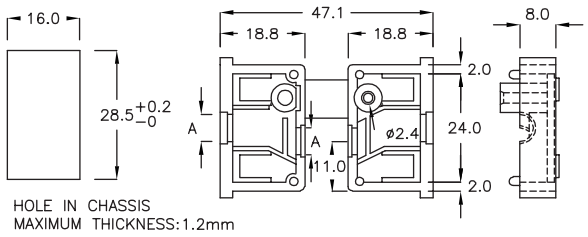


PART NO	A	PACKAGE
6R−9	ø6.0	100
6R−09C	ø8.5	200



電源線扣 STRAIN RELIEF BUSHING — 2-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

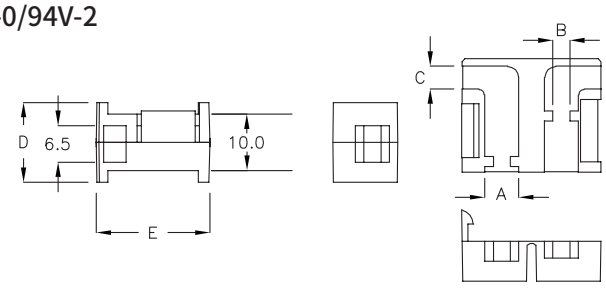


PART NO	A	B	C	D	E	PACKAGE
2RF−25	6.0	3.2	4.0	14.0	20.0	500




保護座 PROTECT HOUSING — 2-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

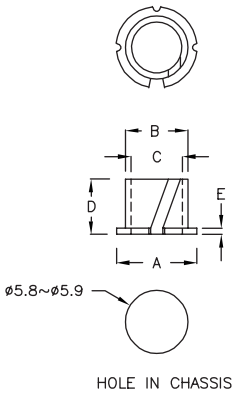


PART NO	A	B	C	D	E	PACKAGE
SG−05	ø8.0	ø6.2	ø5.05	5.4	0.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保護座 PROTECT HOUSING 2-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

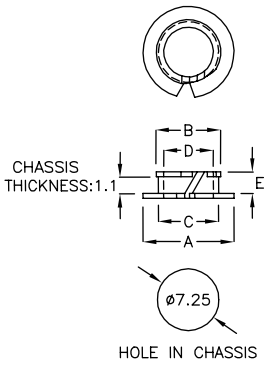


PART NO	A	B	C	D	E	PACKAGE
SG-0610A	ø11.0	ø7.8	ø7.3	ø6.0	3.2	1000




塞環 BUSHING 2-5-2

- MATERIAL: POM
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
SLM-05	ø8.0	ø5.2	ø3.1	6.5	1000



護線環 SNAP BUSHING 2-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

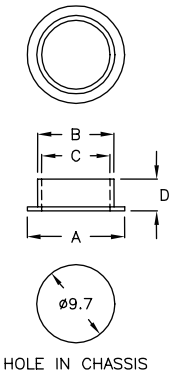


PART NO	A	B	C	D	PACKAGE
SL-0910	ø12.2	ø9.6	ø8.6	4.0	1000



護線環 SNAP BUSHING 2-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
SBK-5AQ	8.5	5.1	1000



護線環 SNAP BUSHING 2-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D HOLE IN CHASSIS	PACKAGE
SBD-06	ø8.5	ø6.2	8.2	ø7.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



護線環 SNAP BUSHING 2-6-1

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK

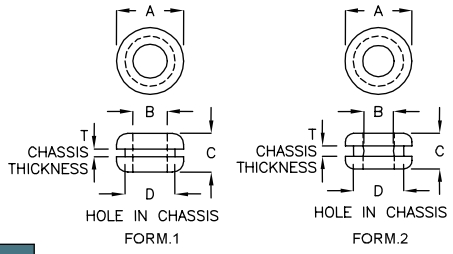


PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	FORM	PACKAGE
WSP-8QN	ø8.8	ø4.4	5.7	ø6.8	1.6	2	1000
WSP-12F	ø12.0	ø6.1	7.0	ø9.0	1.3	1	
WSP-12AC	ø12.8	ø6.8	6.8	ø10.0	1.4	2	2000
WSP-16BK	ø16.0	ø5.4	8.5	ø12.0	2.4	2	1000
WSP-16GR	ø16.0	ø7.1	7.5	ø12.0	1.4	2	
WSP-16C	ø16.0	ø7.1	8.5	ø12.0	2.4	2	
WSP-20K	ø20.0	ø8.2	8.5	ø16.0	2.4	2	500
WSP-20RY	ø20.0	ø6.8	8.5	ø16.0	2.4	2	



護線環 SNAP BUSHING 2-6-2

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	D HOLE IN CHASSIS	PACKAGE
WSZ-9AC	ø9.4	ø3.1	8.5	ø7.0	1000
WSZ-12KM	ø12.6	ø4.8	9.8	ø8.9	
WSZ-13BR	ø13.9	ø5.3	9.7	ø10.4	
WSZ-14A	ø15.5	ø6.6	9.5	ø12.0	
WSZ-14DX	ø14.2	ø6.2	9.5	ø10.6	
WSZ-15DZ	ø15.5	ø6.9	9.7	ø12.0	
WSZ-16AM	ø16.0	ø7.4	9.7	ø12.5	



護線環 SNAP BUSHING 2-6-3

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SB-0603	8.5	3.3	4.5	ø5.3	1.4	2000
SB-0806	10.5	5.5	5.5	ø7.5	1.4	1000
SB-1208	16.0	10.0	8.0	ø12.0	3.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



護線環 SNAP BUSHING — 2-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




E88476

PART NO	CHASSIS THICKNESS	HOLE IN CHASSIS	A	B	C	UL	PACKAGE
SB-4757	3.6~6.4	ø57.2	63.1	47.1	18.3		50
SB-3845	1.5~3.2	ø44.5	47.7	35.3	11.6		100
SB-3338K	1.0~3.2	ø38.1	40.9	33.3	11.5		200
SB-3338	6.4	ø38.1	41.2	33.3	14.3		
SB-2634	1.0~2.8	ø34.2	38.0	26.2	11.5	UL	100
SB-2530	1.0~3.1	ø30.0	33.5	25.2	11.5		
SB-2428	1.0~3.3	ø28.0	31.5	24.1	11.3		200
SB-1822	0.9~2.3	ø22.0	24.8	18.2	11.5	UL	
SB-1519	1.0~3.0	ø19.0	21.7	15.3	11.1	UL	
SB-1316	1.4~3.5	ø16.0	18.0	12.8	10.4	UL	500
SB-1316K	0.8~1.8	ø16.0	18.0	12.8	10.4		
SB-1013	0.8~3.0	ø13.0	15.3	10.2	9.1	UL	
SB-0710	0.8~1.8	ø10.0	12.1	7.2	6.6	UL	1000
SB-0305	1.6~1.7	ø4.8	6.5	3.2	6.0		



開口式護線環 OPEN CLOSED BUSHING — 2-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

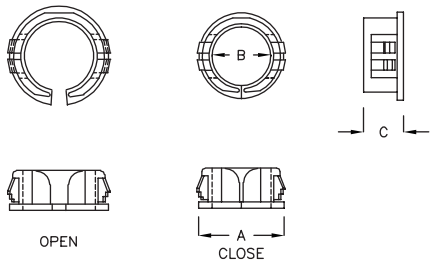

E88476


PART NO	CHASSIS THICKNESS	HOLE IN CHASSIS	A	B	C	UL	PACKAGE
SB-1822A	1.0~3.5	ø22.0	24.8	17.3	11.5	UL	200
SB-1922A	0.8~1.2	ø22.0	25.0	19.0	7.4		500
SB-1720A	0.8~1.0	ø20.0	23.5	17.0	7.2		
SB-1519A	1.2~3.3	ø19.0	20.6	14.4	11.0	UL	200
SB-1316A	1.2~3.5	ø16.0	18.0	10.5	10.5	UL	500
SB-1216A	0.7~3.3	ø16.0	18.6	12.3	10.0	UL	
SB-1013A	0.8~3.5	ø13.0	14.9	9.0	10.5	UL	
SB-0609A	0.7~1.7	ø9.5	11.4	6.6	6.5	UL	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開口式護線環 OPEN CLOSED BUSHING —— 2-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

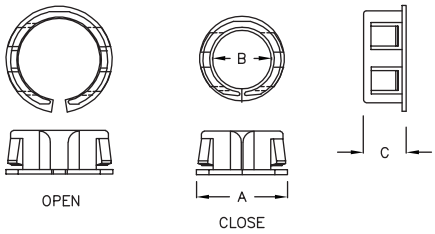


E88476

PART NO	CHASSIS THICKNESS	HOLE IN CHASSIS	A	B	C	UL	PACKAGE
SB-2126A	0.8~1.2	ø25.4~25.6	28.0	21.1	8.0		500
SB-2024A	0.8~1.2	ø24.0	26.4	20.0	11.3	UL	
SB-2228A	0.8~1.2	ø27.8	28.8	22.0	9.0		200



開口式護線環 OPEN CLOSED BUSHING —— 2-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

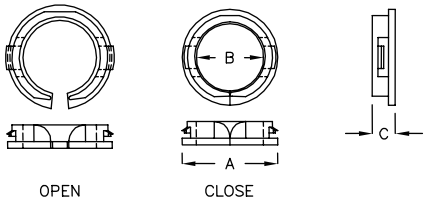


E88476

PART NO	A	B	C	CHASSIS THICKNESS	HOLE IN CHASSIS	UL	PACKAGE
SA-0204K	ø5.1	ø2.8	5.0	0.7~0.9	ø4.5		1000
SA-0407A	ø9.8	ø4.8	5.0	0.7~0.9	ø6.8~ø7.0	UL	
SA-0407T	ø9.8	ø4.8	5.2	0.4~1.0	ø6.8~ø7.0		
SA-1013C	ø15.5	ø9.6	5.9	1.9~2.0	ø13.0		500
SA-1013A	ø15.5	ø9.6	5.4	1.0~1.5	ø13.0	UL	
SA-1316A	ø18.4	ø12.5	5.4	1.0~1.4	ø16.0		
SA-1317Q	ø19.5	ø13.5	5.9	1.8~2.0	ø17.0		
SA-1519A	ø21.8	ø14.9	5.7	0.8~1.0	ø19.0	UL	
SA-1822A	ø24.6	ø17.6	5.6	0.8~1.0	ø22.0		
SA-2024A1	ø26.0	ø20.0	5.4	0.8~1.0	ø24.0		
SA-2024A	ø26.0	ø20.0	5.3	1.0~1.2	ø24.0		
SA-2327A	ø30.6	ø23.0	6.0	0.4~1.0	ø27.0~ø27.2		200



開口式護線環 OPEN CLOSED BUSHING——2-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

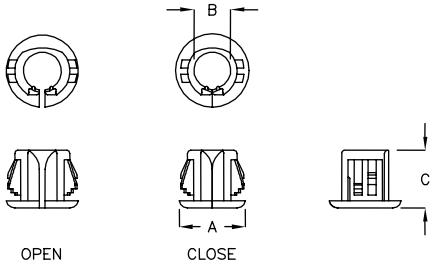


PART NO	A	B	C	CHASSIS THICKNESS	HOLE IN CHASSIS	PACKAGE
SB-0609C	ø11.8	ø6.1	9.8	1.0~3.5	ø9.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開口式護線環 OPEN CLOSED BUSHING —— 2-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

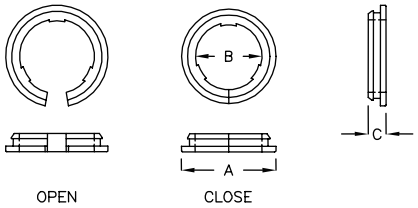


PART NO	A	B	C	CHASSIS THICKNESS	HOLE IN CHASSIS	PACKAGE
SYB-1316C	ø19.2	ø13.0	3.5	1.0	ø16.0	500



開口式護線環 OPEN CLOSED BUSHING —— 2-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK

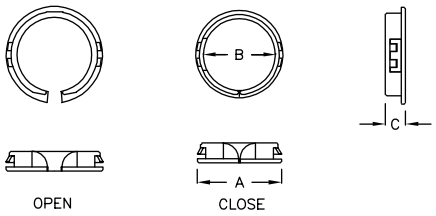


PART NO	CHASSIS THICKNESS	HOLE IN CHASSIS	A	B	C	PACKAGE
SY-2832A	0.8~1.4	ø32.0	35.1	28.2	6.7	200



開口式護線環 OPEN CLOSED BUSHING —— 2-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

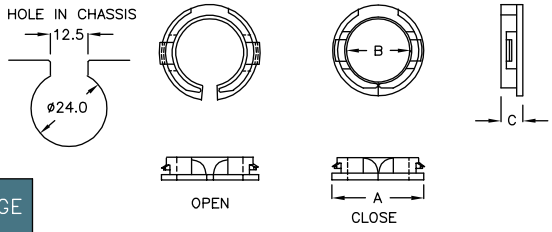


	MAXIMUM THICKNESS	A	B	C	PACKAGE
SA-2024C	0.8~1.1	26.0	20.0	5.3	500



開口式護線環 OPEN CLOSED BUSHING —— 2-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

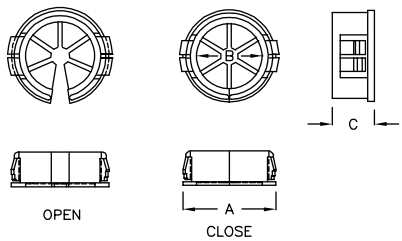


PART NO	MAXIMUM THICKNESS	HOLE IN CHASSIS	A	B	C	PACKAGE
SC-2128A	0.8~3.0	ø27.8~ø28.0	29.5	20.7	11.5	200
SC-1926A	0.8~3.0	ø25.4~ø25.5	27.0	19.0	11.5	
SC-1926C	0.8~1.0	ø25.4~ø25.5	27.0	19.0	5.3	500
SC-1422A	0.8~3.0	ø22.2~ø22.4	23.8	14.6	11.5	
SC-1319A	0.8~3.0	ø19.0~ø19.1	21.8	14.1	9.9	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



護線環 SNAP BUSHING — 2-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK




PART NO	CHASSIS THICKNESS	HOLE IN CHASSIS	A	B	C	PACKAGE
SS-3238	1.2~3.2	ø38.1~ø38.2	41.0	32.0	11.0	200



護線環 SNAP BUSHING — 2-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	CHASSIS THICKNESS	A	B	C	D	E	G	F	PACKAGE
SSK-7175	1.2	79.4	75.0	8.5	45.0	30.0	34.7	71.4	100
SSK-106110	1.2	115.4	110.0	8.5	60.0	50.0	55.7	106.4	



護線環 SNAP BUSHING — 2-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

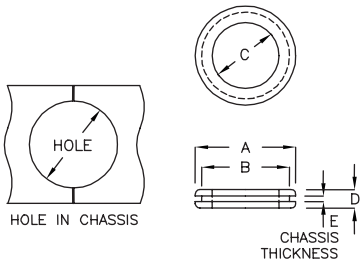


PART NO	HOLE IN CHASSIS	A	B	C	D	E CHASSIS THICKNESS	PACKAGE
SB-2114	ø18.0	ø21.2	ø18.0	ø14.1	4.0	1.0	1000



開口式護線環 OPEN CLOSED BUSHING — 2-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

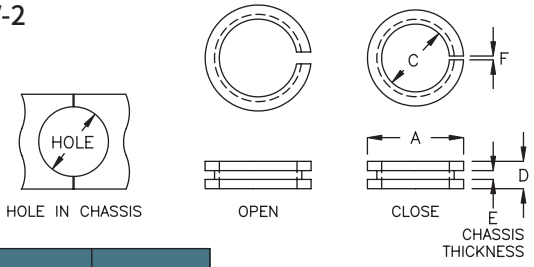


PART NO	HOLE IN CHASSIS	A	C	D	E CHASSIS THICKNESS	F	PACKAGE
SB-1223A	ø19.0	22.0	11.9	4.8	1.3	1.2~2.3	500
SB-1318A	ø14.8	18.0	12.7	6.1	2.4	0.7~1.3	
SB-1420A	ø16.0	18.9	13.8	3.65	1.7	0.3~0.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



方型護線環 EDGE SADDLE 2-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

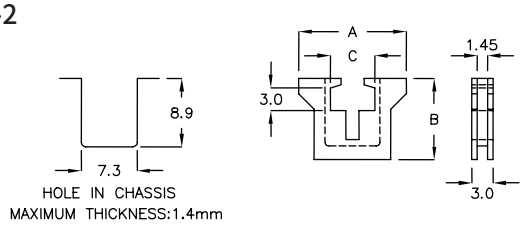


PART NO	A	B	C	PACKAGE
DS-7	14.0	10.65	5.8	1000



方型護線環 EDGE SADDLE 2-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

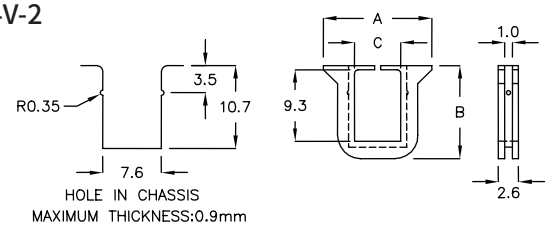


PART NO	A	B	C	PACKAGE
DS-8	14.0	12.0	6.0	2000



方型護線環 EDGE SADDLE 2-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

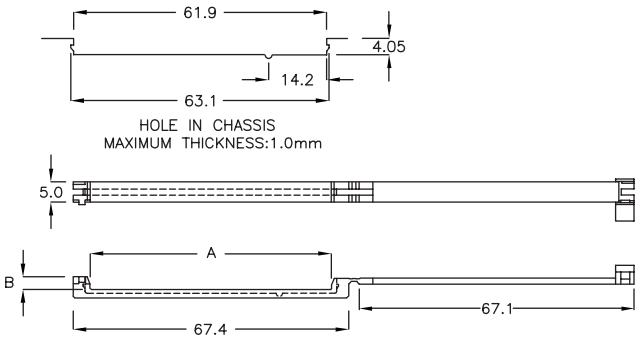


PART NO	A	B	PACKAGE
DDS-02	59.0	3.1	200



方型護線環 EDGE SADDLE 2-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

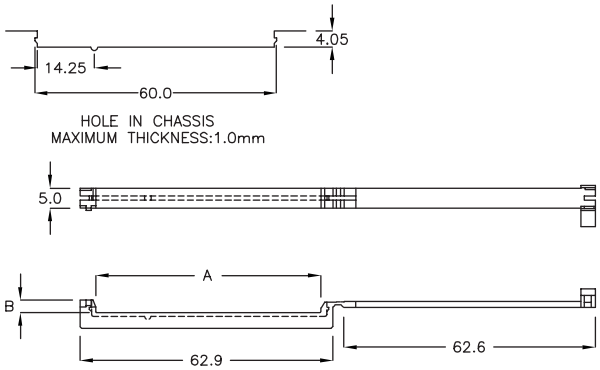


PART NO	A	B	PACKAGE
DDS-03	56.0	3.1	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



方型護線環 EDGE SADDLE 2-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

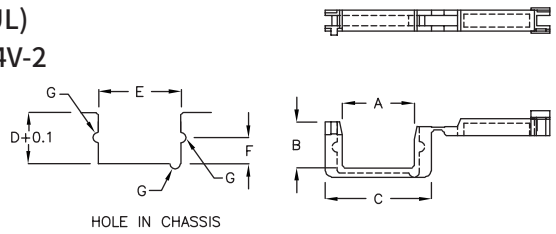


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
DDS-01	17.4	11.2	25.8	12.6	20.0	6.3	R1.4	2.1	500
DDS-06	28.0	6.6	36.6	9.0	31.0	3.3	R1.35	2.0	200



方型護線環 EDGE SADDLE 2-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

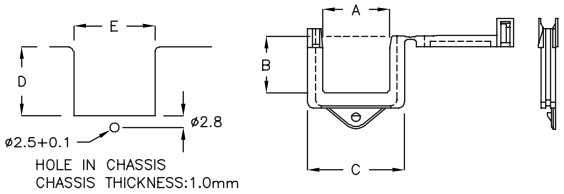


PART NO	A	B	C	D	E	PACKAGE
DDS-17	17.0	14.4	24.6	21.0	21.0	200
DDS-22	22.4	21.3	30.6	29.0	27.1	




方型護線環 EDGE SADDLE 2-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

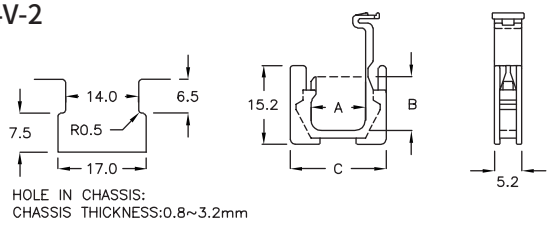


PART NO	A	B	C	PACKAGE
DSF-10A	10.5	10.8	18.5	500




方型護線環 EDGE SADDLE 2-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

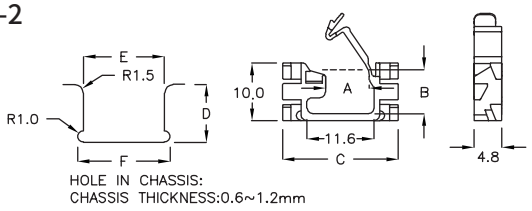


PART NO	A	B	C	D	E	F	PACKAGE
DSW-11A	7.6	7.7	20.0	10.0	14.0	16.0	1000



方型護線環 EDGE SADDLE 2-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

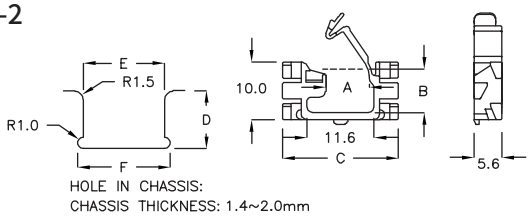


PART NO	A	B	C	D	E	F	PACKAGE
DSW-11MQ	7.6	7.7	20.0	10.0	14.0	16.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




方型護線環 EDGE SADDLE 2-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

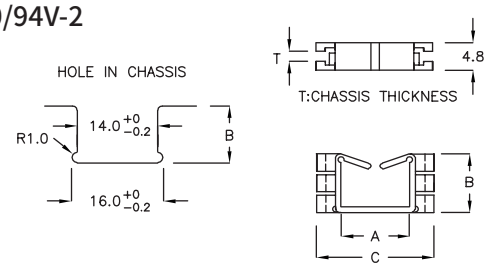


PART NO	A	B	C	T	PACKAGE
DS−1	12.0	10.0	20.2	0.9	1000
DS−3	12.0	10.0	20.2	1.9	




方型護線環 EDGE SADDLE 2-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

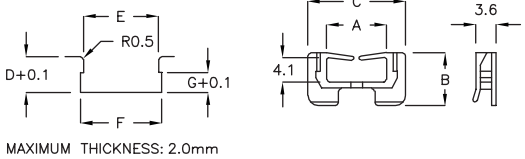


PART NO	A	B	C	D	E	F	G	PACKAGE
DS−02S	5.2	8.5	11.5	6.1	8.1	9.1	3.6	2000
DS−2	10.2	9.1	16.9	6.1	12.8	13.8	3.4	1000



方型護線環 EDGE SADDLE 2-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

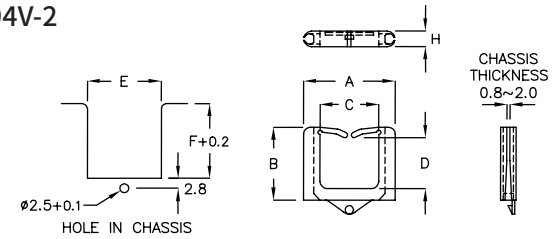


PART NO	A	B	C	D	E	F	H	PACKAGE
DS−11A	25.0	12.5	11.5	6.2	$13.6^{+0.1}_{-0}$	12.5	7.1	1000
DS−12	19.8	12.1	11.5	7.2	$14.0^{+0.1}_{-0}$	12.3	4.7	
DS−16TR	26.0	21.0	17.0	14.6	$21.0^{+0.2}_{-0}$	21.0	4.6	500
DS−23	33.1	29.2	22.4	21.8	$27.0^{+0.2}_{-0}$	29.0	4.7	



方型護線環 EDGE SADDLE 2-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

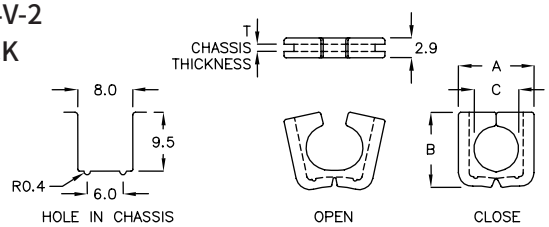


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
DS−4RT	11.0	10.9	ø6.6	0.7~0.8	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



方型護線環 EDGE SADDLE 2-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

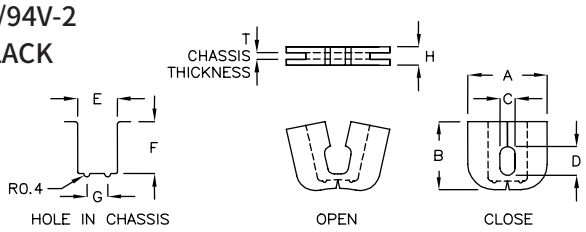


PART NO	A	B	C	D	E	F	G	H	R	T CHASSIS THICKNESS	PACKAGE
DS-04K	12.0	10.9	2.3	4.56	6.05	9.45	4.0	2.9	R0.4	0.8~1.0	1000
DS-4WY	12.5	11.5	2.4	4.8	7.2	10.3	4.35	2.5	R0.3	0.5~0.6	
DS-4KJ	12.0	10.9	2.6	5.2	6.05	9.45	4.0	2.9	R0.4	0.8~1.0	
DS-4YL	12.0	10.9	3.0	6.0	5.9	9.7	4.0	2.9	R0.5	0.8~1.0	
DS-4FR	16.0	10.9	2.65	5.3	9.9	9.7	8.0	2.9	R0.5	0.8~1.0	




方型護線環 EDGE SADDLE 2-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

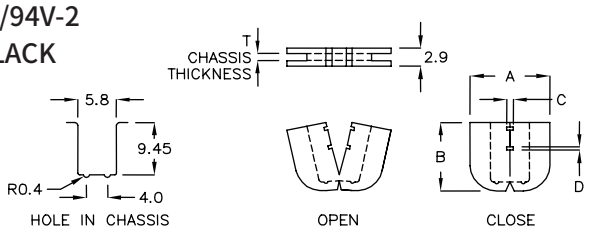


PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
DS-04P	12.0	10.85	1.0	0.5	0.8~1.0	1000




方型護線環 EDGE SADDLE 2-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

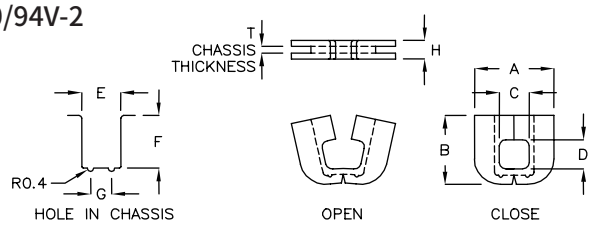


PART NO	A	B	C	D	E	F	G	H	T CHASSIS THICKNESS	PACKAGE
DS-04Q	12.0	10.9	4.6	4.6	5.9	9.45	4.0	2.9	0.8~1.0	1000
DS-04F	12.0	10.9	4.6	7.0	6.0	9.45	4.0	2.9	0.8~1.0	
DS-04R	12.0	10.9	6.5	7.0	8.0	9.5	6.0	2.9	0.8~1.0	
DS-4FA	12.0	10.9	4.5	7.0	6.1	9.45	4.0	2.9	0.4~0.6	
DS-4GL	13.3	10.9	6.9	7.0	8.3	9.5	6.3	3.0	0.6~0.8	
DS-06	14.6	8.8	7.0	4.6	8.3	7.4	6.4	2.9	0.8~1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




方型護線環 EDGE SADDLE 2-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

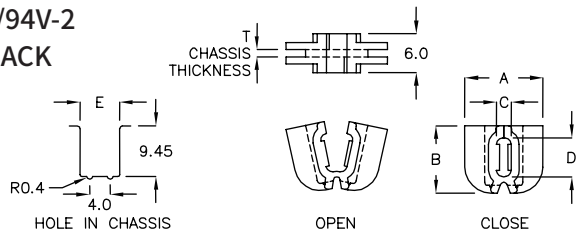


PART NO	A	B	C	D	E	T CHASSIS THICKNESS	PACKAGE
DS-04H	12.0	10.35	2.3	6.05	6.05	0.8~1.0	1000
DS-04J	12.0	10.4	4.6	4.6	6.0	0.8~1.0	
DS-04L	12.0	10.4	2.44	4.7	6.0	0.8~1.0	




方型護線環 EDGE SADDLE 2-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

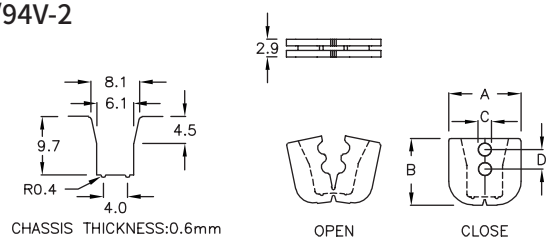


PART NO	A	B	C	D	PACKAGE
DS-4AD	12.0	11.1	ø2.2	3.2	1000




方型護線環 EDGE SADDLE 2-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

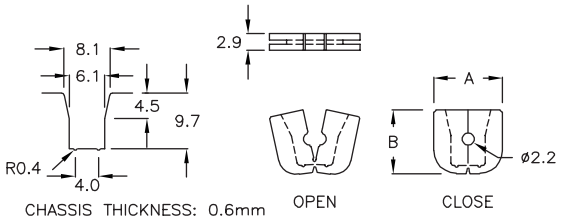


PART NO	A	B	PACKAGE
DS-4MP	12.0	11.1	1000



方型護線環 EDGE SADDLE 2-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

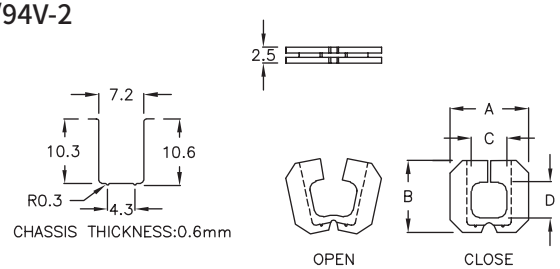


PART NO	A	B	C	D	PACKAGE
DS-4CF	12.5	11.5	4.3	6.5	1000
DS-4DG	12.5	11.5	4.3	4.3	
DS-4HQ	12.5	11.5	4.3	2.15	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



方型護線環 EDGE SADDLE 2-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

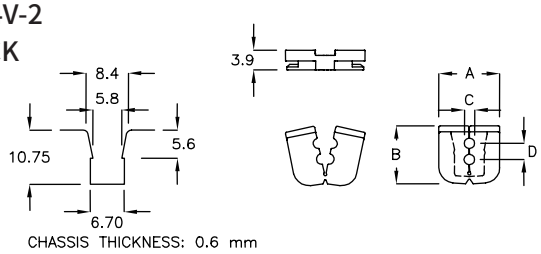


PART NO	A	B	C	D	PACKAGE
DSH-12K	12.2	11.55	ø2.1	3.2	1000



方型護線環 EDGE SADDLE 2-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

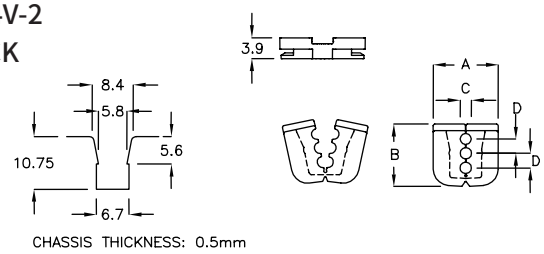


PART NO	A	B	C	D	PACKAGE
DSH-12HM	12.2	11.55	ø2.1	2.6	1000



方型護線環 EDGE SADDLE 2-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

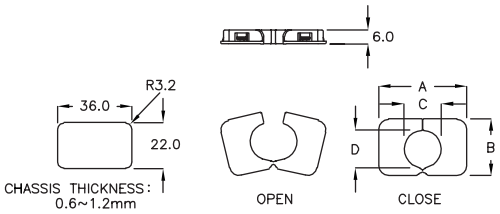


PART NO	A	B	C	D	PACKAGE
SAQ-16	37.8	24.0	16.0	16.0	200



方型護線環 EDGE SADDLE 2-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

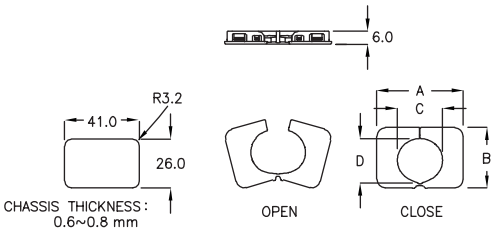


PART NO	A	B	C	D	PACKAGE
SAQ-20A	42.8	28.0	22.0	20.0	200



方型護線環 EDGE SADDLE 2-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

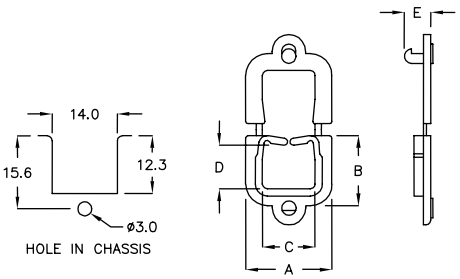


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
DS-10A	18.0	14.45	10.8	8.9	6.7	2.2	500
DS-10	18.5	14.5	11.0	8.6	6.0	1.6	
DS-10S	18.6	14.7	11.0	8.7	4.2	0.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



方型護線環 EDGE SADDLE 2-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

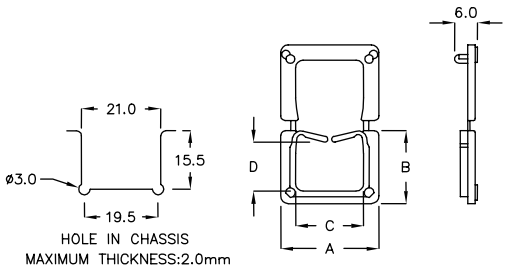


PART NO	A	B	C	D	PACKAGE
DS-14	26.2	20.0	18.0	12.8	500



方型護線環 EDGE SADDLE 2-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

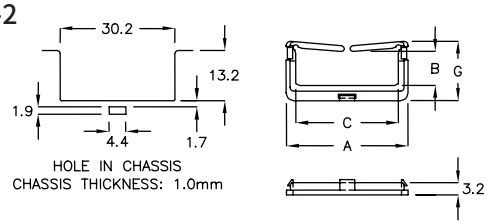


PART NO	A	B	C	G	PACKAGE
DS-27	32.0	9.0	27.0	15.6	500



方型護線環 EDGE SADDLE 2-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

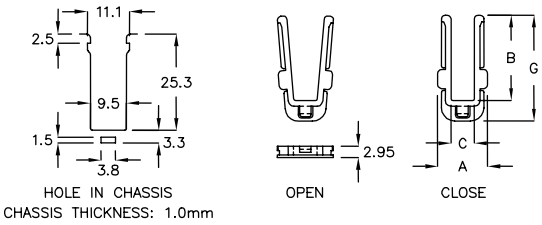


PART NO	A	B	C	G	PACKAGE
DSC-6FN	12.7	22.5	6.2	28.0	500



方型護線環 EDGE SADDLE 2-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

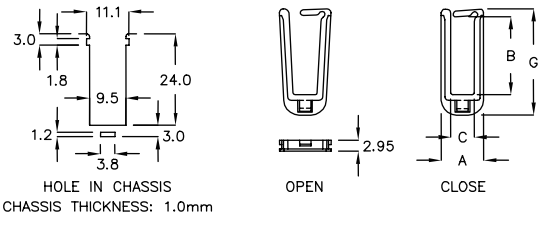


PART NO	A	B	C	G	PACKAGE
DSC-6GM	11.1	20.0	6.3	27.8	500




方型護線環 EDGE SADDLE 2-17-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

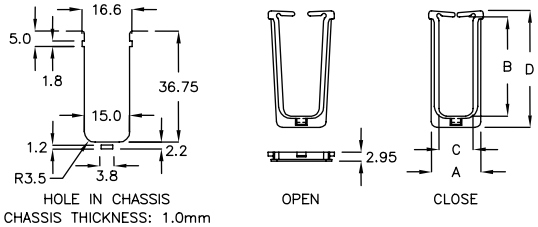



PART NO	A	B	C	D	PACKAGE
DSC-12NT	16.4	32.7	11.8	38.7	500




方型護線環 EDGE SADDLE — 2-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
CT–16	27.9	6.8	16.0	2.0	500



保護蓋 HOLE PROTECT COVER — 2-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
BH–8	25.0	10.0	20.0	ø3.2	1.0	1000
BH–9	46.0	12.0	34.0	ø3.5	0.8	
BH–10	35.0	16.0	25.0	ø3.1	1.6	
BH–10A	35.0	16.0	25.0	ø3.1	2.6	
BH–10C	42.0	16.0	32.0	ø3.2	3.6	
BH–51A	51.0	10.0	46.0	ø3.2	0.8	200




保護蓋 HOLE PROTECT COVER — 2-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
BHA–03	21.3	15.2	2.0	8.0	500



保護蓋 HOLE PROTECT COVER — 2-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
BHA–01	21.0	15.0	2.0	6.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保護蓋 HOLE PROTECT COVER 2-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
BH-011	20.3	10.6	1.0	1000




保護蓋 HOLE PROTECT COVER 2-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL




PART NO	A	B	C	PACKAGE
BH-019	18.7	6.0	3.7	1000



端子保護蓋 CONNECTOR COVER 2-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
BH-012	24.5	10.2	10.5	500



護線套 EDGING 2-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

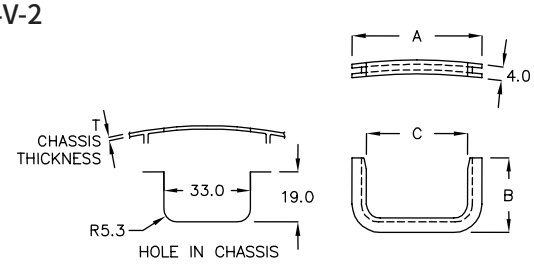


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
DDS-04	37.9	21.65	29.5	1.3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




護線套 EDGING 2-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

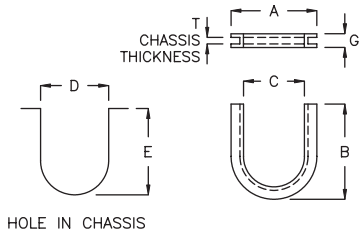


PART NO	A	B	C	D	E	G	T CHASSIS THICKNESS	PACKAGE
UST-01	24.2	26.8	17.2	19.2	25.0	3.85	1.6	500
UST-02	24.0	21.0	16.0	18.0	18.0	3.8	1.7	
UST-03	21.4	29.7	16.0	17.8	27.9	3.0	0.8	
UST-04	16.0	16.0	10.0	12.0	14.0	3.4	1.3	
UST-05	21.4	27.5	16.0	17.8	25.7	3.0	1.0	
UST-06	31.3	36.5	21.3	26.0	35.0	3.8	1.6	
UST-07	31.3	36.8	21.3	26.1	34.2	4.3	1.7	
UST-08	28.3	29.5	20.7	22.0	26.7	4.0	1.6~1.8	
UST-12	24.0	21.0	16.0	18.0	18.0	3.3	1.0	
★ UST-30C	35.4	33.9	29.8	32.0	32.7	3.0	0.8	




護線套 EDGING 2-20-2

- MATERIAL：NYLON 66(UL)
- FLAME CLASS：94V-0/94V-2
- COLOR：BLACK

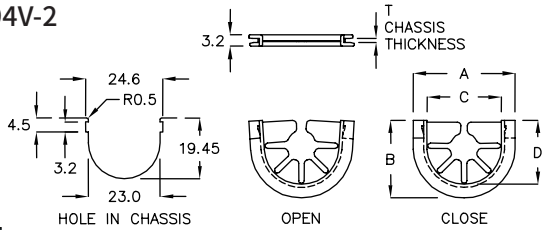


PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
USK-21A	29.0	22.1	21.2	18.0	1.0	500




方型護線環 EDGE SADDLE 2-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

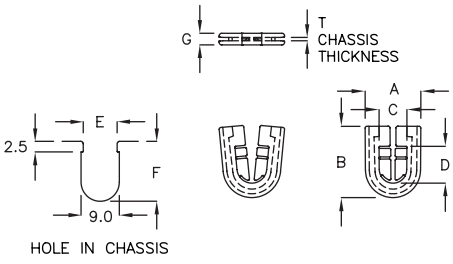


PART NO	A	B	C	D	E	F	G	T CHASSIS THICKNESS	PACKAGE
USM-6KP	13.0	16.8	6.4	8.7	8.0	15.0	2.75	0.6	1000
★ USM-6LQ	13.0	16.8	6.4	8.7	8.0	15.0	3.20	1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



方型護線環 EDGE SADDLE 2-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

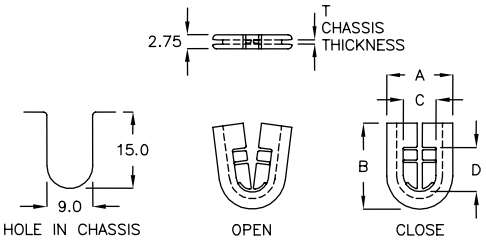


PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
USM-6M	13.0	16.8	6.4	8.7	0.6	1000



方型護線環 EDGE SADDLE 2-21-2

- MATERIAL: TPE
- COLOR: BLACK

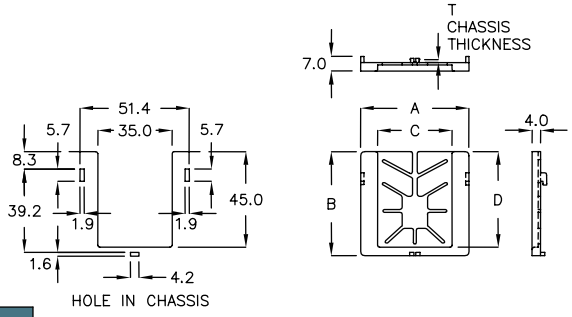


PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
USCF-51G	51.0	49.0	35.0	45.0	1.0	200



護線套 EDGING 2-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK

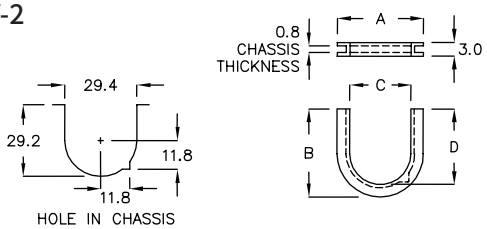


PART NO	A	B	C	D	PACKAGE
UST-27Q	35.1	31.7	27.4	27.8	500




方型護線環 EDGE SADDLE 2-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

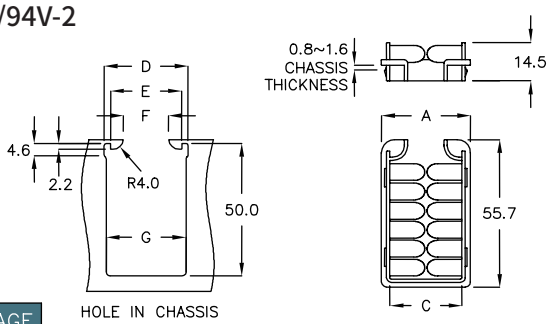


PART NO	A	C	D	E	F	G	PACKAGE
USC-27KH	33.6	27.2	31.6	26.8	17.0	30.0	100
USC-37FG	43.6	37.2	41.6	36.8	29.2	40.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



活動護線套 MOVABLE BUSHING — 2-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL





PART NO	A	B	C	D	E	SUITABLE THICKNESS	PACKAGE
US-12.31	31.2	3.2	4.0	1.2	1.1	1.2	2000
US-116.7	66.5	3.7	3.9	1.0	1.0	1.2	
US-127.9	79.0	3.2	4.3	1.3	1.2	1.3	1000
US-2010	100.0	4.4	4.3	1.3	2.0	2.0	
US-0725	255.0	3.2	4.6	1.7	0.7	0.7	
US-0926	260.0	3.1	3.8	0.8	0.9	1.0	
US-1125	256.0	3.4	4.4	1.6	1.0	1.1	
US-1126	265.0	3.5	4.4	1.6	0.9	1.0	
US-1225	256.0	3.2	4.2	1.4	1.2	1.3	
US-1317	176.0	3.7	4.3	1.3	1.3	1.5	
US-1325	256.0	3.7	4.3	1.3	1.3	1.5	
US-1725	256.0	4.2	4.4	1.4	1.6	1.7	500
US-2025	256.0	4.4	4.3	1.4	2.0	2.1	
US-2425	256.0	5.2	4.6	1.7	2.4	2.4	
US-3025	255.0	5.8	4.5	1.25	3.0	3.2	
US-3525	256.0	6.2	5.5	2.3	3.4	3.6	200



塞環 HOLE PLUG — 2-22-2


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: BLACK






PART NO	CHASSIS THICKNESS	HOLE IN CHASSIS	A	B	C	PACKAGE
M-8A	1.6	ø8.5	ø11.5	1.8	6.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




塞環 HOLE PLUG 2-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	MAXIMUM THICKNESS	HOLE IN CHASSIS	A	B	C	PACKAGE
M-3K	1.6	ø3.0~ø3.1	5.2	1.65	4.3	2000
M-3LM	1.6	ø3.4~ø3.6	5.6	1.8	4.3	
M-4DR	1.6	ø3.9~ø4.1	5.8	1.65	5.0	
M-4MF	1.6	ø4.4~ø4.6	6.0	1.65	5.0	
M-4	1.6	ø4.7~ø4.9	6.0	1.8	5.2	
M-5	1.0	ø4.95~ø5.0	7.5	1.3	5.7	
M-6	1.6	ø6.3~ø6.5	7.6	1.8	5.6	
M-6A	1.6	ø6.2~ø6.5	8.0	1.85	8.0	1000
M-7	1.6	ø7.0~ø7.1	11.0	1.9	7.0	
M-8	1.6	ø7.6~ø8.0	9.5	1.8	6.0	
M-9	1.2	ø9.5~ø9.6	13.0	2.0	6.5	
M-10	1.4	ø9.6~ø10.0	13.0	1.8	6.0	
M-11A	1.4	ø11.45~ø11.55	18.6	2.0	7.0	
M-11DC	0.8	ø11.2~ø11.25	15.0	1.35	6.9	
M-13	2.1	ø12.7~ø13.0	17.0	2.3	8.0	
M-16	2.0	ø15.9~ø16.0	20.0	2.3	7.7	500




塞環 HOLE PLUG 2-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: BLACK




PART NO	MAXIMUM THICKNESS	HOLE IN CHASSIS	A	B	C	PACKAGE
M-15	1.6	ø15.0~ø15.1	16.8	1.8	7.0	500
M-19	3.2	ø18.9~ø19.0	23.5	3.5	10.5	
M-22	3.0	ø21.9~ø22.0	26.0	3.4	9.6	
M-22C	3.5	ø21.9~ø22.0	25.8	3.7	11.7	200
M-25	3.2	ø25.4~ø25.6	28.0	4.0	12.7	
M-28A	3.5	ø28.3~ø28.4	32.0	3.9	13.1	
M-30	3.2	ø30.5~ø30.6	34.0	4.0	13.0	
M-32	2.2	ø32.0~ø32.1	35.7	2.6	13.0	




塞環 HOLE PLUG 2-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	MAXIMUM THICKNESS	A	B	C	D	PACKAGE
M-22A	2.0	19.4	2.2	7.5	25.6	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塞頭 HOLE PLUG 2-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	MAXIMUM THICKNESS	A	B	PACKAGE
MU-9JP	3.4	ø12.0	10.5	1000



保護蓋 HOLE PROTECTOR 2-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MBF-01	ø8.9	4.9	1000



塞頭 HOLE PLUG 2-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MHG-1A	ø6.2	5.0	2000



塞頭 HOLE PLUG 2-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MHG-02	ø6.0	6.0	2000



塞頭 HOLE PLUG 2-24-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MMD-01	14.4	7.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塞頭 HOLE PLUG 2-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MHG-04	ø13.4	7.9	2000



塞頭 HOLE PLUG 2-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MHG-4A	ø9.5	8.0	2000



塞頭 HOLE PLUG 2-25-3

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	PACKAGE
MPL-05	ø5.0	4.0	2000



塞頭 HOLE PLUG 2-25-4

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	PACKAGE
MPL-21Q	ø21.8	12.0	100



塞頭 HOLE PLUG 2-25-5

- MATERIAL: TPE
- COLOR: BLACK

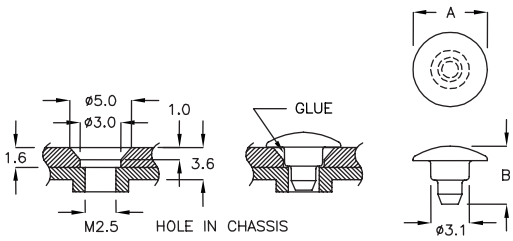


PART NO	A	B	PACKAGE
MPZ-6Q	ø6.0	4.7	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




塞頭 HOLE PLUG 2-26-1

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	PACKAGE
MHG-5F	ø7.7	1000



塞頭 HOLE PLUG 2-26-2

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	PACKAGE
MAF-4D	ø12.0	1000



固定座 MOUNT 2-26-3

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	PACKAGE
MMQ-01	ø7.0	4.0	2000



固定座 MOUNT 2-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MMQ-02	ø3.0	2.0	2000




塞頭 HOLE PLUG 2-26-5

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	PACKAGE
MXR-7BK	11.75	4.4	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塞頭 HOLE PLUG 2-27-1

- MATERIAL: TPE
- COLOR: BLACK

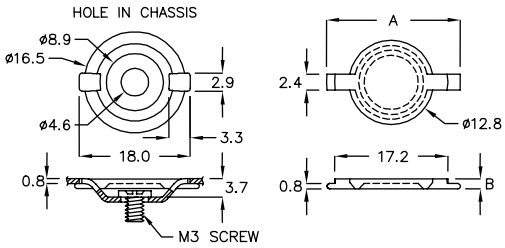


PART NO	A	B	PACKAGE
MXT−12GR	20.3	1.5	1000



塞頭 HOLE PLUG 2-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MBF−6A	ø7.0	5.4	2000




塞頭 HOLE PLUG 2-27-3

- MATERIAL: TPE
- COLOR: BLACK

NEW




PART NO	A	B	PACKAGE
★ MPLA−11C	ø11.5	9.0	1000




ANT3 RFID 塞頭 ANT3 RFID HOLE PLUG 2-27-4

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	PACKAGE
MPL−9A	ø9.0	5.7	2000




護板套 EDGING 2-27-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

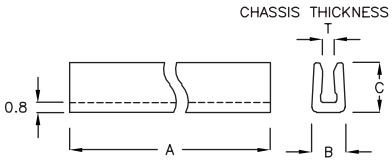


PART NO	A	B	C	T	PACKAGE
VTU−14	14.0	2.4	3.2	0.8	1000
VTU−20DM	20.0	2.8	5.5	1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




護板套 EDGING 2-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
VTU−20A	20.0	4.8	5.0	2.5	1000
VTU−30C	30.0	4.4	5.0	1.6	
VTU−47	47.0	4.4	5.0	1.6	




護板套 EDGING 2-28-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

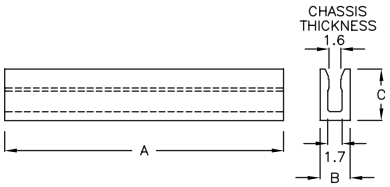


PART NO	A	B	C	PACKAGE
UTU−30	30.0	3.6	6.0	1000
UTU−60	60.0	3.6	6.0	500
UTU−60A	59.0	5.5	8.0	
UTU120	120.0	5.5	8.0	100



護線套 EDGING 2-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

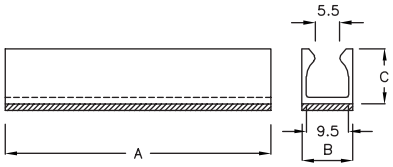


PART NO	A	B	C	PACKAGE
UTU−60C	60.0	11.5	12.5	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

03


P.C.板間隔柱
SPACER SUPPORT





P.C. 板間隔柱 SPACER SUPPORT 3-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T MAXIMUM THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
LSA−2A	3.0	1.6	1.2	6.8	500




P.C. 板間隔柱 SPACER SUPPORT 3-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

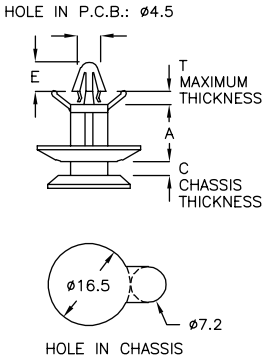


PART NO	A	T MAXIMUM THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
LSD−9B	8.6	4.0	2.5	5.8	500
LSD−11A	11.1	2.0	2.5	5.8	
LSD−12	12.1	1.6	2.5	5.8	
LSD−12A	12.1	2.0	2.5	5.8	
LSD−14	14.0	1.6	2.5	5.8	



P.C. 板間隔柱 SPACER SUPPORT 3-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T MAXIMUM THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
LSD−4A	4.5	ø4.5	2.0	2.5	5.8	500
LSD−6	6.0	ø6.0	1.6	1.8	7.6	
LSD−9A	9.5	ø4.5	1.6	1.8	5.8	
LSD−9C	8.6	ø6.0	1.6	1.8	7.6	
LSD−13A	13.3	ø6.0	1.6	1.8	7.6	




P.C. 板間隔柱 SPACER SUPPORT 3-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

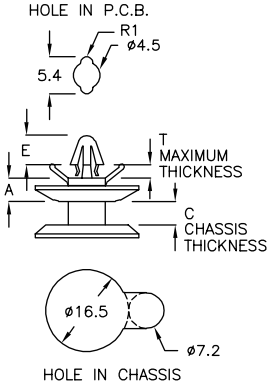


PART NO	A	T MAXIMUM THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
LSD−8	3.3	2.0	2.5	6.5	500
LSD−8C	3.2	2.0	5.0	6.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T MAXIMUM THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
LSD-11	11.0	2.0	2.2	5.8	500




P.C. 板間隔柱 SPACER SUPPORT 3-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T MAXIMUM THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
LSD-11C	11.0	2.0	2.1	5.8	500




P.C. 板間隔柱 SPACER SUPPORT 3-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
ACBS-3C	3.5	1.4~1.8	0.8~1.0	7.1	1000




P.C. 板間隔柱 SPACER SUPPORT 3-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
ACMS-3RK	3.5	1.6	0.6	4.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
ACBS-2	2.5	1.4~1.7	0.8~1.4	7.1	1000
ACBS-3A	3.5	1.4~1.7	0.8~1.0	7.1	
ACBS-5	5.0	1.2~1.7	0.8~1.4	7.1	
ACBS-6	6.5	1.2~1.7	0.8~1.2	7.3	
ACBS-6B	6.35	1.4~1.9	0.8~1.4	7.1	
ACBS-6C	6.35	1.4~2.0	0.8~1.4	7.2	
ACBS-6M	6.85	1.2~1.6	0.5~0.8	7.0	
ACBS-8	8.0	1.4~1.8	0.8~1.4	7.1	
ACBS-10	10.0	1.4~1.8	0.8~1.5	7.1	
ACBS-12	12.7	1.4~1.8	1.0~1.6	7.1	




P.C. 板間隔柱 SPACER SUPPORT 3-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
ACBS-8A	8.0	1.4~1.9	1.6~2.2	7.1	1000



P.C. 板間隔柱 SPACER SUPPORT 3-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
ACBS-6K	6.5	1.8~2.3	0.6~0.8	7.1	1000




P.C. 板間隔柱 SPACER SUPPORT 3-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

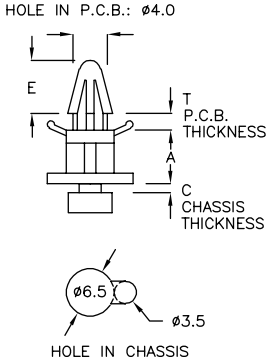

PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
ACBS-6T	6.4	1.5~2.3	0.8~1.5	7.1	1000
ACBS-17T	17.0	1.4~1.8	0.6~0.8	7.1	500
ACBS-74T	74.0	1.4~1.6	1.0~1.2	7.3	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	PACKAGE
AF−003	3.2	1.6	1.0~1.7	1000







P.C. 板間隔柱 SPACER SUPPORT 3-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	PACKAGE
AC−003	3.2	1.6	1.0~1.7	10.3	1000
AC−006	6.4	1.6	1.0~1.7	10.2	







P.C. 板間隔柱 SPACER SUPPORT 3-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	D	E	PACKAGE
ACBS−6Y	6.4	1.2~1.6	ø11.8	7.2	1000
ACBS−8X	8.0	1.2~1.7	ø15.0	7.2	
ACBS−8Y	8.0	1.2~1.7	ø11.6	7.2	
ACBS−8K	8.0	1.2~1.7	ø18.0	7.1	
ACT−17	17.0	1.4~1.8	ø11.3	7.0	






P.C. 板間隔柱 SPACER SUPPORT 3-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	D	E	PACKAGE
ACBS−8D	8.0	1.2~1.6	ø11.8	7.5	1000
ACBS−9K	8.5	1.6~2.2	ø12.0	6.0	
ACBS−9Y	9.0	1.2~1.6	ø12.0	7.1	
ACBS−10Y	10.0	1.2~1.6	ø12.0	7.1	
ACBS−11Y	11.0	1.2~1.6	ø11.9	7.1	






P.C. 板間隔柱 SPACER SUPPORT 3-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T P.C.B. THICKNESS	D	E	PACKAGE
ACBK−9HG	9.6	1.6	ø15.0	8.3	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	E	PACKAGE
LSD-13	13.3	2.0	5.8	500







P.C. 板間隔柱 SPACER SUPPORT 3-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	E	PACKAGE
LSD-21	19.0	2.0	5.8	200







P.C. 板間隔柱 SPACER SUPPORT 3-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	E	PACKAGE
LTD-10	9.9	2.0	5.4	500






P.C. 板間隔柱 SPACER SUPPORT 3-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	E	F	PACKAGE
LTD-11	11.0	2.0	5.8	2.0	500
LTD-14	14.0	2.0	5.8	2.0	

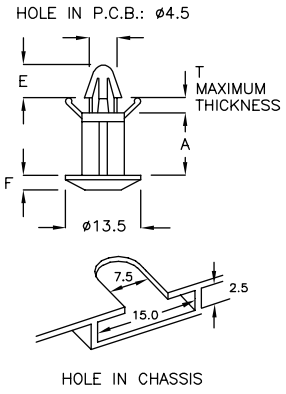




P.C. 板間隔柱 SPACER SUPPORT 3-6-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	E	F	PACKAGE
LTD-18	18.0	1.8	5.8	3.5	500
LTD-18A	18.0	1.8	5.8	3.0	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T MAXIMUM THICKNESS	E	F	PACKAGE
LTD−18C	18.0	1.7	6.0	3.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

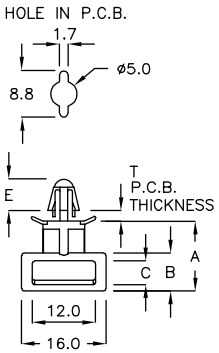


PART NO	A	B	C	T P.C.B. THICKNESS	E	PACKAGE
LTX−13	13.2	7.2	3.7	1.6	6.0	1000




P.C. 板間隔柱 SPACER SUPPORT 3-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

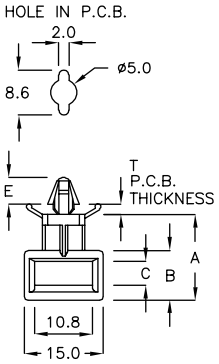


PART NO	A	B	C	T P.C.B. THICKNESS	E	PACKAGE
LTX−16A	16.2	9.4	4.5	1.6	5.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

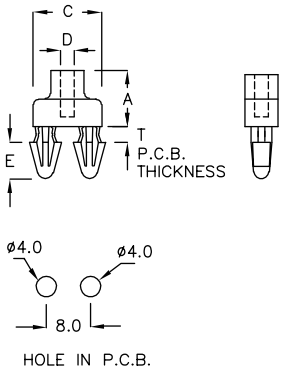


PART NO	A	T P.C.B. THICKNESS	C	D TAPPING SCREW	E	PACKAGE
TAA−01	13.8	2.0	12.5	M3X8	6.7	500
TAA−03	21.0	1.6	12.5	M3X8	6.7	
TAA−04	15.0	2.0	12.5	M3X8	6.7	
TAA−05	5.0	1.6	12.5	M3X4	6.7	
TAA−06	14.1	2.5	12.5	M3X8	6.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

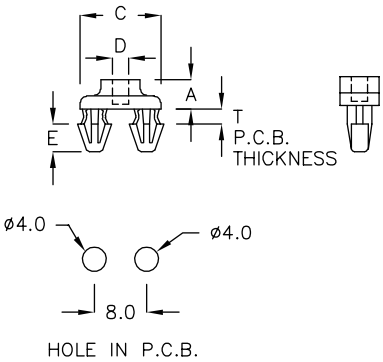


PART NO	A	T P.C.B. THICKNESS	C	D TAPPING SCREW	E	PACKAGE
TAA-07	4.5	2.0	12.5	M3X4	4.3	500
TAA-4A	8.5	1.6	12.5	M3X6	4.8	




P.C. 板間隔柱 SPACER SUPPORT 3-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

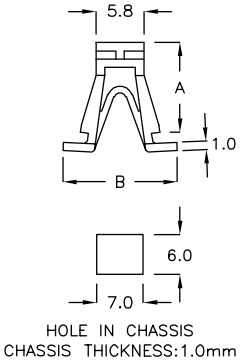


PART NO	A	B	PACKAGE
FK-011	11.0	13.0	1000



P.C. 板間隔柱 SPACER SUPPORT 3-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	B	C CHASSIS THICKNESS	PACKAGE
FCB-4M	4.5	ø9.8	0.8~1.2	1000
FCB-5	5.0	ø11.5	1.4~2.0	
FCB-6	6.35	ø10.4	1.0~2.0	
FCB-6A	6.35	ø10.0	1.5~2.3	
FCB-7	7.0	ø10.4	1.3~1.9	
FCB-8	8.0	ø9.8	1.0~1.4	
FCB-10	10.0	ø9.8	1.0~1.4	
FCB-10A	10.0	ø11.5	1.4~2.0	
FCB-12	12.7	ø9.8	1.0~1.4	
FCB-12A	12.7	ø9.9	1.2~2.2	
FCB-14	13.9	ø9.9	1.5~2.0	500
FCB-15	15.7	ø9.8	1.6~2.2	




P.C. 板間隔柱 SPACER SUPPORT 3-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5



PART NO	A	B	C CHASSIS THICKNESS	PACKAGE
FCT-14	14.0	ø9.8	1.0~2.0	1000
FCT-19A	19.0	ø10.0	0.8~1.6	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5

PART NO	A	B	C CHASSIS THICKNESS	PACKAGE
FCTA−14A	14.0	8.0	0.5~1.0	500







P.C. 板間隔柱 SPACER SUPPORT 3-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.8


PART NO	A	B	C CHASSIS THICKNESS	FORM	PACKAGE
FFR−05	5.0	ø6.75	1.4~1.6	1	1000
FFR−15H	15.5	ø9.0	1.4~1.6	2	



FORM.1




FORM.2



P.C. 板間隔柱 SPACER SUPPORT 3-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0

PART NO	A	C CHASSIS THICKNESS	D	E	PACKAGE
KDD−11	11.0	1.6	ø4.2	4.6	500
KDD−12C	12.5	1.6	ø4.2	4.1	
KDD−12MK	12.5	1.6	ø5.0	4.7	
KDD−12TS	12.5	1.6	ø5.0	5.5	
KDD−14C	14.6	1.6	ø4.2	5.1	
KDD−15A	15.0	1.6	ø5.0	4.6	
KDD−19	19.0	1.6	ø4.2	5.2	
KDD−22A	22.3	1.6	ø4.2	5.2	
KDD−24	24.0	1.6	ø5.0	4.6	







P.C. 板間隔柱 SPACER SUPPORT 3-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.6


PART NO	A	C CHASSIS THICKNESS	E	PACKAGE
KDH−09	9.0	0.8~1.6	4.3	1000






P.C. 板間隔柱 SPACER SUPPORT 3-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ3.5




PART NO	A	C CHASSIS THICKNESS	D	E	PACKAGE
KDM−14K	15.0	1.4~1.6	ø6.0	5.8	500
KDM−16	16.0	1.4~1.6	ø6.0	5.8	2000
KDM−21C	21.6	1.4~1.6	ø7.5	12.8	500



P.C. 板間隔柱 SPACER SUPPORT 3-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

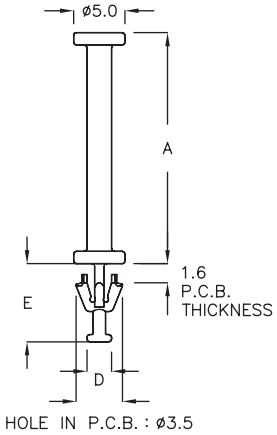


	PART NO	A	D	E	PACKAGE
★	TCKY−22A	22.5	2.4	7.6	500
★	TCKY−22C	22.3	2.6	6.6	
★	TCKY−22D	22.5	2.8	6.1	




P.C. 板間隔柱 SPACER SUPPORT 3-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.6




PART NO	A	B	C CHASSIS THICKESS	PACKAGE
SCQ−09	9.0	ø10.0	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

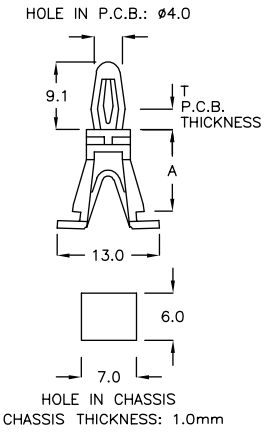


PART NO	A	T P.C.B. THICKNESS	PACKAGE
SK−011	11.0	1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCK-2C	2.5	1.4~1.6	0.8~1.0	ø5.8	2.7	2000
SCK-2K	2.5	1.6~1.9	0.8~1.0	ø5.8	2.65	
SCK-3A	3.2	1.4~1.6	0.8~1.6	ø8.0	3.0	1000
SCK-04	4.0	1.4~1.6	0.8~1.6	ø8.2	3.1	
SCK-4AM	4.5	1.4~1.6	0.8~1.6	ø8.2	3.1	
SCK-05	5.0	1.4~1.6	0.8~1.2	ø5.8	3.1	
SCK-5QN	5.5	1.4~1.6	1.4~1.6	ø8.2	3.1	
SCK-06	6.0	1.4~1.6	0.8~1.6	ø8.2	2.95	
SCK-07	7.0	1.4~1.6	1.4~1.6	ø8.2	3.1	
SCK-08	8.0	1.4~1.6	0.8~1.6	ø8.2	3.1	
SCK-10	10.0	1.4~1.6	0.8~1.6	ø8.2	3.1	
SCK-12	12.0	1.4~1.6	0.8~1.6	ø8.0	2.95	
SCK-16YT	16.0	1.4~1.6	1.4~1.6	ø8.0	2.9	




P.C. 板間隔柱 SPACER SUPPORT 3-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCE-3A	3.5	1.2~1.7	1.1~1.7	ø11.45	3.6	1000
SCE-4KD	4.8	1.2~1.7	1.1~1.6	ø11.45	3.6	
SCE-6	6.35	1.2~1.7	1.1~1.6	ø11.45	3.6	
SCE-07	7.0	1.2~1.7	1.1~1.6	ø11.45	3.6	
SCE-8	8.0	1.2~1.7	1.1~1.6	ø11.45	3.6	
SCE-10	9.7	1.2~1.7	1.1~1.6	ø11.45	3.6	500
SCE-10A	10.5	1.2~1.7	1.1~1.6	ø11.45	3.6	
SCE-10C	9.7	1.2~1.7	1.1~1.6	ø7.0	3.6	
SCE-11	11.0	1.2~1.7	1.1~1.6	ø11.45	3.6	




P.C. 板間隔柱 SPACER SUPPORT 3-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCG-2A	2.5	1.6	0.5	ø8.0	3.2	2000
SCG-3D	3.8	1.6	0.8	ø8.0	3.2	
SCG-05	5.0	1.6	0.5	ø8.0	3.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

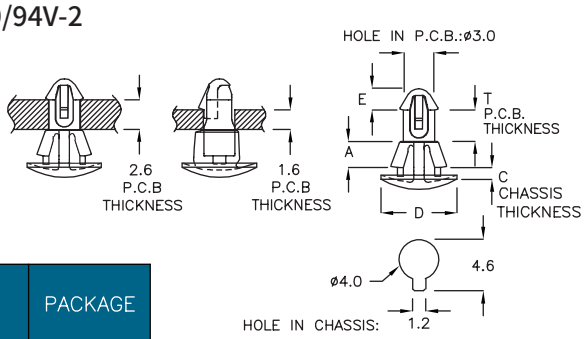


PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCZ-2M	2.5	1.6	0.8~1.0	ø7.0	2.0	2000
		2.6				



P.C. 板間隔柱 SPACER SUPPORT 3-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCK-2DM	2.8	0.8~1.0	1.8	ø8.0	3.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCX-15	15.0	1.6	1.0	ø8.0	3.0	1000
SCX-35C	35.3	1.6	1.0	ø8.0	3.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCW-05	5.0	1.2~1.6	0.6~1.2	ø8.0	3.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCS−4KP	4.5	1.6~1.8	0.8~1.0	ø7.8	3.5	1000
SCU−11K	11.0	1.4~1.6	0.8~1.2	ø9.5	2.8	




P.C. 板間隔柱 SPACER SUPPORT 3-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCD−10S	10.0	0.8~1.9	1.0~1.6	ø11.5	9.65	500
SCD−12S	11.8	0.8~1.9	1.2~2.0	ø11.5	9.65	




P.C. 板間隔柱 SPACER SUPPORT 3-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B HOLE IN CHASSIS	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCD−10	10.0	ø5.5	1.2~1.7	1.0~1.6	ø11.4	10.6	500
SCD−12	12.7	ø5.5	1.2~1.7	1.0~1.5	ø12.8	10.6	
SCD−15K	15.9	ø5.4	1.2~1.6	1.5~1.6	ø12.7	9.6	



P.C. 板間隔柱 SPACER SUPPORT 3-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCD−10A	10.0	1.2~1.6	1.0~1.1	ø10.0	10.8	500
SCD−25	25.0	1.2~1.6	1.0~1.1	ø10.0	10.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCY-10	10.0	1.2~1.6	1.2~1.6	ø9.85	10.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCT-06	6.0	1.2~1.6	1.2~1.6	ø10.0	4.0	1000
SCT-7	7.0	1.2~1.6	1.3~2.0	ø11.2	4.0	
SCT-12A	12.0	1.2~1.6	1.1~2.0	ø9.9	4.0	
SCT-13A	13.5	1.2~1.6	0.8~1.6	ø9.9	4.0	
SCT-14	14.0	1.2~1.6	1.3~2.0	ø9.9	4.0	
SCT-21A	21.7	1.2~1.6	0.8~1.6	ø9.9	4.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCT-3	3.0	ø9.8	4.0	0.8~1.6	1.2~1.6	1000
SCT-3A	3.5	ø9.8	3.6	0.8~1.0	1.2~1.6	
SCT-10	10.0	ø9.8	4.5	1.4~2.0	1.2~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCT-7AF	7.05	ø11.1	3.8	1.3~2.2	1.2~1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCT−05	5.0	ø9.8	3.8	1.4~2.0	1.2~1.6	1000
SCT−6KT	6.35	ø9.8	3.8	1.4~2.0	1.2~1.6	
SCT−08	8.0	ø9.8	3.8	1.2~1.6	1.2~1.6	
SCT−8C	7.9	ø9.6	4.0	1.1~1.8	1.2~1.6	
SCT−12C	11.9	ø9.7	4.0	1.1~1.8	1.2~1.6	
SCT−18	18.0	ø9.8	4.0	1.0~2.0	1.2~1.6	
SCT−18K	18.0	ø9.8	4.0	1.8~2.2	1.2~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCT−10A	10.0	ø10.0	3.2	0.8~1.6	1.2~1.6	1000
SCT−19	19.0	ø10.0	3.2	0.8~1.6	1.2~1.6	
SCT−19A	19.0	ø10.0	3.4	0.6	1.2~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C P.C.B THICKNESS	T P.C.B THICKNESS	PACKAGE
SCTA−10	10.0	ø9.6	4.0	1.6	2.0	1000



P.C. 板間隔柱 SPACER SUPPORT 3-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCC−21	21.0	ø10.0	4.0	0.8~1.0	1.4~1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCB-5	5.0	ø10.0	7.4	0.8~1.4	1.2~1.6	1000
SCB-5.5	5.5	ø10.0	7.1	0.8~1.7	1.2~1.6	
SCB-6	6.35	ø10.0	7.5	0.8~1.2	1.2~1.6	
SCB-6A	6.5	ø10.2	7.1	0.8~1.7	1.4~1.8	
SCB-6F	6.5	ø10.0	4.9	1.0~1.7	1.2~1.6	
SCB-8	8.0	ø9.9	7.1	0.8~1.4	1.2~1.6	
SCB-8A	8.0	ø10.1	7.4	0.8~1.1	1.2~1.6	
SCB-9A	9.0	ø9.9	7.3	0.8~1.4	1.2~1.8	
SCB-10	10.0	ø10.0	7.6	0.8~1.2	1.2~1.6	
SCB-10A	10.0	ø10.0	7.1	1.0~1.4	1.5~2.4	
SCB-11F	11.0	ø9.9	7.3	0.8~1.2	1.2~1.6	
SCB-12	12.4	ø9.9	7.2	0.8~1.4	1.2~1.6	
SCB-15	15.7	ø9.8	7.3	0.8~1.4	1.2~1.6	
SCB-16	16.2	ø9.8	6.6	0.7~1.2	1.2~1.6	500
SCB-19	19.0	ø9.9	7.5	0.8~1.4	1.2~1.6	
SCB-24	24.1	ø9.8	7.5	0.8~1.4	1.2~1.6	
SCB-28A	28.2	ø9.9	6.4	0.8~1.0	1.4~1.8	



P.C. 板間隔柱 SPACER SUPPORT 3-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCC-3	3.5	ø11.4	4.0	1.6~2.2	1.2~1.6	1000
SCC-3A	3.2	ø11.4	4.0	1.8~2.2	1.5~1.7	
SCC-3C	3.5	ø11.4	4.0	1.8~2.3	1.8~2.2	
SCC-5	5.0	ø11.4	4.0	1.6~2.2	1.2~1.6	
SCC-6	6.35	ø11.5	4.0	1.6~2.2	1.4~1.9	
SCC-8	8.2	ø11.4	4.0	1.6~2.2	1.3~1.7	
SCC-8D	7.9	ø11.5	4.0	1.6~2.2	1.3~1.7	
SCC-10	10.0	ø11.5	4.0	1.6~2.2	1.4~1.8	
SCC-10A	10.1	ø11.5	4.0	1.6~2.2	1.8~2.2	
SCC-10C	10.0	ø11.5	4.0	1.6~2.2	2.8~3.2	
SCC-12	12.8	ø11.4	4.0	1.6~2.2	1.2~1.6	
SCC-15	15.7	ø11.4	4.0	1.6~2.2	1.3~1.7	
SCC-19	19.1	ø11.4	4.0	1.6~1.8	1.3~1.7	
SCC-19A	19.1	ø11.4	4.0	1.6~2.2	1.6~2.0	
SCC-20	20.0	ø11.5	4.0	1.6~2.2	1.2~1.6	500
SCC-24	23.8	ø11.4	4.0	1.6~2.0	1.3~1.7	
SCC-26A	25.8	ø11.4	4.0	1.7~2.3	1.4~1.6	
SCC-32	32.0	ø11.4	4.0	1.7~2.3	1.4~1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.6




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCC-34	34.0	ø11.4	3.6	1.6~1.8	1.4~1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ6.0




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCF-5	5.3	ø11.5	4.0	0.8~1.6	1.2~1.7	1000
SCF-06	6.35	ø11.6	4.1	0.8~1.6	1.2~1.7	
SCF-8	8.2	ø11.6	4.0	0.8~1.6	1.2~1.7	500
SCF-10	10.0	ø11.6	4.1	0.8~1.6	1.2~1.7	
SCF-12	12.7	ø11.6	4.0	0.8~1.6	1.2~1.7	
SCF-15AP	15.9	ø11.0	3.0	0.8~2.0	1.2~1.7	
SCF-21J	21.6	ø11.5	4.0	0.6~0.8	1.2~1.6	



P.C. 板間隔柱 SPACER SUPPORT 3-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ6.0




PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCD-6A	6.4	ø10.0	10.0	0.8~1.2	1.2~1.7	1000




P.C. 板間隔柱 SPACER SUPPORT 3-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ6.0



PART NO	A	D	E	C P.C.B THICKNESS	T P.C.B. THICKNESS	PACKAGE
SCD-14K	14.0	ø10.0	10.0	0.8~1.2	1.2~1.7	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5

NEW




	PART NO	A	D	E	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
★	SCN−08	8.0	8.0	4.5	0.5~1.0	1.2~1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCP−3A	3.5	1.4~1.6	0.5~0.8	ø9.5	4.0	2000



P.C. 板間隔柱 SPACER SUPPORT 3-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SDA−10	10.0	1.2~1.6	0.8~1.2	ø10.0	7.1	1000



P.C. 板間隔柱 SPACER SUPPORT 3-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCM−19	19.0	1.0	0.6~0.8	ø10.0	3.3	500
SCM−25	25.0	1.6	0.6~0.8	ø10.0	2.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCM−05	5.0	1.6	0.6	ø10.0	3.3	1000




P.C. 板間隔柱 SPACER SUPPORT 3-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCL−9	9.0	1.1	1.5~1.8	ø9.5	5.1	500




P.C. 板間隔柱 SPACER SUPPORT 3-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	D	E	PACKAGE
SCA−19	19.0	1.6	0.8	ø10.0	3.1	1000




P.C. 板間隔柱 SPACER SUPPORT 3-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	E	T P.C.B. THICKNESS	PACKAGE
MCL−14	14.0	ø3.2	2.0	1.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	F	C P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
KHA-3A	3.2	2.0	2.95	1.6	0.8	2000




P.C. 板間隔柱 SPACER SUPPORT 3-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	E	T P.C.B. THICKNESS	PACKAGE
MCS-2A	2.2	ø3.2	1.85	1.0	2000
MCS-2F	2.2	ø3.2	1.85	1.6	
MCS-03	3.0	ø3.2	1.95	1.0	
MCS-3DF	3.5	ø3.2	1.85	1.0	
MCS-04	4.0	ø3.2	1.85	1.0	
MCS-4GW	4.1	ø3.2	1.9	0.9	
MCS-4A	4.5	ø3.2	1.85	1.0	
MCS-4C	4.0	ø3.2	1.85	1.6	
MCS-4F	4.5	ø3.2	1.85	1.6	
MCS-05	5.0	ø3.2	1.85	1.0	
MCS-5A	5.5	ø3.2	1.85	1.0	

PART NO	A	B	E	T P.C.B. THICKNESS	PACKAGE
MCS-5C	5.0	ø3.2	1.85	1.6	2000
MCS-5F	5.5	ø3.2	1.85	1.6	
MCS-06	6.0	ø3.2	1.85	1.0	
MCS-6A	6.5	ø3.2	1.85	1.0	
MCS-6C	6.0	ø3.2	1.85	1.6	
MCS-6F	6.5	ø3.2	1.85	1.6	
MCS-08	8.0	ø3.2	1.85	1.0	
MCS-8C	8.0	ø3.2	1.85	1.6	
MCS-10A	10.5	ø3.2	2.1	1.6	
MCS-18	18.2	ø3.0	1.5	1.0	
MCS-22	22.0	ø3.2	2.0	1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B. THICKNESS	PACKAGE
MEA-2M	2.5	1.6	2000
MEA-4M	4.5	1.6	
MEA-05	5.0	1.6	
MEA-5M	5.5	1.6	
MEA-6M	6.5	1.6	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
MCJ−6	6.0	1.6	2000






P.C. 板間隔柱 SPACER SUPPORT 3-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B THICKNESS	C P.C.B THICKNESS	PACKAGE
LBK−04	3.0	0.8~1.0	0.8~1.6	2000







P.C. 板間隔柱 SPACER SUPPORT 3-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	E	PACKAGE
MCK−3A	3.5	ø4.4	1.7	2.2	2000







P.C. 板間隔柱 SPACER SUPPORT 3-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
MCA−4	3.8	0.8~1.6	5.8	1.5	2000
MCA−06	6.0	0.8~1.6	5.8	1.4	







P.C. 板間隔柱 SPACER SUPPORT 3-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	PACKAGE
MEG−03	3.0	0.9	1.6	2000
MEG−06	6.0	1.6	2.3	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL





PART NO	A	C CHASSIS THICKNESS	T CHASSIS THICKNESS	PACKAGE
MEG−04A	4.0	0.8	0.5	2000



P.C. 板間隔柱 SPACER SUPPORT 3-22-2


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






PART NO	A	B	E	T	FORM	PACKAGE
MCD2−2	2.0	ø4.5	2.2	1.2~1.6	1	2000
MCD2−2M	2.5	ø4.5	2.0	1.2~1.6	1	
MCD2−3	3.0	ø4.5	2.2	1.2~1.6	1	
MCD2−3A	3.2	ø4.3	2.2	1.2~1.6	1	
MCD2−3M	3.5	ø4.5	2.0	1.2~1.6	1	
MCD2−4	4.0	ø4.5	2.2	1.2~1.6	1	
MCD2−4M	4.5	ø4.5	2.1	1.2~1.6	1	
MCD2−5	5.0	ø4.5	2.2	1.2~1.6	1	
MCD2−5M	5.5	ø4.5	2.0	1.2~1.6	1	

PART NO	A	B	E	T	FORM	PACKAGE
MCD2−6	6.0	ø4.6	2.2	1.2~1.6	1	2000
MCD2−6M	6.5	ø4.5	2.0	1.2~1.6	1	
MCD2−7	7.0	ø4.5	2.4	1.2~1.6	1	
MCD2−7A	7.5	ø4.5	2.2	1.6~1.8	2	
MCD2−8	8.0	ø4.5	2.2	1.2~1.6	1	
MCD2−9M	9.5	ø4.5	2.0	1.2~1.6	1	1000
MCD2−10	10.0	ø4.5	2.2	1.2~1.6	1	
MCD2−12	12.0	ø4.5	2.2	1.2~1.6	1	
MCD2−20	20.0	ø4.5	2.0	1.2~1.6	2	




P.C. 板間隔柱 SPACER SUPPORT 3-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	E	T P.C.B. THICKNESS	PACKAGE
UCX−5K	5.0	ø4.5	2.0	1.2~1.6	2000



P.C. 板間隔柱 SPACER SUPPORT 3-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
MQD−2DK	2.8	1.4~1.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

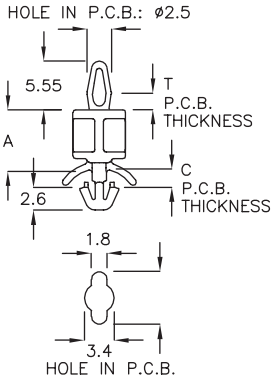


PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	PACKAGE
LCY-7MR	7.0	1.6	1.0~1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

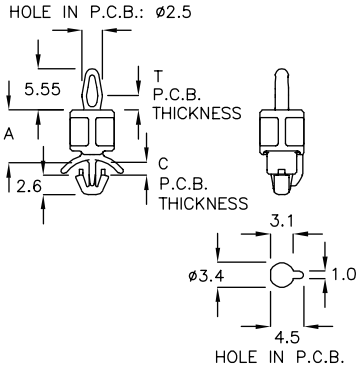


PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	PACKAGE
LCY-7SA	7.0	1.6	1.0~1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	C CHASSIS THICKNESS	PACKAGE
MEH-02	2.0	1.0	1.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
LCA2-5	5.0	1.0~1.7	1.7	3.3	2000
LCA2-8	7.7	1.0~1.7	1.7	3.3	
LCA2-9	9.0	1.0~1.7	1.7	3.3	
LCA2-10	9.9	1.0~1.7	1.7	3.3	
LCA2-12	11.6	1.0~1.7	1.7	3.3	
LCA2-14	13.6	1.0~1.7	1.6	3.3	
LCA2-16	15.7	1.0~1.7	1.7	3.3	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	PACKAGE
LCJ-19	19.0	7.4	0.3~0.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	PACKAGE
LCR-11A	11.6	1.6	2.0	1000



P.C. 板間隔柱 SPACER SUPPORT 3-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	E	PACKAGE
UCF-03	3.0	ø3.0	0.8	1.5	2000
UCF-9H	9.5	ø4.5	1.6	1.8	1000




P.C. 板間隔柱 SPACER SUPPORT 3-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
UCC-05	5.0	0.8	1.0	1.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
MCM−2A	1.4	1.4~1.6	5.4	2.4	2000
MCM−02	2.0	1.4~1.6	5.3	2.4	



P.C. 板間隔柱 SPACER SUPPORT 3-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
LCX−3A	3.25	1.4~1.6	0.8~1.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	B HOLE IN P.C.B.	C P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
MCL−03	3.0	2.1	ø3.0	1.6	0.8	2000
MCL−18	18.0	2.2	ø1.5	1.0	1.0	




P.C. 板間隔柱 SPACER SUPPORT 3-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

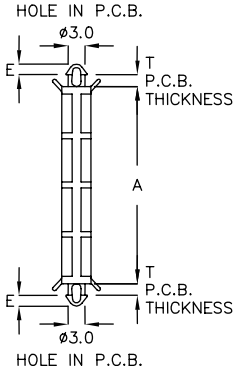


PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
DMK−49J	49.6	1.8	1.6	500




P.C. 板間隔柱 SPACER SUPPORT — 3-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCY-25	25.0	1.4 ~ 1.6	1.0~ 1.2	2.0	2.4	500
MCY-26A	26.8	1.4 ~ 1.6	1.0~ 1.2	2.0	2.4	




P.C. 板間隔柱 SPACER SUPPORT — 3-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCY-36P	36.5	1.6	1.2	2.0	2.4	500




P.C. 板間隔柱 SPACER SUPPORT — 3-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
MCH-28A	28.2	1.0 ~ 1.2	1.4 ~ 1.6	1.9	500




P.C. 板間隔柱 SPACER SUPPORT — 3-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LCA3-3A	3.1	1.0~1.7	3.2	2000
LCA3-3	3.2	1.0~1.7	3.2	
LCA3-7	6.8	1.6~1.9	3.2	
LCA3-11	11.5	1.0~1.6	3.2	1000
LCA3-15	15.2	1.0~1.6	3.2	
LCA3-20	19.8	1.0~1.8	3.2	
LCA3-25	25.0	1.6~1.7	3.2	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
MCB3−6	6.35	1.2~1.7	9.1	3.3	2000
MCB3−12	12.7	1.2~1.7	9.1	3.3	1000







P.C. 板間隔柱 SPACER SUPPORT 3-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
MCFA−2A	2.5	2.6	0.7~0.9	2000







P.C. 板間隔柱 SPACER SUPPORT 3-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MCF−2A	2.5	1.2~1.8	3.6	2000
MCF−03	3.0	1.2~1.8	3.7	
MCF−3M	3.5	1.2~1.8	3.6	
MCF−04	4.0	1.2~1.8	3.7	
MCF−4M	4.5	1.2~1.8	3.6	
MCF−05	5.0	1.2~1.8	3.7	
MCF−5M	5.5	1.2~1.8	3.6	
MCF−6	6.35	1.2~1.8	3.7	
MCF−07	7.0	1.2~1.8	3.7	
MCF−8	8.0	1.2~1.8	3.7	
MCF−09	9.0	1.2~2.0	3.6	
MCF−10	9.7	1.2~1.8	3.7	
MCF−12	12.7	1.2~1.8	3.7	1000
MCF−57	57.0	1.4~1.6	3.5	500







P.C. 板間隔柱 SPACER SUPPORT 3-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCF−6A	6.0	0.8~1.0	1.2~1.7	3.6	3.6	2000
MCF−3RK	3.1	1.0~1.35	1.5~1.7	3.5	2.5	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B THICKNESS	C P.C.B THICKNESS	E	PACKAGE
MQY−4MA	4.3	0.8～1.0	1.4～1.6	2.8	2000



P.C. 板間隔柱 SPACER SUPPORT 3-28-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LTA3−10M	10.5	1.2~1.6	2.5	1000
LTA3−12	12.0	1.2~1.6	2.5	
LTA3−13	13.0	1.2~1.6	2.5	
LTA3−18M	18.3	1.2~1.6	2.5	
LTA3−36A	36.8	0.8~1.8	2.5	500
LTA3−40	40.0	1.2~1.6	2.5	




P.C. 板間隔柱 SPACER SUPPORT 3-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

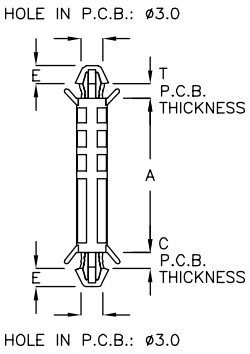


PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LTA3−40A	40.8	1.2~1.6	1.4~1.6	2.4	1000
LTA3−41A	41.5	1.2~1.6	1.4~1.8	2.4	




P.C. 板間隔柱 SPACER SUPPORT 3-28-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LBD−7A	7.65	0.8～1.0	1.4～1.6	4.0	2.7	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MQF−14DC	14.4	1.2~1.6	0.6	3.05	2.35	1000




P.C. 板間隔柱 SPACER SUPPORT 3-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	E	PACKAGE
MCQ−1AT	1.0	1.0	3.1	2000




P.C. 板間隔柱 SPACER SUPPORT 3-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

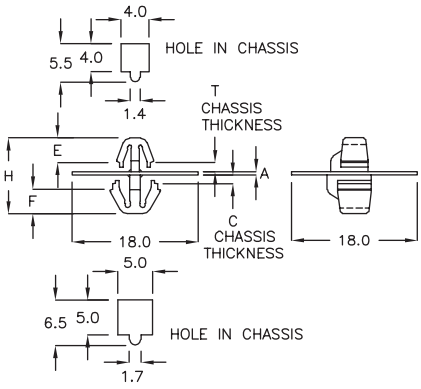


PART NO	A	T CHASSIS THICKNESS	C CHASSIS THICKNESS	E	F	H	PACKAGE
MCI−1GS	0.5	1.0	1.0~1.5	3.5	3.5	10.8	1000
MCI−1JR	0.5	0.5	1.0~1.5	3.5	3.5	10.1	




P.C. 板間隔柱 SPACER SUPPORT 3-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCN−31	31.0	1.2~1.6	3.6~4.0	3.5	4.1	1000



P.C. 板間隔柱 SPACER SUPPORT 3-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LCB3−8	7.4	0.8~1.7	0.8~2.0	3.5	3.5	1000
LCB3−10	10.0	0.8~1.7	0.8~2.0	3.5	3.5	
LCB3−13	13.0	1.2~1.6	0.8~1.8	3.5	3.3	



P.C. 板間隔柱 SPACER SUPPORT 3-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LCBA−15L	16.4	0.8~1.8	1.2~2.0	2.8	3.4	1000




P.C. 板間隔柱 SPACER SUPPORT 3-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LBCM−5GA	5.0	0.8~2.0	1.2~2.6	2.8	3.4	1000



P.C. 板間隔柱 SPACER SUPPORT 3-30-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LCH−6A	6.6	0.6~1.0	1.6~1.8	3.1	1000
LCH−8A	8.6	0.6~1.0	1.6~1.8	3.1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-31-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MQC-14	13.9	1.4~1.6	0.8~2.0	3.5	5.1	1000




P.C. 板間隔柱 SPACER SUPPORT 3-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCX-4A	4.8	1.4~1.6	1.4~1.6	8.7	1.6	2000
MCX-4GR	4.0	1.4~1.6	0.8~1.0	8.7	1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
MCX-9C	9.5	1.4 ~ 1.6	8.7	2.0	2000



P.C. 板間隔柱 SPACER SUPPORT 3-31-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCZ-10A	10.5	1.4~1.6	2.1~2.3	3.3	3.7	2000
MCZ-10MR	10.45	1.4~1.6	1.8~2.0	3.1	2.7	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	E	PACKAGE
MCP−7A	7.9	ø5.6	1.4 ~ 1.6	3.8	2000






P.C. 板間隔柱 SPACER SUPPORT 3-32-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
UCD−10A	10.1	1.4 ~ 1.6	1.9	2000
UCD−11A	11.1	1.4 ~ 1.6	1.9	
UCD−16A	15.9	1.4 ~ 1.6	1.9	1000







P.C. 板間隔柱 SPACER SUPPORT 3-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
UCK−10F	10.1	1.4 ~ 1.6	1.9	2000







P.C. 板間隔柱 SPACER SUPPORT 3-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LCS−14D	14.3	0.8~2.0	4.0	1000







P.C. 板間隔柱 SPACER SUPPORT 3-32-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MCU−10	10.3	1.4 ~ 1.6	3.4	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
TCU−4A	4.8	1.4 ~ 1.6	8.7	3.3	2000







P.C. 板間隔柱 SPACER SUPPORT 3-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LCQ−15A	15.6	1.8～2.0	2.3～2.5	3.1	1000







P.C. 板間隔柱 SPACER SUPPORT 3-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL


PART NO	A	T P.C.B. THICKNESS	PACKAGE
LBC−4A	5.0	1.2~1.6	1000






P.C. 板間隔柱 SPACER SUPPORT 3-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LBC−03	3.0	1.0~1.6	0.8~1.6	4.0	2.8	1000
LBC−04	4.0	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−5A	5.0	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−05	5.35	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−6A	6.35	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−06	6.75	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−07	7.0	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−7A	7.5	1.2~1.7	0.8~1.6	4.0	2.5	
LBC−8A	8.0	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−08	8.35	1.0~1.6	0.8~1.6	4.0	2.8	
LBC−09	9.60	1.0~1.6	0.8~2.0	4.0	2.4	
LBC−11	11.2	1.0~1.6	0.8~2.0	4.0	2.4	
LBC−12	12.7	1.0~1.6	0.8~2.0	4.0	2.4	
LBC−16	16.0	1.0~1.6	0.8~2.0	4.0	2.4	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK


PART NO	A	T P.C.B. THICKNESS	PACKAGE
LCA35-13C	13.6	2.0~2.75	1000





P.C. 板間隔柱 SPACER SUPPORT 3-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LBC-3A	3.4	1.0~1.6	2.0~2.4	4.0	3.4	1000




P.C. 板間隔柱 SPACER SUPPORT 3-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LBC-10	9.6	0.8~1.6	4.0	1000







P.C. 板間隔柱 SPACER SUPPORT 3-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MCE-2A	2.5	1.4~1.8	3.75	2000
MCE-03	3.0	1.4~1.8	3.7	
MCE-3A	3.5	1.4~1.8	3.75	
MCE-4	4.0	1.4~1.8	3.7	
MCE-4A	4.5	1.4~1.8	3.75	
MCE-05	5.0	1.4~1.8	3.7	
MCE-5A	5.5	1.4~1.8	3.75	
MCE-6A	6.0	1.4~1.8	3.75	
MCE-6	6.35	1.4~1.8	3.7	
MCE-07	7.0	1.4~1.8	3.7	
MCE-7A	7.0	1.4~1.8	2.8	
MCE-8	8.0	1.4~1.8	3.7	
MCE-10	9.7	1.4~1.8	3.7	1000
MCE-12	12.7	1.4~1.8	3.7	
MCE-15A	15.0	1.4~1.6	2.8	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	E	T P.C.B. THICKNESS	C P.C.B. THICKNESS	PACKAGE
LMA−3A	3.6	3.2	0.8~1.6	2.0~2.6	1000
LMA−27	27.5	3.5	0.4~1.1	2.5~3.6	500







P.C. 板間隔柱 SPACER SUPPORT 3-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MCW−20	20.0	1.2~1.6	3.4	1000

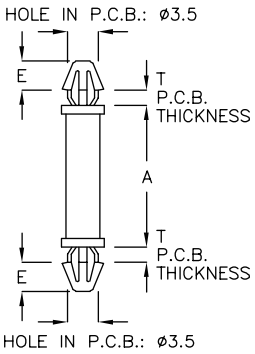




P.C. 板間隔柱 SPACER SUPPORT 3-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LCA35−3	2.1	0.8~2.0	3.5	1000
LCA35−3A	3.0	0.8~2.0	3.4	
LCA35−3M	3.5	0.8~2.0	3.4	
LCA35−4	4.0	0.8~2.0	3.4	
LCA35−5	4.8	0.8~2.0	3.5	
LCA35−5M	5.5	0.8~2.0	3.4	
LCA35−7	7.0	0.8~2.0	3.5	
LCA35−10	10.0	0.8~2.0	3.5	
LCA35−18	18.0	1.1~1.7	3.5	
LCA35−20	20.0	1.0~1.6	3.5	
LCA35−21	20.8	1.2~1.6	3.5	
LCA35−25	25.0	1.4~1.6	3.4	500

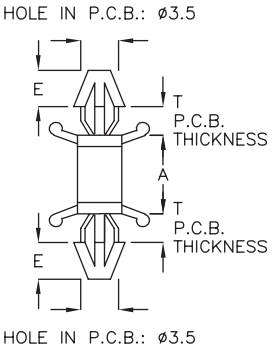





P.C. 板間隔柱 SPACER SUPPORT 3-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LCA35−3H	3.05	0.3~0.6	3.4	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
UCB−5A	4.8	1.4 ~ 1.6	2.6	2000



P.C. 板間隔柱 SPACER SUPPORT 3-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LCF−18A	17.8	1.4 ~ 1.6	0.6~1.0	3.5	3.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
MCB−19K	19.0	1.4~1.6	4.0	3.8	1000




P.C. 板間隔柱 SPACER SUPPORT 3-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	E	F	PACKAGE
MCQA−2HC	2.0	0.8	2.2	2.8	3.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
UCH-29AM	29.0	1.0~1.6	3.6	500



P.C. 板間隔柱 SPACER SUPPORT 3-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	E	PACKAGE
MCR-3A	3.6	ø7.4	1.4 ~ 1.6	2.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCB-8A	7.9	1.0~1.6	1.4~1.6	3.6	2.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D HOLE IN CHASSIS	E	F	T P.C.B. THICKNESS	PACKAGE
MCB-3	3.2	ø4.0	3.6~3.8	2.1	0.8~1.6	2000
MCB-6	6.35	ø4.0	3.6~3.8	2.2	0.8~1.6	
MCB-8	8.2	ø4.0	3.6~3.8	2.2	0.8~1.6	
MCB-10	10.5	ø4.0	3.6~3.8	2.1	0.8~1.6	
MCB-12	12.7	ø4.0	3.6~3.8	2.2	0.8~1.6	
MCB-15	15.7	ø4.0	3.6~3.8	2.2	0.8~1.6	1000
MCB-19	19.1	ø4.0	3.6~3.8	2.2	0.8~1.6	
MCB-28	28.5	ø3.85	3.6~3.8	1.9	1.4~1.6	
MCB-30A	30.7	ø3.85	3.6~3.8	1.8	0.8~1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

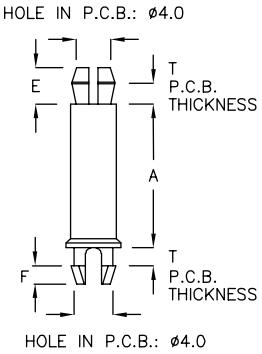


PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
MCB−24	24.1	1.2~1.6	3.6	1.9	1000




P.C. 板間隔柱 SPACER SUPPORT 3-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
MCB−10K	10.5	0.8	2.2~2.3	3.8	2.1	2000



P.C. 板間隔柱 SPACER SUPPORT 3-38-3


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
KCA−2M	2.5	3.0	1.4~1.6	2000
KCA−3	3.2	3.6	1.4~1.6	
KCA−04	4.0	3.8	1.4~1.6	
KCA−4A	4.5	3.6	1.4~1.6	
KCA−5	5.0	3.6	1.4~1.6	1000
KCA−5A	5.5	3.6	1.4~1.6	
KCA−6	6.35	3.6	1.4~1.6	
KCA−07	7.0	3.0	1.2~1.7	
KCA−7A	7.5	3.6	1.4~1.6	
KCA−8	8.0	3.6	1.4~1.6	
KCA−9	9.5	3.6	1.4~1.6	
KCA−10	10.5	3.6	1.4~1.6	
KCA−11	11.0	3.6	1.4~1.6	
KCA−12	12.7	3.6	1.4~1.6	
KCA−12S	12.7	3.2	1.4~1.6	


PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
KCA−14	14.0	3.0	1.4~1.6	1000
KCA−15	15.7	3.6	1.4~1.6	
KCA−15L	15.9	3.0	1.2~1.7	
KCA−19	19.0	3.6	1.4~1.6	
KCA−20	19.9	3.6	1.4~1.6	
KCA−25	25.0	3.7	1.4~1.6	
KCA−28A	28.5	3.5	1.4~1.6	500
KCA−30	30.0	3.7	1.4~1.6	
KCA−34	34.0	3.6	1.4~1.6	
KCA−34A	34.0	3.6	1.4~1.6	
KCA−40A	40.4	3.6	1.4~1.6	
KCA−47	47.0	3.25	1.4~1.6	200
KCA−69	69.0	3.7	1.4~1.6	
KCA−80	80.0	3.0	1.4~1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
UCB-9M	9.5	1.2~1.6	2.4	1000



P.C. 板間隔柱 SPACER SUPPORT 3-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

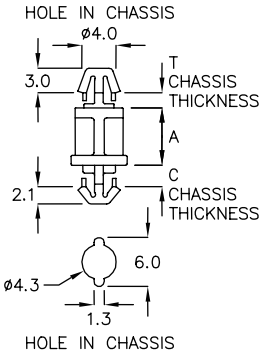


Built-In Anti-Spin Function

PART NO	A	C CHASSIS THICKNESS	T CHASSIS THICKNESS	PACKAGE
MQT-7CL	7.0	2.36	1.6	2000




P.C. 板間隔柱 SPACER SUPPORT 3-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



FORM. 1




FORM. 2

PART NO	A	T P.C.B. THICKNESS	E	FORM	PACKAGE
LCAS-3	3.5	0.8~1.8	7.0	1	1000
LCAS-10	10.5	0.8~1.8	7.0	1	
LCAS-15	14.8	0.8~1.8	7.0	2	
LCAS-16M	16.6	0.8~1.8	7.0	2	
LCAS-44	44.0	0.8~1.8	6.0	2	200
LCBS-48	47.8	0.8~1.8	7.0	2	




P.C. 板間隔柱 SPACER SUPPORT 3-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
LCFA-7K	7.6	0.8~1.2	0.8	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LCA4−4	4.0	1.0~1.6	1.0~1.6	3.4	1000
LCA4−5	4.8	1.6~1.9	1.6~1.9	3.0	
LCA4−6	6.0	1.0~1.6	1.0~1.6	3.4	
LCA4−7	7.0	1.0~1.6	1.0~1.6	3.4	
LCA4−8	7.1	1.2~1.8	1.2~1.8	3.6	
LCA4−8A	7.6	2.5~3.0	2.5~3.0	2.6	
LCA4−9	8.8	1.6~2.0	1.6~2.0	3.0	
LCA4−10	10.0	1.2~2.0	1.2~2.0	3.6	
LCA4−10A	10.4	1.1~1.8	1.6~3.1	3.6	
LCA4−12	13.1	1.1~2.0	1.1~2.0	3.6	
LCA4−15	15.9	1.1~2.0	1.1~2.0	3.6	
LCA4−16	16.2	1.3~2.2	1.3~2.2	3.6	


PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LCA4−17	17.2	1.1~2.0	1.1~2.0	3.6	1000
LCA4−20A	19.6	1.1~2.0	1.7~3.5	3.6	500
LCA4−29M	29.8	1.0~1.7	1.0~1.7	3.6	
LCA4−31	30.8	1.0~1.7	1.0~1.7	3.6	
LCA4−34A	34.0	1.1~1.9	1.6~3.1	3.6	
LCA4−34C	34.0	0.8~2.0	1.7~3.5	3.6	
LCA4−36	36.0	2.0~3.0	2.0~3.0	3.6	
LCA4−36A	35.3	2.5~3.8	2.5~3.8	3.6	
LCA4−44	43.6	0.8~1.9	0.8~1.9	3.6	
LCA4−55	55.0	0.8~1.8	0.8~1.8	3.6	200
LCA4−56	56.4	1.0~1.6	1.0~1.6	3.6	



P.C. 板間隔柱 SPACER SUPPORT 3-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
LTQB−12CH	12.7	0.8~1.7	1000







P.C. 板間隔柱 SPACER SUPPORT 3-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
LCD−151	151.8	1.8~2.0	10.0	100







P.C. 板間隔柱 SPACER SUPPORT 3-40-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MQW−51A	51.7	1.6	3.3	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T MAXIMUM THICKNESS	E	PACKAGE
LLS−12	12.6	2.0	6.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LTU−20	20.0	1.7	1.7	6.0	500
LTU−20A	20.0	1.7	2.0	6.0	




P.C. 板間隔柱 SPACER SUPPORT 3-41-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C MAXIMUM THICKNESS	D HOLE IN CHASSIS	E	F	G	T P.C.B. THICKNESS	PACKAGE
LT−10	9.2	5.5	2.0	ø4.0	7.4	5.2	5.0	0.8~2.0	500
LT−12	11.9	5.5	2.0	ø4.0	7.35	4.5	5.0	0.8~2.0	
LT−15	15.1	5.5	2.0	ø4.0	7.4	5.2	5.0	0.8~2.0	
LT−18	17.2	5.5	2.0	ø4.0	7.35	5.2	5.0	0.8~2.0	
LT−26	26.2	6.4	2.0	ø5.0	15.0	5.2	6.0	0.8~2.0	



P.C. 板間隔柱 SPACER SUPPORT 3-41-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C MAXIMUM THICKNESS	E	T P.C.B. THICKNESS	PACKAGE
LTG−5A	5.7	2.4	6.5	0.8~1.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C CHASSIS THICKNESS	E	T P.C.B. THICKNESS	PACKAGE
LT-08A	7.5	1.2~1.6	7.0	1.4~1.6	500
LT-18A	18.8	1.0~1.4	7.3	1.4~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL





PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LCWS-12	12.7	1.4~1.6	0.8~2.0	4.8	500



P.C. 板間隔柱 SPACER SUPPORT 3-42-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	FORM	PACKAGE
LCBS-5	5.0	0.8~1.7	0.8~1.7	7.1	6.1	1	1000
LCBS-6	6.35	0.8~1.7	0.8~1.7	7.1	6.1	1	
LCBS-10	10.0	0.8~1.7	0.8~1.7	7.1	6.1	1	500
LCBS-15	15.0	0.8~1.7	0.8~1.7	7.1	5.7	1	
LCBS-20	20.0	0.8~1.7	0.8~1.7	7.1	5.7	1	
LCBS-25	25.0	0.8~1.7	0.8~1.7	7.1	5.7	1	
LCBS-29	29.0	0.8~1.7	0.8~1.7	7.1	6.1	2	
LCBS-30	30.0	1.0~2.0	1.0~2.0	7.0	6.0	2	
LCBS-35	35.0	0.8~1.7	0.8~1.7	7.1	6.1	1	
LCBS-37KM	37.7	0.8~1.7	1.0~2.0	7.1	6.0	2	
LCBS-38	38.0	0.8~1.7	0.8~1.7	7.1	6.1	1	
LCBS-45	45.0	0.8~1.7	0.8~1.7	7.1	6.1	1	



P.C. 板間隔柱 SPACER SUPPORT 3-42-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LCBS-20QT	20.0	0.8~1.7	1.5~2.5	6.7	5.7	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	F	PACKAGE
LCBS-44	43.65	0.8~1.7	4.0	4.0	500







P.C. 板間隔柱 SPACER SUPPORT 3-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	PACKAGE
LCK-20	14.6	0.6	0.8~1.0	3.4	1000
LCK-27	21.2	0.6	1.4~1.6	3.4	







P.C. 板間隔柱 SPACER SUPPORT 3-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
LTBS-6	6.35	0.8~1.7	500
LTBS-10	9.4	0.8~1.7	
LTBS-12	12.7	0.8~1.7	
LTBS-15	15.9	0.8~1.7	
LTBS-19	19.1	0.8~1.7	
LTBS-21	20.5	0.8~1.7	
LTBS-22	22.2	0.8~1.7	







P.C. 板間隔柱 SPACER SUPPORT 3-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
LTQM-22A	22.5	0.8~2.0	500







P.C. 板間隔柱 SPACER SUPPORT 3-43-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	T P.C.B. THICKNESS	C P.C.B. THICKNESS	PACKAGE
LCC-28A	1.2~1.6	0.5~2.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C P.C.B. THICKNESS	T P.C.B. THICKNESS	E	F	PACKAGE
LCC-10K	9.5	0.8~2.0	1.2~1.6	10.2	5.6	500
LCC-16KF	15.9	0.8~2.0	1.2~1.7	10.2	5.0	500
LCC-22TB	22.2	0.8~2.0	1.2~1.6	10.2	5.6	1000
LCC-25QT	25.4	0.8~2.0	1.2~1.7	10.2	5.0	500
LCC-25A	25.8	0.8~1.6	1.2~1.6	10.2	5.9	1000
LCC-28C	28.6	0.8~2.0	1.2~1.6	10.2	5.9	500




P.C. 板間隔柱 SPACER SUPPORT 3-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LCC-5	4.8	1.2~1.6	1.0~2.2	10.7	5.5	500
LCC-6	6.35	1.2~1.6	1.0~2.2	10.7	5.5	
LCC-10	9.6	1.2~1.6	1.0~2.2	10.7	5.5	
LCC-12	12.7	1.2~1.6	1.0~2.2	10.7	5.5	
LCC-15	15.9	1.2~1.6	1.0~2.2	10.7	5.5	




P.C. 板間隔柱 SPACER SUPPORT 3-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
CBS-5	4.8	0.8~1.9	0.5~2.2	6.0	5.5	1000
CBS-6	6.35	0.8~1.9	0.5~2.2	6.0	5.5	
CBS-10	9.2	0.8~1.9	0.5~2.2	6.0	5.5	
CBS-12	12.7	0.8~1.9	0.5~2.2	6.0	5.5	
CBS-15	15.9	0.8~1.9	0.5~2.2	6.0	5.5	500
CBS-19	19.0	0.8~1.9	0.5~2.2	6.0	5.5	
CBS-25	25.4	0.8~1.9	0.5~2.2	6.0	5.5	
CBS-28	28.5	0.8~1.9	0.5~2.2	6.0	5.5	
CBS-35	35.0	0.8~1.9	0.5~2.2	6.0	5.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C P.C.B. THICKNESS	E	F	PACKAGE
LBB−10	9.6	0.8~1.7	0.8~2.0	5.8	5.1	1000




P.C. 板間隔柱 SPACER SUPPORT 3-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	T P.C.B. THICKNESS	PACKAGE
WCB−6	1.2~1.6	1000



P.C. 板間隔柱 SPACER SUPPORT 3-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D SCREW	PACKAGE
L−16	12.0	M3.0 X 19.0	500
L−16S	5.0	M3.0 X 12.0	1000



P.C. 板間隔柱 SPACER SUPPORT 3-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	D SCREW	PACKAGE
L−9A	9.4	M3.0X16.0	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCE-1AL	1.5	1.4~1.6	2.0	2000
PCE-2L	2.0	1.4~1.6	2.0	
PCE-2M	2.5	1.4~1.6	2.0	
PCE-3L	3.0	1.4~1.6	2.0	
PCE-3M	3.5	1.4~1.6	2.0	
PCE-04	4.0	1.4~1.6	2.0	
PCE-4EW	4.5	1.4~1.6	2.0	
PCE-5BZ	5.0	1.4~1.6	2.0	







P.C. 板間隔柱 SPACER SUPPORT 3-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCE-4D	4.0	1.4~1.6	2.1	2000







P.C. 板間隔柱 SPACER SUPPORT 3-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCR-2C	2.5	0.8~1.0	2.0	2000
PCR-03	3.0	0.8~1.0	2.0	
PCR-3M	3.5	0.8~1.0	2.0	
PCR-04	4.0	0.8~1.0	2.0	
PCR-4M	4.5	0.8~1.0	2.0	






P.C. 板間隔柱 SPACER SUPPORT 3-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCE-8MR	8.0	1.4~1.6	2.0	2000
PCE-10F	10.5	1.4~1.6	2.0	
PCE-11	11.0	1.4~1.6	2.0	

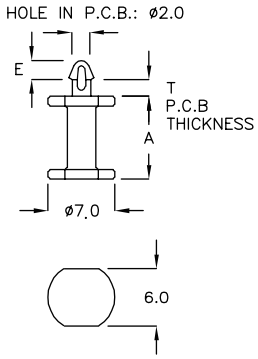


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

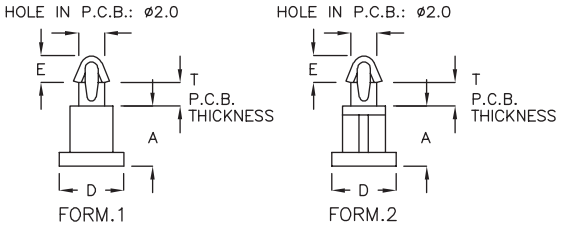


PART NO	A	D	T P.C.B. THICKNESS	E	FORM	PACKAGE
PCE−1A	1.5	ø4.8	1.4~1.6	2.0	1	
PCE−1C	1.8	ø4.2	1.4~1.6	2.0	1	
PCE−02	2.0	ø4.2	1.4~1.6	2.3	1	
PCE−2A	2.5	ø4.8	1.4~1.6	2.0	1	
PCE−2C	2.0	ø4.8	1.8~2.0	2.0	1	
PCE−2D	2.9	ø4.2	1.4~1.6	2.3	1	
PCE−2F	2.0	ø4.2	0.8~1.0	2.0	1	
PCE−2H	2.2	ø4.2	1.0~1.2	2.0	1	
PCE−2K	1.8	ø4.2	1.0~1.2	2.0	1	
PCE−2XC	2.15	ø4.2	1.4~1.6	2.0	1	
PCE−03	3.0	ø4.2	1.4~1.6	2.0	1	
PCE−3A	2.6	ø4.1	1.4~1.6	2.0	1	
PCE−3DF	3.2	ø4.8	1.4~1.6	2.1	1	
PCE−3K	3.5	ø4.8	1.4~1.6	2.0	1	
PCE−3PW	3.85	ø6.0	1.4~1.6	2.0	1	
PCE−3RY	3.75	ø4.8	1.4~1.6	2.0	1	2000
PCE−4A	4.0	ø4.8	1.4~1.6	2.1	1	
PCE−4F	4.7	ø4.8	1.4~1.6	2.0	1	
PCE−4M	4.5	ø4.8	1.4~1.6	2.0	1	
PCE−05	5.0	ø4.8	1.4~1.6	2.0	1	
PCE−5JD	5.0	ø4.8	1.0~1.2	2.0	1	
PCE−5QR	5.0	ø6.0	1.4~1.6	2.0	2	
PCE−5TS	5.3	ø4.8	0.8~1.0	2.3	1	
PCE−5K	5.6	ø4.8	1.4~1.6	2.0	1	
PCE−06	6.0	ø4.8	1.4~1.6	2.1	1	
PCE−6A	6.5	ø4.8	1.4~1.6	2.2	1	
PCE−6C	6.5	ø4.8	1.4~1.6	2.0	1	
PCE−6NS	6.5	ø6.0	1.4~1.6	2.0	2	
PCE−07	7.0	ø4.2	1.0~1.2	2.0	1	
PCE−08	8.0	ø4.8	1.4~1.6	3.0	1	
PCE−09	9.0	ø5.0	1.4~1.6	2.0	1	




P.C. 板間隔柱 SPACER SUPPORT 3-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCY−06	5.9	2.2~2.4	2.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B HOLE IN P.C.B.	D	E	T P.C.B. THICKNESS	PACKAGE
PCA-3	3.0	ø2.0	ø3.4	2.6	0.8~1.0	2000
PCA-3C	3.0	ø2.0	ø3.4	2.6	1.0~1.2	
PCA-4	4.0	ø1.5	ø3.0	2.0	1.4~1.6	
PCA-4A	4.0	ø2.0	ø3.5	2.0	1.4~1.6	
PCA-4C	4.7	ø2.0	ø4.8	2.6	1.4~1.6	
PCA-5	5.0	ø2.0	ø3.5	2.0	1.4~1.6	



P.C. 板間隔柱 SPACER SUPPORT — 3-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCC-03	3.0	1.4~1.6	2.0	2000
PCC-04	4.0	1.4~1.6	2.0	
PCC-05	5.0	1.4~1.6	2.0	




P.C. 板間隔柱 SPACER SUPPORT — 3-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
PHA-2T	2.95	1.4~1.6	2000




P.C. 板間隔柱 SPACER SUPPORT — 3-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D	T P.C.B. THICKNESS	PACKAGE
PCK-4C	4.1	ø5.5	1.8~2.0	2000
PCK-4G	4.0	ø4.4	0.8~1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D	T P.C.B. THICKNESS	E	PACKAGE
PCK-1MF	1.6	3.5	0.8~1.0	2.0	2000
PCK-2M	2.5	3.5	0.8~1.0	2.0	
PCK-3M	3.5	4.4	0.8~1.0	2.0	
PCK-4M	4.5	4.4	0.8~1.0	2.0	
PCK-05	5.0	4.4	0.8~1.0	2.0	
PCK-5A	5.6	4.4	0.8~1.0	2.4	
PCK-7A	7.0	4.4	1.4~1.6	2.4	
PCK-7C	7.5	4.4	0.8~1.0	2.3	
PCK-8A	8.0	4.4	1.4~1.6	2.2	
PCK-9A	8.9	4.4	1.4~1.6	2.2	




P.C. 板間隔柱 SPACER SUPPORT 3-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D	T CHASSIS THICKNESS	E	PACKAGE
PCK-1TF	1.5	ø4.5	0.8~1.0	2.0	2000
PCK-1A	1.5	ø4.5	1.4~1.6	2.1	
PCK-2A	2.5	ø4.5	1.4~1.6	2.0	
PCK-2C	2.7	ø6.0	1.4~1.6	2.2	
PCK-2D	2.8	ø5.0	1.4~1.6	2.0	
PCK-2F	2.8	ø5.0	1.5~1.7	2.0	
PCK-2J	2.95	ø5.0	1.4~1.6	2.0	
PCK-3A	3.5	ø4.5	1.4~1.6	2.0	
PCK-04	4.0	ø4.5	1.4~1.6	1.8	
PCK-4A	4.5	ø4.5	1.4~1.6	2.0	
PCK-4F	4.0	ø5.0	1.4~1.6	2.0	
PCK-5K	5.0	ø3.6	1.9~2.1	2.0	
PCK-5RH	5.0	ø4.5	1.4~1.6	1.6	
PCK-06	6.0	ø4.5	1.6~1.8	1.5	




P.C. 板間隔柱 SPACER SUPPORT 3-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
PCK-14	14.0	1.4~1.6	2000
PCK-15	15.0	1.4~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
PCK-6C	6.5	2.2~2.45	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT — 3-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
PCS-2A	3.1	3.3~3.5	2000



P.C. 板間隔柱 SPACER SUPPORT — 3-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCJ-3S	2.9	2.6~2.85	2.0	2000
PCJ-3T	3.5	2.3~2.5	2.0	
PCJ-3M	3.5	3.3~3.5	2.1	
PCJ-4A	3.85	3.4~3.65	2.2	
PCJ-4M	4.5	2.3~2.5	2.1	




P.C. 板間隔柱 SPACER SUPPORT — 3-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCJ-9FQ	9.5	0.8~1.0	2.0	2000
PCJ-33A	33.7	1.4~1.6	2.1	500




P.C. 板間隔柱 SPACER SUPPORT — 3-50-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
DCBS-2	2.0	1.2~1.7	3.8	2000
DCBS-2A	2.5	1.2~1.7	3.8	
DCBS-3	3.0	1.2~1.7	3.7	
DCBS-3A	3.3	1.2~1.7	3.7	
DCBS-3M	3.5	1.2~1.7	3.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-51-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



FORM.1




FORM.2

PART NO	A	D	T P.C.B. THICKNESS	E	FORM	PACKAGE
DCBS−4	4.0	ø7.0	1.2~1.6	3.8	1	2000
DCBS−4C	4.0	ø6.0	1.2~1.6	3.7	1	
DCBS−4M	4.5	ø7.0	1.2~1.6	3.8	1	
DCBS−5	5.0	ø7.0	1.2~1.6	3.8	1	
DCBS−5M	5.5	ø7.0	1.2~1.6	3.8	1	
DCBS−6	6.0	ø7.0	1.2~1.6	3.8	1	
DCBS−7	7.0	ø7.0	1.2~1.6	3.7	1	
DCBS−8	8.0	ø7.0	1.2~1.6	3.8	1	
DCBS−8A	8.0	ø6.8	1.2~1.6	4.3	1	
DCBS−8C	8.0	ø7.0	2.0~2.2	3.3	1	
DCBS−8M	8.5	ø7.0	1.2~1.6	3.7	1	
DCBS−9	9.0	ø7.0	1.2~1.6	3.8	1	
DCBS−10	10.0	ø7.0	1.2~1.6	3.8	1	
DCBS−10A	10.5	ø7.0	1.2~1.6	3.9	1	
DCBS−11	11.0	ø7.0	1.2~1.6	3.8	1	
DCBS−12	12.0	ø7.0	1.2~1.6	3.8	1	1000
DCBS−13	13.0	ø7.0	1.2~1.6	3.8	1	
DCBS−14	14.0	ø4.8	1.2~1.6	3.8	1	
DCBS−15	15.0	ø7.0	1.2~1.6	3.8	1	
DCBS−16KH	16.0	ø10.0	1.2~1.6	3.7	2	




P.C. 板間隔柱 SPACER SUPPORT 3-51-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
DCBS−6A	6.5	1.4~1.6	2.5	2000



P.C. 板間隔柱 SPACER SUPPORT 3-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW




	PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
★	DCBS−8KT	8.0	2.4	3.3	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	D	PACKAGE
PCF-2A	2.5	1.4~1.6	2.95	ø5.0	2000
PCF-2C	2.8	1.4~1.6	2.95	ø5.0	
PCF-03	3.0	1.4~1.6	3.1	ø5.0	
PCF-3A	3.2	1.4~1.6	3.1	ø5.0	
PCF-3C	3.0	1.4~1.6	2.95	ø6.0	
PCF-3M	3.5	1.4~1.6	3.0	ø5.0	
PCF-04	4.0	1.4~1.6	3.0	ø5.0	
PCF-4A	4.5	1.4~1.6	2.95	ø5.0	
PCF-05	5.0	1.4~1.6	3.0	ø5.0	
PCF-5A	5.0	1.4~1.6	3.1	ø9.0	
PCF-09	9.0	1.4~1.6	2.95	ø5.0	
PCF-9FK	9.4	1.4~1.6	2.9	ø6.0	



P.C. 板間隔柱 SPACER SUPPORT 3-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

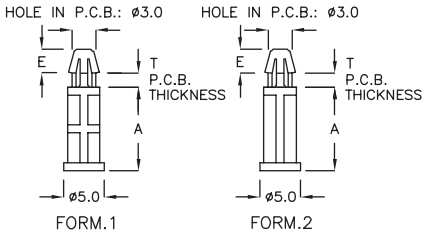


PART NO	A	T P.C.B. THICKNESS	E	FORM	PACKAGE
PCF-9A	9.5	1.6	2.7	2	2000
PCF-10	10.0	1.6	2.7	1	
PCF-20	20.0	1.6	2.7	1	1000
PCF-22	22.0	1.6	2.9	1	
PCF-25	25.0	1.6	2.9	1	



P.C. 板間隔柱 SPACER SUPPORT 3-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCF-4A	4.5	1.6~1.7	3.6	2000
TCF-10	10.0	1.6~1.7	3.8	1000



P.C. 板間隔柱 SPACER SUPPORT 3-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T P.C.B THICKNESS	E	PACKAGE
TAX-12D	12.0	1.55~1.65	3.8	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCW−12A	12.7	0.6	2.3	1000






P.C. 板間隔柱 SPACER SUPPORT 3-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCN−04	4.0	1.0~1.2	2.95	2000






P.C. 板間隔柱 SPACER SUPPORT 3-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MFR−15	15.0	1.2~1.6	3.5	1000







P.C. 板間隔柱 SPACER SUPPORT 3-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B THICKNESS	E	PACKAGE
MFD−12	12.0	1.2~1.6	3.0	1000






P.C. 板間隔柱 SPACER SUPPORT 3-53-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T CHASSIS THICKNESS	E	PACKAGE
MFRK−11A	11.0	1.4~1.6	2.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MFC−37KS	37.5	1.4~1.6	2.7	500
MFC−38C	38.4	1.2~1.6	2.7	








P.C. 板間隔柱 SPACER SUPPORT 3-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2x2 TAPPING SCREW

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
SDF−2C	2.15	1.6	2	2000
		2.6		








P.C. 板間隔柱 SPACER SUPPORT 3-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCQ−03	3.0	1.4~1.6	4.8	1000






P.C. 板間隔柱 SPACER SUPPORT 3-54-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2 TAPPING SCREW

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TAK−6A	6.6	1.0~1.2	3.5	2000






P.C. 板間隔柱 SPACER SUPPORT 3-54-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCH−14A	14.5	1.4~1.6	2.7	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

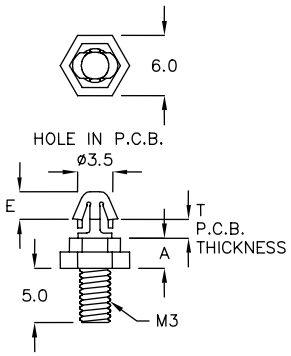


PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
SDC−3TH	3.0	2.75	1.2~1.6	2000




P.C. 板間隔柱 SPACER SUPPORT 3-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	D	PACKAGE
SDM−03	3.0	0.8~1.0	M3	2000
SDM−04	4.0	0.8~1.0	M2.5	



P.C. 板間隔柱 SPACER SUPPORT 3-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	D SCREW	E	PACKAGE
SDS−05	4.9	3.0	0.8～1.0	M2.5	3.3	2000
SDS−05A	4.9	3.0	0.8～1.0	M4	3.3	
SDS−3A	3.4	4.0	0.8～1.0	M4	3.5	




P.C. 板間隔柱 SPACER SUPPORT 3-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

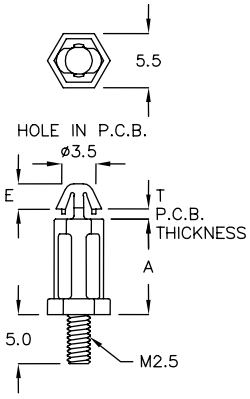


PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
SDN−9AG	9.7	2.6	0.6~0.8	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	D SCREW	E	PACKAGE
SDT−10A	10.4	5.0	1.4 ~ 1.6	M3	3.25	2000



P.C. 板間隔柱 SPACER SUPPORT — 3-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	D SCREW	E	PACKAGE
SSA−13A	13.0	6.0	1.4 ~ 1.6	M3	3.9	500



P.C. 板間隔柱 SPACER SUPPORT — 3-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	D SCREW	E	PACKAGE
SSBS−6	6.2	7.6	1.0~1.7	#6−32	10.6	1000
SSBS−6M	6.35	5.0	1.0~1.7	#6−32	10.6	
SSBS−10	9.6	7.5	1.0~1.7	#6−32	10.6	
SSBS−12A	12.5	5.0	1.0~1.7	#6−32	10.1	500
SSBS4−6	6.3	5.0	1.0~1.7	M4	10.6	
SSBS4−10	10.0	7.4	1.0~1.7	M4	10.6	
SSBS4−16	15.8	7.4	1.0~1.7	M4	10.6	




P.C. 板間隔柱 SPACER SUPPORT — 3-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
MF−04A	4.55	2.5	1.6~2.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

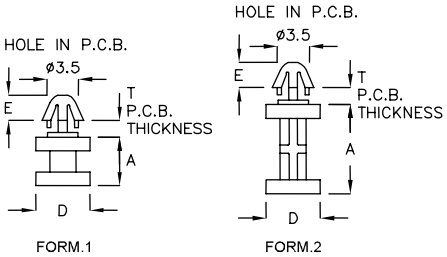


PART NO	A	D	E	T P.C.B. THICKNESS	FORM	PACKAGE
MF-003	3.0	ø6.0	3.0	1.3~1.6	1	2000
MF-03M	3.5	ø6.0	2.8	1.3~1.6	1	
MF-004	4.0	ø6.0	3.0	1.3~1.6	1	
MF-005	5.0	ø6.0	3.0	1.3~1.6	1	
MF-05M	5.5	ø6.0	2.8	1.3~1.6	1	
MF-08	8.0	ø6.0	2.8	1.3~1.6	1	
MF-10	10.0	ø3.5	3.0	0.8~1.0	1	
MF-10AD	10.0	ø6.0	2.85	1.2~1.4	1	
MF-10FH	10.0	ø6.0	2.8	1.3~1.6	1	
MF-13	13.0	ø6.0	2.9	1.0~1.2	2	1000
MF-19	19.0	ø6.0	2.9	1.0~1.2	2	500




P.C. 板間隔柱 SPACER SUPPORT 3-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
MF-26C	26.0	2.5	1.4~1.6	500
MF-36	35.95	2.5	1.4~1.6	
MF-38A	38.35	2.5	1.4~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
MFQ-4A	4.5	3.5	1.2~1.6	1000
MFQ-07	7.0	3.5	1.2~1.6	
MFQ-12	12.0	3.5	1.2~1.6	
MFQ-15	15.0	3.5	1.2~1.6	
MFQ-16	16.0	3.5	1.2~1.6	



P.C. 板間隔柱 SPACER SUPPORT 3-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
DCMS-4M	4.5	3.6	1.4~1.7	2000
DCMS-6	6.35	3.6	1.4~1.7	
DCMS-11SF	11.0	3.0	1.0~1.4	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
TCD−13	13.0	3.85	1.4~1.6	500







P.C. 板間隔柱 SPACER SUPPORT 3-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	D	E	T P.C.B. THICKNESS	PACKAGE
TCC−13A	13.5	ø9.0	5.0	1.4~1.6	1000
TCC−14	14.5	ø6.0	4.0	1.4~1.6	
TCC−14A	14.5	ø6.0	2.7	1.4~1.6	
TCC−21SD	21.0	ø8.0	2.8	1.0~1.2	500
TCC−22	22.0	ø5.0	2.9	1.4~1.6	






P.C. 板間隔柱 SPACER SUPPORT 3-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	E	T CHASSIS THICKNESS	PACKAGE
LCG−2K	2.65	2.5	0.6	1000







P.C. 板間隔柱 SPACER SUPPORT 3-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	D	E	T P.C.B. THICKNESS	PACKAGE
MQB−25M	25.5	ø5.0	2.8	1.0~1.2	500
MQB−28F	28.5	ø5.0	2.8	1.0~1.2	







P.C. 板間隔柱 SPACER SUPPORT 3-58-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	E	PACKAGE
PCQ−03	3.0	ø5.5	1.4~1.6	3.2	2000
PCQ−4A	4.3	ø9.5	1.4~1.6	3.2	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
PCM−07	7.0	3.2～3.4	4.0	2000

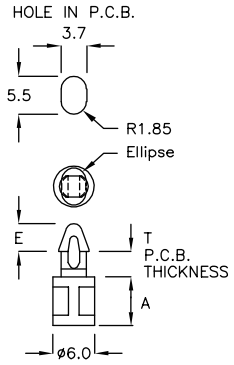





P.C. 板間隔柱 SPACER SUPPORT 3-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MCC−17S	16.6	1.4～1.6	2.0	1000







P.C. 板間隔柱 SPACER SUPPORT 3-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCS−15	15.0	1.4～1.6	2.0	1000






P.C. 板間隔柱 SPACER SUPPORT 3-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
TCN−07	7.0	1.2～1.6	2000







P.C. 板間隔柱 SPACER SUPPORT 3-59-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C	E	PACKAGE
TCK−15	15.5	1.2～1.4	10.9	5.0	1000
TCK−17	17.5	1.2～1.4	10.9	5.0	500
TCK−21A	21.5	1.2～1.6	8.0	3.0	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
TCJ−11	11.0	1.2~1.6	1000
TCJ−12A	12.2	1.2~1.6	
TCJ−15	15.0	1.2~1.6	
TCJ−18	18.0	1.2~1.6	



P.C. 板間隔柱 SPACER SUPPORT — 3-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
MFS−11	11.0	1.2~1.6	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C	E	PACKAGE
TCX−12	12.0	1.6 ~ 2.0	ø4.7	3.0	1000
TCX−19H	19.6	2.6 ~ 3.0	ø8.0	3.0	
TCX−21	21.0	1.4 ~ 1.8	ø8.0	3.0	500




P.C. 板間隔柱 SPACER SUPPORT — 3-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TAN−29F	29.4	1.4~1.6	4.9	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T CHASSIS THICKNESS	PACKAGE
TCBR-8KF	8.0	7.1	1.6~1.7	1000




P.C. 板間隔柱 SPACER SUPPORT 3-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C	D TAPPING SCREW	PACKAGE
MC-5	5.0	1.2~1.7	ø4.95	M2.5	2000
MC-6	6.35	1.2~1.7	ø4.9	M2.5	
MC-10	9.7	1.2~1.7	ø5.8	M2.5	1000
MC-12	12.7	1.2~1.7	ø5.8	M2.5	




P.C. 板間隔柱 SPACER SUPPORT 3-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MC-3M	3.5	0.9~1.1	3.2	2000
MC-4M	4.5	0.9~1.1	3.2	
MC-05C	5.0	0.9~1.1	4.0	
MC-5M	5.5	0.9~1.1	3.2	
MC-6F	6.0	0.9~1.1	3.2	



P.C. 板間隔柱 SPACER SUPPORT 3-61-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
MC-04F	4.0	1.2~1.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

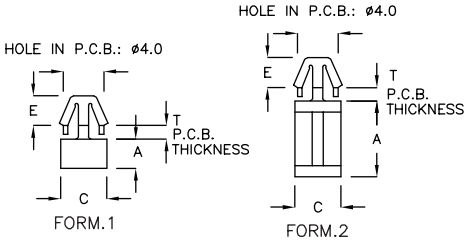


PART NO	A	T P.C.B. THICKNESS	C	E	FORM	PACKAGE
MC−1AK	1.5	0.6~0.8	ø5.0	3.0	1	2000
MC−002	2.0	0.6~0.8	ø5.0	3.6	1	
MC−02A	2.0	0.7~0.8	ø4.8	2.5	1	
MC−02C	2.0	0.9~1.2	ø5.0	3.8	1	
MC−2DP	2.0	0.85~1.15	ø6.8	2.2	1	
MC−2M	2.5	1.2~1.6	ø5.0	3.6	1	
MC−2NJ	2.0	0.85~1.0	ø5.0	2.2	1	
MC−2P	2.3	1.2~1.6	ø5.0	3.5	1	
MC−3	3.0	1.2~1.7	ø5.1	3.4	2	2000
MC−3A	3.0	1.6~2.0	ø7.0	2.9	2	
MC−3K	3.5	1.2~1.6	ø5.0	3.5	2	
MC−3QS	3.2	1.2~1.6	ø5.0	3.5	2	
MC−4	4.0	1.2~1.7	ø5.2	3.4	2	
MC−4KP	4.0	1.6~1.8	ø7.0	2.9	2	
MC−04D	4.5	1.2~1.7	ø5.0	3.3	2	
MC−5B	5.0	0.8~1.0	ø5.1	3.4	2	
MC−06A	6.5	1.2~1.7	ø5.0	3.3	2	
MC−07M	7.5	1.2~1.7	ø5.0	3.3	2	
MC−8	8.0	1.2~1.7	ø4.9	3.6	2	
MC−8A	8.5	1.2~1.6	ø5.1	3.3	2	
MC−09	9.0	1.2~1.6	ø5.1	3.3	2	
MC−10A	10.0	1.2~1.6	ø5.1	3.3	2	1000
MC−14	14.0	1.2~1.6	ø5.1	3.5	2	
MC−14C	14.5	1.2~1.6	ø5.1	3.0	2	
MC−15C	15.9	1.2~1.6	ø5.1	3.0	2	
MC−35	35.0	1.2~1.6	ø5.1	3.3	2	500




P.C. 板間隔柱 SPACER SUPPORT — 3-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C	SCREW & THICKNESS		E	PACKAGE
				D TAPPING SCREW	SUITABLE THICKNESS		
BCBS−6	6.35	1.2~1.7	9.0	M3.5X6	1.0	10.7	500
BCBS−8	8.0	1.2~1.7	8.9	M3.5X6	1.0	10.6	
BCBS−10	10.0	1.2~1.7	9.0	M3.5X6	1.0	10.1	
BCBS−12	12.7	1.2~1.7	8.9	M3.5X6	1.0	10.6	
BCBS−14	14.0	1.2~1.7	9.2	M3.5X6	1.0	10.2	
BCBS−15	15.9	1.2~1.7	9.1	M3.5X6	1.0	10.1	
BCBS−29A	29.0	1.2~1.7	9.2	M3.5X6	1.0	10.4	
BCBS−29	29.4	1.2~1.7	9.2	M3X6	1.0	10.4	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-63-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C	SCREW & THICKNESS		E	PACKAGE
				D TAPPING SCREW	SUITABLE THICKNESS		
BCMS-6	6.35	1.2~1.7	9.0	M3X6	1.0	10.7	500
BCMS-6AD	6.0	1.2~1.7	8.6	M3X5	1.0	10.2	
BCMS-8	8.0	1.2~1.7	8.9	M3X6	1.0	10.6	
BCMS-10	10.0	1.2~1.7	9.0	M3X6	1.0	10.1	
BCMS-12	12.7	1.2~1.7	8.9	M3X6	1.0	10.6	
BCMS-14	14.0	1.2~1.7	9.2	M3X6	1.0	10.3	




P.C. 板間隔柱 SPACER SUPPORT 3-63-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
TCY-09	9.0	1.2~1.6	1000
TCY-12A	12.8	1.2~1.6	
TCY-16	16.0	1.2~1.6	
TCY-18	18.0	1.2~1.6	
TCY-22	22.0	1.2~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-63-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B THICKNESS	PACKAGE
MFKA-5H	6.4	5.5	1.57	1000



P.C. 板間隔柱 SPACER SUPPORT 3-63-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	E	PACKAGE
MFW-31A	31.35	0.8~2.0	5.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT — 3-64-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
TCYA−12JM	12.0	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-64-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	SCREW & THICKNESS		PACKAGE
			D TAPPING SCREW	SUITABLE THICKNESS	
TAJ−12	12.0	1.2~2.1	M3X8	1.0	500




P.C. 板間隔柱 SPACER SUPPORT — 3-64-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCA−3F	3.6	1.5~1.8	6.8	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-64-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

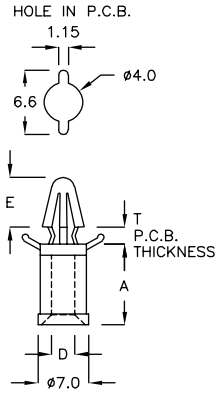


PART NO	A	T P.C.B. THICKNESS	SCREW & THICKNESS		E	PACKAGE
			D TAPPING SCREW	SUITABLE THICKNESS		
TCA−3K	3.6	1.2~1.7	M3X3	1.0	5.0	1000
TCA−4A	4.5	1.2~1.7	M3X4	1.0	6.8	500
TCA−5C	5.5	1.2~1.7	M3X5	1.0	4.0	1000
TCA−07	7.0	1.2~1.7	M3X6	1.0	6.8	
TCA−7A	7.7	1.2~1.7	M3X7	1.0	5.8	
TCA−8A	8.5	1.2~1.7	M3X7	1.0	6.8	
TCA−8C	8.5	1.2~1.7	M3X7	1.0	5.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-65-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
TCR-3A	3.6	1.2~1.7	4.0	2000




P.C. 板間隔柱 SPACER SUPPORT 3-65-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

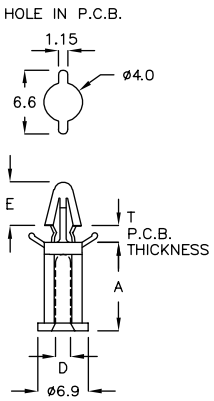


PART NO	A	T P.C.B. THICKNESS	SCREW & THICKNESS		E	PACKAGE
			D TAPPING SCREW	SUITABLE THICKNESS		
TCA-14	14.0	1.1~1.7	M3X10	1.0	7.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-65-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	E	T P.C.B. THICKNESS	SCREW & THICKNESS		PACKAGE
					D TAPPING SCREW	SUITABLE THICKNESS	
TCBS-5	5.0	ø6.9	7.2	1.2~1.9	M3X4.5	1.0	1000
TCBS-5A	5.5	ø6.9	7.0	1.2~1.9	M3X4.5	1.0	
TCBS-6	6.35	ø8.0	6.8	1.2~1.9	M3X5	1.0	
TCBS-7	7.0	ø7.8	6.8	1.2~1.9	M3X6	1.0	
TCBS-10	10.0	ø6.9	7.2	1.2~1.9	M3X6	1.0	
TCBS-12K	12.5	ø6.9	6.8	1.2~1.9	M3X8	1.0	
TCBS-14	14.0	ø6.8	7.1	1.2~1.9	M3X8	1.0	
TCBS-15	15.1	ø6.9	7.0	1.2~1.9	M3X10	1.0	
TCBS-18	18.0	ø6.9	6.7	1.2~1.9	M3X10	1.0	
TCBS-20	20.0	ø6.8	7.1	1.2~1.9	M3X10	1.0	
TCBS-25	25.0	ø6.9	7.1	1.2~1.9	M3X10	1.0	
TCBS-27A	27.5	ø6.9	6.8	1.2~1.9	M3X10	1.0	500
TCBS-29	29.3	ø6.9	6.8	1.2~1.9	M3X10	1.0	
TCBS-30	30.0	ø6.9	7.2	1.2~1.9	M3X10	1.0	
TCBS-35	35.0	ø6.9	6.8	1.2~1.9	M3X10	1.0	
TCBS-38	38.0	ø9.9	6.7	1.2~1.9	M3X10	1.0	
TCBS-40	40.0	ø7.0	7.0	1.2~1.9	M3X10	1.0	
TCBS-49	49.0	ø8.1	6.6	1.2~1.9	M3X10	1.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B. THICKNESS	SCREW & THICKNESS		PACKAGE
				D SCREW	SUITABLE THICKNESS	
TCM3−7	7.0	6.8	1.2~1.7	M3X7	1.0	1000
TCM3−8M	8.5	6.8	1.2~1.7	M3X6	1.0	
TCM3−11	11.0	6.8	1.2~1.7	M3X8	1.0	




P.C. 板間隔柱 SPACER SUPPORT — 3-66-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

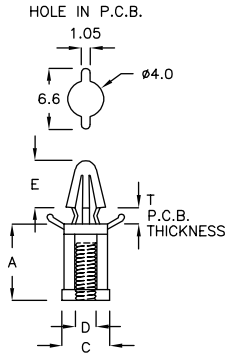


PART NO	A	T P.C.B. THICKNESS	C	SCREW & THICKNESS		E	PACKAGE
				D SCREW	SUITABLE THICKNESS		
TCM3−8MF	8.5	1.2~1.7	ø6.9	M3X7	1.0	6.9	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	SCREW & THICKNESS		E	PACKAGE
			D TAPPING SCREW	SUITABLE THICKNESS		
TCL−07	7.0	1.2~1.7	M3X7	1.0	6.2	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-66-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M



PART NO	A	B	PACKAGE
MSK−2C	3.3	10.0	2000
MSK−2F	3.3	7.0	
MSK−3AF	3.8	10.0	1000
MSK−3D	4.3	10.0	
MSK−6K	6.1	10.0	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-67-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MSR-4Q	3.95	10.0	4.5	2000







P.C. 板間隔柱 SPACER SUPPORT 3-67-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
MSK-2A	3.3	10.0	2000
MSK-2RY	2.3	10.0	







P.C. 板間隔柱 SPACER SUPPORT 3-67-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
MSLQ-2	2.35	18.0	1000







P.C. 板間隔柱 SPACER SUPPORT 3-67-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MSZ-3Q	3.8	7.0	6.0	2000







P.C. 板間隔柱 SPACER SUPPORT 3-67-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MSZ-3KS	3.6	7.0	6.0	2000
MSZ-4ST	5.1	7.0	6.0	
MSZ-5RY	5.75	7.0	6.0	







P.C. 板間隔柱 SPACER SUPPORT — 3-68-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	PACKAGE
MSA−6A	7.7	500
MSA−10	9.8	







P.C. 板間隔柱 SPACER SUPPORT — 3-68-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MST−05	5.0	12.0	ø6.9	500
MST−6C	6.35	12.0	ø6.9	
MST−07	7.0	18.1	ø6.9	
MST−9A	9.4	18.1	ø6.9	
MST−10FC	10.8	18.0	ø8.0	
MST−16	15.9	18.1	ø6.9	
MST−16SA	16.4	18.1	ø6.9	
MST−19BH	19.4	18.0	ø8.0	
MST−20CQ	20.6	18.1	ø6.9	
MST−22	21.8	18.0	ø6.9	
MST−37F	37.0	18.1	ø6.9	







P.C. 板間隔柱 SPACER SUPPORT — 3-68-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

PART NO	A	PACKAGE
MSQ−7A	8.4	500
MSQ−7C	7.5	
MSQ−27K	27.4	






P.C. 板間隔柱 SPACER SUPPORT — 3-68-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- USE M3 TAPPING SCREW

PART NO	A	C	PACKAGE
MSS−6A	6.35	ø7.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-69-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
MSB−6A	6.3	14.0x14.0	500
MSB−11A	12.6	14.0x14.0	




P.C. 板間隔柱 SPACER SUPPORT 3-69-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
MSBA−5TG	5.2	14.0x14.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-69-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
MSP−03	2.8	14.0x16.0	2000



P.C. 板間隔柱 SPACER SUPPORT 3-69-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
AAA−01	3.0	15.0x15.0	500
AAA−3A	4.5	15.0x15.0	




P.C. 板間隔柱 SPACER SUPPORT 3-69-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
MSC−20A	20.3	18.0x18.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-70-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	E	B ADHESIVE AREA	PACKAGE
MSF-13F	13.8	2.9	14.5x14.5	1000
MSF-25	25.1	3.85	18.0x18.0	200



P.C. 板間隔柱 SPACER SUPPORT 3-70-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
SCTMS-5	4.8	18.2x18.2	500




P.C. 板間隔柱 SPACER SUPPORT 3-70-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	ADHESIVE AREA	PACKAGE
MSY-2A	2.0	18.0x18.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-70-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	E	B	ADHESIVE AREA	PACKAGE
MS-6	6.25	10.2	18.0	18.0x18.0	500
MS-8	8.0	9.7	18.0	18.0x18.0	
MS-10	9.5	10.1	18.0	18.0x18.0	
MS-11A	11.5	4.9	18.0	18.0x18.0	
MS-12	12.6	10.0	18.0	18.0x18.0	
MS-16A	16.4	10.0	19.9	19.9x19.9	
MS-19	19.3	10.2	18.0	18.0x18.0	200
MS-22	22.2	9.6	18.0	18.0x18.0	




P.C. 板間隔柱 SPACER SUPPORT 3-70-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	ADHESIVE AREA	PACKAGE
MSH-8RL	8.0	14.0	14.0x14.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-71-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	ADHESIVE AREA	T P.C.B. THICKNESS	PACKAGE
MSD−15	14.2	18.0x18.0	1.2~1.6	500







P.C. 板間隔柱 SPACER SUPPORT 3-71-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
TCT−10A	10.8	ø9.0	0.6~0.8	1000







P.C. 板間隔柱 SPACER SUPPORT 3-71-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
LSJ−2A	2.8	ø5.0	0.8~1.4	1000







P.C. 板間隔柱 SPACER SUPPORT 3-71-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	E	T P.C.B. THICKNESS	PACKAGE
LSF−05	5.15	ø4.3	3.15	0.8~1.6	2000
LSF−8KM	8.25	ø4.5	3.2	0.8~2.0	







P.C. 板間隔柱 SPACER SUPPORT 3-71-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
LSH−2A	2.7	ø5.0	0.8~1.6	1000
LSH−2DH	1.8	ø5.0	0.8~1.6	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-72-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
TCBK-4A	4.1	ø6.8	1.2~1.6	1000






P.C. 板間隔柱 SPACER SUPPORT 3-72-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
TCG-09	9.0	1.4~1.6	1000
TCG-16	16.0	1.4~1.6	







P.C. 板間隔柱 SPACER SUPPORT 3-72-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	PACKAGE
TBK-14A	14.7	1.4~1.6	500
TBK-16F	16.0	1.4~1.6	1000
TBK-20	20.0	1.4~1.6	500
TBK-22	22.0	1.4~1.6	
TBK-34	34.0	1.4~1.6	







P.C. 板間隔柱 SPACER SUPPORT 3-72-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	T MAXIMUM THICKNESS	PACKAGE
LSC-3A	3.8	ø4.8~5.0	2.1	1000
LSC-3C	3.7	ø4.0	2.1	







P.C. 板間隔柱 SPACER SUPPORT 3-72-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
LSC-6	6.35	2.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-73-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	T MAXIMUM THICKNESS	D TAPPING SCREW	E	PACKAGE
LSC−5	4.8	ø4.8~ø5.0	2.0	M3	5.6	1000
LSC−10	9.4	ø4.8~ø5.0	2.0	M3	5.6	
LSC−12	12.7	ø4.8~ø5.0	2.0	M3	5.6	500
LSC−15A	15.9	ø4.5~ø4.6	2.0	M3	5.6	
LSC−19	19.1	ø4.5~ø4.6	2.0	M3	5.6	




P.C. 板間隔柱 SPACER SUPPORT 3-73-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	PACKAGE
TBW−36A	36.2	1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-73-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
TCP−08	7.9	9.5	1.3~1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-73-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	E	PACKAGE
MA−005	5.0	2.8~3.0	5.1	1000
MA−012	12.0	2.8~3.0	5.0	500
MA−014	14.0	2.8~3.0	5.0	




P.C. 板間隔柱 SPACER SUPPORT 3-73-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

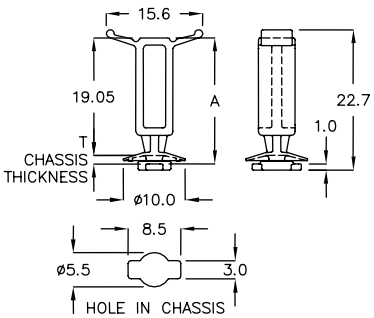


PART NO	A	T CHASSIS THICKNESS	PACKAGE
KPD−24A	20.4	1.0	1000



P.C. 板間隔柱 SPACER SUPPORT 3-74-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T CHASSIS THICKNESS	PACKAGE
MHG-05	4.65	0.6~0.8	1000






P.C. 板間隔柱 SPACER SUPPORT 3-74-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
LSS-8K	17.5	15.9	1.8	500

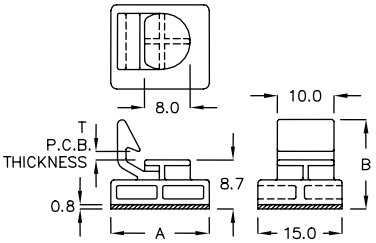





P.C. 板間隔柱 SPACER SUPPORT 3-74-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	D	PACKAGE
FKD-16Y	15.0	0.8	1000







P.C. 板間隔柱 SPACER SUPPORT 3-74-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	D	PACKAGE
FKM-27JC	23.8	2.4	200







P.C. 板間隔柱 SPACER SUPPORT 3-74-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	D	PACKAGE
MWF-13C	5.0	1.6	1000

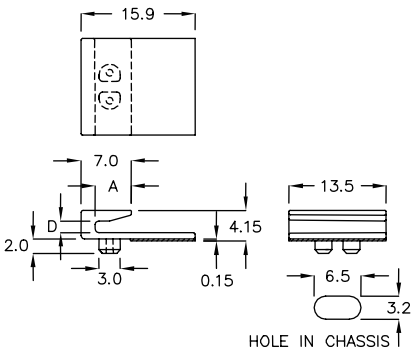


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-75-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

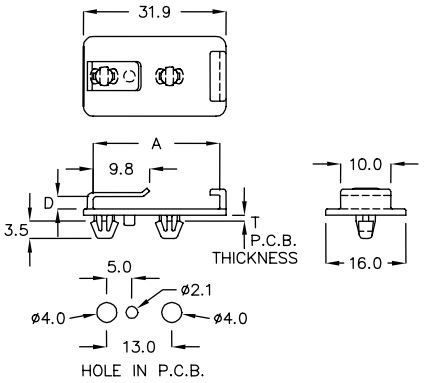


PART NO	A	D	T P.C.B. THICKNESS	PACKAGE
FKC-31AP	28.7	1.7	0.5~0.8	200
FKC-31Y	28.7	2.5	0.6~0.8	




P.C. 板間隔柱 SPACER SUPPORT 3-75-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

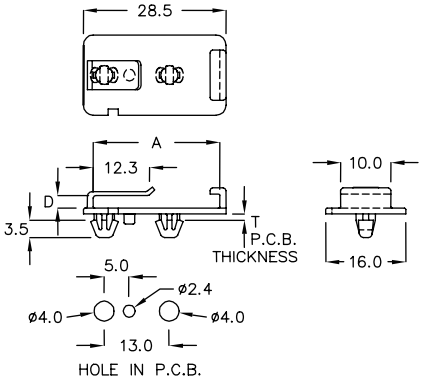


PART NO	A	D	T P.C.B. THICKNESS	PACKAGE
FKC-28AS	25.3	2.5	0.6~0.8	200



P.C. 板間隔柱 SPACER SUPPORT 3-75-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

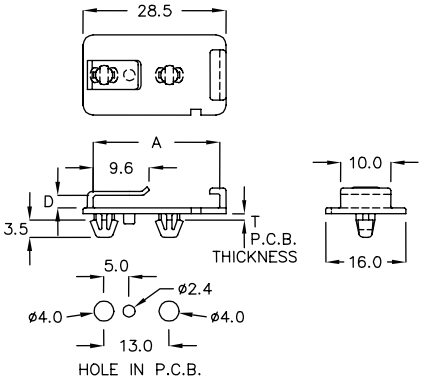


PART NO	A	D	T P.C.B. THICKNESS	PACKAGE
FKC-28PQ	25.3	2.5	0.6~0.8	200



P.C. 板間隔柱 SPACER SUPPORT 3-75-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

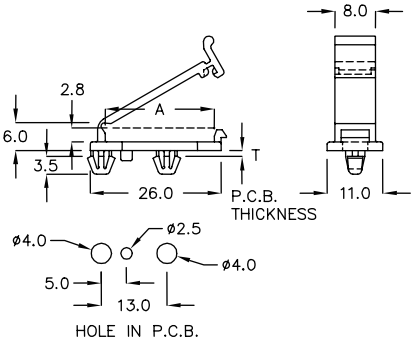


PART NO	A	T P.C.B. THICKNESS	PACKAGE
CYF-21	21.6	0.6~0.8	100

P.C. 板間隔柱 SPACER SUPPORT — 3-76-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

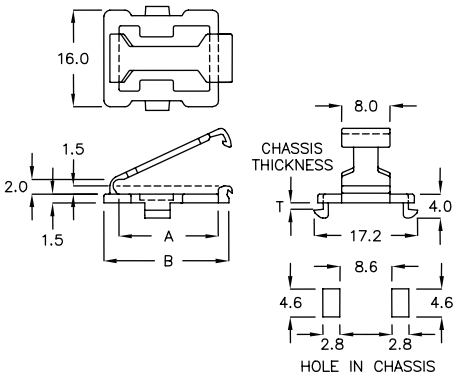


WITH LOCK FEATURE

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CYFJ−15T	15.2	21.4	0.8~1.0	200
CYFJ−16A	16.5	20.7	0.8~1.0	

P.C. 板間隔柱 SPACER SUPPORT — 3-76-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

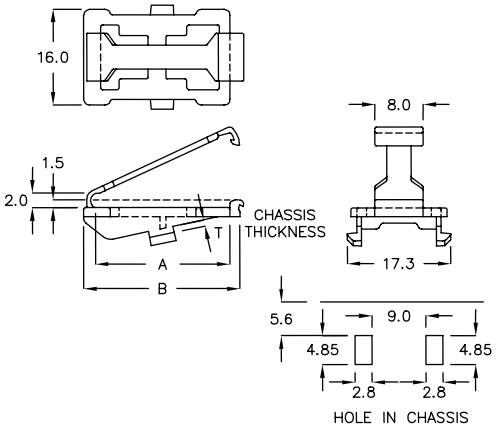


WITH LOCK FEATURE

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CYFQ−22	22.4	26.1	0.8~1.0	100

P.C. 板間隔柱 SPACER SUPPORT — 3-76-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

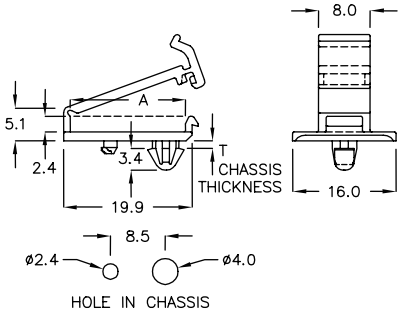


WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYFG−17A	17.9	0.6~0.8	200

P.C. 板間隔柱 SPACER SUPPORT — 3-76-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

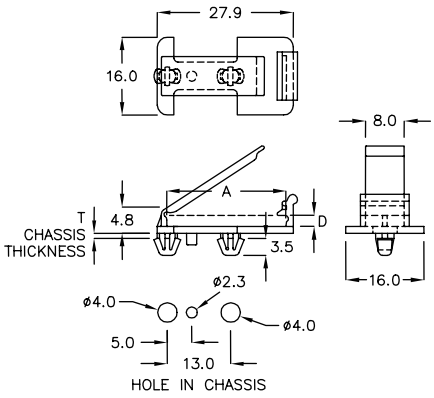

WITH LOCK FEATURE


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CYFK−24D	24.5	2.3	0.5~0.8	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

P.C. 板間隔柱 SPACER SUPPORT 3-77-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

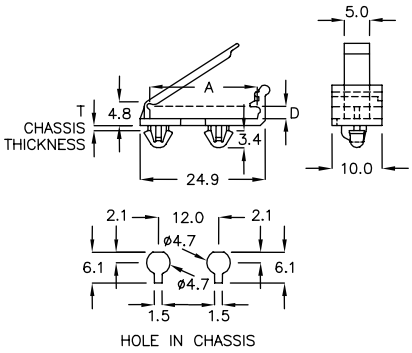


WITH LOCK FEATURE


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CYFT-21A	21.5	2.35	0.6~0.8	100

P.C. 板間隔柱 SPACER SUPPORT 3-77-2




- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK







	PART NO	A	B	C	D	E	F	G	H	T CHASSIS THICKNESS	PACKAGE
	FKJ-14S	16.5	14.5	1.5	ø1.8	4.0	6.0	5.1	20.0	0.7	
	FKJ-15D	17.0	15.0	1.2	ø1.8	4.0	6.0	5.1	20.0	0.5	
★	FKJ-15M	17.5	15.5	1.5	ø1.8	4.0	11.1	5.1	20.0	0.6~0.7	
	FKJ-15Y	17.5	15.5	1.5	ø1.8	4.0	11.1	5.1	20.0	0.6~0.7	
★	FKJ-15H	17.5	15.5	2.4	ø2.0	4.8	11.0	3.0	20.0	0.7	500
★	FKJ-15P	17.5	15.5	2.4	ø2.0	4.8	11.0	3.0	28.0	0.7	
	FKJ-15A	17.5	15.5	1.2	ø2.0	3.4	11.1	4.8	20.0	0.8	
	FKJ-15F	17.5	15.5	2.4	ø2.0	4.6	11.2	3.7	20.0	1.0	
★	FKJ-15G	17.5	15.5	1.45	ø2.0	3.7	11.1	5.1	20.0	1.0	
★	FKJ-16N	18.5	16.5	1.54	ø1.8	4.7	11.2	3.3	20.0	1.0	

P.C. 板間隔柱 SPACER SUPPORT 3-77-3




- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK







PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
FKJR-15	17.0	15.0	0.6	500

P.C. 板間隔柱 SPACER SUPPORT 3-77-4




- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK



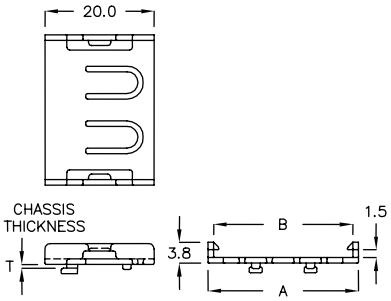


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
FKJD-25	27.5	25.5	0.7	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-78-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	T MAXIMUM THICKNESS	PACKAGE
UB-02C	13.5	7.5	3.3	2.2	3.5	1.3	500



P.C. 板間隔柱 SPACER SUPPORT 3-78-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	T MAXIMUM THICKNESS	PACKAGE
UB-05A	15.0	12.8	1.8	5.5	1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-78-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

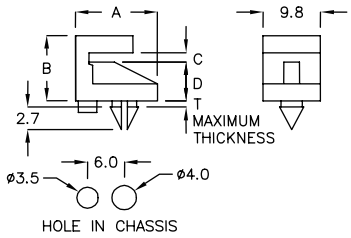


PART NO	A	B	C	D	T MAXIMUM THICKNESS	PACKAGE
UB-6	12.6	10.8	1.7	6.0	1.0	500




P.C. 板間隔柱 SPACER SUPPORT 3-78-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	T MAXIMUM THICKNESS	PACKAGE
UB-6BT	17.5	12.0	1.4	6.5	6.3	1.6	500
UB-6CT	17.5	11.8	1.6	6.35	6.0	1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-79-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

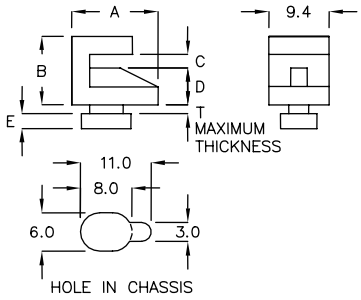


PART NO	A	B	C	D	E	T MAXIMUM THICKNESS	PACKAGE
UB−6A	12.5	10.9	1.9	5.9	2.6	1.2	500
UB−6D	12.3	11.6	2.3	6.4	2.5	1.2	




P.C. 板間隔柱 SPACER SUPPORT 3-79-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

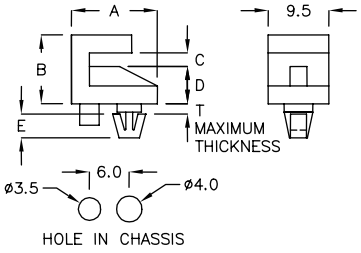


PART NO	A	B	C	D	E	T MAXIMUM THICKNESS	PACKAGE
UB−6E	13.5	10.8	2.4	6.4	3.5	1.3	500
UB−6K	13.4	10.8	2.1	6.0	3.7	2.1	




P.C. 板間隔柱 SPACER SUPPORT 3-79-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

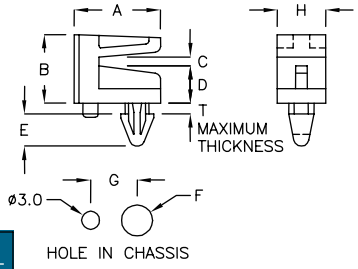


PART NO	A	B	C	D	E	F	G	H	T MAXIMUM THICKNESS	PACKAGE
UB−06H	21.5	11.8	1.3	6.6	6.0	ø4.4	8.0	9.0	1.6	500
UB−6T	14.8	11.9	1.3	6.6	5.9	ø4.4	8.0	9.0	1.7	
UB−06U	12.0	11.8	1.3	6.6	6.0	ø4.4	6.5	6.0	1.8	
UB−08U	12.0	14.0	2.0	8.5	7.0	ø4.4	6.5	6.0	0.8	
UB−14T	15.0	19.2	1.3	14.0	5.9	ø4.4	8.0	9.0	1.8	200
UB−18T	15.5	23.6	1.6	18.3	6.0	ø5.0	8.5	9.0	1.8	




P.C. 板間隔柱 SPACER SUPPORT 3-79-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T MAXIMUM THICKNESS	PACKAGE
UB−7	13.3	1.6	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-80-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

PART NO	A	B	C	D	PACKAGE
UB-09K	13.5	13.6	1.8	8.6	500







P.C. 板間隔柱 SPACER SUPPORT 3-80-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	PACKAGE
UB-6F	15.0	11.1	2.2	6.35	500
UB-11F	15.0	15.8	2.4	10.8	
UB-12F	15.0	16.7	2.3	11.9	







P.C. 板間隔柱 SPACER SUPPORT 3-80-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
UBC-17	27.0	16.7	500







P.C. 板間隔柱 SPACER SUPPORT 3-80-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
UA-10	10.0	14.0	1.2	500






P.C. 板間隔柱 SPACER SUPPORT 3-80-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
UBL-05	5.0	1.6	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-81-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
UNB−11	10.0	2.0	500

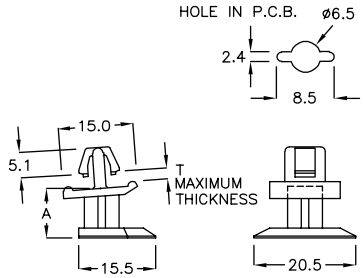





P.C. 板間隔柱 SPACER SUPPORT 3-81-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	PACKAGE
UNC−10A	9.1	8.5°	500

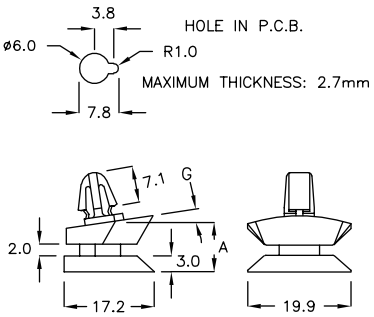





P.C. 板間隔柱 SPACER SUPPORT 3-81-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
UNG−8	8.2	500

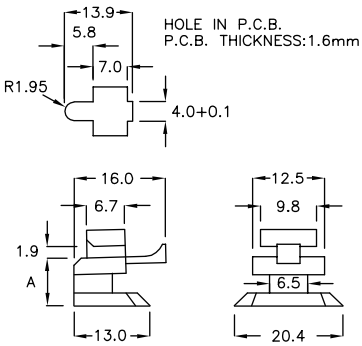





P.C. 板間隔柱 SPACER SUPPORT 3-81-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH−08F	8.0	2.0	500
CH−10K	10.0	1.4	






P.C. 板間隔柱 SPACER SUPPORT 3-81-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH−08K	8.0	2.0	500







P.C. 板間隔柱 SPACER SUPPORT 3-82-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C CHASSIS THICKNESS	T CHASSIS THICKNESS	PACKAGE
MQG-12P	12.7	0.6~0.8	4.7	500







P.C. 板間隔柱 SPACER SUPPORT 3-82-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSB-3A	3.2	1.4~1.6	0.8~1.6	1000

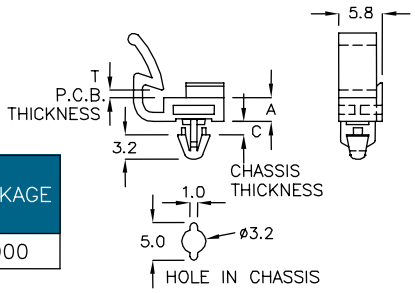





P.C. 板間隔柱 SPACER SUPPORT 3-82-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTY-5A	5.4	8.4	2.2~2.4	0.8~1.0	500

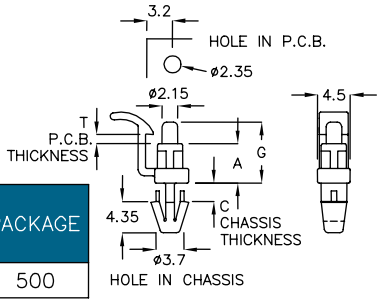





P.C. 板間隔柱 SPACER SUPPORT 3-82-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	C CHASSIS THICKNESS	PACKAGE
LKB-6PA	7.0	11.7	1.4~1.6	1000

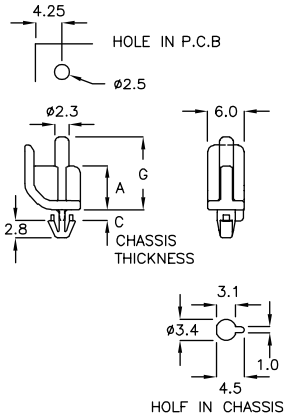




P.C. 板間隔柱 SPACER SUPPORT 3-82-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	C CHASSIS THICKNESS	PACKAGE
LKB-6FQ	6.2	11.7	2.2~2.4	1000

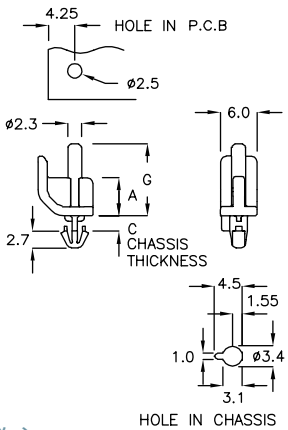


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-83-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	G	C CHASSIS THICKNESS	PACKAGE
LCZ−8PH	8.0	10.7	1.6	2000




P.C. 板間隔柱 SPACER SUPPORT 3-83-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	G	C P.C.B. THICKNESS	PACKAGE
LKC−8A	8.0	13.0	1.6	2000



P.C. 板間隔柱 SPACER SUPPORT 3-83-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	G	C P.C.B. THICKNESS	PACKAGE
LKN−5T	5.0	11.0	1.6	2000




P.C. 板間隔柱 SPACER SUPPORT 3-83-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	G	C CHASSIS THICKNESS	PACKAGE
LKN−11HR	11.6	16.5	2.6	1000



P.C. 板間隔柱 SPACER SUPPORT 3-83-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

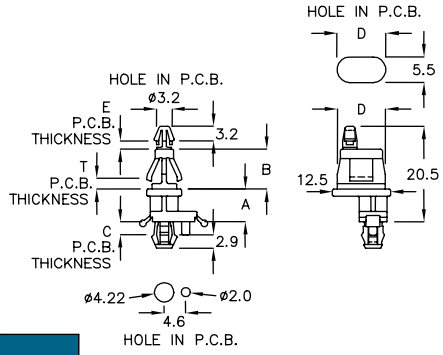


PART NO	A	B	C P.C.B. THICKNESS	D HOLE IN P.C.B.	E P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMWY−26	7.0	8.6	2.36 or 1.92	10.5	1.6	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-84-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

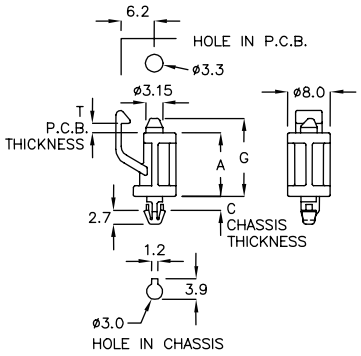


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTZ−12HC	12.0	14.7	2.4	1.6	500




P.C. 板間隔柱 SPACER SUPPORT — 3-84-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

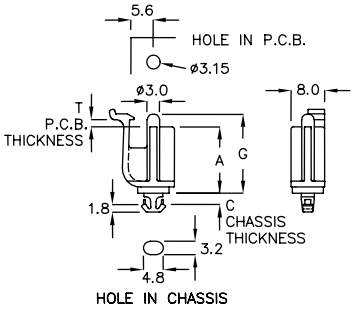


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTKL−16	16.0	19.0	2.5	1.4~1.6	500




P.C. 板間隔柱 SPACER SUPPORT — 3-84-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

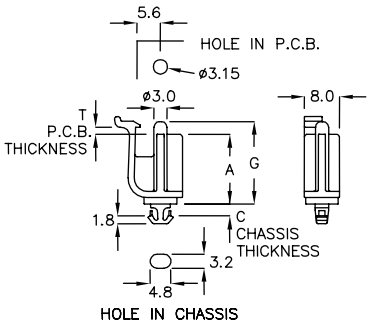


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTKR−16C	16.0	19.0	2.5	1.4~1.6	500




P.C. 板間隔柱 SPACER SUPPORT — 3-84-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

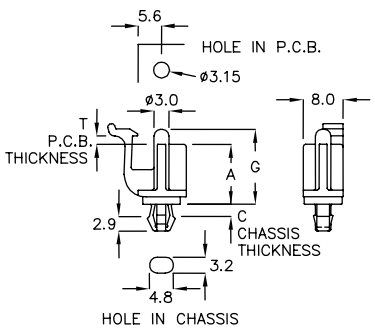


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTEL−12F	12.0	15.0	1.8~2.2	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-85-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

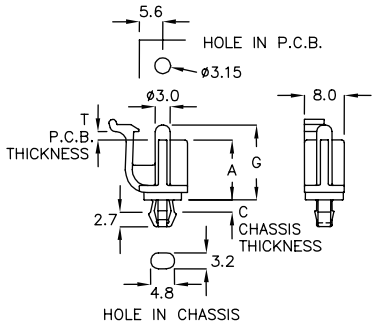


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTER−12G	12.0	15.0	1.8~2.2	1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-85-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

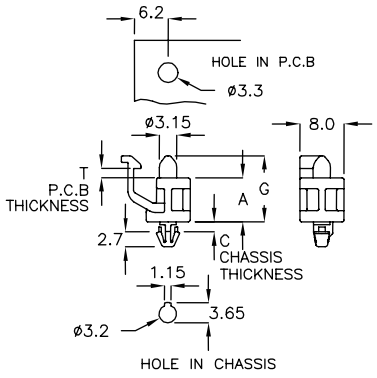


PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LTN−8G	8.0	12.0	1.6	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-85-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

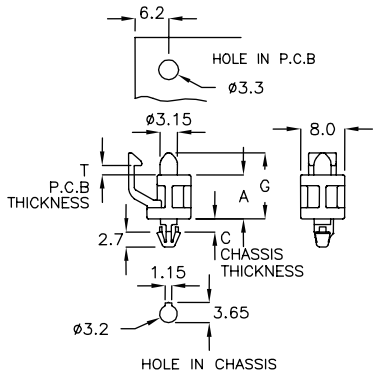


PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LTN−8CK	8.0	12.0	1.6	2.2	1000




P.C. 板間隔柱 SPACER SUPPORT 3-85-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

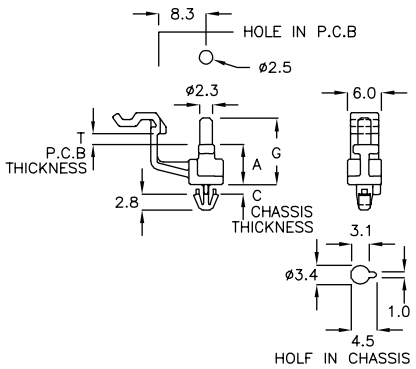

PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMM−6DA	7.0	11.7	1.4~1.6	1.4~1.6	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-86-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACK AGE
LMF−2K	2.8	0.8~1.0	1.4~1.6	1000

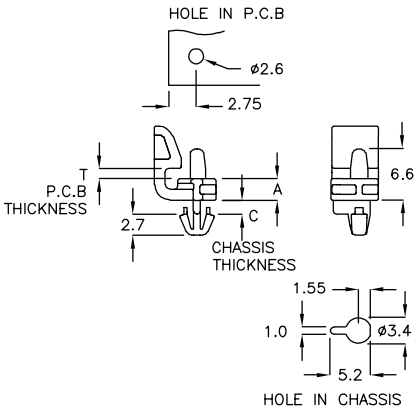





P.C. 板間隔柱 SPACER SUPPORT 3-86-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMH−11	10.5	1.6~1.8	1.4~1.6	1000

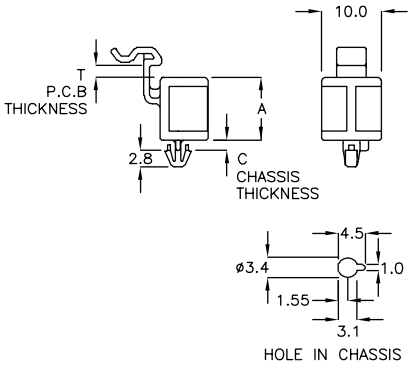




P.C. 板間隔柱 SPACER SUPPORT 3-86-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMH−11SA	10.5	1.6~1.8	2.2~2.4	1000

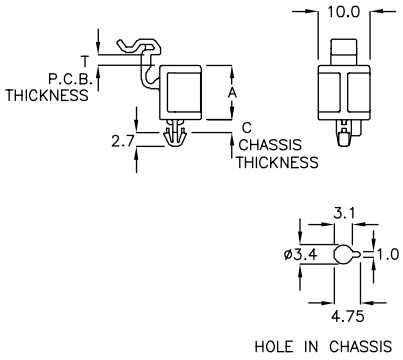





P.C. 板間隔柱 SPACER SUPPORT 3-86-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMK−2YW	2.8	0.8~1.0	1.4~1.6	2000

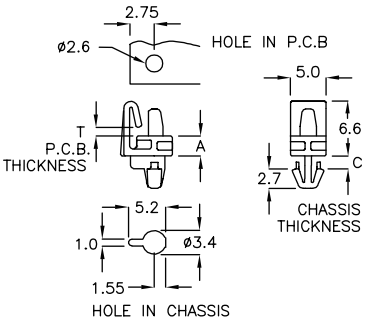


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-87-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

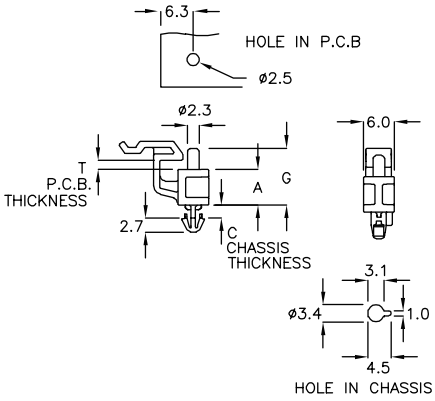


PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMM−6CP	6.9	11.0	1.4~1.6	2.2~2.4	1000



P.C. 板間隔柱 SPACER SUPPORT 3-87-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

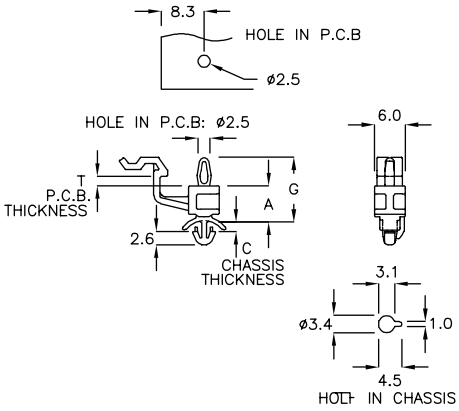


PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMJ−7TC	7.0	12.55	1.6	1.0~1.6	1000



P.C. 板間隔柱 SPACER SUPPORT 3-87-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

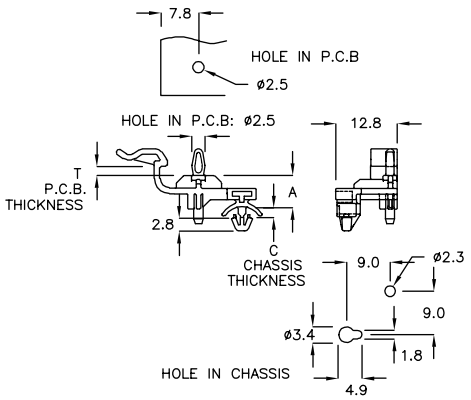


PART NO	A	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMX−7BK	6.7	1.6	1.0~1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-87-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

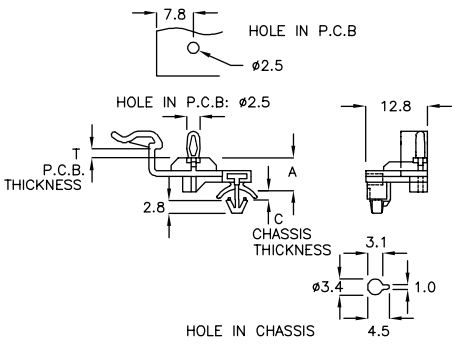

PART NO	A	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMX−7YD	6.7	1.6	1.0~1.6	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-88-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	T P.C.B. THICKNESS	C CHASSIS THICKNESS	PACKAGE
LTH-9PN	9.0	12.0	1.6~1.8	1.4~1.6	1000

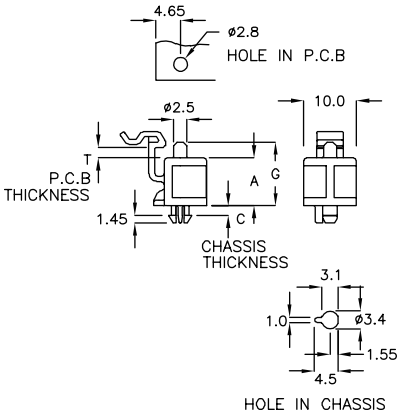




P.C. 板間隔柱 SPACER SUPPORT 3-88-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMP-9RQ	9.55	12.85	0.8~1.0	1.4~1.6	1000

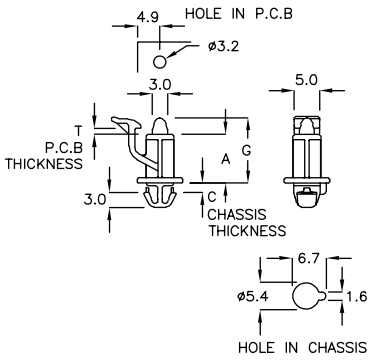




P.C. 板間隔柱 SPACER SUPPORT 3-88-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LTN-7C	7.85	11.4	1.0~1.2	1.4~1.6	1000
LTN-7F	7.85	11.4	1.0~1.2	2.0~2.15	
LTN-9K	9.0	12.6	1.2~1.6	2.15	

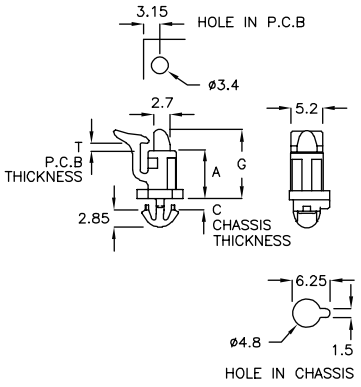





P.C. 板間隔柱 SPACER SUPPORT 3-88-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	G	T P.C.B. THICKNESS	C CHASSIS THICKNESS	PACKAGE
LSK-6P	4.9	7.9	1.4~1.6	0.6~0.8	500

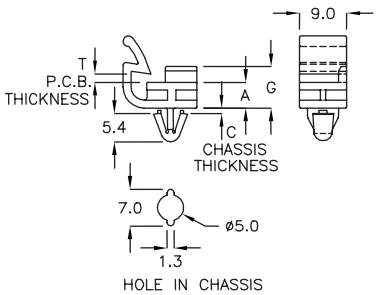


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-89-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

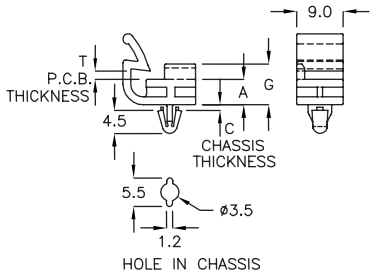


PART NO	A	G	T P.C.B. THICKNESS	C CHASSIS THICKNESS	PACKAGE
LSK−6Q	4.9	7.9	1.4~1.6	0.6~0.8	500



P.C. 板間隔柱 SPACER SUPPORT 3-89-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

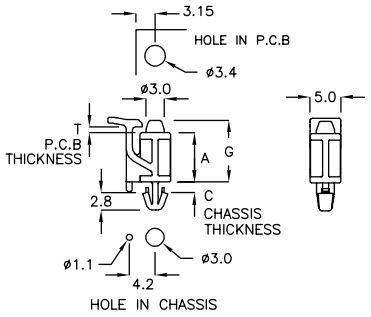


PART NO	A	G	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMR−08	8.0	10.0	0.6~0.8	1.4~1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-89-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

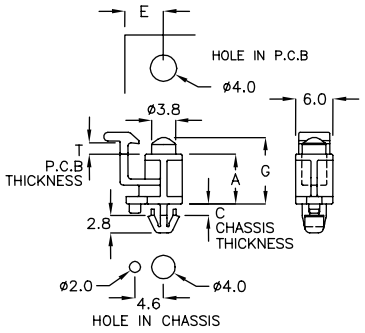


PART NO	A	G	E	T P.C.B THICKNESS	C CHASSIS THICKNESS	PACKAGE
LMQ−8HR	8.0	10.7	5.3	1.6	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT 3-89-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

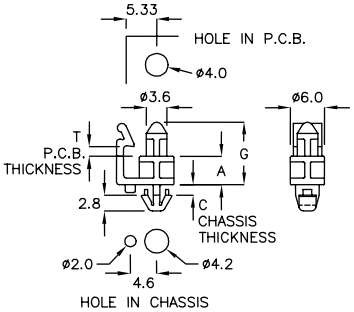


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMG−5FH	5.0	11.0	1.6	1.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-90-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

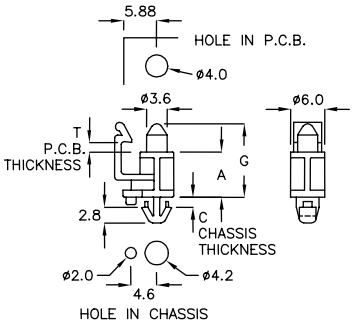


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMG-8AT	8.0	13.0	1.6	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-90-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

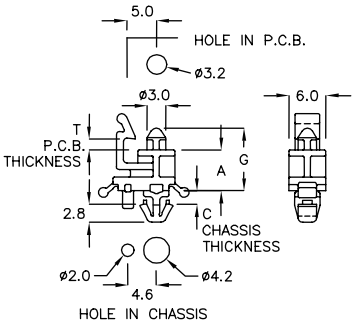


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMB-5AC	6.6	10.1	1.7~1.9	1.6	2000




P.C. 板間隔柱 SPACER SUPPORT — 3-90-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

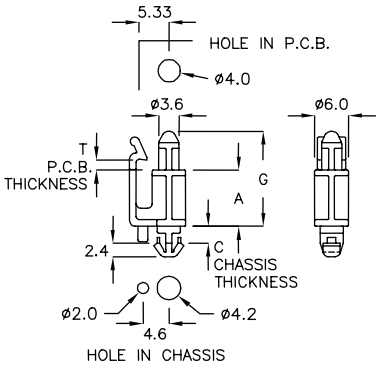


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMG-10JK	10.0	16.9	2.6	1.6	1000



P.C. 板間隔柱 SPACER SUPPORT — 3-90-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

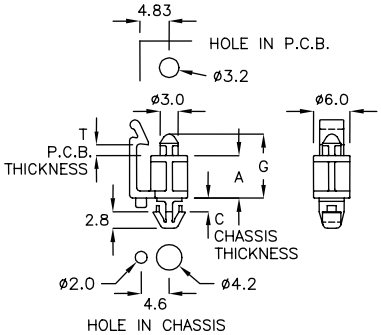


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMG-7JK	7.0	10.5	1.93	1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-91-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

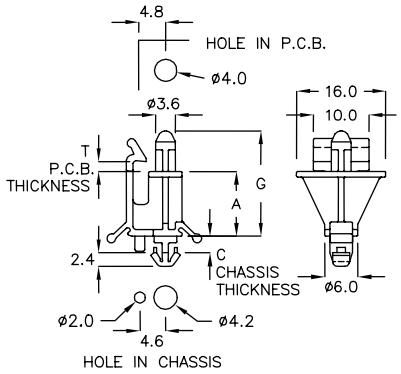


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMGA−11PS	11.6	18.9	2.6	1.6	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-91-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

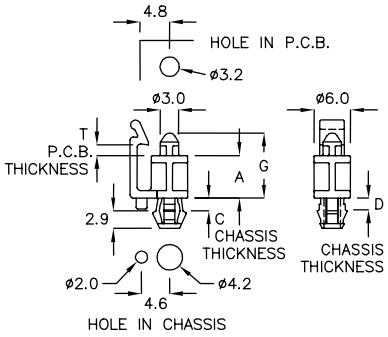


PART NO	A	G	C CHASSIS THICKNESS	D CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LMW−07	7.0	10.7	1.9	1.7	1.6	1000




M.2 卡固定扣 SPACER SUPPORT — 3-91-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

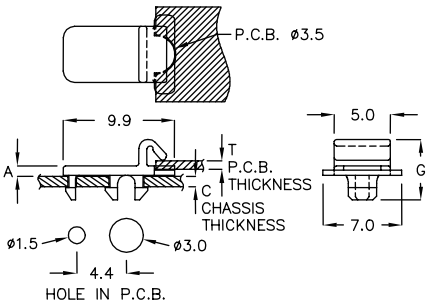


PART NO	A	G	C P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSNT−04	0.85	5.4	1.0	0.8	1000



M.2 卡固定扣 SPACER SUPPORT — 3-91-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

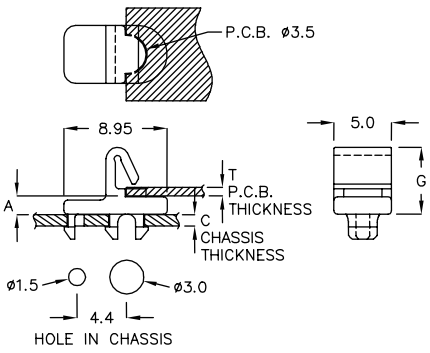


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSN−1A	1.5	5.8	1.0	0.85	2000
LSN−1XR	1.5	5.6	1.6	0.85	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

M.2 卡固定扣 SPACER SUPPORT — 3-92-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

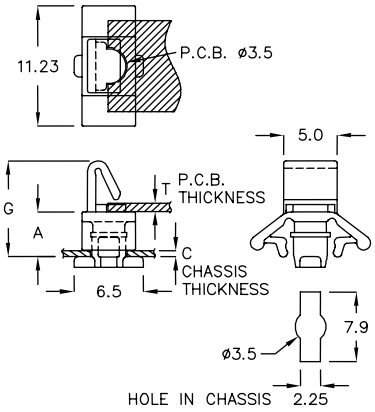


INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSZ−4A	4.15	9.0	1.0~1.6	0.8	1000

M.2 卡固定扣 SPACER SUPPORT — 3-92-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

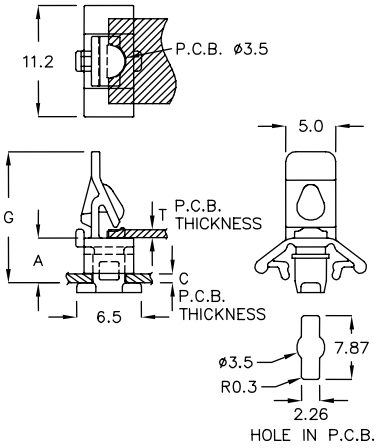


INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

PART NO	A	G	C P.C.B. THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSZQ−2GF	4.5	13.2	1.8~2.2	0.8	1000

M.2 卡固定扣 SPACER SUPPORT — 3-92-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

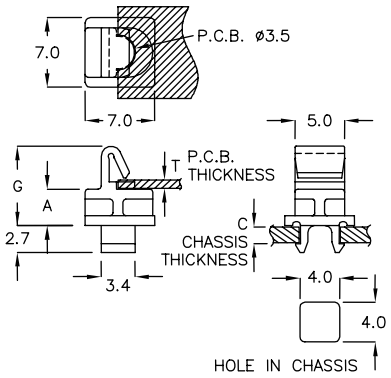


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSP−3AN	3.7	8.0	1.6	0.8	2000

M.2 卡固定扣 SPACER SUPPORT — 3-92-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

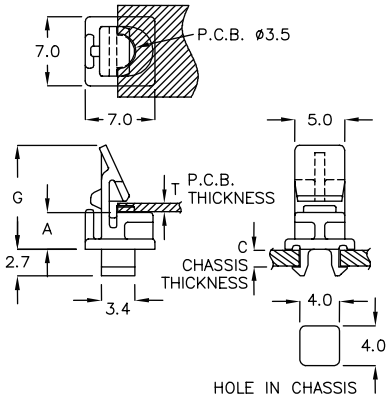


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTQ−2AR	2.5	9.3	1.6	0.8	2000
LTQ−3CP	3.7	10.5	1.6	0.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT — 3-93-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

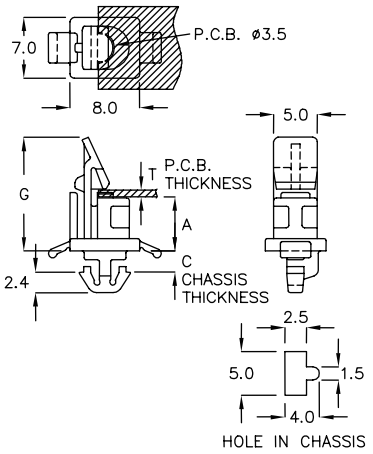


PART NO	A	G	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LTQR−6C	6.1	17.9	1.9	0.8	1000




M.2 卡固定扣 SPACER SUPPORT — 3-93-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

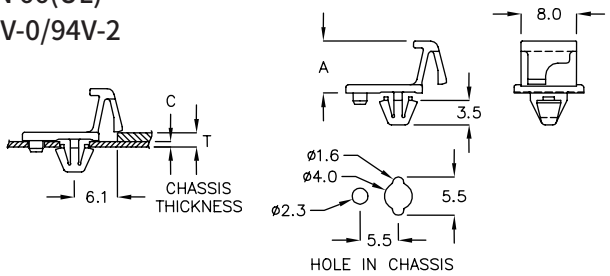


PART NO	A	C CHASSIS THICKNESS	T TOTAL THICKNESS	PACKAGE
LSR−1FM	7.5	0.8	2.1	2000



P.C. 板間隔柱 SPACER SUPPORT — 3-93-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

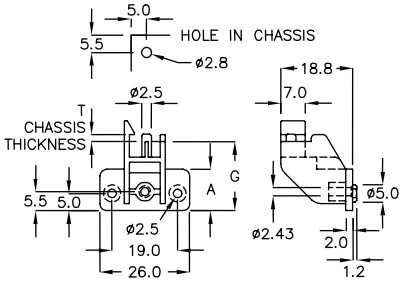


PART NO	A	G	T CHASSIS THICKNESS	PACKAGE
LTRC−18	12.0	18.0	1.8	500



M.2 卡固定扣 M.2 CARD SNAP HOLDER — 3-93-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

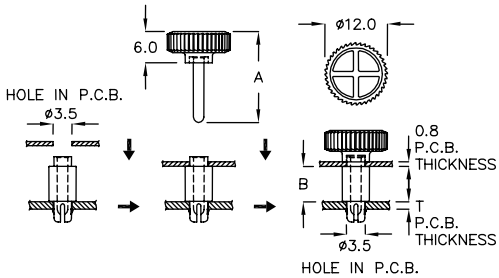


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
SRTA−3KP	17.4	6.65	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-94-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

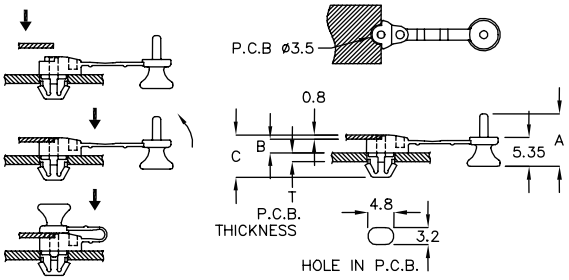


PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
SRTC−4A	9.7	2.5	7.8	1.6	500
SRTC−4CH	9.7	2.5	8.1	2.0	1000
SRTC−4FD	10.9	2.5	9.2	3.0	



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-94-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

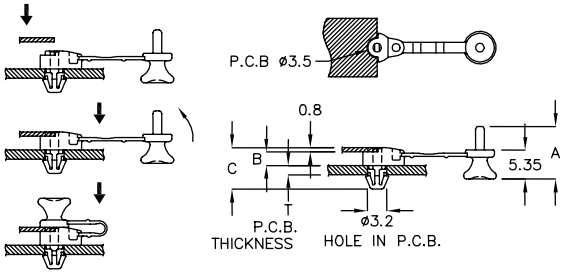


PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
SRTH−3FG	9.7	2.5	7.65	1.6	500



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-94-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

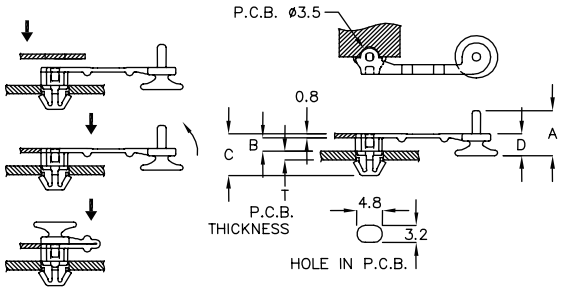


PART NO	A	B	C	D	T P.C.B. THICKNESS	PACKAGE
SRTF−4GW	8.45	2.5	7.8	4.1	1.6	500
SRTF−4RM	9.7	2.5	7.4	5.4	1.2	



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-94-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

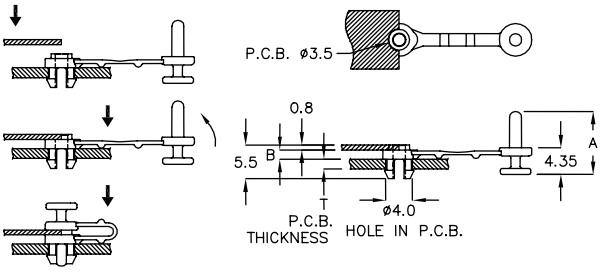


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
SRTQ−4D	10.25	1.5	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



M.2 卡固定扣 M.2 CARD SNAP CLIP 3-95-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

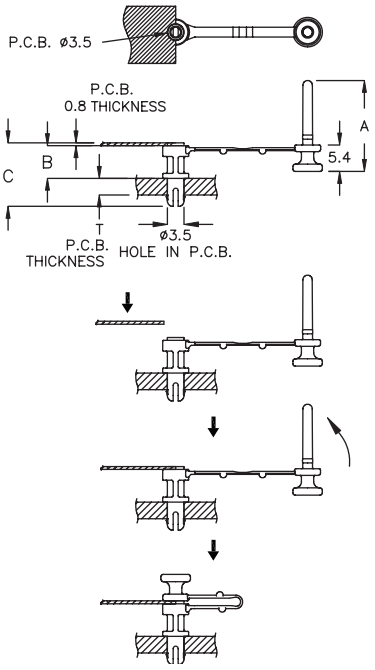


	PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
	SRTK−3QM	13.05	2.5	7.6	1.6~2.2	1000
	SRTK−3GP	15.6	5.1	10.15	1.6~2.2	
	SRTK−3RZ	17.35	6.7	11.95	1.6~2.2	
	SRTK−3FT	18.15	6.7	12.8	2.3~3.0	
★	SRTK−3KC	18.5	6.7	13.2	2.8~3.4	




M.2 卡固定扣 M.2 CARD SNAP CLIP 3-95-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

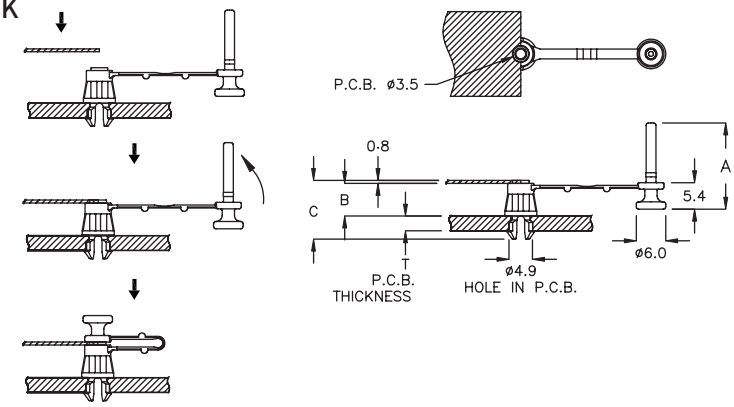


	PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
★	SRTR−4A	17.6	6.7	12.2	2.2~2.8	500




M.2 卡固定扣 M.2 CARD SNAP CLIP 3-95-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

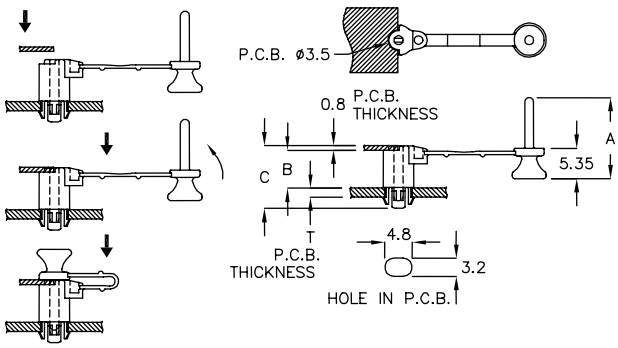


PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
SRTY−4K	16.35	6.5	11.0	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

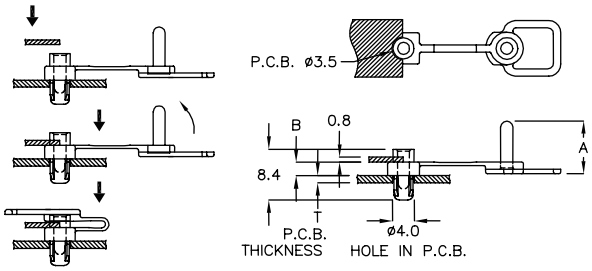


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
SRTM−4K	8.8	2.3	1.2~1.6	500




M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

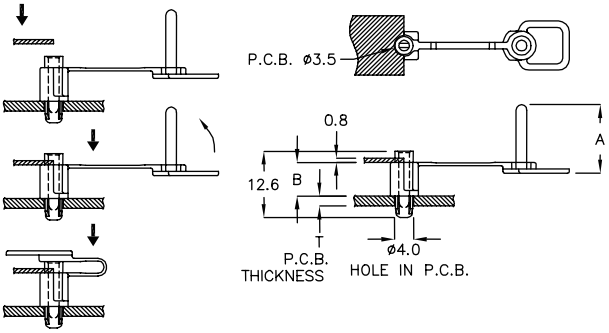


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
SRTM−4PQ	13.5	6.5	1.2~1.6	500




M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

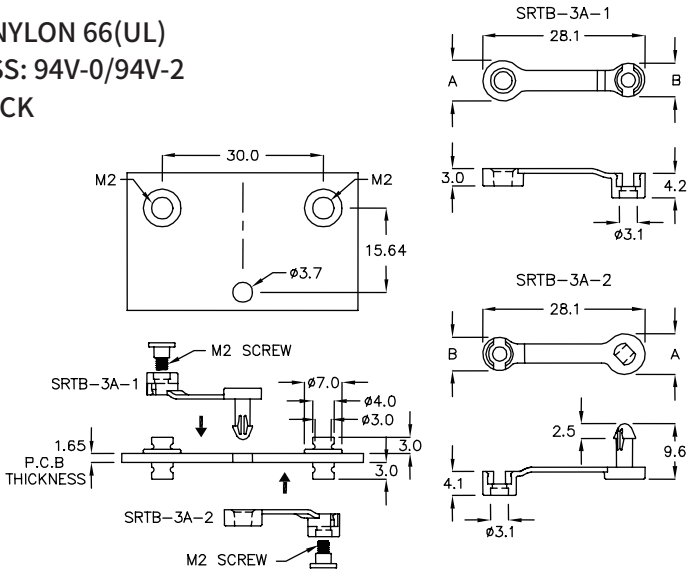


PART NO	A	B	PACKAGE
SRTB−3A	ø7.0	ø5.8	500



M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

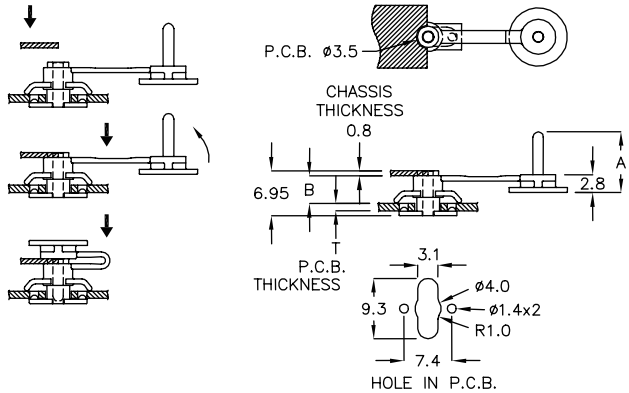


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
SRTD−4YR	9.4	3.85	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

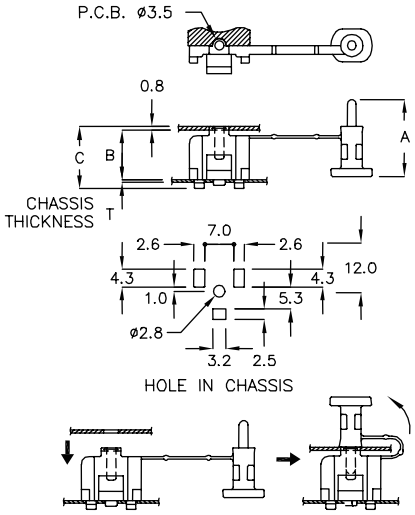


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
SRTL−12A	18.5	12.0	14.9	0.6	200



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

NEW

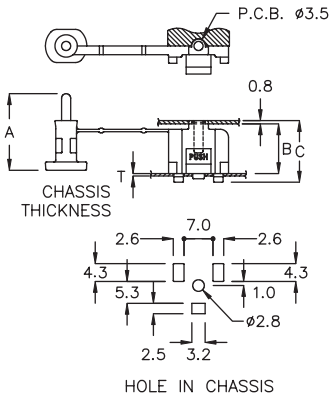


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
★ SRTL−12C	18.5	12.0	14.9	0.6	200




M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-3


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN



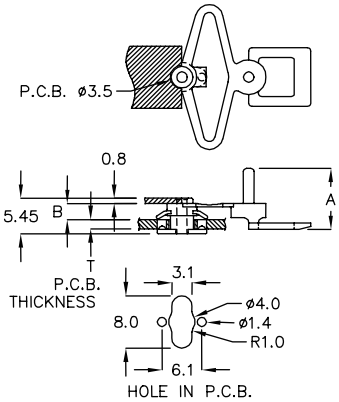


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
SRTP−4FQ	9.4	2.35	1.6	500



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLUE
- USE M3 SCREW

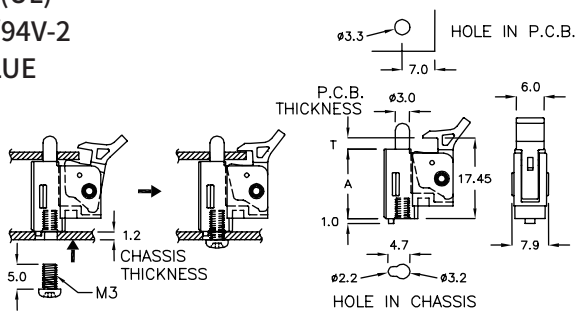


PART NO	A	T P.C.B. THICKNESS	PACKAGE
LXC−21K	15.1	1.6	200



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-98-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

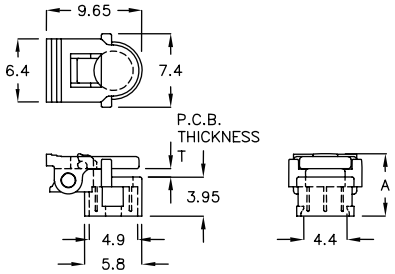


PART NO	A	T P.C.B. THICKNESS	PACKAGE
LXCG−9	6.3	0.8	500



M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-98-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M1.6 SCREW

NEW

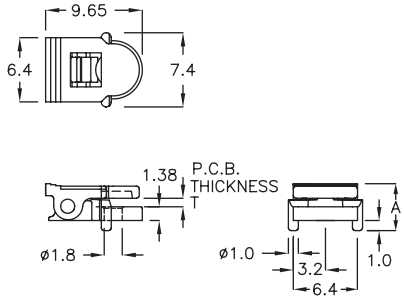


PART NO	A	T P.C.B. THICKNESS	PACKAGE
★ LXCG−9CK	3.6	0.8	500




M.2 卡固定扣 SPACER SUPPORT — 3-98-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built−In Anti−Spin Function
WITH LOCK FEATURE

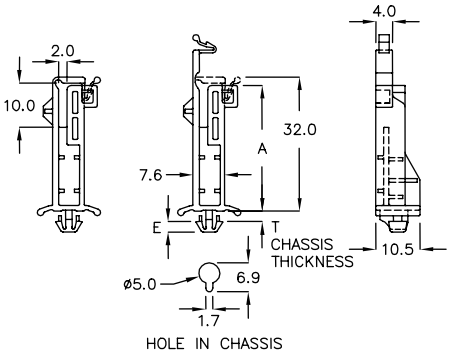


PART NO	A	E	T CHASSIS THICKNESS	PACKAGE
DAG−28C	30.0	2.5	1.8~2.0	500
DAG−28TN	30.0	2.5	2.0~2.2	



M.2 卡固定扣 SPACER SUPPORT — 3-98-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built−In Anti−Spin Function
WITH LOCK FEATURE

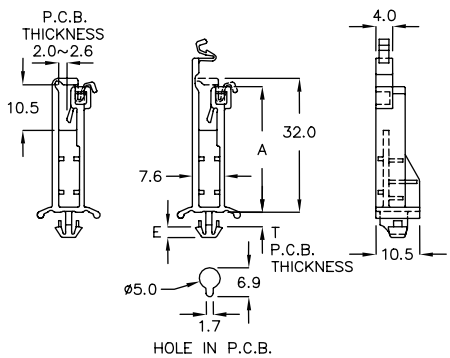


PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
DAGK−28	30.0	2.5	2.2~2.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板固定座 P.C.B MOUNT — 3-99-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2 SCREW

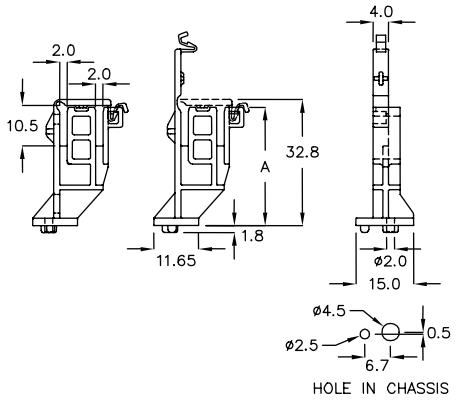


WITH LOCK FEATURE

PART NO	A	PACKAGE
DAGH−30T	30.8	200




P.C. 板間隔柱 SPACER SUPPORT — 3-99-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 TAPPING SCREW

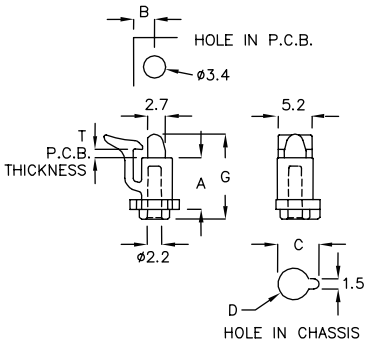


PART NO	A	B	C	D	G	T P.C.B. THICKNESS	USE TAPPING SCREW	PACKAGE
LTW−7AK	7.15	5.5	6.2	ø4.7	18.65	1.7~1.9	M3x5L	1000
LTW−7C	7.85	3.15	6.3	ø4.8	12.9	1.0~1.2	M3x6L	




P.C. 板間隔柱 SPACER SUPPORT — 3-99-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE
- USE M3x8 TAPPING SCREW

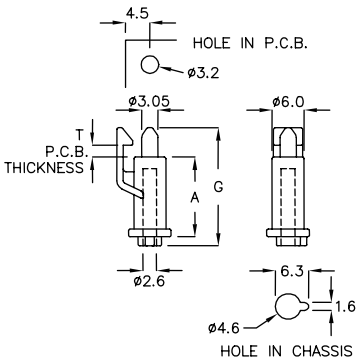


PART NO	A	G	T P.C.B. THICKNESS	PACKAGE
LTF−01	15.0	22.2	1.6~1.8	500




P.C. 板間隔柱 SPACER SUPPORT — 3-99-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,GREEN
- USE M3x7 TAPPING SCREW

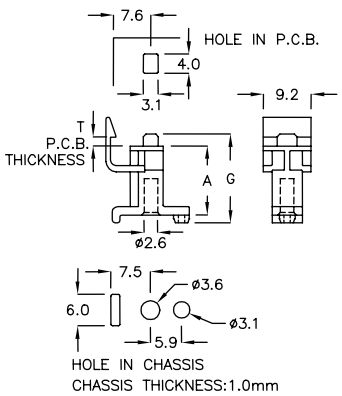


PART NO	A	G	T P.C.B. THICKNESS	PACKAGE
LTR−13A	13.2	17.0	1.4~1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-100-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3.5x6 TAPPING SCREW

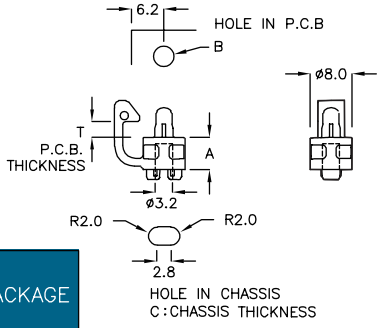


PART NO	A	B	C CHASSIS THICKNESS	T P.C.B THICKNESS	PACKAGE
LTK-6A	6.2	ø4.0	2.0~2.3	2.8~3.0	1000
LTK-7C	7.5	ø3.3	2.5~2.7	1.6~1.85	




P.C. 板間隔柱 SPACER SUPPORT — 3-100-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

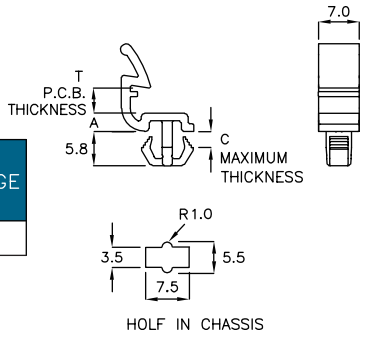


PART NO	A	T P.C.B. THICKNESS	C MAXIMUM THICKNESS	PACKAGE
LS-3A	3.0	3.8~4.0	2.0	500




P.C. 板間隔柱 SPACER SUPPORT — 3-100-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

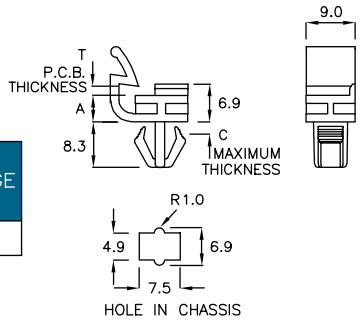


PART NO	A	T P.C.B. THICKNESS	C MAXIMUM THICKNESS	PACKAGE
LS-4A	4.9	1.4~1.6	1.6	500




P.C. 板間隔柱 SPACER SUPPORT — 3-100-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

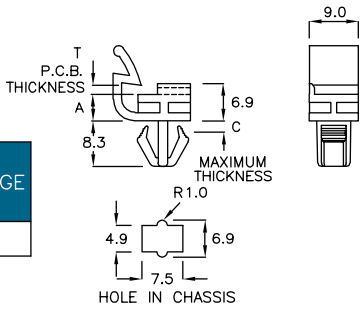


PART NO	A	T P.C.B. THICKNESS	C MAXIMUM THICKNESS	PACKAGE
LS-4C	4.9	1.4~1.6	1.6	500




P.C. 板間隔柱 SPACER SUPPORT — 3-100-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

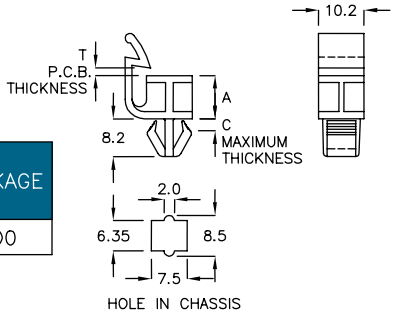


PART NO	A	C MAXIMUM THICKNESS	T P.C.B. THICKNESS	PACKAGE
LS-9A	9.0	2.0	0.8~2.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-101-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

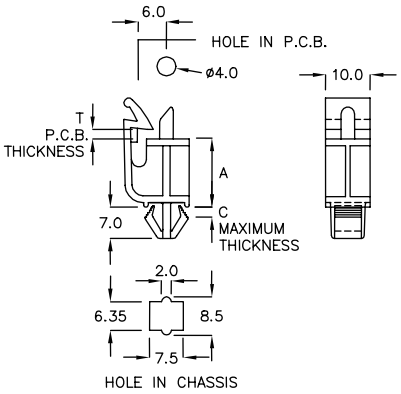


PART NO	A	C MAXIMUM THICKNESS	T P.C.B. THICKNESS	PACKAGE
LS-15	15.2	1.6	1.4~1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-101-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

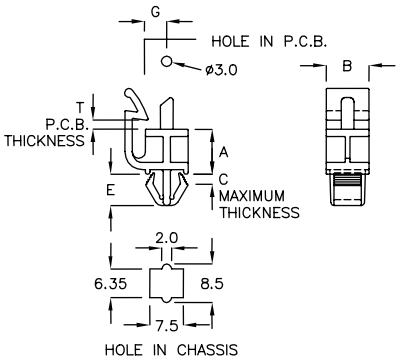


PART NO	A	B	C MAXIMUM THICKNESS	E	G	T P.C.B. THICKNESS	PACKAGE
LS-7	7.5	10.2	1.4	7.1	6.35	0.8~2.2	500
LS-10	10.0	10.1	1.4	7.1	6.35	0.8~2.2	
LS-10AN	10.0	9.5	1.6	6.9	5.35	0.8~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-101-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

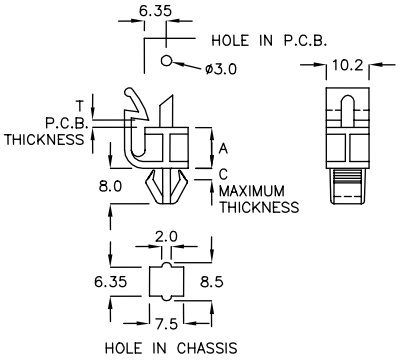


PART NO	A	C MAXIMUM THICKNESS	T P.C.B. THICKNESS	PACKAGE
LS-9	9.0	2.0	0.8~2.2	500




P.C. 板間隔柱 SPACER SUPPORT 3-101-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

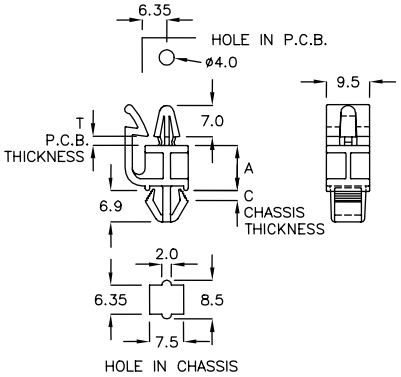


PART NO	A	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
LSQ-10	10.0	0.8~1.6	1.6	500
LSQ-15A	15.0	0.8~1.6	1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-102-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

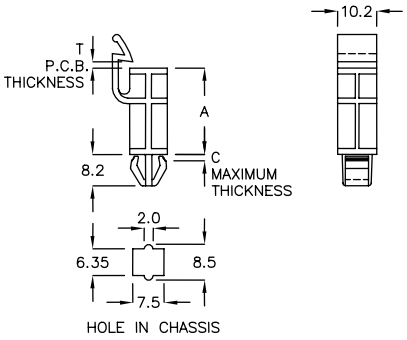



PART NO	A	C MAXIMUM THICKNESS	T P.C.B. THICKNESS	PACKAGE
LS−22A	22.5	0.8	1.4~1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-102-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






PART NO	A	T P.C.B. THICKNESS	C MAXIMUM THICKNESS	PACKAGE
LTS−7	7.5	0.8~2.2	1.4	500
LTS−10	10.0	0.8~2.2	1.4	




P.C. 板間隔柱 SPACER SUPPORT 3-102-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T P.C.B. THICKNESS	C MAXIMUM THICKNESS	PACKAGE
LTS−10A	10.0	1.2~2.2	1.6	500




P.C. 板間隔柱 SPACER SUPPORT 3-102-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLUE

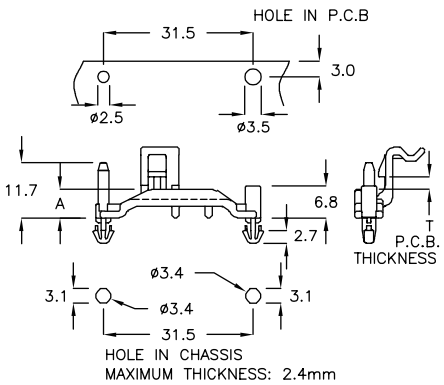


PART NO	A	T P.C.B. THICKNESS	PACKAGE
FKK−6RC	6.1	1.4~1.6	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-103-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

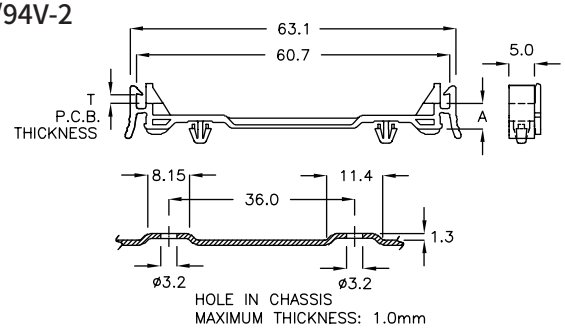


PART NO	A	T P.C.B. THICKNESS	PACKAGE
MTG-65DR	4.9	1.6	200




P.C. 板間隔柱 SPACER SUPPORT — 3-103-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2x8 TAPPING SCREW

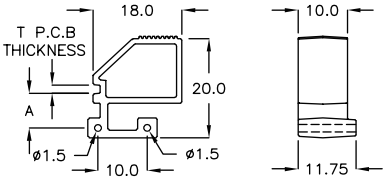


PART NO	A	T P.C.B THICKNESS	PACKAGE
LSY-07	7.0	1.4~1.6	200




P.C. 板間隔柱 SPACER SUPPORT — 3-103-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

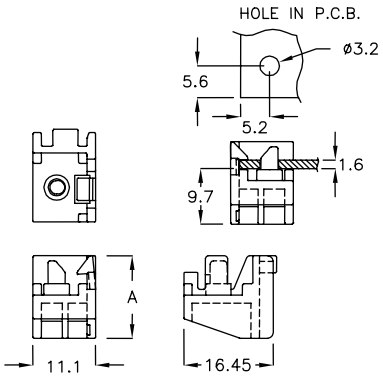


PART NO	A	PACKAGE
MTC-14A	14.65	1000



P.C. 板間隔柱 SPACER SUPPORT — 3-103-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	E	PACKAGE
LD-13	13.3	1.2~1.6	3.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

P.C. 板間隔柱 SPACER SUPPORT 3-104-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	G	H	I	T MAXIMUM THICKNESS	PACKAGE
LW-10	10.6	7.1	9.4	6.3	2.65	1.8	200
LW-012	12.7	7.1	9.2	8.2	2.75	1.8	
LW-013	12.5	6.4	9.1	8.2	2.5	1.4	

P.C. 板間隔柱 SPACER SUPPORT 3-104-2




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

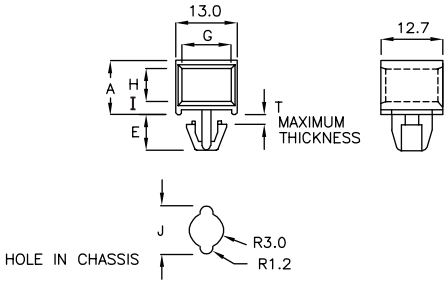


PART NO	A	E	G	H	I	J	T MAXIMUM THICKNESS	PACKAGE
LD-10A	10.6	7.2	9.5	6.1	2.5	8.4	1.6	500
LD-12C	12.6	7.1	9.1	8.2	2.65	9.4	1.6	

P.C. 板間隔柱 SPACER SUPPORT 3-104-3




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

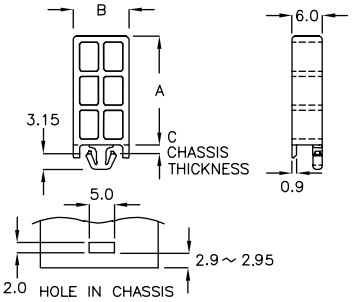


PART NO	A	B	C CHASSIS THICKNESS	PACKAGE
LWC-21A	21.5	11.0	1.4~1.6	500

P.C. 板間隔柱 SPACER SUPPORT 3-104-4




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



PART NO	A	B	C P.C.B THICKNESS	PACKAGE
LWP-14	14.0	11.7	1.7	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT 3-105-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x8 TAPPING SCREW

PART NO	A	T P.C.B. THICKNESS	PACKAGE
LSL−15	15.0	1.8～1.95	500

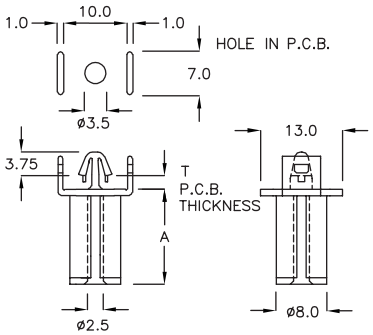





P.C. 板間隔柱 SPACER SUPPORT 3-105-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE #6-32 UNC TAPPING SCREW

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
TS−18	18.8	7.0	2.2	500







P.C. 板間隔柱 SPACER SUPPORT 3-105-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x22 STANDARD TAPPING SCREW

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
TSA−16	15.9	5.5	1.6	200

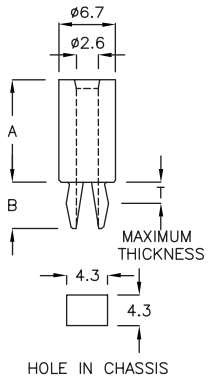





P.C. 板間隔柱 SPACER SUPPORT 3-105-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE #6-32 UNC STANDARD TAPPING SCREW

PART NO	A	B	C	T MAXIMUM THICKNESS	PACKAGE
TB−6A	1.0	7.0	9.5	2.2	1000
TB−6	1.3	7.0	9.5	2.2	
TB−7	7.6	7.1	9.4	2.2	500






P.C. 板間隔柱 SPACER SUPPORT 3-105-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
LWH−3K	3.7	1.0	2000
LWH−5C	5.2	1.0	500






P.C. 板間隔柱 SPACER SUPPORT — 3-106-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 STANDARD TAPPING SCREW

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
TSC−4A	4.5	5.4	2.3	1000







P.C. 板間隔柱 SPACER SUPPORT — 3-106-2

- MATERIAL: PC(UL)
- COLOR: NATURAL
- USE M3 STANDARD TAPPING SCREW

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
TSC−4DK	4.5	5.4	2.3	1000







P.C. 板間隔柱 SPACER SUPPORT — 3-106-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 STANDARD TAPPING SCREW

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
TSD−6M	6.4	4.9	1.6	1000







P.C. 板間隔柱 SPACER SUPPORT — 3-106-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M4x10 STANDARD TAPPING SCREW

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
TB−10	5.0	1.0	500
TB−10A	3.0	1.0	
TB−10C	0.8	1.0	

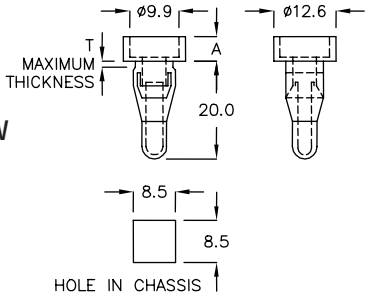





P.C. 板間隔柱 SPACER SUPPORT — 3-106-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
RMF−22	3.8	23.6	1.3~1.5	1000

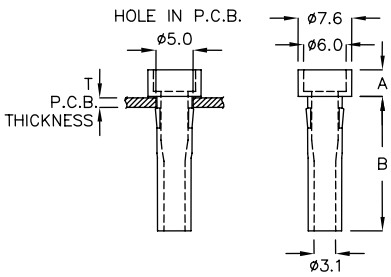


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 3-107-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
RMF−21A	21.4	23.0	500
RMF−25A	25.9	27.5	
RMF−27A	27.7	29.3	
RMF−32A	32.3	34.4	






固定座 MOUNT 3-107-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
RMT−26A	26.4	29.2	6.94	500






固定座 MOUNT 3-107-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
RMG−26C	26.4	29.2	9.9	500






固定座 MOUNT 3-107-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
RMJ−7FS	7.9	10.8	500







固定座 MOUNT 3-107-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
RMK−7WR	7.9	10.8	500



提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





圓體間隔柱 SPACER SUPPORT 3-108-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

PART NO	A	B	C	PACKAGE
★ 405AC	2.0	ø2.4	ø4.5	2000







圓體間隔柱 SPACER SUPPORT 3-108-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADW-3T	3.05	ø1.95	ø4.0	1.6	2000







圓體間隔柱 SPACER SUPPORT 3-108-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
AD-012	12.0	ø3.0	ø7.0	500
AD-12A	12.5	ø3.2	ø7.0	






圓體間隔柱 SPACER SUPPORT 3-108-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADK-13	13.0	ø2.1	ø5.6	1.6	1000

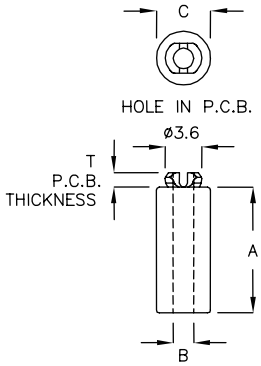




圓體間隔柱 SPACER SUPPORT 3-108-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADH-06C	6.3	ø3.25	ø7.4	1.4~1.6	1000
ADH-17	17.1	ø3.2	ø7.45	1.4~1.6	500
ADH-19T	19.1	ø3.25	ø7.4	1.4~1.6	

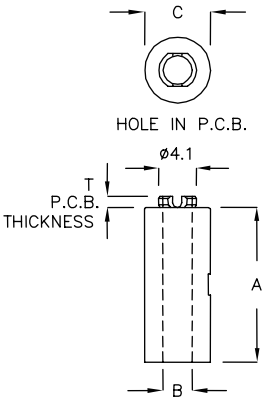


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




圓體間隔柱 SPACER SUPPORT 3-109-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADP-20A	20.0	ø3.2	ø5.0	1.0~1.2	500




圓體間隔柱 SPACER SUPPORT 3-109-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADQ-05	5.0	ø3.2	ø5.2	1.6~1.8	2000




圓體間隔柱 SPACER SUPPORT 3-109-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADF-2M	2.5	ø3.5	ø7.0	1.6~1.8	1000
ADF-03	3.0	ø3.5	ø7.0	1.6~1.8	
ADF-3M	3.5	ø3.5	ø7.0	1.6~1.8	
ADF-04	4.0	ø3.5	ø7.0	1.6~1.8	
ADF-4M	4.5	ø3.5	ø7.0	1.6~1.8	
ADF-05	5.0	ø3.5	ø7.0	1.6~1.8	
ADF-5M	5.5	ø3.5	ø7.0	1.6~1.8	
ADF-06	6.0	ø3.5	ø7.0	1.6~1.8	
ADF-6M	6.5	ø3.5	ø7.0	1.6~1.8	
ADF-07	7.0	ø3.5	ø7.0	1.6~1.8	
ADF-7M	7.5	ø3.5	ø7.0	1.6~1.8	
ADF-08	8.0	ø3.5	ø7.0	1.6~1.8	
ADF-8M	8.5	ø3.5	ø7.0	1.6~1.8	
ADF-09	9.0	ø3.5	ø7.0	1.6~1.8	
ADF-10	10.0	ø3.5	ø7.0	1.6~1.8	
ADF-11	11.0	ø3.5	ø7.0	1.6~1.8	
ADF-17RM	17.5	ø3.5	ø7.0	1.6~1.8	500
ADF-22KC	22.0	ø3.5	ø7.0	1.6~1.8	




P.C. 板間隔柱 SPACER SUPPORT 3-109-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B. THICKNESS	USE SCREW	PACKAGE
MCJA-04	4.0	1.9	1.4~1.6	M2.0x12L	2000
MCJA-05	5.0	1.9	1.4~1.6	M2.0x12L	
MCJA-06	6.0	1.9	1.4~1.6	M2.0x14L	
MCJA-07	7.0	1.9	1.4~1.6	M2.0x14L	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板間隔柱 SPACER SUPPORT 3-110-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 SCREW




PART NO	A	E	T P.C.B. THICKNESS	USE SCREW	PACKAGE
MCJ-03A	3.0	2.4	1.4~1.6	M2.5x10L	2000
MCJ-04A	4.0	2.4	1.4~1.6	M2.5x12L	
MCJ-05A	5.0	2.4	1.4~1.6	M2.5x12L	
MCJ-06A	6.0	2.4	1.4~1.6	M2.5x14L	
MCJ-07	7.0	2.4	1.4~1.6	M2.5x14L	



P.C. 板間隔柱 SPACER SUPPORT 3-110-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	T P.C.B. THICKNESS	PACKAGE
PCBS-3	3.0	3.0	1.4~1.6	2000
PCBS-3M	3.5	3.0	1.4~1.6	
PCBS-4	4.0	3.0	1.4~1.6	
PCBS-4M	4.5	3.0	1.4~1.6	
PCBS-5	5.0	3.0	1.4~1.6	




P.C. 板間隔柱 SPACER SUPPORT 3-110-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

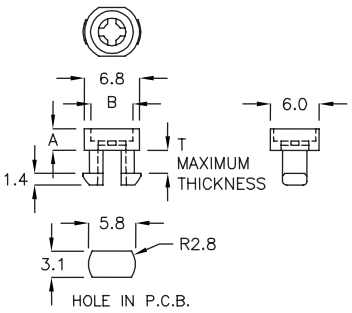


PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
SSR-2A	2.65	ø5.2	2.6	2000




圓體間隔柱 SPACER SUPPORT 3-110-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADJ-2CH	2.9	3.9	ø6.0	0.8~1.6	2000
ADJ-3FQ	3.4	4.4	ø6.0	0.8~1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-111-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D HOLE IN P.C.B.	E	T MAXIMUM THICKNESS	PACKAGE
SRS2−2C	2.0	ø2.1	ø4.0	ø3.0	1.0	1.6	2000
SRS2−2A	2.5	ø2.1	ø4.0	ø3.0	1.0	1.6	
SRS2−2M	2.5	ø2.7	ø5.5	ø4.0	1.5	1.7	
SRS2−3	3.0	ø2.7	ø5.5	ø4.0	1.55	1.7	
SRS2−3GK	3.5	ø2.7	ø5.5	ø4.0	1.4	1.7	
SRS2−4	4.0	ø2.7	ø5.5	ø4.0	1.5	1.7	
SRS2−4AC	4.0	ø2.1	ø4.0	ø3.0	1.0	1.6	
SRS2−4CB	4.5	ø2.7	ø5.5	ø4.0	1.4	1.7	
SRS2−5	5.0	ø2.7	ø5.5	ø4.0	1.5	1.7	
SRS2−5ZM	5.5	ø2.7	ø5.5	ø4.0	1.4	1.7	
SRS2−6	6.0	ø2.7	ø5.5	ø4.0	1.5	1.7	
SRS2−6A	6.35	ø2.25	ø4.54	ø3.55	1.0	1.1	
SRS2−8	8.0	ø2.7	ø5.5	ø4.0	1.4	1.6	
SRS2−15	15.0	ø3.1	ø5.5	ø4.0	1.55	1.6	500
SRS3−2MA	2.0	ø3.2	ø6.4	ø4.8	1.5	1.2	2000
SRS3−3S	2.7	ø3.2	ø6.5	ø4.8	1.6	1.7	
SRS3−3A	3.0	ø2.8	ø5.5	ø4.0	1.4	1.6	
SRS3−3M	3.0	ø3.2	ø6.5	ø4.8	1.7	1.7	
SRS3−3	3.5	ø3.2	ø6.4	ø4.8	1.4	1.7	
SRS3−4	4.0	ø3.2	ø6.5	ø4.8	1.65	1.7	
SRS3−4A	4.5	ø3.4	ø6.5	ø4.8	1.8	1.6	
SRS3−5	5.0	ø3.2	ø6.5	ø4.8	1.6	1.7	
SRS3−6S	6.1	ø3.2	ø6.5	ø4.8	1.6	1.7	1000
SRS3−6	6.5	ø3.2	ø6.4	ø4.8	1.6	1.7	
SRS3−7S	7.0	ø3.2	ø6.5	ø4.8	1.6	1.7	
SRS3−7F	7.4	ø3.2	ø6.5	ø4.8	1.7	1.7	
SRS3−7	7.7	ø3.2	ø6.5	ø4.8	1.7	1.7	
SRS3−8	8.0	ø3.2	ø6.5	ø4.8	1.6	1.7	
SRS3−9	9.0	ø3.2	ø6.5	ø4.8	1.8	1.7	
SRS3−10M	10.5	ø3.15	ø6.5	ø4.8	1.6	1.7	
SRS3−12A	12.7	ø3.2	ø6.5	ø4.8	1.6	1.7	500
SRS3−14	14.2	ø3.2	ø6.5	ø4.8	1.7	1.7	
SRS4−6	6.4	ø3.9	ø6.9	ø6.0	1.6	1.7	1000
SRS4−12S	12.0	ø3.9	ø6.9	ø6.0	1.6	1.7	500
SRS4−12	12.7	ø3.9	ø6.9	ø6.0	1.7	1.7	




圓體間隔柱 SPACER SUPPORT — 3-111-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
AD−35A	35.4	38.4	ø7.0	1.6~1.8	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




圓體間隔柱 SPACER SUPPORT 3-112-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	D	T P.C.B. THICKNESS	PACKAGE
ADA−15	15.0	ø3.5	ø4.8	2.2~2.4	1000






圓體間隔柱 SPACER SUPPORT 3-112-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
ADHM−14	14.0	ø3.2	ø6.0	1.4~1.6	500






圓體間隔柱 SPACER SUPPORT 3-112-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B. THICKNESS	E P.C.B. THICKNESS	PACKAGE
ADM−20A	20.0	1.8~2.0	1.0~1.2	500







圓體間隔柱 SPACER SUPPORT 3-112-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

	PART NO	A	B	C	PACKAGE
★	AG−16	16.0	ø3.1	4.8	2000






P.C. 板間隔柱 SPACER SUPPORT 3-112-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
SH−10	10.5	ø8.0	ø6.5	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C. 板間隔柱 SPACER SUPPORT — 3-113-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




PART NO	A	B	C	PACKAGE
★ SHB−10AC	10.0	ø7.85	ø12.5	1000



絕緣套 BUSHING — 3-113-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
SH−12A	12.7	ø9.0	8.7	ø7.4	ø4.8	1000




P.C. 板間隔柱 SPACER SUPPORT — 3-113-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 SCREW

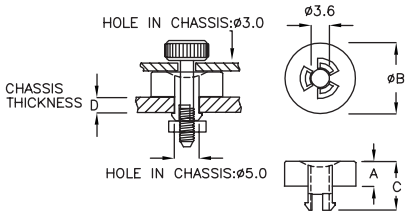


PART NO	A	B	C	D CHASSIS THICKNESS	PACKAGE
MHT−05	5.0	14.0	10.2	3.2~3.4	1000
MHT−5A	5.0	14.0	9.6	2.8~3.0	




P.C. 板間隔柱 SPACER SUPPORT — 3-113-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

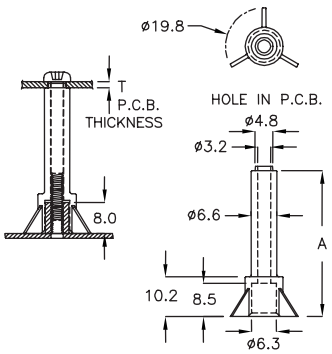


PART NO	A	T P.C.B. THICKNESS	PACKAGE
ADGF−38C	37.5	0.8~1.0	200



P.C. 板間隔柱 SPACER SUPPORT — 3-114-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 SCREW
- P.C.B MAX THICKNESS: 2.4mm

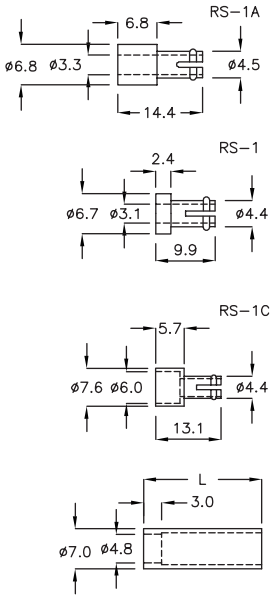


PART NO		L	HOLE IN P.C.B	HOLE IN CHASSIS	PACKAGE
RS−1	RS−57	6.0	ø5.0	ø3.5	1000
	RS−78	7.8			
RS−1A	RS−105	10.5	ø5.0	ø3.5	
	RS−145	14.5			
	RS−160	16.0			
	RS−180	18.4			
RS−1C	RS−215	21.5	ø5.0	ø3.5	
	RS−280	28.2	ø5.0	ø3.5	




P.C. 板間隔柱 SPACER SUPPORT — 3-114-2

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: NATURAL
- USE M4 SCREW
- P.C.B MAX THICKNESS: 2.0mm




PART NO		L	HOLE IN P.C.B	HOLE IN CHASSIS	PACKAGE
RL−1	RL−6S	5.7	ø7.2	ø4.5	1000
	RL−10	10.0			
	RL−15	15.2	ø7.2	ø4.5	1000
	RL−20	20.2			
	RL−25	25.2			




圓體間隔柱 SPACER SUPPORT — 3-114-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




PART NO	A	B	C	PACKAGE
RS−2	5.0	1.6	ø11.0	500



圓體間隔柱 SPACER SUPPORT — 3-114-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
505−3L	5.0	8.0	5.45	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



圓體間隔柱 SPACER SUPPORT 3-115-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
403QP	3.8	5.8	4.3	2000
6310A	10.8	12.4	6.3	1000






圓體間隔柱 SPACER SUPPORT 3-115-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
509A	9.0	9.5	5.1	1000
304K	4.0	5.0	3.15	2000







圓體間隔柱 SPACER SUPPORT 3-115-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	B	C	PACKAGE
403C	3.5	ø8.0	ø4.9	2000






零件墊片 COMPONENT PAD 3-115-4

- MATERIAL: CERAMICS
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
103C	3.0	ø4.5	ø1.8	2000
103DC	3.1	ø2.5	ø1.1	
104C	4.5	ø4.5	ø1.8	
104MC	4.5	ø3.6	ø1.2	
115MC	15.4	ø4.1	ø1.9	







零件墊片 COMPONENT PAD 3-115-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
KWT−103	3.1	ø2.5	ø1.0	2000
KWT−103GH	3.1	ø2.5	ø1.2	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




零件墊片 COMPONENT PAD — 3-116-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: PBT(UL), ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	MATERIAL	A	B	C	PACKAGE
101A	N66	1.1	ø3.0	ø1.7	2000
101CR	N66	1.6	ø2.2	ø0.7	
101DC	N66	1.6	ø3.2	ø0.8	
101MT	N66	1.6	ø3.2	ø1.2	
102F	N66	2.0	ø3.0	ø1.5	
102JK	N66	2.4	ø3.5	ø1.8	
102-H	PBT	2.5	ø3.2	ø1.5	
103AF	N66	3.0	ø2.5	ø1.5	
103S	N66/PBT	3.0	ø3.5	ø1.4	
103K	ABS	3.1	ø2.2	ø0.8	
103MR	N66	3.2	ø2.2	ø0.8	
103TD	N66	3.2	ø3.2	ø1.2	
103AG	N66	3.25	ø3.5	ø1.6	
103M	N66	3.5	ø4.5	ø1.6	
103	N66	3.6	ø3.5	ø1.4	

PART NO	MATERIAL	A	B	C	PACKAGE
104	N66	4.2	ø4.5	ø1.4	2000
104M	N66	4.5	ø4.5	ø1.6	
104AD	N66	4.8	ø2.2	ø0.8	
104CF	N66	4.8	ø3.2	ø1.2	
104A	N66+FRP	5.0	ø4.0	ø1.4	
105A	N66	5.0	ø3.0	ø1.4	
105	N66	5.0	ø4.5	ø1.6	
105M	N66	5.5	ø4.5	ø1.6	
106	N66/PBT	6.0	ø4.4	ø1.6	
106GK	N66	6.4	ø3.2	ø1.2	
106HJ	N66	6.4	ø4.0	ø1.2	
107	N66/PBT	7.0	ø4.4	ø1.6	
108BH	N66	7.9	ø3.2	ø1.2	
108GL	N66	7.9	ø4.0	ø1.2	
108A	N66	8.0	ø3.2	ø1.6	
108	N66	8.0	ø4.5	ø1.4	
109CM	N66	9.5	ø3.2	ø1.2	
112NP	N66	12.7	ø3.2	ø1.2	



零件墊片 COMPONENT PAD — 3-116-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




	PART NO	A	B	C	PACKAGE
★	106C	6.0	ø3.2	ø1.45	2000
	111C	11.5	ø3.2	ø1.25	
★	111D	11.5	ø3.2	ø1.45	




圓體間隔柱 SPACER SUPPORT — 3-116-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	USE SCREW	PACKAGE
KWT-302	2.0	ø5.0	ø3.3	M3	2000
KWT-305	5.0	ø5.0	ø3.3		
KWT-306	6.0	ø5.0	ø3.3		
KWT-308	8.0	ø5.0	ø3.3		
KWT-310	10.0	ø5.0	ø3.3		
KWT-311	11.0	ø5.0	ø3.3		
KWT-405	5.0	ø6.5	ø4.3	M4	
KWT-406	6.0	ø6.5	ø4.3		
KWT-408	8.0	ø6.5	ø4.3		
KWT-410	10.0	ø6.5	ø4.3		
KWT-412	12.0	ø6.5	ø4.3		
KWT-414	14.0	ø6.5	ø4.3		
KWT-416	16.0	ø6.5	ø4.3		

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



圓體間隔柱 SPACER SUPPORT — 3-117-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
201	1.0	ø3.7	ø2.2	
201A	1.5	ø3.7	ø2.2	
201KG	1.6	ø2.2	ø0.8	
201JM	1.6	ø3.6	ø2.2	
201FN	1.6	ø4.2	ø2.7	
201C	1.8	ø3.7	ø2.2	
201D	1.9	ø3.0	ø2.0	
202	2.0	ø4.5	ø2.5	
202C	2.0	ø3.7	ø2.2	
202F	2.6	ø4.6	ø2.7	2000
202A	2.5	ø3.7	ø2.2	
203	3.0	ø4.5	ø2.5	
203A	3.0	ø3.5	ø2.2	
203C	3.0	ø3.7	ø2.2	
203EG	3.2	ø3.2	ø2.3	
203KJ	3.2	ø3.6	ø2.2	
203BU	3.2	ø4.2	ø2.7	
203M	3.5	ø4.5	ø2.5	
203D	3.7	ø4.5	ø2.5	
204	4.0	ø4.5	ø2.5	
204KT	4.0	ø4.7	ø2.7	
204A	4.1	ø3.6	ø2.2	
204M	4.5	ø4.5	ø2.5	
204FP	4.8	ø3.2	ø2.3	
204GN	4.8	ø3.6	ø2.2	
204NJ	4.8	ø4.2	ø2.7	
205	5.0	ø4.5	ø2.5	
205C	5.5	ø4.5	ø2.5	
206	6.0	ø4.5	ø2.5	2000
206BQ	6.4	ø3.2	ø2.3	
206AP	6.4	ø3.6	ø2.2	
206DN	6.4	ø4.2	ø2.7	
206CH	6.4	ø4.8	ø2.3	
206M	6.5	ø4.5	ø2.5	
206F	6.6	ø4.8	ø2.8	
207	7.0	ø4.8	ø2.3	
207A	7.0	ø3.7	ø2.2	
207C	7.5	ø3.7	ø2 3	

PART NO	A	B	C	PACKAGE
208FJ	7.9	ø3.6	ø2.2	
208	8.0	ø4.5	ø2.5	
208C	8.5	ø4.5	ø2.5	
209	9.0	ø4.5	ø2.5	
209AQ	9.5	ø3.6	ø2.2	
209C	9.5	ø4.5	ø2.5	
210	10.0	ø4.5	ø2.5	
211	11.0	ø3.7	ø2.2	
301PW	1.5	ø5.0	ø3.1	
301NL	1.6	ø4.8	ø3.2	2000
301BR	1.6	ø6.4	ø3.2	
301GS	1.6	ø6.4	ø3.7	
302A	2.0	ø6.0	ø3.0	
302C	2.0	ø6.5	ø3.1	
302B	2.5	ø5.0	ø3.1	
302DK	2.0	ø8.0	ø3.5	
302JY	2.5	ø8.0	ø3.2	
303	3.3	ø5.0	ø3.1	
303A	3.0	ø6.0	ø3.1	
303C	3.5	ø5.7	ø3.1	
303D	3.0	ø5.0	ø3.1	
303F	2.6	ø8.0	ø3.5	
303H	3.0	ø6.3	ø3.2	
303Q	2.8	ø6.3	ø3.2	
303DQ	3.2	ø4.8	ø3.2	
303HP	3.2	ø6.4	ø3.2	
303YF	3.2	ø6.4	ø3.7	
303RP	3.8	ø5.2	ø3.7	
303S	3.5	ø4.0	ø3.0	2000
304A	4.0	ø5.0	ø3.2	
304	4.2	ø5.0	ø3.1	
304C	4.5	ø6.0	ø3.2	
304PR	4.8	ø4.8	ø3.2	
304HX	4.8	ø6.4	ø3.2	
304JS	4.8	ø6.4	ø3.7	
305	5.0	ø5.0	ø3.1	
305A	5.0	ø8.0	ø3.1	
305C	5.5	ø5.0	ø3.0	
305DM	5.9	ø5.7	ø3.7	


PART NO	A	B	C	PACKAGE
306	6.1	ø5.0	ø3.1	
306A	6.3	ø6.5	ø3.9	
306XF	6.4	ø4.8	ø3.2	
306KY	6.4	ø6.4	ø3.2	
306QS	6.4	ø6.4	ø3.7	
306M	6.5	ø5.0	ø3.1	
306SK	6.0	ø8.0	ø3.3	
307	7.0	ø5.0	ø3.1	
307A	7.5	ø5.0	ø3.1	
307B	7.5	ø3.9	ø3.1	
308CW	7.9	ø6.4	ø3.2	
308FR	7.9	ø6.4	ø3.7	2000
308LT	7.9	ø4.8	ø3.2	
308	8.1	ø5.0	ø3.1	
308C	8.4	ø6.5	ø3.9	
308M	8.5	ø5.0	ø3.1	
308A	8.7	ø5.0	ø3.1	
309A	9.0	ø5.0	ø3.1	
309	9.2	ø5.0	ø3.1	
309MS	9.5	ø4.8	ø3.2	
309PT	9.5	ø6.4	ø3.7	
309C	9.6	ø7.5	ø3.5	
310	10.1	ø5.0	ø3.1	
311	11.0	ø5.0	ø3.1	
311MH	11.1	ø4.8	ø3.2	
311BN	11.1	ø6.4	ø3.2	
312A	12.0	ø5.0	ø3.2	
312	12.3	ø5.0	ø3.1	
313	13.0	ø5.0	ø3.1	
314	14.0	ø5.0	ø3.1	1000
315	15.0	ø5.0	ø3.1	
316	16.0	ø5.0	ø3.1	
317	17.0	ø5.0	ø3.1	
318	18.3	ø5.0	ø3.1	
319	19.0	ø5.0	ø3.1	
320	20.0	ø5.0	ø3.1	
324	24.0	ø5.0	ø3.1	
331	31.0	ø5.0	ø3.1	500
338	38.0	ø5.9	ø3.1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



圓體間隔柱 SPACER SUPPORT — 3-118-1


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
401AF	1.6	ø6.4	ø4.3	2000
402	2.0	ø6.5	ø4.0	
402A	2.5	ø6.5	ø4.0	
402TK	2.5	ø8.0	ø4.0	
403	3.0	ø6.5	ø4.0	
403DG	3.2	ø6.4	ø4.3	
403A	3.5	ø5.9	ø4.6	
403RL	3.5	ø8.0	ø4.5	
404C	4.0	ø6.5	ø3.5	
404	4.0	ø6.5	ø4.0	
405A	4.5	ø10.7	ø4.3	1000
405MQ	4.8	ø6.4	ø4.3	2000
405	5.2	ø6.5	ø3.9	
406	6.0	ø6.5	ø4.1	
406B	6.1	ø6.5	ø4.4	
406SR	6.4	ø6.4	ø4.3	
406A	6.4	ø6.5	ø4.1	
406D	6.4	ø10.0	ø4.5	
407	7.2	ø6.5	ø4.0	
407C	7.5	ø6.5	ø4.1	
408QF	7.9	ø6.4	ø4.3	
408L	8.0	ø7.4	ø4.5	
408	8.1	ø6.5	ø4.0	
408H	8.5	ø6.5	ø4.1	
409	9.1	ø6.5	ø3.9	
409C	9.5	ø6.5	ø4.1	
410	10.0	ø6.5	ø4.1	
411	11.0	ø6.5	ø4.1	1000
411TP	11.1	ø6.4	ø4.3	
412	12.0	ø6.3	ø4.2	
413	13.0	ø6.5	ø4.1	
414	14.0	ø8.0	ø4.2	
415	15.0	ø6.5	ø4.1	
416A	16.8	ø6.3	ø4.2	
417	17.1	ø6.3	ø4.2	
420	20.0	ø8.0	ø4.2	
421	21.0	ø8.0	ø4.0	
422A	22.23	ø8.0	ø4.93	500
425A	25.4	ø6.3	ø4.3	
427A	27.5	ø6.5	ø4.1	
428	28.0	ø6.5	ø4.1	


PART NO	A	B	C	PACKAGE
428A	28.7	ø6.5	ø4.1	500
433A	33.5	ø8.0	ø4.3	
503	3.0	ø7.0	ø5.0	2000
503A	3.2	ø9.5	ø4.9	
505	5.0	ø8.0	ø5.3	
506	6.0	ø7.0	ø5.3	
507	7.0	ø7.95	ø4.95	1000
508	7.9	ø7.0	ø5.4	
508A	8.0	ø10.0	ø5.6	
509	9.0	ø7.0	ø5.3	
510A	9.35	ø10.0	ø5.4	
509M	9.6	ø8.0	ø5.0	
510	10.0	ø7.0	ø5.3	
516	16.0	ø7.0	ø5.3	
525	25.0	ø8.0	ø5.1	500
527A	27.5	ø7.0	ø5.5	
530	30.0	ø8.0	ø5.1	
612	12.6	ø6.5	ø3.8	1000
614	14.2	ø6.5	ø3.7	
617	17.0	ø10.0	ø6.2	
622	22.0	ø7.1	ø5.8	
6305	5.0	ø8.5	ø6.3	
6305A	5.5	ø7.3	ø6.3	
6305PH	5.0	ø11.0	ø6.3	
6315CX	15.0	ø11.0	ø6.3	
7732FC	32.0	ø11.3	ø7.7	200
803H	3.2	ø10.2	ø8.2	1000
804H	4.7	ø10.2	ø8.2	
8305RT	5.0	ø13.0	ø8.3	
8315DK	15.0	ø13.0	ø8.3	
8507	6.9	ø10.5	ø8.5	
903	3.2	ø11.6	ø9.1	
904	4.7	ø11.6	ø9.1	
9634C	33.3	ø18.7	ø9.3	200
51–080	8.0	ø8.0	ø5.1	1000
57–065	6.5	ø13.0	ø5.7	
64–072	7.2	ø7.65	ø6.4	
65–100	10.0	ø10.0	ø6.5	
70–080	8.0	ø10.0	ø7.0	
70–110	11.0	ø10.0	ø7.0	
75–130	13.0	ø10.5	ø7.5	
82–080	8.0	ø10.6	ø8.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




導電板間隔柱 CONDUCTIVE SUPPORT —— 3-119-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- MATERIAL: PHOSPHOR BRONZE
- PLATING: NICKEL

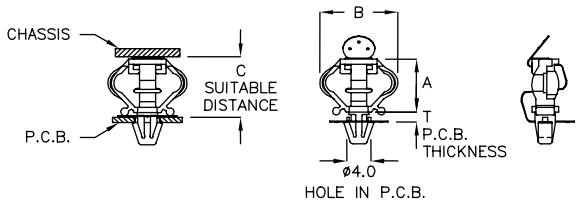


PART NO	A	B	T P.C.B. THICKNESS	C SUITABLE DISTANCE	PACKAGE
CQA-10	10.0	14.8	1.2~1.6	7.0~9.0	1000




導電板間隔柱 CONDUCTIVE SUPPORT —— 3-119-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- MATERIAL: PHOSPHOR BRONZE
- PLATING: NICKEL

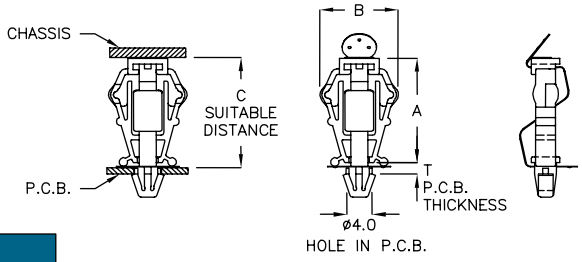


PART NO	A	B	T P.C.B. THICKNESS	C SUITABLE DISTANCE	PACKAGE
CQA-14DS	14.5	13.7	1.2~1.4	13.0~14.3	1000
CQA-18K	18.25	13.7	1.2~1.4	18.0~18.3	




P.C. 板間隔柱 SPACER SUPPORT —— 3-119-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 TAPPING SCREW




PART NO	A	B	C	D SCREW	PACKAGE
SQ-10A	7.0	6.0	6.3	M3	1000




P.C. 板間隔柱 SPACER SUPPORT —— 3-119-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
TAH-05	4.7	6.0	6.0	M3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



六角型間隔柱 SPACER SUPPORT — 3-120-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2 TAPPING SCREW




PART NO	A	B	C	PACKAGE
HHB-06D	7.95	4.15	ø1.6	1000



六角型間隔柱 SPACER SUPPORT — 3-120-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2x5.5 SCREW




PART NO	A	B	PACKAGE
HHJ-8KC	7.95	5.0	1000



六角型間隔柱 SPACER SUPPORT — 3-120-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




PART NO	A	B	C	PACKAGE
HWH-04	4.0	5.5	ø2.5	1000
HWH-10	10.0	4.5	ø2.45	
HWH-20	20.0	5.5	ø2.5	500



六角型間隔柱 SPACER SUPPORT — 3-120-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




PART NO	A	B	C	D	PACKAGE
H-57	57.8	5.9	2.5	10.0	200
H-65	65.5	5.6	2.6	14.9	
H-105	105	9.9	2.6	14.6	100
H-140	139.5	9.9	2.6	14.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



六角型間隔柱 SPACER SUPPORT 3-121-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




PART NO	A	B	C	D	PACKAGE
H-32	32.0	5.5	14.0	ø2.6	500
H-49	49.0	5.5	15.0		200




六角型間隔柱 SPACER SUPPORT 3-121-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- OPTIONAL MATERIAL: POM (94HB FLAMMABILITY)




PART NO	A	B	D	PACKAGE
H2M-6	6.0	4.9	M2.6	1000
H-5KC	5.0	5.4	M3	2000
H-6S	6.0	5.5	M3	1000
H-6	6.45	5.5		
H-7	7.0	5.5		
H-8	8.0	5.5		
H-9	9.1	5.5		
H-10S	10.0	5.5		
H-10	10.6	5.5		
H-11	11.2	5.5		
H-12	12.2	5.5		
H-13	12.8	5.5		
H-14	14.2	5.5		

PART NO	A	B	D	PACKAGE
H-15	15.0	5.5	M3	1000
H-16	16.0	5.5		
H-17	17.1	5.5		
H-18	18.2	5.5		
H-20	20.0	5.5		
H-22	22.3	5.5		
H-24	24.0	5.5	M3	500
H-25	25.1	5.5		
H-26	26.0	5.5		
H-28	27.8	5.5		
H-30	30.0	5.5		
H4-36	36.0	8.0	M4	



六角型間隔柱 SPACER SUPPORT 3-121-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	D	F	FORM	PACKAGE
HU4-406A	6.35	4.75	#4-40		1	1000
HU4-409A	9.53	4.75	#4-40		1	
HU4-412A	12.7	4.75	#4-40		1	
HU4-415A	15.9	4.75	#4-40	6.0	2	
HU4-419A	19.05	4.75	#4-40	8.0	2	
HU4-606C	6.35	6.35	#4-40		1	
HU4-609C	9.53	6.35	#4-40		1	
HU4-611C	11.1	6.35	#4-40		1	
HU4-612C	12.7	6.35	#4-40		1	
HU4-615C	15.9	6.35	#4-40	6.0	2	
HU4-619C	19.05	6.35	#4-40	8.0	2	
HU4-625C	25.4	6.35	#4-40	8.0	2	


PART NO	A	B	D	F	FORM	PACKAGE
HU6-406D	6.35	4.75	#6-32		1	1000
HU6-409D	9.53	4.75	#6-32		1	
HU6-412D	12.7	4.75	#6-32		1	
HU6-415D	15.9	4.75	#6-32	6.0	2	
HU6-419D	19.05	4.75	#6-32	8.0	2	
HU6-606H	6.35	6.35	#6-32		1	
HU6-609H	9.53	6.35	#6-32		1	
HU6-612H	12.7	6.35	#6-32		1	
HU6-615H	15.9	6.35	#6-32	6.0	2	
HU6-619H	19.05	6.35	#6-32	8.0	2	
HU6-625H	25.4	6.35	#6-32	8.0	2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



六角型間隔柱 SPACER SUPPORT — 3-122-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	F	PACKAGE
THU4-406C	6.4	4.8	4.8	#4-40	4.75	1000
THU4-409C	9.53					
THU4-412C	12.7					
THU4-415C	15.9					
THU4-419C	19.05	4.8	4.8	#4-40	4.75	500
THU4-425C	25.4					
THU4-606A	6.35	6.4	4.8	#4-40	4.75	1000
THU4-609A	9.53					
THU4-612A	12.7					
THU4-615A	15.9					
THU4-619A	19.05	6.4	4.8	#4-40	4.75	500
THU4-625A	25.4					

PART NO	A	B	C	D	F	PACKAGE
THU6-406H	6.35	4.8	6.4	#6-32	4.75	1000
THU6-409H	9.53	4.8	6.4	#6-32	6.35	
THU6-412H	12.7					
THU6-415H	15.9					
THU6-419H	19.05	4.8	6.4	#6-32	6.35	500
THU6-425H	25.4					
THU6-606D	6.35	6.4	6.4	#6-32	4.75	1000
THU6-609D	9.5	6.4	6.4	#6-32	6.35	
THU6-612D	12.7					
THU6-615D	15.9					
THU6-619D	19.05	6.4	6.4	#6-32	6.35	500
THU6-625D	25.4					



六角型間隔柱 SPACER SUPPORT — 3-122-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- D: SCREW
- OPTIONAL MATERIAL: POM (94HB FLAMMABILITY)



PART NO	A	B	C	D1 SCREW	D2 SCREW	F	PACKAGE
TH2F-6C	6.0	5.0	8.0	M3	M2.5	5.0	1000
TH2M-6	6.0	4.9	5.0	M2.6	M2.6	5.0	
TH-5	5.0	6.0	4.8	M3	M3	4.0	
TH-6	6.35	6.0	4.8				
TH-7	7.0	6.0	6.3	M3	M3	6.0	
TH-8	8.0	6.0	6.3				
TH-9	9.0	6.0	6.0				
TH-10	10.0	6.0	6.0	M3	M3	8.0	
TH-11	11.0	6.0	6.1				
TH-12	12.7	6.0	6.4	M3	M3	10.0	
TH-12A	12.0	4.7	6.4				
TH-14	14.0	6.0	6.0				
TH-14C	14.0	4.75	4.0				
TH-15	15.0	6.0	6.0				
TH-16	16.0	6.0	6.1				
TH-17.5	17.5	6.0	6.0				
TH-17.5A	17.5	4.75	6.0				


PART NO	A	B	C	D1 SCREW	D2 SCREW	F	PACKAGE
TH-18A	18.4	6.0	6.1	M3	M3	10.0	1000
TH-20	20.0	6.0	6.1	M3	M3	10.0	500
TH-21	21.0	6.0	6.0	M3	M3	10.5	1000
TH-22	22.0	6.0	6.4	M3	M3	10.0	500
TH-25	25.2	6.0	6.5				
TH-30	30.0	6.0	6.5	M3	M3	10.5	
TH4-10	10.1	6.1	6.1	M4	M3	8.0	1000
TH4-12C	12.7	6.0	6.0	M4	M4	8.0	
TH4-13	13.1	6.1	6.0	M4	M4	10.5	
TH4-15	15.0	6.0	6.0	M4	M4	10.0	
TH4-17C	17.5	8.0	5.5	M4	M4	8.0	
TH4-19	19.1	8.0	5.5	M4	M4	8.0	500
TH4-25	25.1	6.1	6.5	M4	M4	10.3	
TH4-30	30.2	6.1	6.4	M4	M4	10.0	
TH4-37	37.0	8.0	5.5	M4	M4	8.0	200
TH4-45	45.3	6.0	6.4	M4	M4	10.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




六角型間隔柱 SPACER SUPPORT — 3-123-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE TAPPING SCREW




PART NO	A	B	C	D SCREW	E	F	USE TAPPING SCREW	PACKAGE
TH2−4	4.0	5.0	2.8	M2	ø1.6	2.8	M2	2000
TH−15A	15.0	5.0	5.0	#6−32	ø2.8	10.0	#6−32	1000



六角型間隔柱 SPACER SUPPORT — 3-123-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D SCREW	PACKAGE
THK−35	35.0	6.0	6.0	M3	1000
THK−36M	36.0	6.0	6.0		
THK−37M	37.0	6.0	6.0		



六角型間隔柱 SPACER SUPPORT — 3-123-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D SCREW	PACKAGE
THB−29	29.2	ø8.0	5.0	#6−32	1000




六角型間隔柱 SPACER SUPPORT — 3-123-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	B	C	D SCREW	PACKAGE
★ THM−5	5.0	8.0	6.0	M5	2000
THM−17	17.0	5.0	5.0	#6−32	1000



六角型間隔柱 SPACER SUPPORT — 3-123-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D SCREW	PACKAGE
THC−13	13.0	5.0	5.0	#6−32	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




六角型間隔柱 SPACER SUPPORT — 3-124-1

- MATERIAL: NYLON 66(UL), PPS(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- SCREW MATERIAL: BRASS




	PART NO	MATERIAL	A	B	C	D SCREW	F	PACKAGE
	TH3F-6R	N66	6.0	6.0	3.5	M3	2.9	500
	TH3F-712G	PPS	12.0	7.0	6.0	M3	4.0	
★	TH3F-653A	PPS	53.5	6.4	6.0	M3	7.0	200
★	TH4F-818	N66	18.0	8.0	6.0	M4	6.0	500
	THU6-712F	PPS	12.0	7.0	6.0	#6-32	4.5	



六角型間隔柱 SPACER SUPPORT — 3-124-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- SCREW MATERIAL: BRASS




PART NO	A	B	C	D SCREW	PACKAGE
THT-6U12	12.0	6.5	6.0	#6-32	500




六角型間隔柱 SPACER SUPPORT — 3-124-3

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- SCREW MATERIAL: BRASS




	PART NO	A	B	C	D SCREW	PACKAGE
★	HTH-22A	22.0	6.4	5.0	M3	200
	HTH-77K	77.5	6.4	7.0	M3	100
	HTH-81C	81.5	6.4	7.0	M3	



P.C.B 板支撐柱 P.C.B SUPPORT — 3-124-4

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




	PART NO	A	B	C	PACKAGE
	DPX-02	2.3	ø2.0	ø3.0	2000
★	DPX-5	2.8	ø1.6	ø5.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




間隔柱 SPACER SUPPORT — 3-125-1

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CBD-10SA	10.0	14.65	ø8.0	ø4.6	1.2	1000



間隔柱 SPACER SUPPORT — 3-125-2

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CBD-21HR	21.3	24.85	ø12.0	ø3.8	0.6~0.8	500
CBD-28AP	28.5	32.05	ø10.0	ø3.8	0.6~0.8	
CBD-28PQ	28.8	32.6	ø10.0	ø3.8	0.9~1.0	
CBD-29M	29.5	33.05	ø10.0	ø3.8	0.6~0.8	
CBD-31MA	31.5	35.05	ø10.0	ø3.8	0.6~0.8	



間隔柱 SPACER SUPPORT — 3-125-3

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CBD-25A	25.4	29.9	ø13.3	ø4.5	0.6~0.8	500
CBD-27F	27.2	31.1	ø15.0	ø4.8	0.8~1.0	
CBD-33AC	33.1	36.75	ø13.4	ø4.6	0.5~0.6	
CBD-33P	33.0	36.9	ø13.3	ø4.6	0.5~0.8	



間隔柱 SPACER SUPPORT — 3-125-4

- MATERIAL: PC(UL)
- COLOR: CLEAR

Built-In Anti-Spin Function

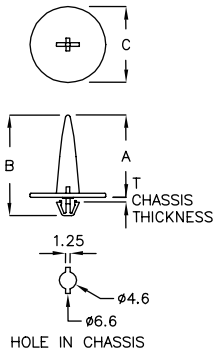


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
KFD-21A	21.75	26.65	ø20.0	0.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

間隔柱 SPACER SUPPORT 3-126-1



- MATERIAL: PC(UL)
- COLOR: CLEAR

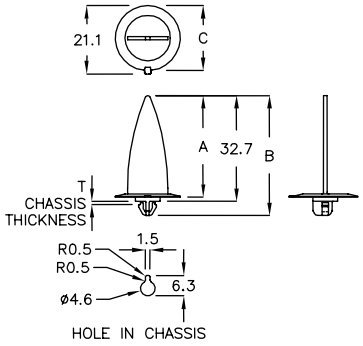


Built-In Anti-Spin Function

PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
KFL-31FD	31.4	37.0	ø20.0	0.6~0.8	500

間隔柱 SPACER SUPPORT 3-126-2



- MATERIAL: PC(UL)
- COLOR: CLEAR

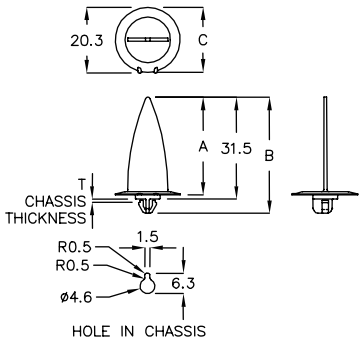


Built-In Anti-Spin Function

PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
KFJ-30G	30.2	35.8	ø20.0	0.8	500

間隔柱 SPACER SUPPORT 3-126-3




- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CBL-42CY	42.6	47.1	ø15.0	ø5.0	1.2~1.3	500

間隔柱 SPACER SUPPORT 3-126-4




- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CBLA-18JL	18.5	22.8	ø18.0	ø4.6	0.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



間隔柱 SPACER SUPPORT 3-127-1

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CBL-42MK	40.0	44.1	ø15.0	ø5.2	1.0~1.3	500



間隔柱 SPACER SUPPORT 3-127-2

- MATERIAL: PC(UL)
- COLOR: WHITE, CLEAR

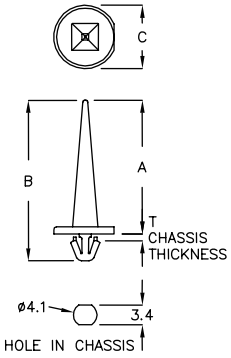


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
FXA-30Y	30.5	35.1	ø11.0	0.8~1.0	500
FXA-35PC	35.8	40.4	ø11.0	1.05	
FXA-39A	39.4	44.0	ø11.0	1.05	



間隔柱 SPACER SUPPORT 3-127-3

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	B	C	H HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SUP-23A	24.0	28.9	ø20.0	ø5.0	0.6~0.8	500
SUP-34D	34.0	38.9	ø20.0	ø5.0	0.6~0.8	



間隔柱 SPACER SUPPORT 3-127-4

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	C	D	E	PACKAGE
FJW-18PQ	18.8	10.0	ø4.0	ø6.5	500
FJW-25T	25.2	10.0	ø4.0	ø6.5	
FJW-27AK	27.2	10.0	ø4.0	ø6.5	
FJW-27HM	27.2	10.0	ø4.3	ø8.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



間隔柱 SPACER SUPPORT 3-128-1

- MATERIAL: PC(UL)
- COLOR: WHITE




PART NO	A	C	PACKAGE
CBPA−18C	18.2	ø18.0	200




間隔柱 SPACER SUPPORT 3-128-2

- MATERIAL: PC(UL)
- COLOR: WHITE
- ADHESIVE TAPE: 3M




PART NO	A	B	C	PACKAGE
FZA−12TC	13.05	20.0	20.0	500
FZA−26FD	26.15	20.0	20.0	
FZA−30PJ	30.15	20.0	25.0	




間隔柱 SPACER SUPPORT 3-128-3

- MATERIAL: PC(UL)
- COLOR: CLEAR

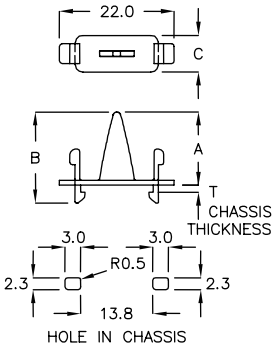


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
DCRJ−14MK	14.0	17.4	7.0	1.0~1.2	500




間隔柱 SPACER SUPPORT 3-128-4

- MATERIAL: PC(UL)
- COLOR: WHITE

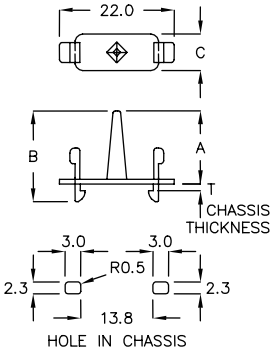


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
DCR−14H	14.0	17.4	7.0	1.0~1.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




間隔柱 SPACER SUPPORT 3-129-1

- MATERIAL: PC(UL)
- COLOR: CLEAR
- ADHESIVE TAPE: GENERAL




PART NO	A	B	C	PACKAGE
FJH−12YK	12.55	20.0	20.0	500
FJH−19CY	19.25	20.0	20.0	




間隔柱 SPACER SUPPORT 3-129-2

- MATERIAL: PC(UL)
- COLOR: CLEAR
- ADHESIVE TAPE: GENERAL




PART NO	A	B	C	PACKAGE
FJH−29K	29.65	20.0	20.0	500
FJH−30	30.15	20.0	20.0	
FJH−33M	33.72	20.0	20.0	



間隔柱 SPACER SUPPORT 3-129-3

- MATERIAL: PC(UL)
- COLOR: CLEAR
  ADHESIVE TAPE: 3M




PART NO	A	B	C	PACKAGE
FJH−14CR	14.35	22.0	27.0	500
FJH−19KT	19.9	22.0	27.0	
FJH−20MA	20.7	30.0	25.0	
FJH−21DP	21.85	20.0	20.0	
FJH−21GK	21.65	22.0	27.0	
FJH−21MD	21.65	22.0	27.0	



間隔柱 SPACER SUPPORT 3-129-4


- MATERIAL: PC(UL)
- COLOR: CLEAR




此產品亦可貼背膠
OPTIONAL WITH ADHESIVE TAPE ON BASE

PART NO	A	D	E	PACKAGE
FMY−22C	22.0	ø4.2	ø3.7	500

間隔柱 SPACER SUPPORT 3-130-1



- MATERIAL: PC(UL)
- COLOR: CLEAR




此產品亦可貼背膠
OPTIONAL WITH ADHESIVE TAPE ON BASE

PART NO	A	D	E	PACKAGE
FMY-21TC	21.5	ø4.2	ø3.7	200
FMY-22KP	22.0	ø4.2	ø3.7	

間隔柱 SPACER SUPPORT 3-130-2



- MATERIAL: PC(UL)
- COLOR: CLEAR




此產品亦可貼背膠
OPTIONAL WITH ADHESIVE TAPE ON BASE

PART NO	A	D	E	PACKAGE
FMG-19LH	19.9	ø5.5	ø3.9	500

間隔柱 SPACER SUPPORT 3-130-3



- MATERIAL: PC(UL)
- COLOR: CLEAR




此產品亦可貼背膠
OPTIONAL WITH ADHESIVE TAPE ON BASE

PART NO	A	D	E	PACKAGE
FMQ-21MC	21.5	ø4.2	ø3.5	500

間隔柱 SPACER SUPPORT 3-130-4



- MATERIAL: PC(UL)
- COLOR: CLEAR

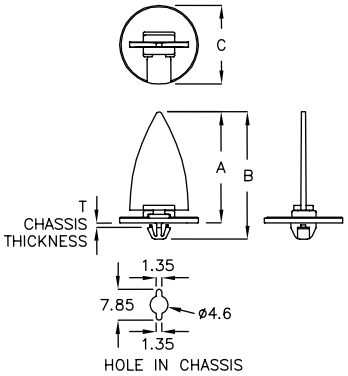


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
KFDX-28M	28.3	32.4	ø20.0	0.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

04

LED座
LED HOUSING

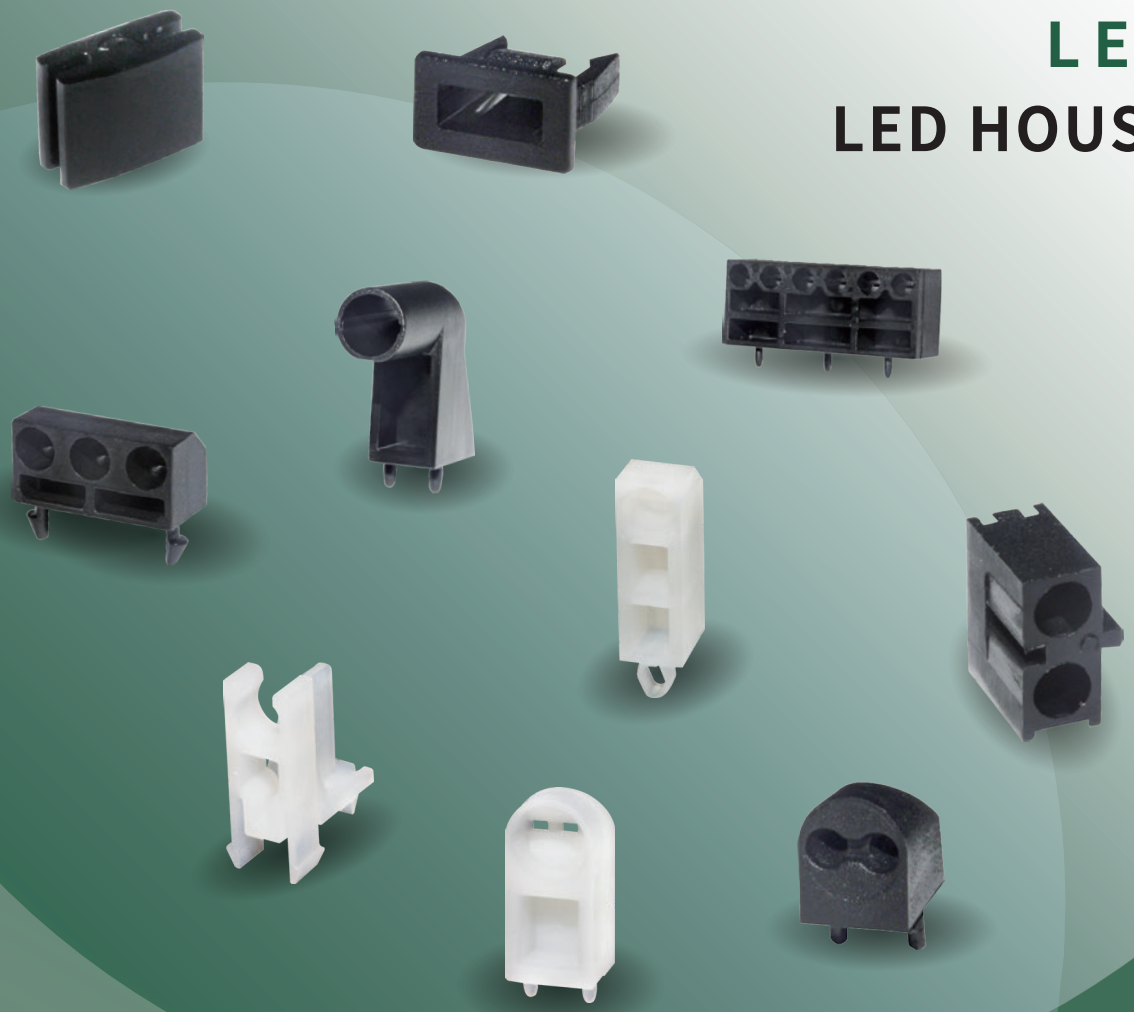

LED套
LED HOLDER






LED 套 LED HOLDER 4-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
LEQ-9	6.6	2000







LED 套 LED HOLDER 4-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
LEQ-1	2.6	2000






LED 套 LED HOLDER 4-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
LED-2x10	7.8	1000

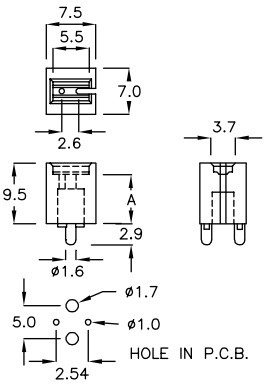




LED 套 LED HOLDER 4-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR QUADRATE 2PIN LED			
PART NO	A	B	PACKAGE
LEQ-3T	3.0	6.5	2000
LEQ-4T	4.0	7.5	






LED 套 LED HOLDER 4-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
LED-13.5	13.5	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
LEJ-3	3.3	2000



LED 座 LED HOUSING 4-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

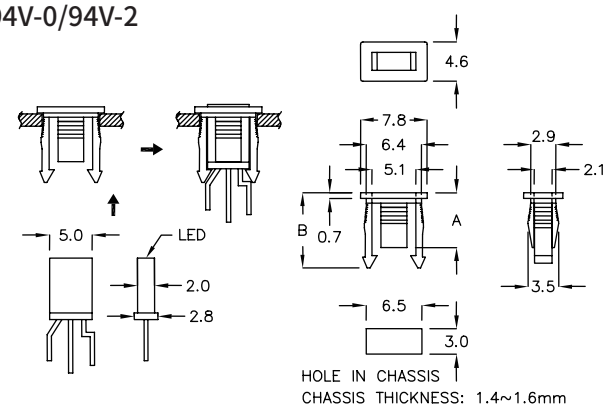


FOR QUADRATE 2PIN,3PIN LED			
PART NO	A	B	PACKAGE
SLED-1	5.2	7.8	2000
SLED-2M	6.2	8.6	




LED 座 LED HOUSING 4-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

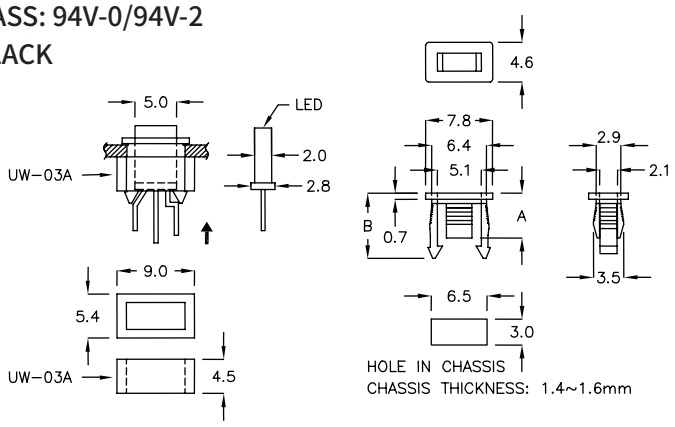


FOR QUADRATE 2PIN,3PIN LED			
PART NO	A	B	PACKAGE
SLED-2	5.2	7.6	2000

ALSO CAN ASSEMBLE WITH UW-03A



LED 套 LED HOLDER 4-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




FOR QUADRATE 2PIN LED			
PART NO	A	B	PACKAGE
EDH-04	4.0	5.1	2000
EDH-4A	4.5	5.1	
EDH-9CF	9.5	5.1	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED		
PART NO	A	PACKAGE
LED-3x3	3.2	2000
LED3x4	4.0	




LED 套 LED HOLDER 4-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function




FOR QUADRATE 3PIN LED		
PART NO	A	PACKAGE
LED-3x2KQ	2.1	2000



LED 套 LED HOLDER 4-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED				
PART NO	A	B	C	PACKAGE
QLG-4S	3.8	7.6	3.5	2000



LED 套 LED HOLDER 4-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED				
PART NO	A	D	E	PACKAGE
QLE-1MH	1.5	ø1.4	3.7	2000
QLE-12C	12.0	ø1.45	3.9	1000



LED 套 LED HOLDER 4-4-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED			
PART NO	A	D	PACKAGE
QLE-3	3.0	ø1.1	2000
QLE-4B	3.8		
QLE-5B	5.1		
QLE-5M	5.5		
QLE-7B	7.0		
QLE-8B	8.0		
QLE-10	10.0	ø1.1	1000
QLE-12	12.0	ø1.45	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED			
PART NO	A	D	PACKAGE
QLE-4	4.0	ø1.1	2000
QLE-5	5.0		
QLE-6	6.0		
QLE-7	7.0		
QLE-8	8.0		
QLE-9	9.0	ø1.1	1000
QLE-10A	10.0	ø1.45	
QLE-11	11.0		
QLE-12A	12.0	ø1.1	
QLE-13	13.0		
QLE-14	14.0		
QLE-15	15.0		




LED 套 LED HOLDER 4-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




FOR QUADRATE 3PIN LED			
PART NO	A	D	PACKAGE
QLEH-4A	4.5	ø1.1	2000



LED 套 LED HOLDER 4-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function




FOR QUADRATE 3PIN LED						
PART NO	A	B	C	D	F	PACKAGE
QLE-02	2.0	3.5	7.3	1.0	1.2	2000
QLE-3HA	3.0	3.0	6.5	1.0	2.2	



LED 套 LED HOLDER 4-5-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

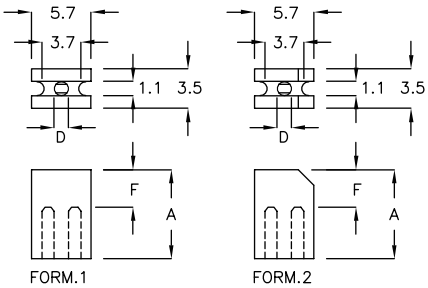

Built-In Clamp Function


FOR QUADRATE 3PIN LED					
PART NO	A	F	D	FORM	PACKAGE
QLE-8LR	8.5	3.5	ø1.1	2	1000
QLE-9AK	9.0	4.0	ø1.1	1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 套 LED HOLDER 4-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED		
PART NO	A	PACKAGE
QLK-5M	5.4	2000
QLK-6	6.0	
QLK-7	6.9	
QLK-8	8.0	
QLK-9	9.0	1000
QLK-10	10.0	
QLK-11	11.0	
QLK-12	12.0	
QLK-13	13.0	
QLK-14	14.0	
QLK-15	14.9	
QLK-16	15.9	
QLK-17	17.0	
QLK-18	18.0	
QLK-18A	18.5	
QLK-19	19.0	



LED 套 LED HOLDER 4-6-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

FOR QUADRATE LED 3PIN			
PART NO	A	D	PACKAGE
QLB-9NC	9.0	ø1.1	1000




LED 套 LED HOLDER 4-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR QUADRATE 3PIN LED			
PART NO	A	B	PACKAGE
QLQ-6	6.0	8.0	2000



LED 套 LED HOLDER 4-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

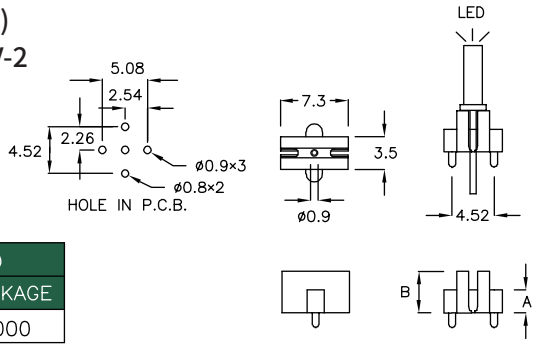

Built-In Clamp Function


FOR QUADRATE 3PIN LED			
PART NO	A	B	PACKAGE
QLK-4T	2.5	4.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

FOR ø5 4PIN LED				
PART NO	A	B	C	PACKAGE
EDE—3A	3.5	3.0	5.8	2000
EDE—04	4.0	3.0	5.8	
EDE—4A	4.5	3.0	5.8	
EDE—05	5.0	3.0	5.8	
EDE—5A	5.5	3.0	5.8	


Built—In Clamp Function

FOR ø5 4PIN LED				
PART NO	A	B	C	PACKAGE
EDE—06	6.0	3.0	5.8	2000
EDE—6A	6.5	3.0	5.8	
EDE—07	7.0	3.0	5.8	
EDE—7A	7.5	3.0	5.8	
EDE—08	8.0	3.0	5.8	
EDE—8A	8.5	3.0	5.8	
EDE—09	9.0	3.0	5.8	
EDE—10A	10.5	3.0	5.8	
EDE—11	11.0	3.0	5.8	
EDE—11A	11.5	3.0	5.8	
EDE—12A	12.5	3.0	5.8	
EDE—15	15.0	3.0	5.8	



LED 套 LED HOLDER 4-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

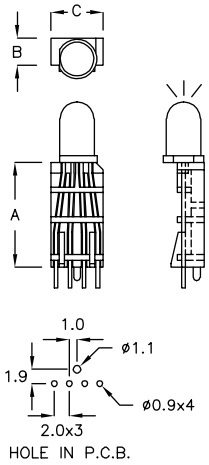


FOR ø5 4PIN LED				
PART NO	A	B	C	PACKAGE
EES—15	15.0	3.9	7.5	2000



LED 座 LED HOUSING 4-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



Built—In Clamp Function


FOR QUADRATE 2PIN LED			
PART NO	A	B	PACKAGE
EDF—09	9.0	11.7	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




FOR QUADRATE 2PIN LED			
PART NO	A	B	PACKAGE
EKL-01	4.4	1.27	1000




LED 座 LED HOUSING 4-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

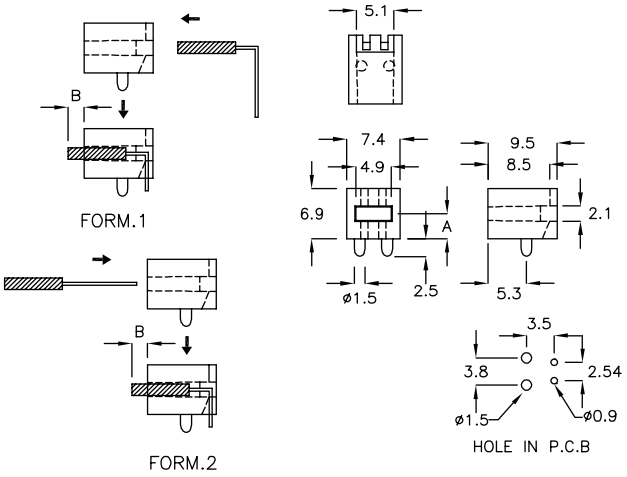


FOR QUADRATE 2PIN LED				
PART NO	A	B	FORM	PACKAGE
LEA-5	3.45	0	1	500
LEA-5A	3.45	4.3	2	
LEA-5C	3.45	2.8	2	




LED 座 LED HOUSING 4-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

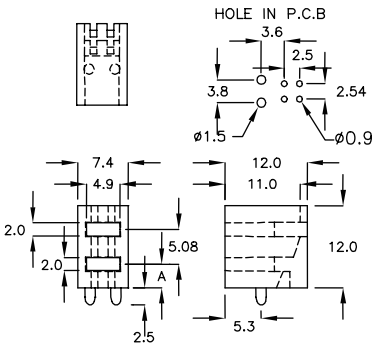


FOR QUADRATE 2 PIN LED		
PART NO	A	PACKAGE
2LEA-5	3.45	500



LED 座 LED HOUSING 4-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

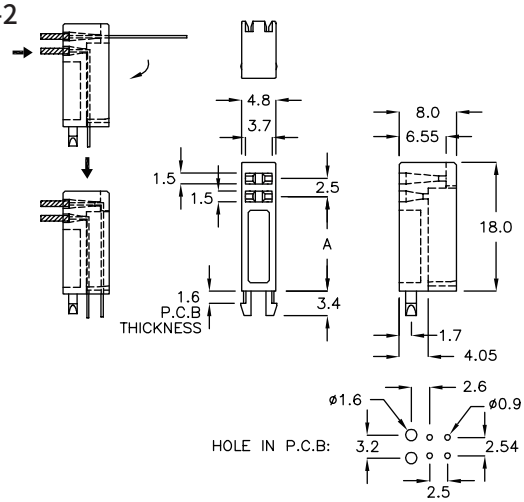

FOR QUADRATE 2 PIN LED		
PART NO	A	PACKAGE
2LEA-3AK	13.25	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDR—4A	4.5	8.2	1000

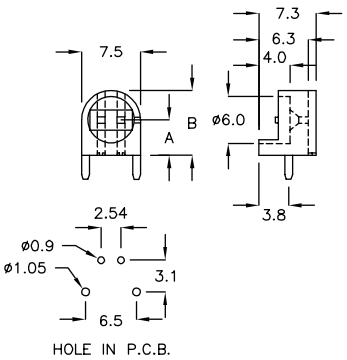




LED 座 LED HOUSING 4-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
EEL—4TQ	4.0	7.8	1000

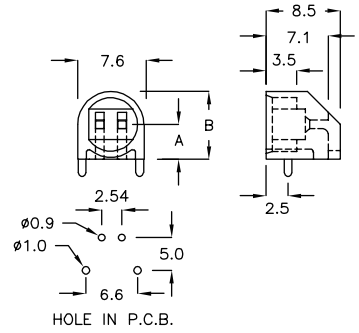





LED 座 LED HOUSING 4-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

Built—In Clamp Function

FOR ø5 , ø3 2PIN LED							
PART NO	A	B	C	D	E	F	PACKAGE
LED—2F	3.0	5.6	ø5.0	ø4.1	2.0	3.5	1000







LED 座 LED HOUSING 4-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED					
PART NO	A	B	C	F	PACKAGE
LED—3F	3.0	4.8	ø5.0	4.2	1000






LED 座 LED HOUSING 4-9-5


- MATERIAL: NYLON 66(UL)+GREEN LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2 PIN LED						
PART NO	A	B	C	D	E	PACKAGE
LED—3F—10	3.0	5.6	3.5	4.2	4.9	500

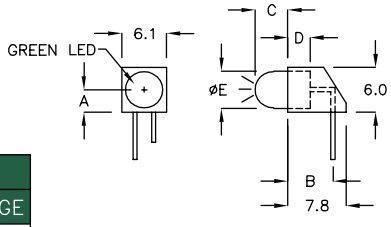

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

FOR ø5 2PIN LED				
PART NO	A	B	C	PACKAGE
LED-5F	4.3	8.4	8.6	1000






LED 座 LED HOUSING 4-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
QLC-3F	3.9	7.0	2000






LED 座 LED HOUSING 4-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

FOR ø5 2 PIN LED		
PART NO	A	PACKAGE
LEH5-4.5	4.5	1000
LEH5-6	6.0	
LEH5-7	7.0	
LEH5-8	8.0	
LEH5-9	9.0	
LEH5-10	10.0	






LED 座 LED HOUSING 4-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

FOR ø5 2PIN LED				
PART NO	A	B	D	PACKAGE
LEH5-3T	3.0	2.5	ø1.0	1000
LEH5-4.5T	4.5	2.5	ø1.1	
LEH5-6T	6.0	2.5	ø1.0	
LEH5-7T	7.0			
LEH5-8T	8.0	2.9	ø1.0	
LEH5-9T	9.0			
LEH5-10T	10.0			
LEH5-12.5T	12.5			
LEH5-16T	16.0			

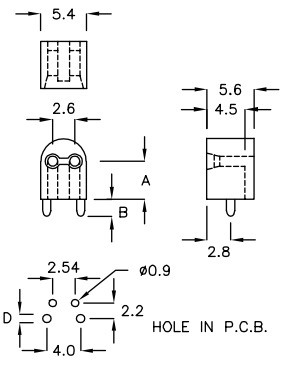


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

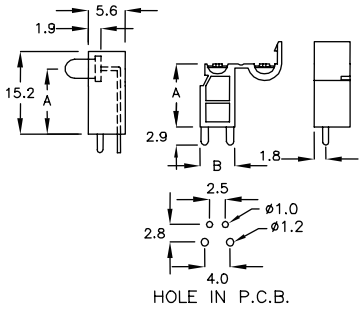


Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LJA—12A	12.5	5.4	500



LED 座 LED HOUSING 4-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

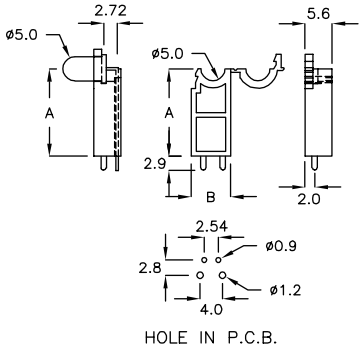


Built—In Clamp Function

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
QLJ—18	18.0	8.1	500




LED 座 LED HOUSING 4-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

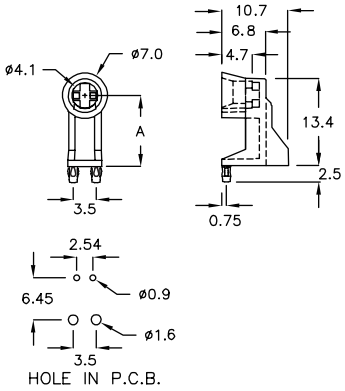


Built—In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
QQD—10A	10.9	500



LED 座 LED HOUSING 4-11-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

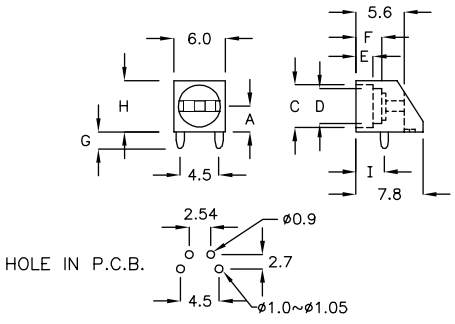

Built—In Clamp Function


FOR ø5 , ø3 2PIN LED									
PART NO	A	C	D	E	F	G	H	I	PACKAGE
LED—2C	3.0	ø5.0	ø4.1	2.7	4.2	3.2	6.0	3.3	1000
LED—2Y	3.0	ø5.0	ø4.1	2.0	3.0	3.2	6.0	3.4	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

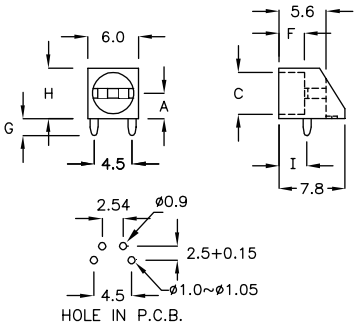

Built—In Clamp Function


FOR ø3 2PIN LED							
PART NO	A	C	F	G	H	I	PACKAGE
LED—3Y	4.0	ø4.1	1.4	2.5	7.0	3.3	1000
LED—3YK	4.0	ø3.3	1.4	2.5	7.0	3.3	
LED—4Y	3.0	ø4.1	1.4	1.5	6.0	3.3	




LED 座 LED HOUSING 4-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LED—5Y	3.0	500







LED 座 LED HOUSING 4-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
LED—4WK	4.0	1000

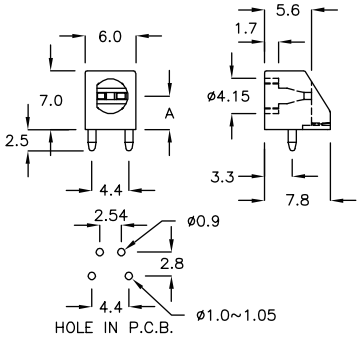





LED 座 LED HOUSING 4-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
ELA—01	3.0	500






LED 座 LED HOUSING 4-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LED—10Y	10.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
LEF5-5	5.1	1000






LED 座 LED HOUSING 4-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LEF-16HF	16.6	500






LED 座 LED HOUSING 4-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LMD-5A	5.1	7.3	1000







LED 座 LED HOUSING 4-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
EEW-6A	6.35	1000

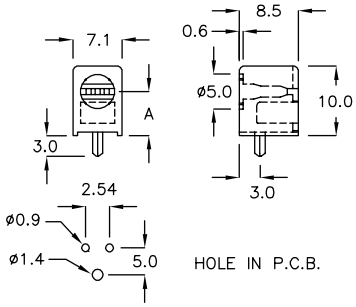




LED 座 LED HOUSING 4-13-5


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
LET3-4AK	4.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LET5-3T	3.3	1000






LED 座 LED HOUSING 4-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LET5-4.5T	3.8	1000

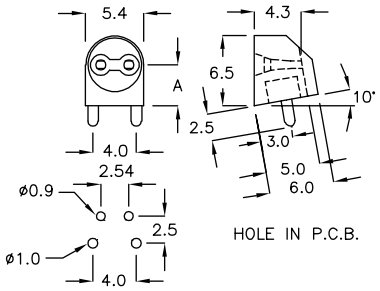




LED 座 LED HOUSING 4-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LET5-5A	6.4	1000

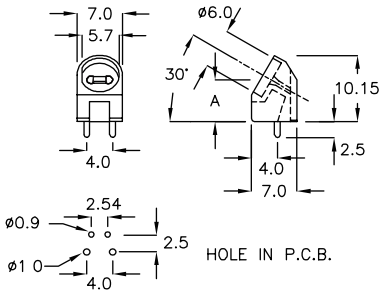




LED 座 LED HOUSING 4-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LET5-06	5.0	1000







LED 座 LED HOUSING 4-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LET5-2C	2.0	2000

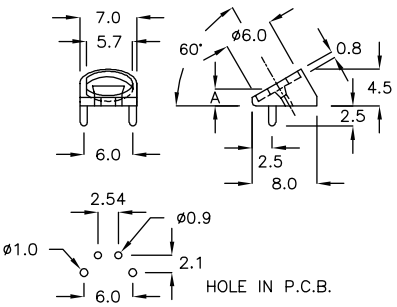

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LET5—4CK	4.0	1000

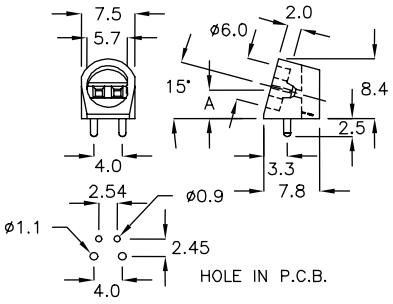




LED 座 LED HOUSING 4-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED								
PART NO	A	B	C	D	E	F	G	PACKAGE
LET5—2DF	2.0	2.0	5.0	2.3	8.65	2.65	75°	1000
LET5—3MQ	3.0	2.0	7.25	3.35	8.85	3.9	45°	

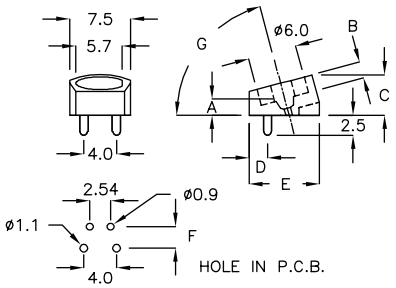





LED 座 LED HOUSING 4-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
QLC—3A	3.4	3.5	2000

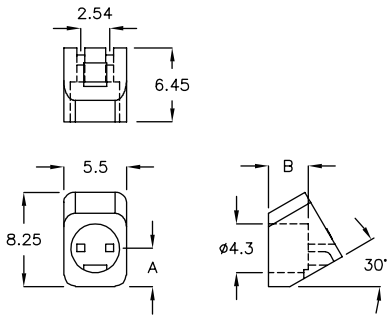





LED 座 LED HOUSING 4-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
QLX—3K	3.4	3.5	1000

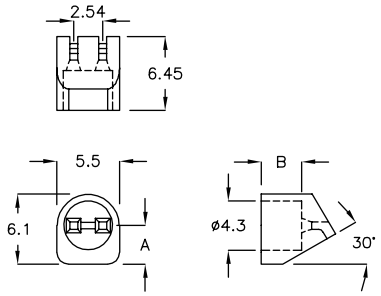




LED 座 LED HOUSING 4-15-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
EKF—1A	1.8	6.0	2000

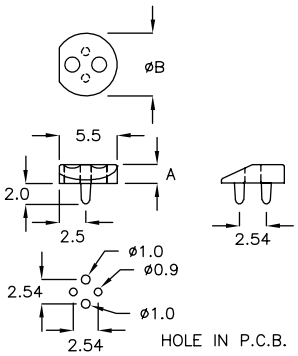

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





LED 座 LED HOUSING 4-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EEN-3A	4.3	5.5	1000

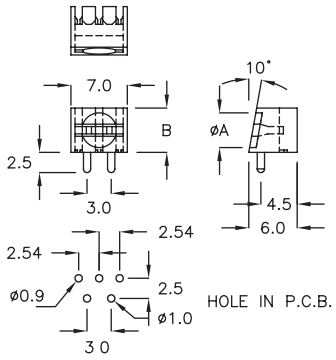




LED 座 LED HOUSING 4-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
QLA-05	4.1	3.45	2000






LED 座 LED HOUSING 4-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LEH5-4MT	4.5	500






LED 座 LED HOUSING 4-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
EDT-7A	9.5	1000

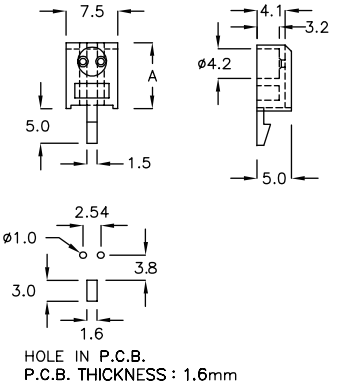




LED 座 LED HOUSING 4-16-5


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

FOR ø3 2PIN LED							
PART NO	A	B	C	D	E	F	PACKAGE
LEM3-16	16.0	18.5	ø4.1	5.0	5.6	3.0	500
LEM4-16	16.0	18.6	ø4.2	5.1	5.7	2.0	

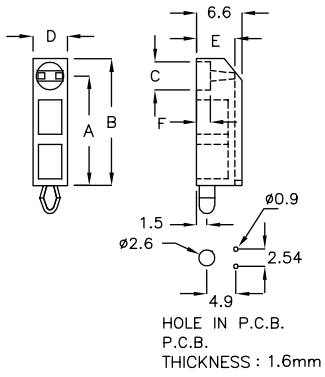

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





LED 座 LED HOUSING 4-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LEM4—20A	20.5	23.0	500







LED 座 LED HOUSING 4-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
EKC—20A	20.5	23.0	500

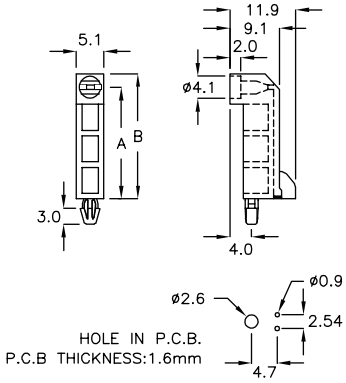




LED 座 LED HOUSING 4-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR QUADRATE 2PIN LED			
PART NO	A	B	PACKAGE
EDW—10	10.0	12.0	1000

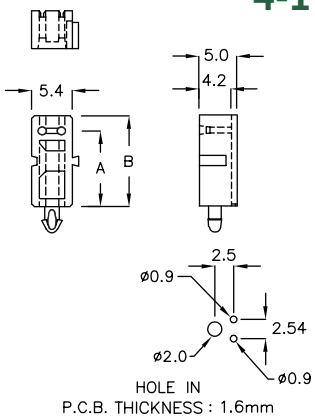





LED 座 LED HOUSING 4-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 3PIN LED		
PART NO	A	PACKAGE
LEX—18T	18.0	500

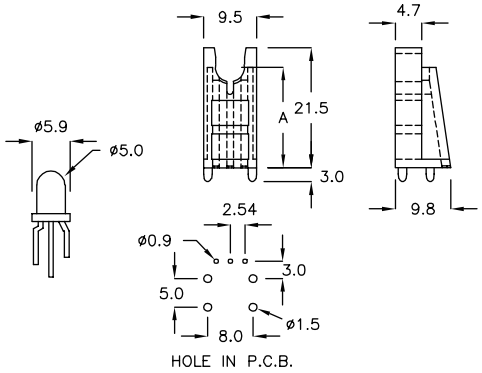




LED 座 LED HOUSING 4-17-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 2PIN LED			
PART NO	A	C	PACKAGE
LEW—18T	18.0	0.5	500
LEI—18T	18.0	0.3	

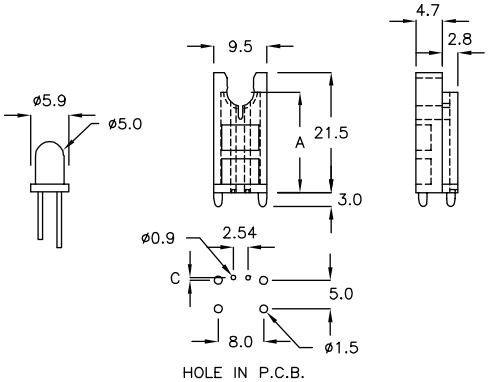


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

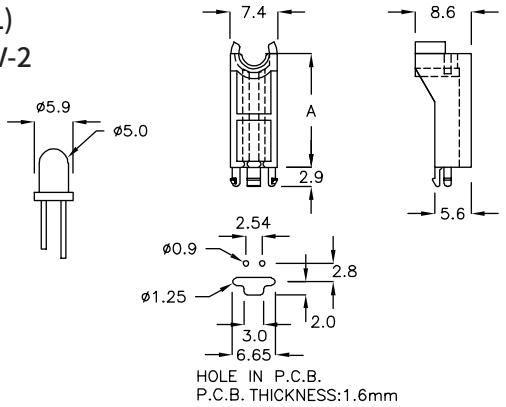


Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LJD—18	17.5	500



LED 座 LED HOUSING 4-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

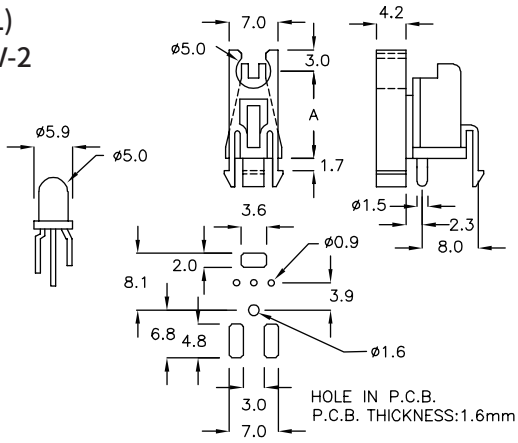


FOR ø5 3PIN LED		
PART NO	A	PACKAGE
LED—5AT	12.5	500




LED 座 LED HOUSING 4-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

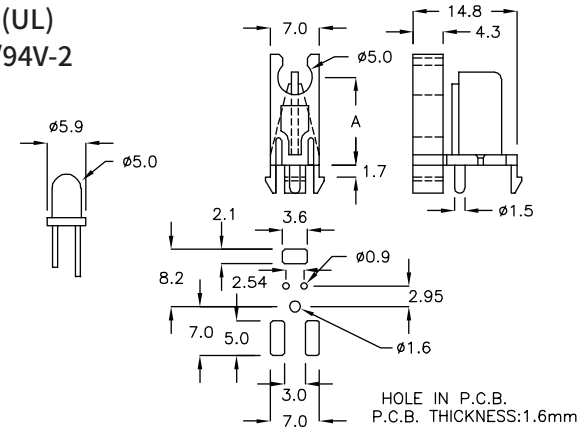


FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LED—5BT	12.5	500



LED 座 LED HOUSING 4-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

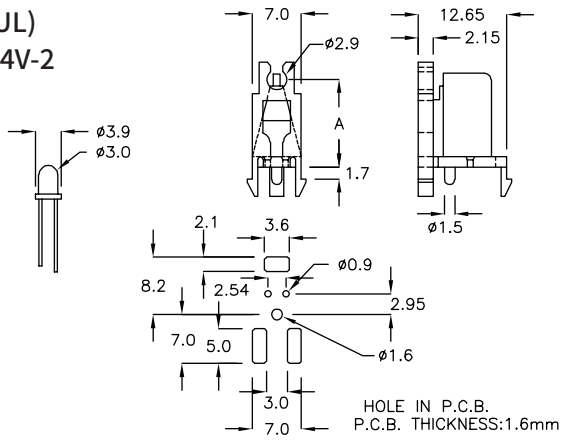


FOR ø3 2PIN LED		
PART NO	A	PACKAGE
LED—3BT	12.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

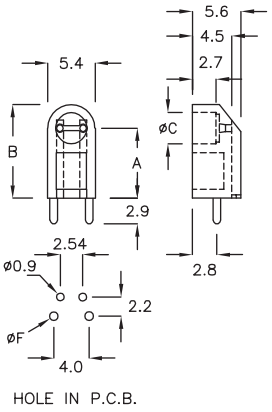


Built—In Clamp Function

FOR ø3 2PIN LED					
PART NO	A	B	C	F	PACKAGE
LEG3—6A	6.5	9.2	ø3.6	1.1	1000
LEG3—8T	8.0	10.7	ø3.6	1.0	
LEG3—10F	10.6	13.3	ø4.1	1.0	500
LEG3—11C	11.6	14.3	ø4.1	1.0	2000



LED 座 LED HOUSING 4-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

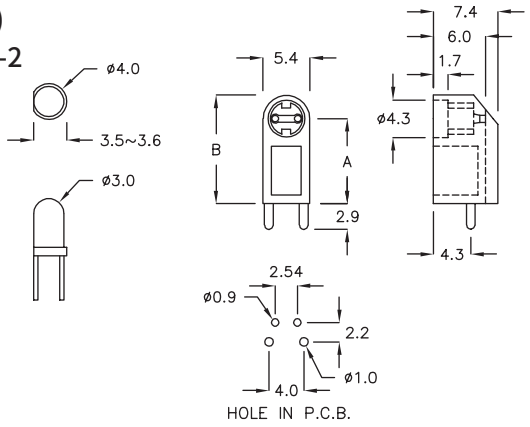


Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LEG3—9JQ	9.7	12.4	500



LED 座 LED HOUSING 4-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

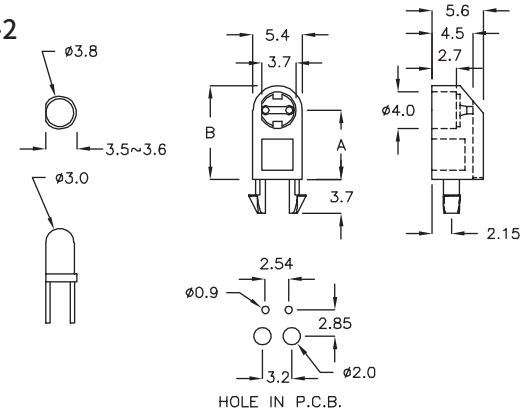


Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LEG3—7ML	7.5	10.2	1000



LED 座 LED HOUSING 4-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

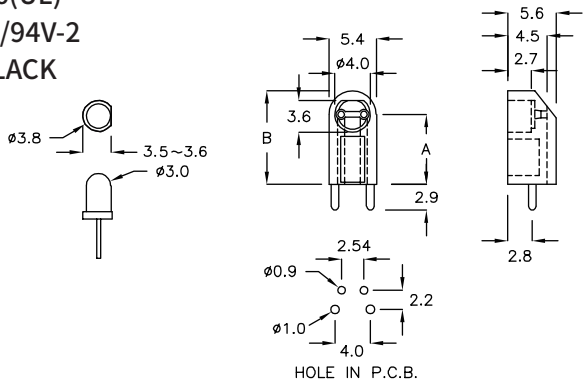

Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LEG3—10NQ	10.6	13.3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDJ—12	12.0	15.8	500

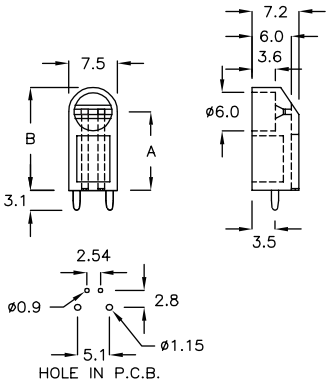




LED 座 LED HOUSING 4-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
EEM—14A	14.5	17.75	500






LED 座 LED HOUSING 4-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
EEH—9A	10.0	2000







LED 座 LED HOUSING 4-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
LEH5—19K	19.0	21.7	1000

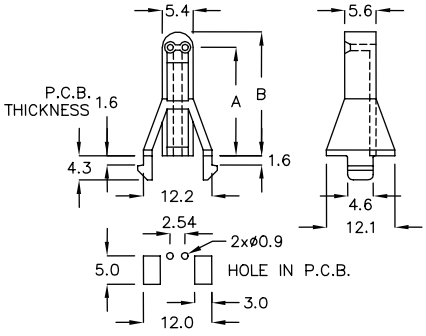




LED 座 LED HOUSING 4-20-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
EEC—03	3.05	5.6	1000

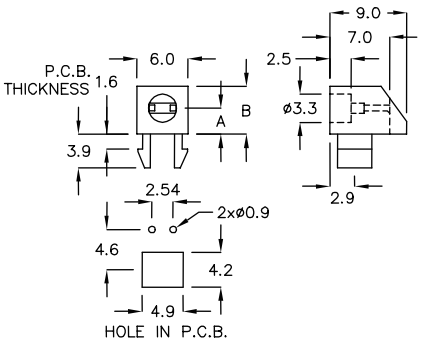

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
EEK—6A	6.1	9.1	5.2	1000

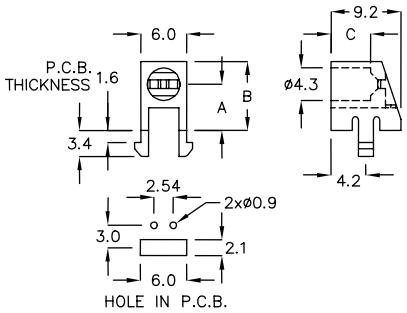




LED 座 LED HOUSING 4-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
EDL—03	3.0	7.0	1000

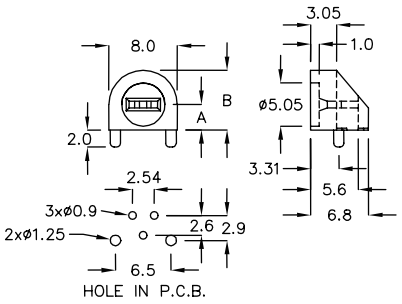




LED 座 LED HOUSING 4-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
EKN—05A	3.0	10.0	2.0	500

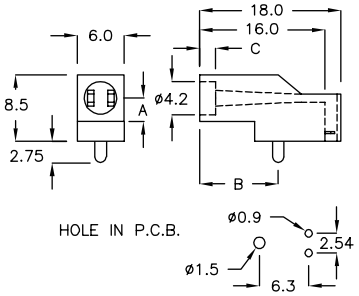





LED 座 LED HOUSING 4-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
QQR—7A	7.0	500

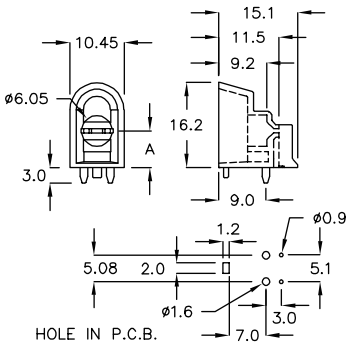




LED 座 LED HOUSING 4-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EDC—05	5.0	8.2	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
EKT-4C	4.0	6.3	2000






LED 座 LED HOUSING 4-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EKB-04	4.0	6.6	1000






LED 座 LED HOUSING 4-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
LER-4	4.0	8.0	1000

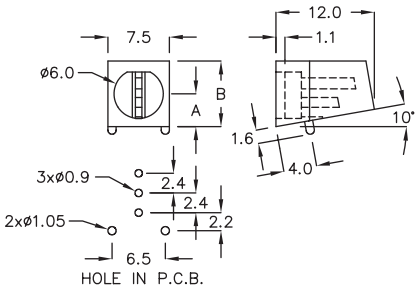





LED 座 LED HOUSING 4-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
LEKC-5A	4.0	7.6	500

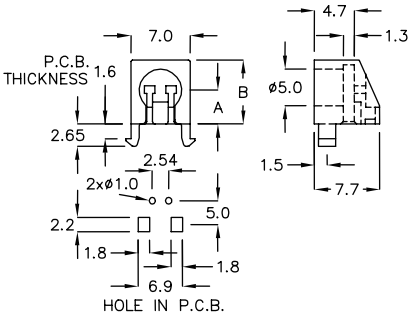




LED 座 LED HOUSING 4-22-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
LEK5-5TX	4.6	8.1	500

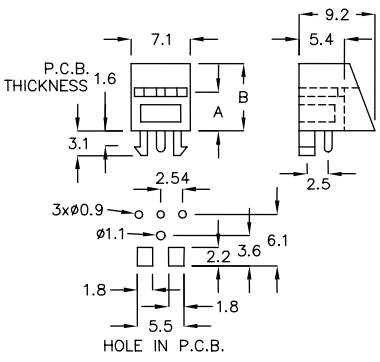


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
EDA-11	16.0	20.0	500



LED 座 LED HOUSING 4-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EDM-05	5.0	8.2	1000



LED 座 LED HOUSING 4-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

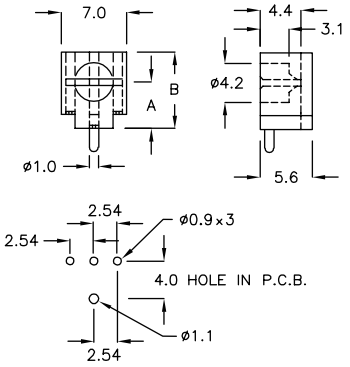


Built-In Clamp Function

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EDM-5C	5.0	8.2	1000



LED 座 LED HOUSING 4-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

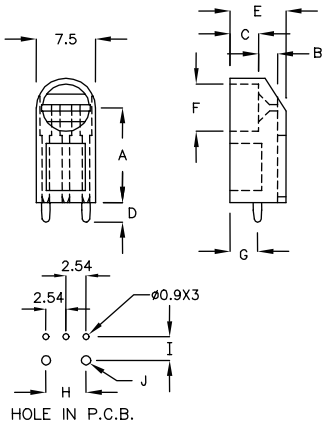

Built-In Clamp Function


FOR ø5 3PIN LED											
PART NO	A	B	C	D	E	F	G	H	I	J	PACKAGE
LEE-12	12.0	2.5	3.6	3.1	7.1	ø6.0	3.5	5.08	3.0	ø1.2	
LEK2-10T	9.5	2.0	4.0	3.0	7.1	ø6.1	3.5	5.08	3.0	ø1.2	
LEK2-12T	12.0	2.5	3.6	2.5	7.1	ø6.0	3.5	5.08	3.0	ø1.2	500
LEK2-13T	13.5	2.1	3.9	2.5	7.1	ø6.0	3.8	6.5	2.7	ø1.05	
LEK2-18T	17.5	2.4	3.6	3.0	7.0	ø6.0	3.5	5.08	3.0	ø1.2	
LEK4-4T	4.0	4.6	1.0	3.0	6.6	ø6.2	3.8	6.5	2.5	ø1.05	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

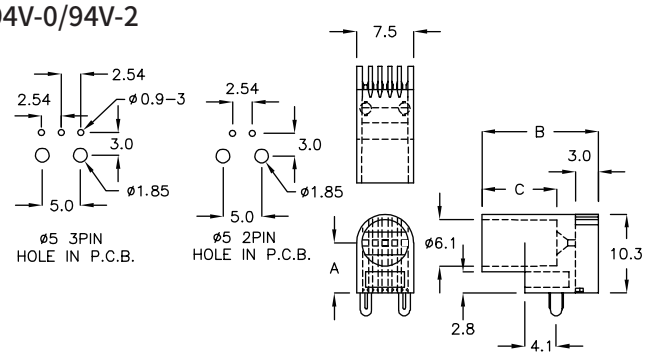


Built–In Clamp Function

FOR ø5 2PIN & ø5 3PIN LED				
PART NO	A	B	C	PACKAGE
QLT–6A	6.55	14.0	8.6	500
QLT–6C	6.55	14.0	6.1	



LED 座 LED HOUSING 4-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

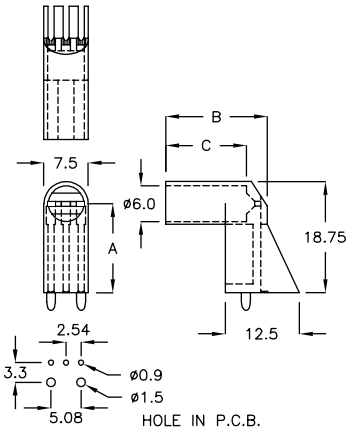


Built–In Clamp Function

FOR ø5 3PIN LED LAMP				
PART NO	A	B	C	PACKAGE
QLU–15	15.0	17.1	13.6	500



LED 座 LED HOUSING 4-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

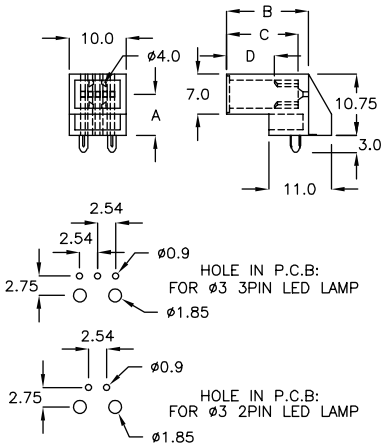


Built–In Clamp Function

FOR ø3 3PIN, 2PIN LED LAMP					
PART NO	A	B	C	D	PACKAGE
QBT–7A	7.25	14.4	12.6	8.4	500
QBT–7C	7.25	14.4	7.6	3.4	
QBT–7D	7.25	14.4	6.6	2.4	
QBT–7F	7.25	8.4	6.6	2.4	
QBT–7K	7.25	13.4	11.6	7.4	



LED 座 LED HOUSING 4-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




FOR ø5 3PIN, 2PIN LED				
PART NO	A	B	C	PACKAGE
LEA–01	10.0	ø7.4	ø6.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




FOR ø5 3PIN LED							
PART NO	A	B	C	D	E	F	PACKAGE
LEK2-4.5T	4.5	2.1	4.0	7.1	3.2	2.8	1000
LEK4-4.5T	4.5	4.5	1.0	6.5	2.0	2.0	



LED 座 LED HOUSING 4-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

FOR ø5 3PIN LED								
PART NO	A	B	C	D	E	F	G	PACKAGE
LEU-06	6.0	10.0	ø1.0	4.3	2.6	6.0	ø6.2	500
LEU-09	9.0	13.0	ø1.2	3.5	2.5	5.5	ø6.0	
LEU-10	10.0	14.0	ø1.0	4.0	2.6	5.5	ø6.0	



LED 座 LED HOUSING 4-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




FOR ø5 3PIN LED									
PART NO	A	B	C	D	F	G	H	J	PACKAGE
LEK4-3T	3.0	4.0	1.0	5.0	3.0	3.0	ø1.2	6.0	1000
LEY-03	3.5	4.0	1.0	5.0	3.0	2.7	ø1.2	6.5	



LED 座 LED HOUSING 4-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

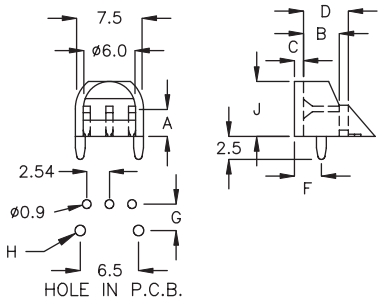


Built-In Clamp Function

FOR ø5 3PIN LED									
PART NO	A	B	C	D	F	G	H	J	PACKAGE
LEK4-3TW	3.0	4.0	1.0	5.0	3.0	3.0	ø1.2	6.0	1000



LED 座 LED HOUSING 4-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

FOR ø3 3PIN LED									
PART NO	A	B	C	D	E	F	G	H	PACKAGE
EKM—05	5.0	3.8	4.0	7.3	4.0	6.1	3.1	7.0	1000




LED 座 LED HOUSING 4-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
LEK4—2T	3.0	4.0	1000



LED 座 LED HOUSING 4-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
LEC—01	9.2	13.5	1000



LED 座 LED HOUSING 4-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EEB—09	9.0	12.0	500



LED 座 LED HOUSING 4-26-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



Built—In Clamp Function


FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
EEB—10	10.0	13.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø5 3PIN LED		
PART NO	A	PACKAGE
EDQ-07	7.0	1000



LED 座 LED HOUSING 4-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
EEJ-09	9.0	500



LED 座 LED HOUSING 4-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

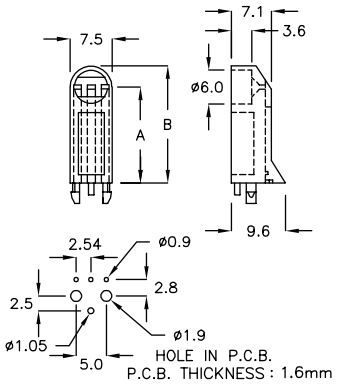


Built-In Clamp Function

FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
EEF-17	17.0	20.9	500




LED 座 LED HOUSING 4-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

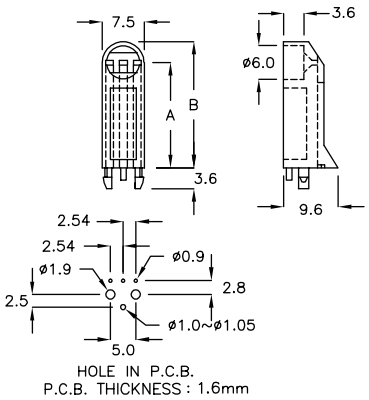

Built-In Clamp Function


FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
EEF-18A	18.7	22.4	500
EEF-18C	18.4	22.1	



LED 座 LED HOUSING 4-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 3PIN LED					
PART NO	A	B	C	D	PACKAGE
LEK2-7TX	7.0	10.8	ø6.2	9.5	500
LEK2-10TX	10.0	13.8	ø6.0	12.1	
LEK2-13TX	13.5	17.3	ø6.0	12.1	

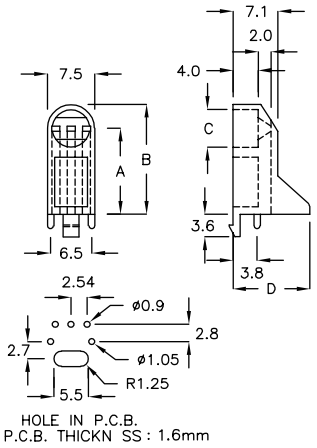


HOLE IN P.C.B.
P.C.B. THICKN SS : 1.6mm



LED 座 LED HOUSING 4-28-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

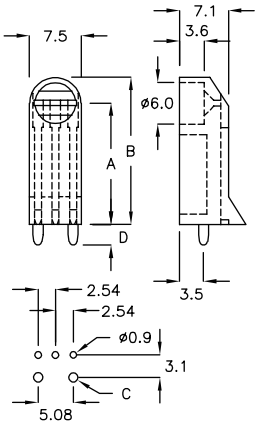

HOLE IN P.C.B.
P.C.B. THICKNESS : 1.6mm


Built-In Clamp Function

FOR ø5 3PIN LED					
PART NO	A	B	C	D	PACKAGE
LEK2-5TW	5.0	8.75	ø1.5 ~ ø1.6	3.0	1000
LEK2-6TW	6.0	9.95			
LEK2-7TW	7.0	10.75		3.0	500
LEK2-8TW	8.0	11.75			
LEK2-9TW	9.0	12.75			
LEK2-11TW	11.0	14.75			
LEK2-14TW	14.0	17.75			
LEK2-15TW	15.0	18.75			
LEK2-16TW	16.0	19.75			
LEK2-17TW	17.0	20.75			
LEK2-18TW	17.5	21.25	ø1.2	3.0	
LEK2-18LTW	18.0	21.75	ø1.5 ~ ø1.6	3.0	500
LEK2-19TW	19.0	22.75			
LEK2-20TW	20.0	23.75			
LEK2-11MTW	11.5	15.45	ø1.2	2.5	
LEN-05	5.0	8.75	ø1.0	3.0	1000



LED 座 LED HOUSING 4-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

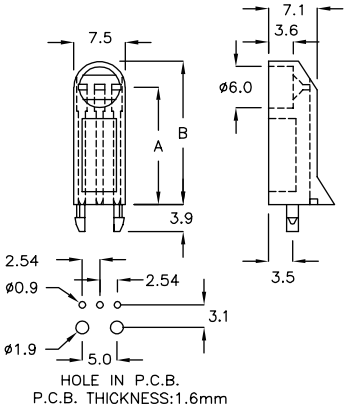

HOLE IN P.C.B.
P.C.B. THICKNESS:1.6mm

Built-In Clamp Function


FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
LEK2-17TP	17.0	20.75	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

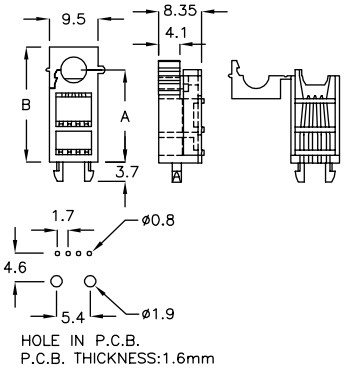


Built—In Clamp Function

FOR ø5 4PIN LED			
PART NO	A	B	PACKAGE
LEW—17D	17.0	21.5	500
LEW—18A	18.0	22.5	




LED 座 LED HOUSING 4-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

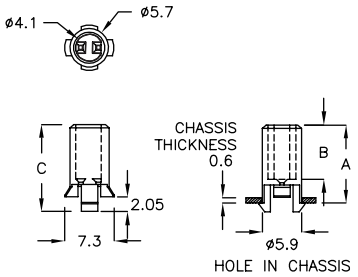


FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
QLY—2A	11.45	8.0	12.8	500
QLY—7K	9.95	6.5	11.3	1000




LED 座 LED HOUSING 4-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

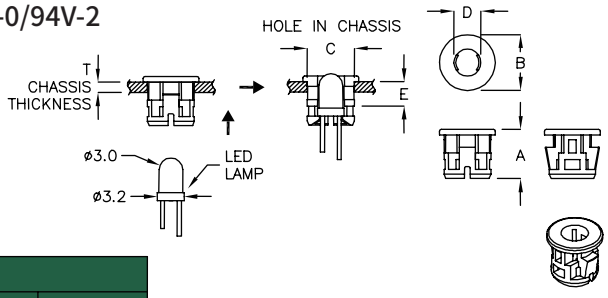


FOR ø3 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
CLED—3S	5.3	ø6.0	ø5.2	ø2.9	2.75	1.2	2000




LED 座 LED HOUSING 4-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

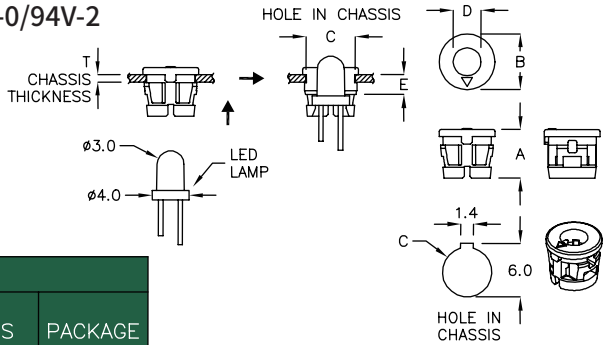


FOR ø3 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
KLED—3FM	5.4	ø6.2	ø5.5	ø3.1	2.2	0.8	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

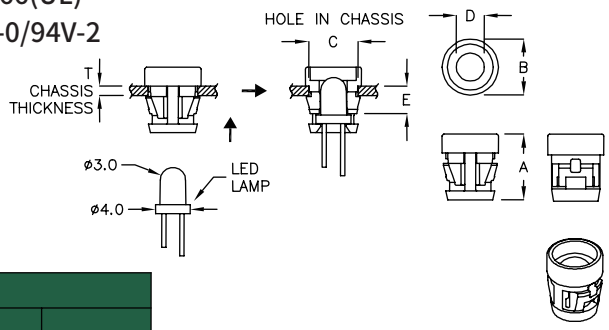


FOR ø3 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
KLED-3DQ	6.7	ø5.6	ø4.95	ø3.1	2.2	0.8	2000




LED 座 LED HOUSING 4-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

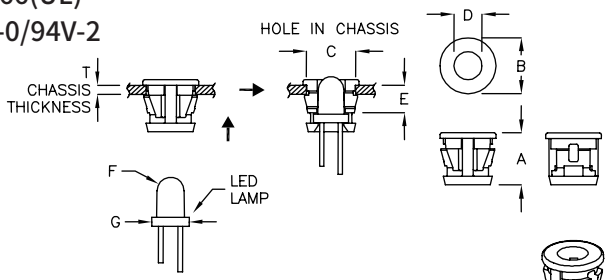




FOR ø3 2PIN or 3PIN LED											
PART NO	A	B	C HOLE IN CHASSIS	D	E	F	G	T CHASSIS THICKNESS	FORM	ø3 LED	PACKAGE
KLED-3JL	5.0	ø5.5	ø5.0	ø2.87	1.9	ø2.9	ø3.2	0.8	1	2 PIN	2000
KLED-3TU	5.1	ø5.5	ø5.0	ø2.87	1.9	ø2.9	ø3.2	0.8	3	2 PIN	
KLED-3PH	5.2	ø5.6	ø4.95	ø3.1	2.2	ø3.0	ø4.0	0.8	1	2 PIN	
KLED-3HS	5.2	ø6.0	ø5.3	ø2.95	2.55	ø3.0	ø3.2	0.9	1	2 PIN	
KLED-3YM	5.2	ø6.0	ø5.3	ø2.95	1.45	ø3.0	ø3.2	0.9	1	2 PIN	
KLED-3CF	5.6	ø5.6	ø5.0	ø3.1	2.6	ø3.0	ø4.0	1.0	1	2 PIN	
KLED-3RG	5.6	ø6.0	ø5.2	ø3.0	2.85	ø3.0	ø4.0	0.8	2	3 PIN	
KLED-3BN	5.6	ø6.0	ø5.2	ø3.0	2.85	ø3.0	ø4.0	0.8	2	3 PIN	
KLED-3A	5.6	ø6.0	ø5.3	ø3.0	2.95	ø3.0	ø4.0	1.0	1	2 PIN	
KLED-3MK	5.6	ø6.0	ø5.3	ø3.0	2.95	ø3.0	ø4.0	0.9	1	2 PIN	
KLED-3TB	5.7	ø6.0	ø5.2	ø3.0	2.6	ø3.0	ø4.0	1.0	1	2 PIN	
KLED-3WT	5.7	ø6.0	ø5.2	ø3.0	2.8	ø3.0	ø4.0	1.0	1	2 PIN	




LED 座 LED HOUSING 4-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

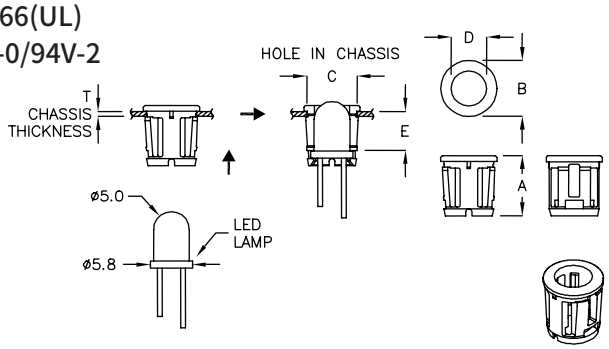


FOR ø5 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
KLED-5MS	8.4	ø7.8	ø7.0	ø4.9	5.35	0.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-31-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

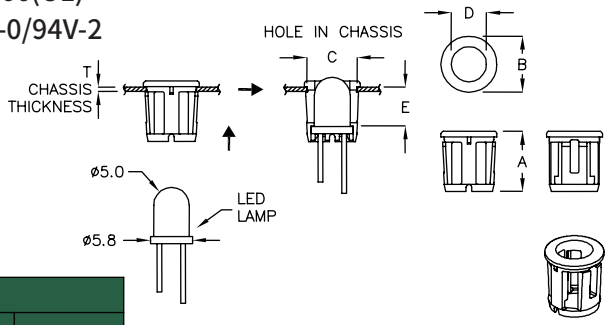


FOR ø5 2PIN LED							
PART NO	A	B	C	D	E	T CHASSIS THICKNESS	PACKAGE
HLED-5RC	8.4	ø7.8	ø7.0	ø4.9	5.45	0.6	2000




LED 座 LED HOUSING 4-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

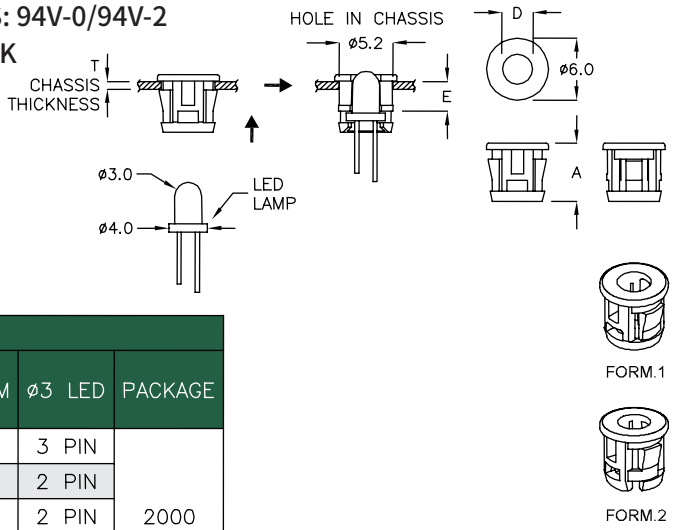


FOR ø3 2PIN or 3PIN LED							
PART NO	A	D	E	T CHASSIS THICKNESS	FORM	ø3 LED	PACKAGE
CLED-3K	5.6	ø2.9	3.0	0.8	2	3 PIN	2000
CLED-3C	5.6	ø3.0	2.95	0.8	1	2 PIN	
CLED-3RY	5.6	ø3.0	2.95	1.0	1	2 PIN	
CLED-3H	5.8	ø3.0	2.9	0.9	1	2 PIN	
CLED-3TN	5.7	ø3.1	3.15	1.0	2	3 PIN	




LED 座 LED HOUSING 4-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

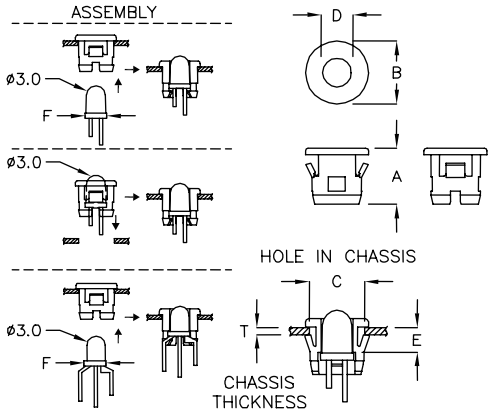


FOR ø3 2PIN or 3PIN LED								
PART NO	A	B	C HOLE IN CHASSIS	D	E	F	T CHASSIS THICKNESS	PACKAGE
MLED-3A	5.3	ø6.0	ø5.2	ø3.0	2.4	ø3.2	0.6	2000
MLED-3GS	6.0	ø6.7	ø5.3	ø3.05	3.0	ø3.8	0.8	



LED 座 LED HOUSING 4-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

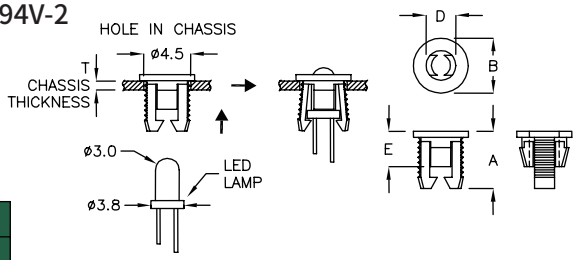


FOR ø3 2PIN LED						
PART NO	A	B	D	E	T CHASSIS THICKNESS	PACKAGE
CLED-1J	5.7	ø5.5	ø3.0	3.5	0.8	2000
CLED-1K	5.7	ø5.5	ø3.0	3.5	1.2	
CLED-1N	5.7	ø5.5	ø3.0	3.6	1.6	
CLED-3D	5.9	ø5.5	ø3.0	3.45	1.0	
CLED-6A	5.7	ø5.5	ø3.1	3.4	0.8	



LED 座 LED HOUSING 4-32-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

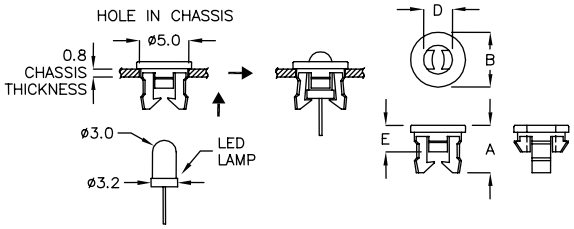


FOR ø3 2PIN LED					
PART NO	A	B	D	E	PACKAGE
CLED-3NX	4.8	ø5.6	ø2.95	2.7	2000



LED 座 LED HOUSING 4-32-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

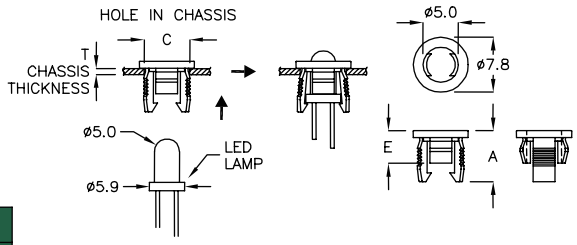


FOR ø5 2PIN LED					
PART NO	A	E	C HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CLED-1AQ	7.25	4.65	ø6.3	0.8~1.0	2000
			ø6.5	1.2~1.5	



LED 座 LED HOUSING 4-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

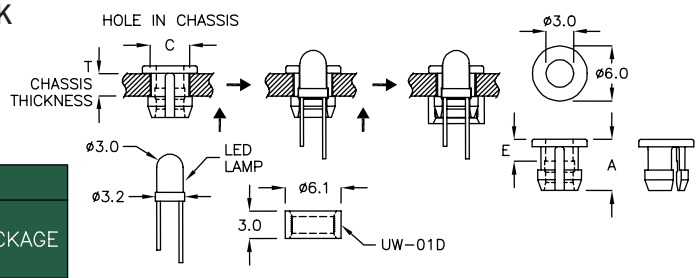

FOR ø3 2PIN LED					
PART NO	A	C HOLE IN CHASSIS	E	T CHASSIS THICKNESS	PACKAGE
CLED-4A	5.5	ø4.15	0.7	0.8	2000
CLED-4D	5.6	ø4.2	2.4	0.8~2.5	


ALSO CAN ASSEMBLE WITH UW-01D

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

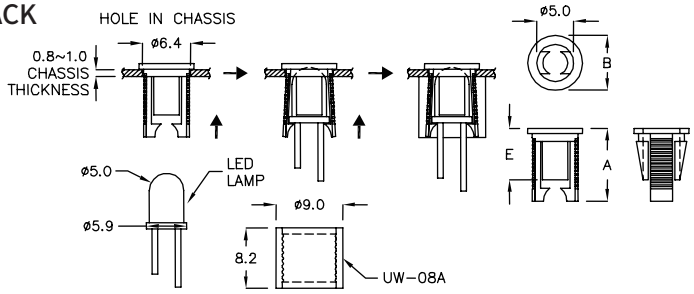


FOR ø5 2PIN LED				
PART NO	A	B	E	PACKAGE
CLED-2K	9.9	ø7.4	6.95	2000
CLED-2QT	11.4	ø7.4	8.45	

ALSO CAN ASSEMBLE WITH UW-08A



LED 座 LED HOUSING 4-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

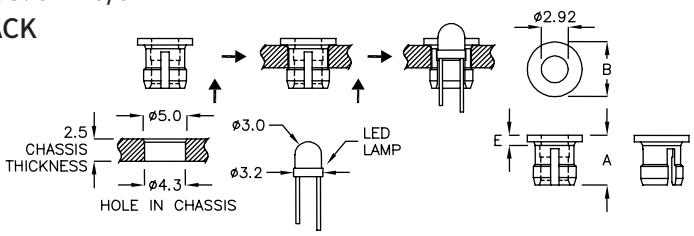


FOR ø3 2PIN LED				
PART NO	A	B	E	PACKAGE
CLED-4	5.46	ø6.0	1.12	2000




LED 座 LED HOUSING 4-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

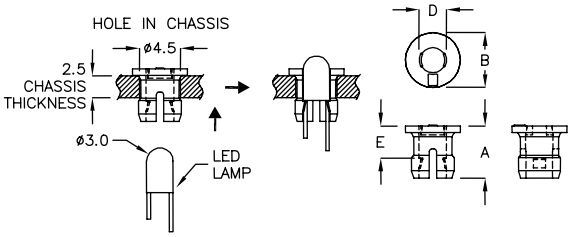


FOR ø3 2PIN LED					
PART NO	A	B	D	E	PACKAGE
CLED-4FM	5.7	ø6.0	ø3.0	3.5	2000



LED 座 LED HOUSING 4-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

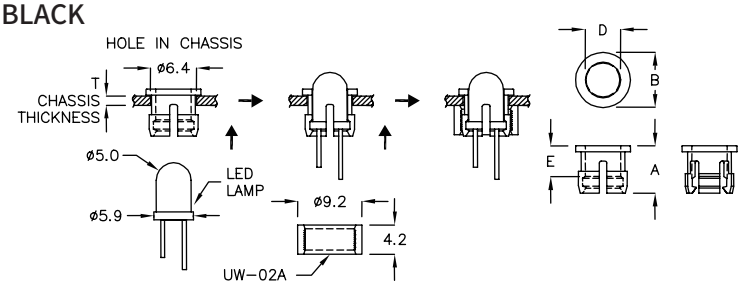


FOR ø5 2PIN LED						
PART NO	A	B	D	E	T CHASSIS THICKNESS	PACKAGE
CLED-5	6.8	ø7.9	ø5.1	4.45	0.8~2.6	2000
CLED-5A	6.8	ø7.9	ø5.1	4.45	2.8	

"CLED-5" ALSO CAN ASSEMBLE WITH UW-02A




LED 座 LED HOUSING 4-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

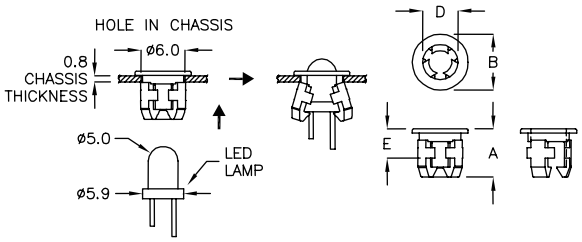


FOR ø5 2PIN LED					
PART NO	A	B	D	E	PACKAGE
YLED-5GK	6.9	ø8.0	ø5.05	4.2	2000



LED 座 LED HOUSING 4-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

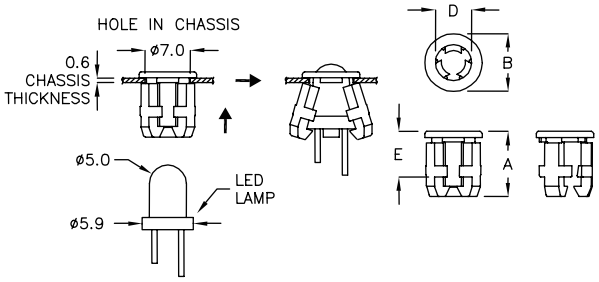


FOR ø5 2PIN LED					
PART NO	A	B	D	E	PACKAGE
GLED-5TC	8.85	ø7.8	ø4.9	6.2	2000




LED 座 LED HOUSING 4-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

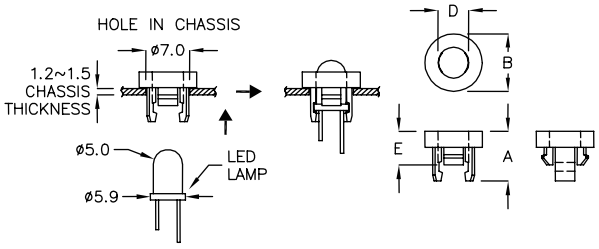


FOR ø5 2PIN or 3PIN LED					
PART NO	A	B	D	E	PACKAGE
CLED-1L	8.2	ø9.5	ø5.1	5.55	2000




LED 座 LED HOUSING 4-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

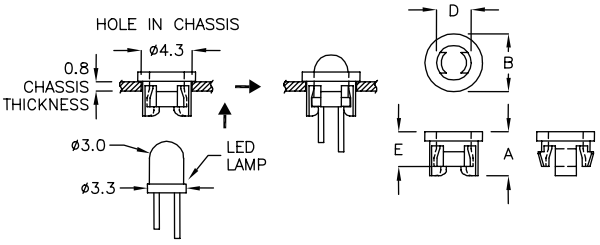


FOR ø3 2PIN or 3PIN LED					
PART NO	A	B	D	E	PACKAGE
CLED-2M	3.8	ø5.0	ø3.0	3.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING — 4-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

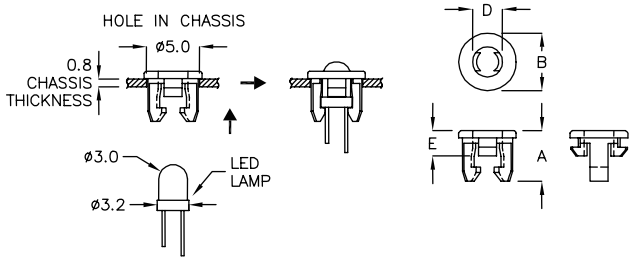


FOR ø3 2PIN LED					
PART NO	A	B	D	E	PACKAGE
CLED-2AJ	4.9	ø5.6	ø2.95	2.45	2000




LED 座 LED HOUSING — 4-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

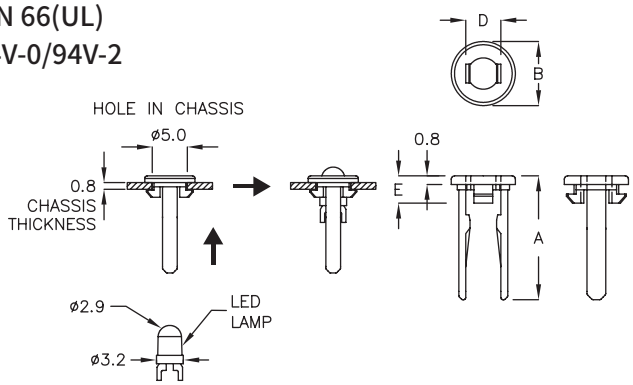


FOR ø3.0 2PIN LED					
PART NO	A	B	D	E	PACKAGE
★ CLED-2BK	11.6	ø6.0	3.3	2.55	1000




LED 座 LED HOUSING — 4-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

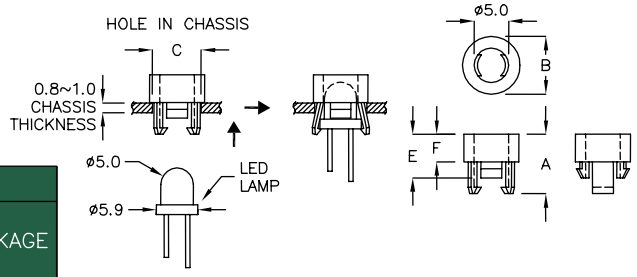


FOR ø5 2PIN or 3PIN LED						
PART NO	A	B	C HOLE IN CHASSIS	E	F	PACKAGE
CLED-1M	8.5	ø7.9	ø6.6	6.3	4.0	2000
CLED-1FC	9.2	ø7.9	ø6.5	7.3	5.0	
CLED-1Q	10.3	ø7.9	ø6.5	8.4	6.1	
CLED-1R	13.8	ø7.9	ø6.5	11.9	9.6	



LED 座 LED HOUSING — 4-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

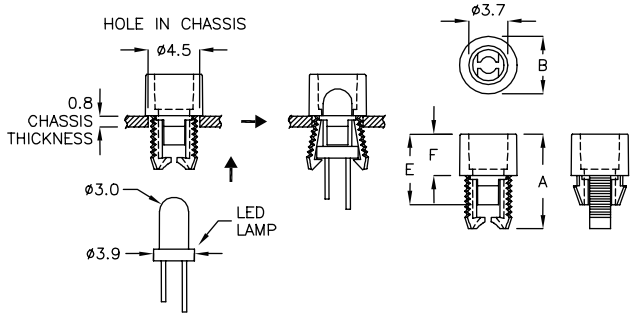


FOR ø3 2PIN or 3PIN LED					
PART NO	A	B	E	F	PACKAGE
CLED-1GK	9.05	ø5.5	6.75	3.95	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

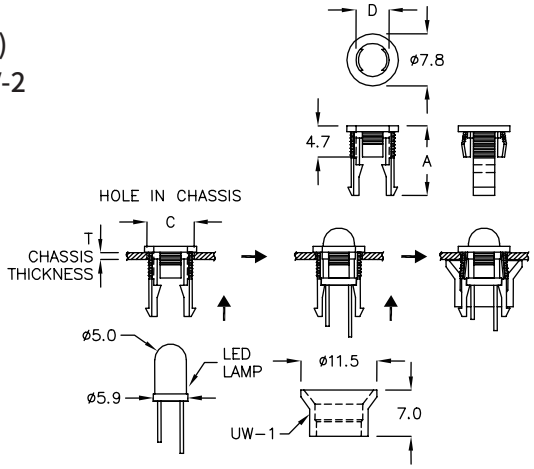


FOR ø5 2PIN LED					
PART NO	A	C HOLE IN CHASSIS	D	T CHASSIS THICKNESS	PACKAGE
CLED-2	10.5	ø6.5	ø5.0	1.0	2000
CLED-10YS	10.5	ø6.2	ø5.1	0.7~1.0	

ALSO CAN ASSEMBLE WITH UW-1



LED 座 LED HOUSING 4-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

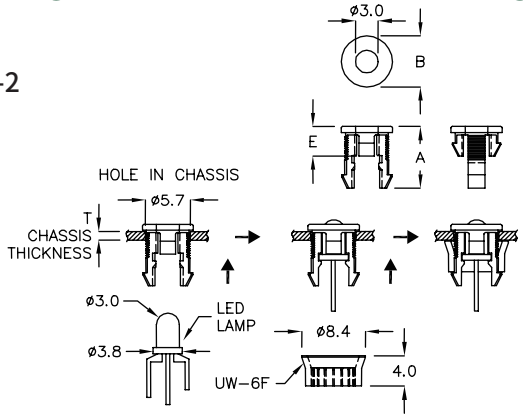


FOR ø3 3PIN LED					
PART NO	A	B	E	T CHASSIS THICKNESS	PACKAGE
CLED-6D	8.1	ø6.7	3.9	1.2	2000
CLED-6F	7.7	ø6.7	3.5	0.8	

ALSO CAN ASSEMBLE WITH UW-6F



LED 座 LED HOUSING 4-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

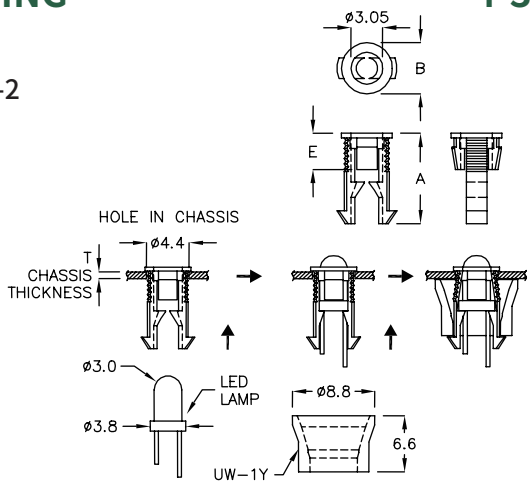


FOR ø3 2PIN LED					
PART NO	A	B	E	T CHASSIS THICKNESS	PACKAGE
CLED-2P	9.35	ø4.9	3.5	0.8	2000

ALSO CAN ASSEMBLE WITH UW-1Y



LED 座 LED HOUSING 4-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

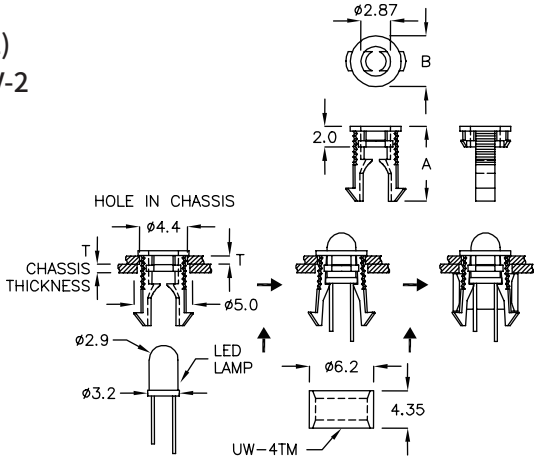

FOR ø3 2PIN LED				
PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CLED-7WP	7.85	ø4.9	0.8	2000


ALSO CAN ASSEMBLE WITH UW-4TM

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

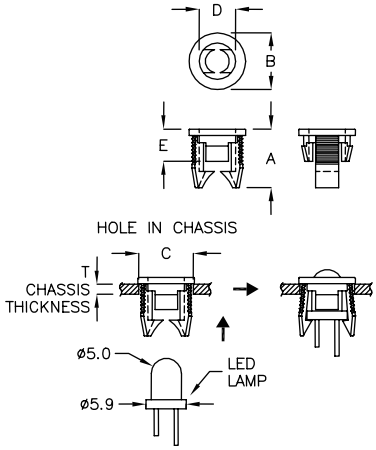


FOR ø5 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
CLED-1D	8.05	ø7.8	ø6.5	ø5.0	4.45	0.8~1.1	2000
CLED-4C	6.3	ø7.8	ø6.0	ø5.0	3.9	0.8~1.1	
CLED-6	8.0	ø7.8	ø7.0	ø5.1	4.6	0.8~0.9	




LED 座 LED HOUSING 4-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

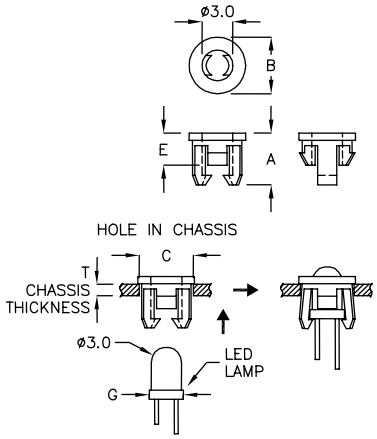


FOR ø3 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	E	T CHASSIS THICKNESS	G LED LAMP	PACKAGE
CLED-1H	5.0	ø5.5	ø5.0	3.15	1.0~1.1	ø3.9	2000
CLED-3F	6.4	ø5.5	ø4.5	4.2	0.8	ø3.9	
CLED-3GX	8.15	ø5.5	ø4.5	5.95	4.0	ø3.3~ø3.5	
CLED-3Q	4.8	ø5.6	ø5.0	2.7	0.7~0.9	ø3.3~ø3.5	
CLED-2D	5.2	ø5.6	ø5.0	3.1	0.8	ø3.9	
CLED-1W	5.5	ø5.8	ø4.7	3.0	1.2~1.3	ø3.9	



LED 座 LED HOUSING 4-37-3


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

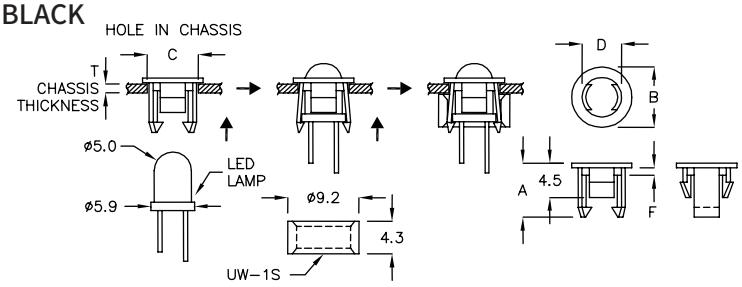

FOR ø5 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	F	T CHASSIS THICKNESS	PACKAGE
CLED-1S	7.0	ø7.8	ø6.2	ø5.1	1.0	1.0~1.6	2000
CLED-1T	6.9	ø7.8	ø6.2	ø5.1	1.9	1.0~1.6	
CLED-1U	7.0	ø7.8	ø6.2	ø5.1	0.2	1.0	


"CLED-1S" ALSO CAN ASSEMBLE WITH UW-1S

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

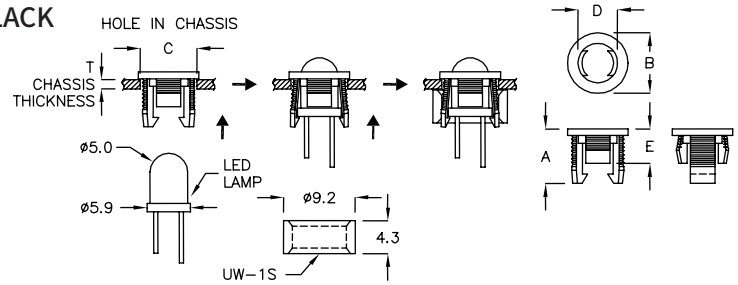


FOR ø5 2PIN LED							
PART NO	A	B	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
CLED-1	7.15	ø7.8	ø6.5	ø5.0	4.4	0.8~1.6	2000
CLED-1A	7.05	ø7.8	ø6.2	ø5.0	4.45	1.0~1.6	

ALSO CAN ASSEMBLE WITH UW-1S




LED 座 LED HOUSING 4-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

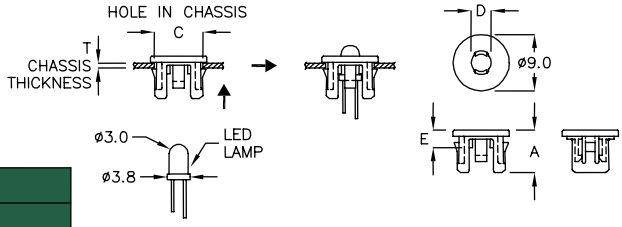


FOR ø3 2PIN LED						
PART NO	A	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
QLED-3AK	6.8	ø7.6	ø3.2	2.8	0.6~0.8	2000




LED 座 LED HOUSING 4-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

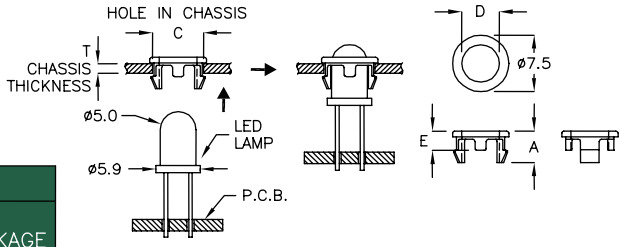


FOR ø5 2PIN LED						
PART NO	A	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
FLED-5C	4.2	ø6.5	ø5.0	2.6	1.5	2000




LED 座 LED HOUSING 4-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

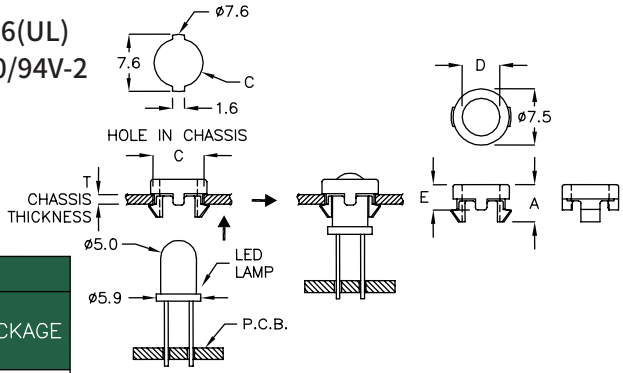


FOR ø5 2PIN LED						
PART NO	A	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
FLED-5HK	5.0	ø6.5	ø5.0	3.4	1.2	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 套 LED HOLDER 4-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

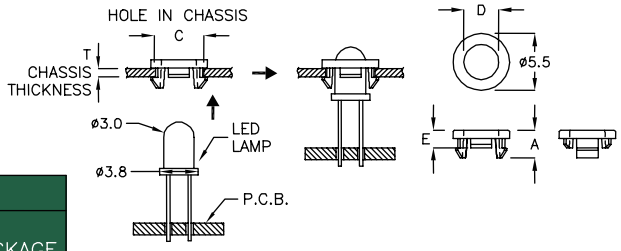


FOR ø3 2PIN LED						
PART NO	A	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
CLA-3FM	2.5	ø4.7	ø3.0	2.0	0.6	2000
CLA-03	2.7	ø4.7	ø3.0	1.7	0.8	
CLA-3BK	3.4	ø4.7	ø3.05	2.4	1.5	




LED 套 LED HOLDER 4-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

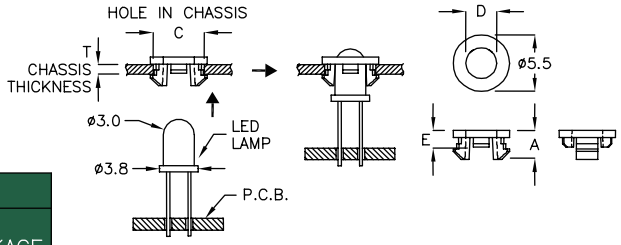


FOR ø3 2PIN LED						
PART NO	A	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
CLA-3AR	2.8	ø4.9	ø3.0	1.6	1.0	2000



LED 座 LED HOUSING 4-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

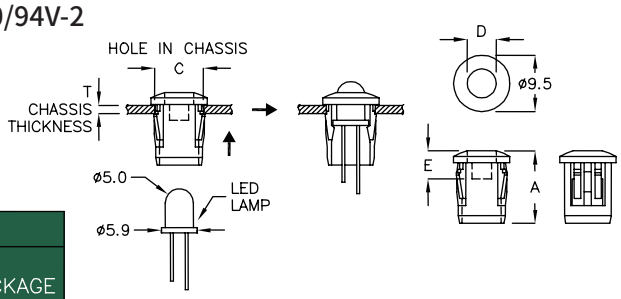


FOR ø5 2PIN LED						
PART NO	A	C HOLE IN CHASSIS	D	E	T CHASSIS THICKNESS	PACKAGE
EEA-1C	12.2	ø8.0	ø4.9	4.7	0.8~1.5	2000
EEA-12D	12.2	ø8.0	ø4.9	4.7	2.0	



LED 座 LED HOUSING 4-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

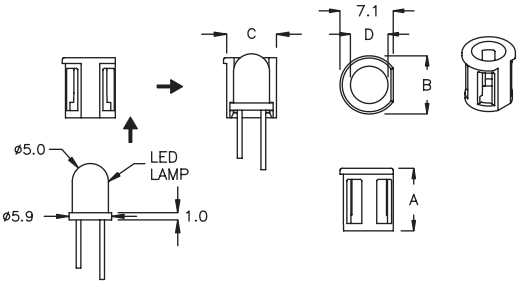

FOR ø5 2PIN LED					
PART NO	A	B	C	D	PACKAGE
JLED-5A	8.4	ø7.8	ø6.65	ø5.0	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
LES-02	2.0	2000

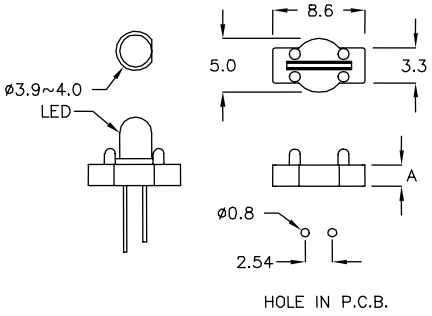




LED 套 LED HOLDER 4-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LES-5	5.0	2000






LED 套 LED HOLDER 4-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
LEZ-7	7.0	2000






LED 套 LED HOLDER 4-40-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
EQC-09	9.0	500






LED 套 LED HOLDER 4-40-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

FOR ø5 2PIN LED			
PART NO	A	B	PACKAGE
LEDX-3	3.0	5.0	2000
LEDX-4	4.0		
LEDX-5	5.0		
LEDX-6	6.0		
LEDX-7	7.0		
LEDX-8	8.0		
LEDX-9	9.0	5.0	1000
LEDX-10	10.0		
LEDX-11	11.0		
LEDX-12	12.0		




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 2PIN LED				
PART NO	A	B	C	PACKAGE
QBF-15	15.0	5.0	3.4	1000






LED 套 LED HOLDER 4-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

FOR ø5 2PIN LED			
PART NO	A	C	PACKAGE
LED-18	16.0	18.0	1000






LED 套 LED HOLDER 4-41-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 2PIN LED				
PART NO	A	B	D	PACKAGE
LED3-1TF	1.0	ø5.0	2.54	2000






LED 套 LED HOLDER 4-41-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 2PIN LED				
PART NO	A	B	C	PACKAGE
LED-4T	4.0	ø5.0	4.0	2000
LED-4DT	4.0	ø4.2	3.0	
LED-6T	6.0	ø5.0	4.0	
LED-7T	7.0	ø5.0	4.0	1000
LED-8T	8.0	ø5.0	4.0	
LED-10T	10.0	ø5.0	4.0	
LED-11T	11.0	ø5.0	4.0	
LED-12T	12.0	ø5.1	4.0	
LED-12AT	12.5	ø5.0	4.0	
LED-13T	13.0	ø5.0	4.0	
LED-14T	14.0	ø5.0	4.0	
LED-14FT	14.5	ø5.0	4.0	
LED-15T	15.0	ø5.0	4.0	
LED-17T	17.1	ø5.6	4.6	
LED-18T	18.3	ø5.0	4.0	
LED-19T	19.0	ø5.0	4.0	
LED-20T	20.0	ø5.0	4.0	
LED-24T	24.0	ø5.0	4.0	500
LED-28T	28.0	ø5.0	4.0	

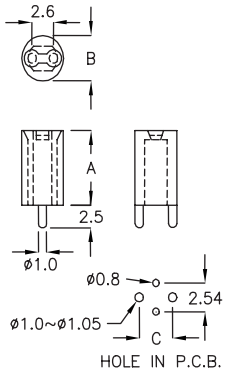

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 套 LED HOLDER — 4-42-1


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

＊ LED HOLDER WITH CONCAVE
＊表示 LED 套開凹槽

LED 套無開槽



＊LED 套開凹槽



FOR ø5 2PIN LED				
PART NO	A	B	C	PACKAGE
LED−2	2.2	ø5.6	ø3.8	2000
LED−2.5	2.6	ø5.9	ø3.8	
LED−3	3.2	ø5.6	ø3.8	
＊LED−3.6	3.6	ø5.6	ø3.8	
LED−4	4.1	ø5.6	ø3.8	
＊LED−4.5	4.5	ø5.6	ø3.8	
＊LED−5	5.0	ø5.6	ø3.8	
＊LED−6	6.0	ø5.6	ø3.8	
＊LED−6S	6.1	ø5.7	ø3.8	
＊LED−6.8	6.8	ø5.6	ø3.8	
LED−7.5	7.5	ø5.6	ø3.8	
＊LED−8	8.0	ø5.6	ø3.8	
LED−8.8	8.8	ø5.6	ø3.8	
LED−9.8	9.8	ø5.6	ø3.8	
＊LED−10A	10.0	ø5.9	ø3.9	
＊LED−11A	11.2	ø5.8	ø3.9	1000
LED−12	12.0	ø5.8	ø3.9	
LED−15	15.1	ø5.6	ø3.9	
＊LED−17	17.1	ø5.6	ø3.9	
LED−18.5	18.5	ø5.7	ø3.9	
LED−24	24.1	ø5.8	ø3.9	500
LED−37	37.5	ø5.8	ø3.9	

FOR ø5 2PIN LED				
PART NO	A	B	C	PACKAGE
＊LED−2A	2.0	ø5.0	ø3.7	2000
＊LED−2.5A	2.5	ø5.0	ø3.7	
＊LED−3A	3.1	ø5.0	ø3.7	
＊LED−3.5	3.5	ø5.0	ø3.6	
＊LED−4C	4.0	ø5.0	ø3.6	
＊LED−4.5A	4.5	ø5.0	ø3.6	
＊LED−5A	5.0	ø5.0	ø3.6	
＊LED−5.5	5.5	ø5.0	ø3.6	
＊LED−6A	6.0	ø5.0	ø3.6	
＊LED−6.5A	6.5	ø5.0	ø3.5	
＊LED−7	7.0	ø5.0	ø3.6	
＊LED−7.5A	7.5	ø5.1	ø3.6	
＊LED−7.9	7.9	ø5.0	ø3.6	
＊LED−8.5A	8.5	ø5.0	ø3.6	
＊LED−9	9.0	ø5.1	ø3.6	
LED−9.5	9.5	ø5.0	ø3.6	
＊LED−10	10.0	ø5.0	ø3.5	
＊LED−10.6	10.7	ø5.1	ø3.6	1000
LED−11	11.0	ø5.0	ø3.8	
＊LED−12A	12.0	ø5.0	ø3.2	
＊LED−13	13.0	ø5.0	ø3.6	
＊LED−13.8	13.8	ø5.0	ø3.7	
LED−14	14.0	ø5.0	ø3.6	
＊LED−14A	14.0	ø5.0	ø3.7	
＊LED−15KM	15.0	ø5.0	ø3.5	
＊LED−15A	15.2	ø5.0	ø3.7	
＊LED−16	16.0	ø5.0	ø3.7	
＊LED−16A	16.4	ø5.0	ø3.7	
LED−18B	18.3	ø5.1	ø3.6	
LED−19	19.1	ø5.0	ø3.9	
＊LED−20	20.2	ø5.0	ø3.8	
LED−21	21.0	ø5.0	ø3.8	
＊LED−22	22.0	ø5.1	ø3.9	
＊LED−23	23.0	ø5.1	ø3.8	500




LED座 LED HOUSING — 4-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built−in Clamp Function

FOR ø3 2PIN or 3PIN LED				
PART NO	A	B	C	PACKAGE
EQA−07	7.0	ø5.4	12.0	1000
EQA−11	11.0	ø5.4	12.0	

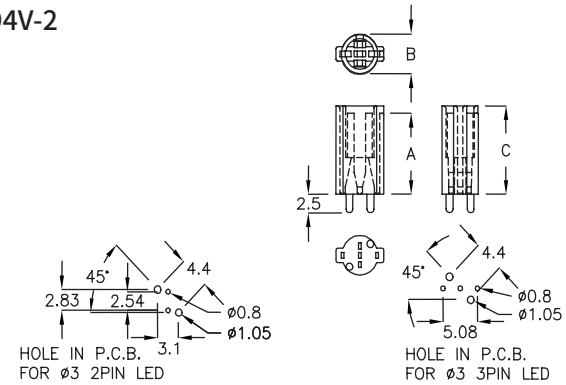


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

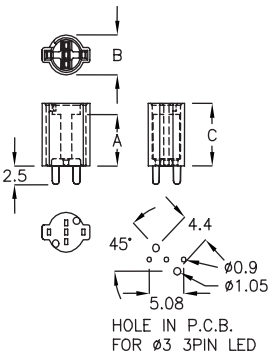


Built-in Clamp Function

FOR ø3 2PIN or 3PIN LED				
PART NO	A	B	C	PACKAGE
EQA-7PQ	7.0	ø5.4	8.5	1000



LED 座 LED HOUSING 4-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

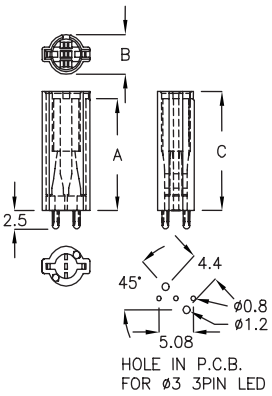


Built-In Clamp Function

FOR ø3 2PIN or 3PIN LED				
PART NO	A	B	C	PACKAGE
EQF-19	19.0	ø5.4	20.0	1000



LED 座 LED HOUSING 4-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

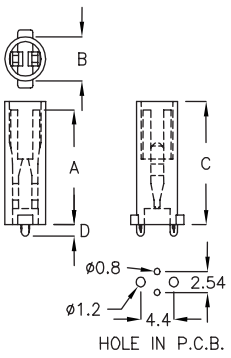


FOR ø3 2PIN LED					
PART NO	A	B	C	D	PACKAGE
EQH-14	14.0	ø5.4	15.0	1.4	1000
EQH-17	17.0	ø5.4	18.0	1.8	
EQH-21	21.0	ø5.4	22.0	1.8	



LED 套 LED HOLDER 4-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED				
PART NO	A	B	D	PACKAGE
LED3-2A	2.0	ø4.2	2.54	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

FOR ø3 2PIN LED				
PART NO	A	B	D	PACKAGE
LED3—1SQ	1.5	4.5	2.54	2000



LED 套 LED HOLDER 4-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK




FOR ø3 2PIN LED					
PART NO	A	B	C	D	PACKAGE
LED3—1D	1.5	ø4.2	0.5	3.0	2000
LED3—5GW	5.0	ø4.2	0.5	3.0	
LED3—9K	9.0	ø4.2	0.5	3.0	



LED 套 LED HOLDER 4-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK




FOR ø3 2PIN LED					
PART NO	A	B	C	D	PACKAGE
LED3—1A	1.5	ø4.2	0.8	3.0	2000
LED3—1B	1.6	ø4.0	0.7	3.05	
LED3—1C	0.8	ø4.2	1.0	3.0	
LED3—2B	2.3	ø4.2	1.1	3.05	
LED3—2.5	2.5	ø4.1	1.25	3.05	
LED3—3B	3.3	ø4.2	1.0	3.05	



LED 套 LED HOLDER 4-44-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED3—4M	4.6	ø4.2	ø3.4	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED3−4DK	4.0	ø4.0	ø3.5	2000
LED3−6DC	6.0	ø4.0	ø3.2	
LED3−7K	7.5	ø4.0	ø3.3	



LED 套 LED HOLDER 4-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED−3.8	3.8	4.1	3.1	2000
LED−4A	4.1	4.1	3.1	



LED 套 LED HOLDER 4-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

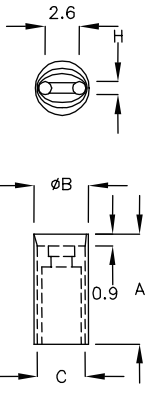

打*表LED套H:打橢圓孔

* LED HOLDER WITH AN OVAL HOLE "H"

FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED3−3S	2.8	4.2	3.5	2000
LED3−3	3.0	4.2	3.5	
LED3−3A	3.5	4.2	3.5	
* LED3−4	4.0	4.2	3.5	
LED3−4A	4.5	4.2	3.5	
LED3−5	5.0	4.2	3.5	
LED3−5B	5.5	4.2	3.5	
LED3−6	6.1	4.2	3.5	
* LED3−6B	6.5	4.2	3.5	
LED3−7	7.0	4.2	3.5	
LED3−7B	7.6	4.2	3.5	
LED3−8	8.0	4.2	3.6	
LED3−8B	8.5	4.2	3.6	
LED3−9	9.0	4.2	3.6	
LED3−9A	9.2	4.2	3.6	
LED3−9B	9.5	4.2	3.6	
LED3−10	10.0	4.2	3.6	


FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED3−11	11.1	4.2	3.5	2000
LED3−12	12.0	4.2	3.5	
*LED3−12B	12.5	4.2	3.6	
LED3−13	13.0	4.2	3.5	
LED3−14	14.0	4.2	3.6	
*LED3−15	15.0	4.2	3.5	1000
LED3−15A	15.0	4.1	3.6	
LED3−16	16.0	4.2	3.5	
*LED3−17	17.0	4.2	3.5	
LED3−18	18.0	4.2	3.5	
*LED3−18B	18.5	4.2	3.5	
LED3−19	19.0	4.2	3.5	
*LED3−20	20.0	4.2	3.5	
*LED3−21	21.0	4.2	3.5	
*LED3−22	22.0	4.2	3.5	
LED3−23	23.0	4.2	3.5	
LED3−25	25.0	4.4	3.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED3-8F	8.5	ø4.2	ø3.6	2000



LED 套 LED HOLDER 4-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
LED3-17K	17.1	ø4.0	ø3.5	1000



LED 套 LED HOLDER 4-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
LED3-21F	21.0	ø4.2	1000



LED 套 LED HOLDER 4-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



Built-In Clamp Function


FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
EET-10	10.0	ø4.25	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

FOR ø3 & ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDG—10	10.0	ø5.2	2000



LED 套 LED HOLDER 4-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



Built—In Clamp Function

FOR ø3 or ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDP—02	2.0	ø4.25	2000
EDP—2M	2.5	ø4.25	
EDP—3M	3.5	ø4.25	
EDP—04	4.0	ø4.25	
EDP—4A	4.5	ø4.25	
EDP—05	5.0	ø4.25	
EDP—5A	5.5	ø4.25	
EDP—06	6.0	ø4.25	


Built—In Clamp Function

FOR ø3 or ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDP—6A	6.5	ø4.25	2000
EDP—07	7.0	ø4.25	
EDP—7A	7.5	ø4.25	
EDP—08	8.0	ø4.25	
EDP—8A	8.5	ø4.25	
EDP—09	9.0	ø4.25	
EDP—9A	9.5	ø4.25	
EDP—10	10.0	ø4.25	
EDP—10A	10.5	ø4.25	
EDP—11	11.0	ø4.25	
EDP—11A	11.5	ø4.25	
EDP—12	12.0	ø4.25	
EDP—12A	12.5	ø4.25	
EDP—17	17.0	ø4.25	




LED 套 LED HOLDER 4-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

FOR ø3 & ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDP—23	23.0	ø4.25	1000



LED 套 LED HOLDER 4-47-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



Built—In Clamp Function


FOR ø3 & ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDD—4FQ	4.0	ø5.2	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



Built—In Clamp Function

FOR ø3 or ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDG—02	2.0	ø5.2	2000
EDG—2M	2.5	ø5.2	
EDG—3M	3.5	ø5.2	
EDG—04	4.0	ø5.2	
EDG—4A	4.5	ø5.2	
EDG—05	5.0	ø5.2	
EDG—5A	5.5	ø5.2	


Built—In Clamp Function

FOR ø3 or ø5 2PIN LED			
PART NO	A	B	PACKAGE
EDG—06	6.0	ø5.2	2000
EDG—6A	6.5	ø5.2	
EDG—07	7.0	ø5.2	
EDG—7A	7.5	ø5.2	
EDG—08	8.0	ø5.2	
EDG—8A	8.5	ø5.2	
EDG—09	9.0	ø5.2	
EDG—9A	9.5	ø5.2	
EDG—10A	10.0	ø5.2	
EDG—10C	10.5	ø5.2	
EDG—11	11.0	ø5.2	
EDG—11A	11.5	ø5.2	
EDG—12	12.0	ø5.2	
EDG—12A	12.5	ø5.2	



LED 套 LED HOLDER 4-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
ECW—06	7.0	ø5.4	2000



LED 套 LED HOLDER 4-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




FOR ø3 3PIN LED				
PART NO	A	B	D	PACKAGE
EEP—15	15.0	ø5.4	16.0	2000



LED 套 LED HOLDER 4-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

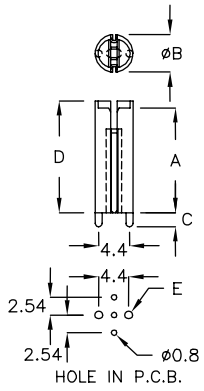

FOR ø3 3PIN LED						
PART NO	A	B	C	D	E	PACKAGE
EEG—08	7.0	ø5.4	1.5	8.0	ø1.05	2000
EEG—15	15.0	ø5.4	2.0	16.0	ø1.10	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED					
PART NO	A	B	C	D	PACKAGE
QLW-02	2.0	ø5.0	ø4.1	7.9	2000
QLW-2A	2.0	ø5.0	ø4.1	6.6	
QLW-03	4.5	ø5.0	ø4.1	10.0	






LED 套 LED HOLDER 4-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
QQA-3AD	1.1	ø5.8	ø4.1	2000






LED 套 LED HOLDER 4-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED					
PART NO	A	B	C	D	PACKAGE
QLS-1A	1.0	ø7.4	ø5.9	8.0	2000






LED 套 LED HOLDER 4-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN LED					
PART NO	A	B	C	D	PACKAGE
QLS-05	5.0	ø7.4	ø6.0	12.0	2000






LED 套 LED HOLDER 4-49-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 3PIN LED			
PART NO	A	B	PACKAGE
QBU-03	3.1	ø5.4	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER — 4-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 3PIN LED				
PART NO	A	B	D	PACKAGE
QLH-01	1.35	ø6.6	6.0	2000






LED 套 LED HOLDER — 4-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 3PIN LED				
PART NO	A	B	D	PACKAGE
QLH-2A	1.35	ø8.0	7.5	2000






LED 套 LED HOLDER — 4-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 3PIN LED					
PART NO	A	B	C	D	PACKAGE
QLM-3AF	1.3	ø8.0	ø5.6	7.7	2000
QLM-3CP	1.3	ø6.6	ø5.2	6.0	






LED 座 LED HOUSING — 4-50-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 3PIN LED					
PART NO	A	B	C	D	PACKAGE
QLP-3CA	1.3	ø8.0	8.4	7.7	2000
QLP-3FG	1.3	ø6.6	7.8	7.0	






LED 座 LED HOUSING — 4-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED				
PART NO	A	B	D	PACKAGE
QLR-3KH	2.35	11.5	10.2	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-51-1

- MATERIAL: TPE
- COLOR: BLACK

FOR ø3 2PIN LED			
PART NO	A	B	PACKAGE
MTD-13HK	10.5	ø8.1	1000






LED 套 LED HOLDER 4-51-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 3PIN LED				
PART NO	A	B	C	PACKAGE
LED-1x3A	1.6	ø7.4	0.5	2000






LED 套 LED HOLDER 4-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø3 3PIN LED				
PART NO	A	B	C	PACKAGE
LED-3x3A	3.0	5.0	1.0	2000
LED-4x3A	4.0	5.0	1.0	
LED-5x3A	5.0	5.0	1.5	
LED-5Cx3A	5.5	5.0	1.5	
LED-14x3A	14.0	5.0	9.0	1000






LED 套 LED HOLDER 4-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 3PIN LED				
PART NO	A	B	D	PACKAGE
QLF-3A	2.8	ø7.1	6.6	2000






LED 套 LED HOLDER 4-51-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

FOR ø5 3PIN LED				
PART NO	A	B	D	PACKAGE
LED-2Mx3	2.6	ø7.4	6.6	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø5 3PIN LED				
PART NO	A	B	D	PACKAGE
LED-5Sx3	5.0	7.4	6.0	2000
LED-4Sx3	4.4	7.4	6.0	
LED-5x3	5.5	7.4	6.5	1000
LED-5Kx3	5.0	7.4	7.7	
LED-7x3	7.0	7.5	8.1	
LED-8x3	8.0	7.4	9.0	
LED-8Mx3	8.5	7.4	9.5	
LED-10x3	10.5	7.4	11.5	
LED-16x3	13.8	7.2	16.0	500



LED 套 LED HOLDER 4-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FOR ø5 3PIN LED				
PART NO	A	B	D	PACKAGE
LED-14X3	12.0	ø7.0	14.0	500



LED 套 LED HOLDER 4-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

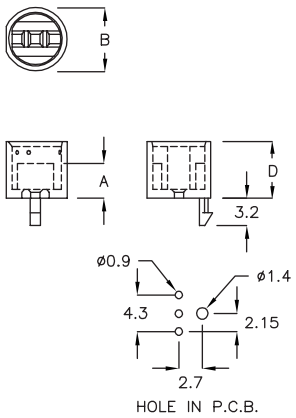


FOR ø5 3PIN LED				
PART NO	A	B	D	PACKAGE
LED-1Tx3	2.6	ø7.4	6.6	1000
LED-4Tx3	4.0	ø7.4	6.7	



LED 套 LED HOLDER 4-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

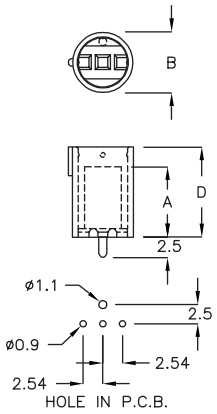


FOR ø5 3PIN LED				
PART NO	A	B	D	PACKAGE
QBE-8M	8.5	ø7.5	10.9	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 套 LED HOLDER 4-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

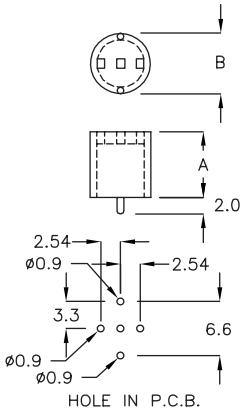


FOR ø5 3PIN LED			
PART NO	A	B	PACKAGE
QBK-08	8.0	ø7.4	2000



固定座 MOUNT 4-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

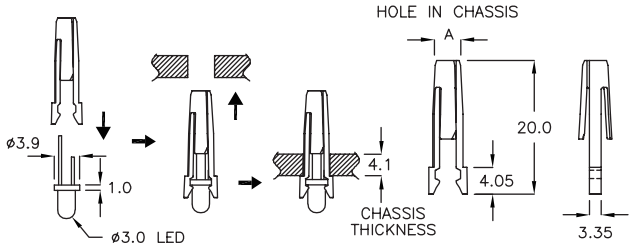



PART NO	A HOLE IN CHASSIS	PACKAGE
MTX-4JQ	ø4.5	1000



LED 座 LED HOUSING 4-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



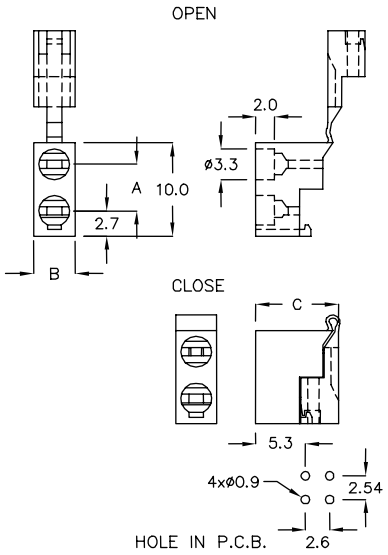


FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
2LED-3Q	5.0	4.5	8.9	1000



LED 座 LED HOUSING 4-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	F	H	I	K	SUITABLE LED	PACKAGE
2LED-3	5.0	5.1	10.1	10.0	ø3.9	7.1	1.3	2.5	2.6	ø3 2PIN	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	F	H	I	K	SUITABLE LED	PACKAGE
2LED-3A	5.0	4.4	8.8	9.7	ø3.2	5.2	2.0	2.7	2.5	ø3 2PIN	1000
2LED-3B	5.0	5.0	8.9	9.8	ø3.2	5.2	3.0	2.7	2.5	ø3 2PIN	
2LED-3C	5.0	5.0	10.1	9.6	ø3.2	7.1	1.3	2.5	2.6	ø3 2PIN	
2LED-3D	5.0	4.4	9.0	9.8	ø3.4	5.45	1.5	2.6	2.55	ø3 2PIN	
2LED-3E	5.0	4.4	9.0	9.8	ø3.4	5.45	2.0	2.6	2.55	ø3 2PIN	
2LED-3P	6.0	4.4	9.7	13.5	ø3.3	6.2	2.0	5.0	2.55	ø3 2PIN	



LED 座 LED HOUSING 4-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

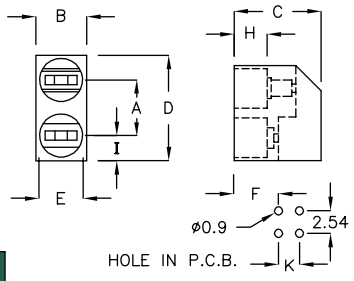


PART NO	A	B	C	D	E	F	K	H	I	SUITABLE LED	PACKAGE
2LED-5	6.2	5.9	11.0	12.0	ø5.0	6.1	2.4	4.2	2.85	ø5 2PIN	500



LED 座 LED HOUSING 4-54-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

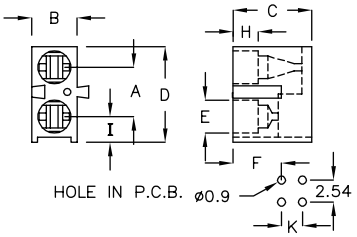


FOR ø3 2PIN LED										
PART NO	A	B	C	D	E	F	H	I	K	PACKAGE
2LED-3F	5.0	4.6	8.0	9.7	ø3.3	5.1	2.6	2.6	2.4	1000
2LED-3H	5.1	4.3	8.1	12.6	ø3.2	4.8	2.0	4.6	2.6	
2LED-3J	5.0	4.4	9.0	9.7	ø3.35	5.3	1.5	2.6	2.5	



LED 座 LED HOUSING 4-54-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

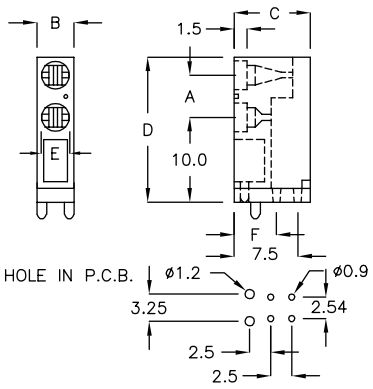


FOR ø3 2PIN LED							
PART NO	A	B	C	D	E	F	PACKAGE
2LED-3K	5.0	4.4	9.0	17.1	ø3.4	5.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




LED 座 LED HOUSING 4-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

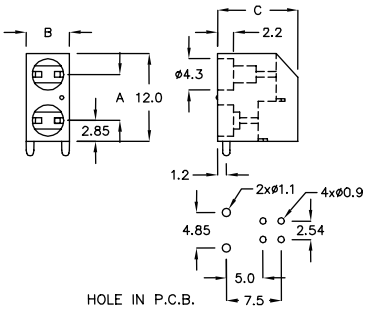


Built—In Clamp Function

FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
2LED—3N	6.3	5.9	11.0	500



LED 座 LED HOUSING 4-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

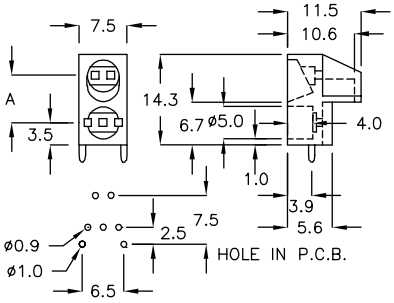


FOR ø5 2 PIN LED ø5 3 PIN LED		
PART NO	A	PACKAGE
2LED—5A	7.45	500



LED 座 LED HOUSING 4-55-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

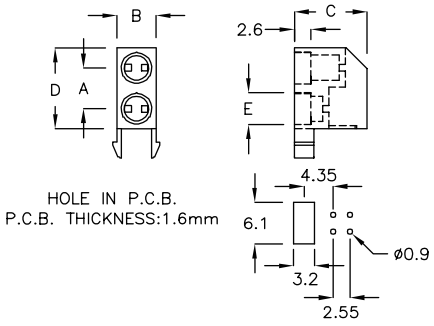


Built—In Clamp Function

PART NO	A	B	C	D	E	SUITABLE LED	PACKAGE
2LED—5C	6.3	6.0	11.2	12.5	ø4.9	ø5 2PIN	500



LED 座 LED HOUSING 4-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

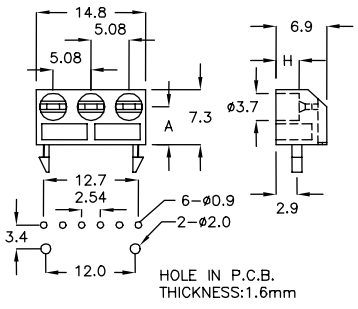


Built—In Clamp Function

FOR ø3 2PIN LED			
PART NO	A	H	PACKAGE
3LED—3AT	5.1	3.2	500
3LED—3BT	5.1	2.0	



LED 座 LED HOUSING 4-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built—In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
3LED—3C	5.1	500



LED 座 LED HOUSING 4-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

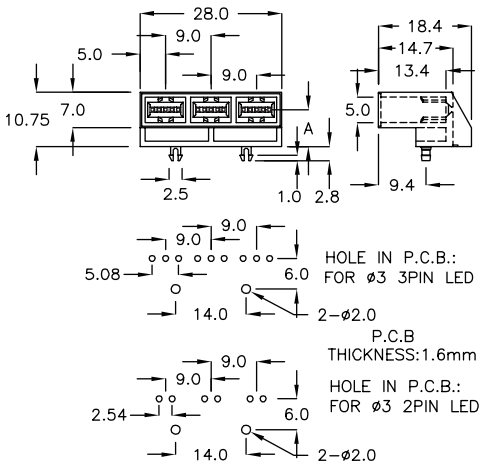


Built—In Clamp Function

FOR ø3 2PIN/3PIN LED FOR QUADRATE 2PIN/3PIN LED		
PART NO	A	PACKAGE
3LED—3H	7.25	500




LED 座 LED HOUSING 4-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

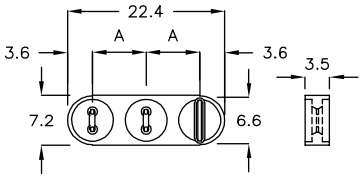


Built—In Clamp Function


FOR ø5 3PIN LED x1 ø5 2PIN LED x2		
PART NO	A	PACKAGE
3LED—7	7.6	1000



LED 座 LED HOUSING 4-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK






Built—In Clamp Function


FOR ø5 2PIN LED		
PART NO	A	PACKAGE
3LED—5	3.1	500



LED 座 LED HOUSING 4-56-5

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK





Built—In Clamp Function


FOR ø5 2PIN LED		
PART NO	A	PACKAGE
3LED—5—R	3.1	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built-In Clamp Function

FOR ø3 2PIN LED								
PART NO	A	B	C	D	E	F	G	PACKAGE
3LED-3	5.08	15.25	3.9	6.45	9.0	11.45	2.50	500
3LED-3E	6.0	17.0	5.7	8.25	10.8	12.5	2.70	



LED 座 LED HOUSING 4-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

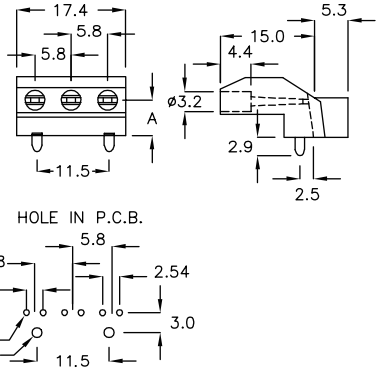


Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
3LEL-6	5.5	200



LED 座 LED HOUSING 4-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

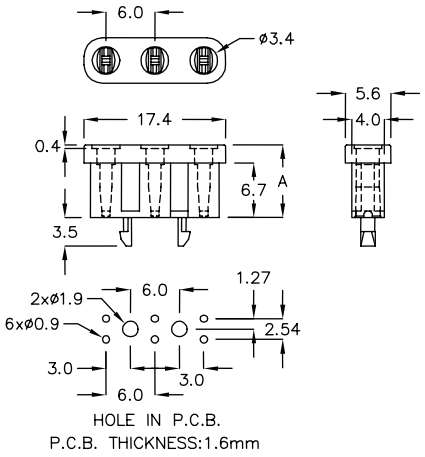


Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
3LED-3M	8.9	500



LED 座 LED HOUSING 4-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

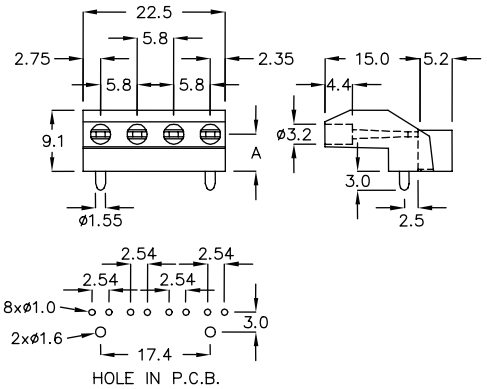

Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
4LEL-6	5.6	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
4LED-3	5.0	500

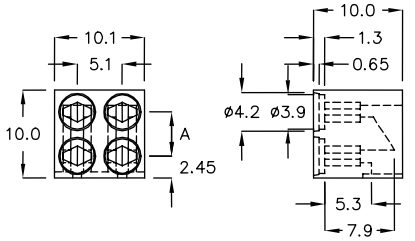





LED 座 LED HOUSING 4-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	E	PACKAGE
4LEL-6A	7.0	200

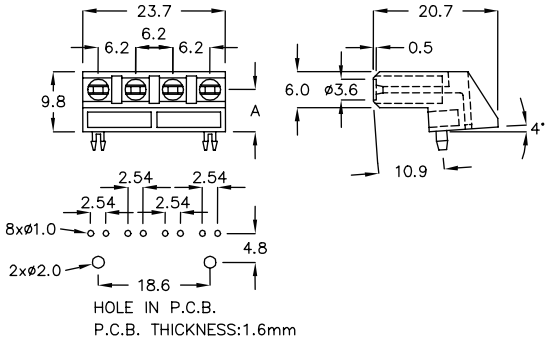




LED 座 LED HOUSING 4-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
4LEL-6C	5.25	200

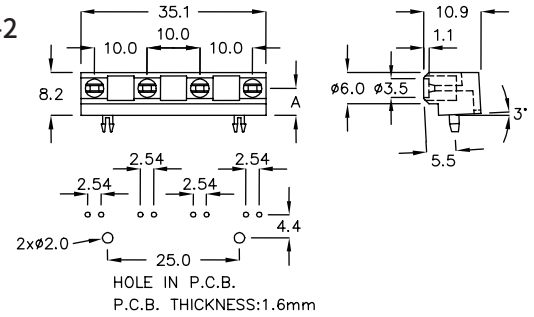





LED 座 LED HOUSING 4-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
4LEL-6D	9.0	200

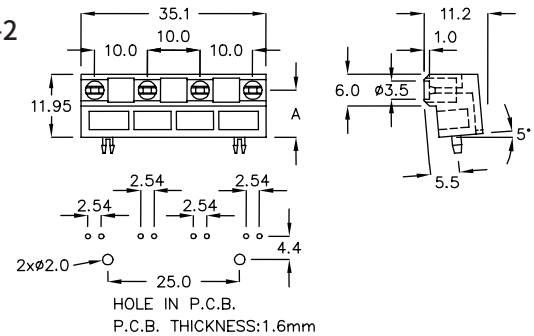




LED 座 LED HOUSING 4-58-5

- MATERIAL: NYLON 66(UL)+30%FRP
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

FOR ø5 2PIN ø5 3PIN LED		
PART NO	A	PACKAGE
4LED-1A	14.0	500

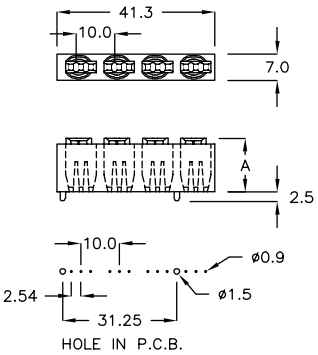


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

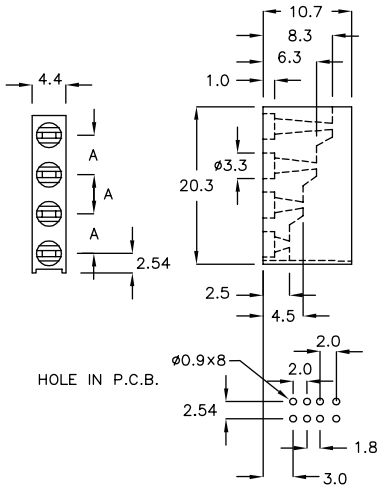


FOR ø3 2PIN LED		
PART NO	A	PACKAGE
4LED-3C	5.08	500




LED 座 LED HOUSING 4-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

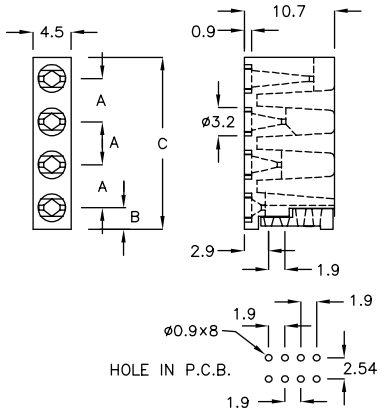


FOR ø3 2PIN LED				
PART NO	A	B	C	PACKAGE
4LED-3D	5.1	2.54	20.3	500
4LED-3K	5.1	4.75	22.5	




LED 座 LED HOUSING 4-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

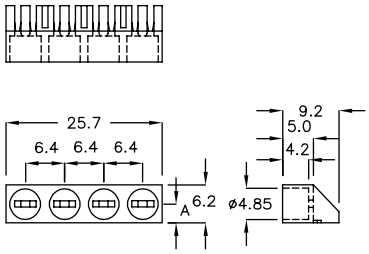


FOR ø5 2PIN LED		
PART NO	A	PACKAGE
4LED-5	3.1	500



LED 座 LED HOUSING 4-59-4

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

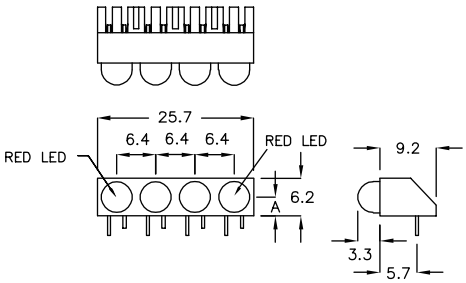

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
4LED-5-R	3.1	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





LED 座 LED HOUSING 4-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
5LED—3	5.08	500

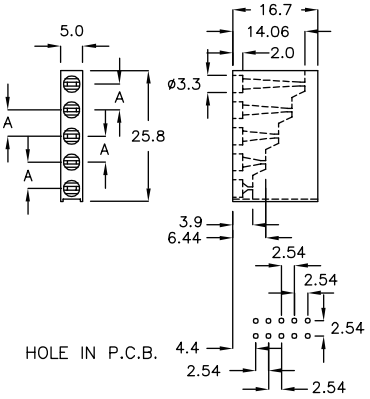




LED 座 LED HOUSING 4-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED x 3 FOR ø5 3PIN LED x 2		
PART NO	A	PACKAGE
QLD—44	9.0	1000

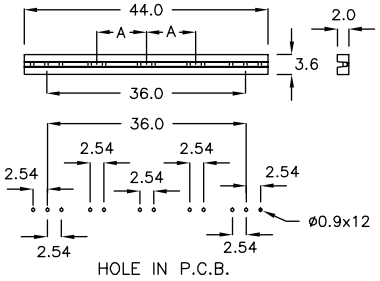




LED 座 LED HOUSING 4-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
5LED—5	3.1	500

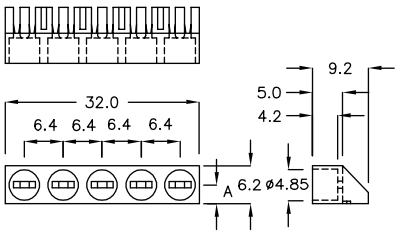





LED 座 LED HOUSING 4-60-4

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø5 2PIN LED		
PART NO	A	PACKAGE
5LED—5—R	3.1	500



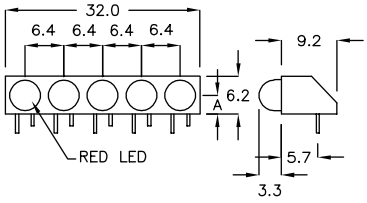




LED 座 LED HOUSING 4-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

FOR ø3 2PIN LED		
PART NO	A	PACKAGE
5LEL—6	5.8	200

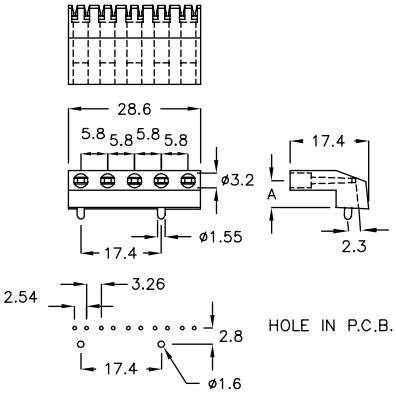


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

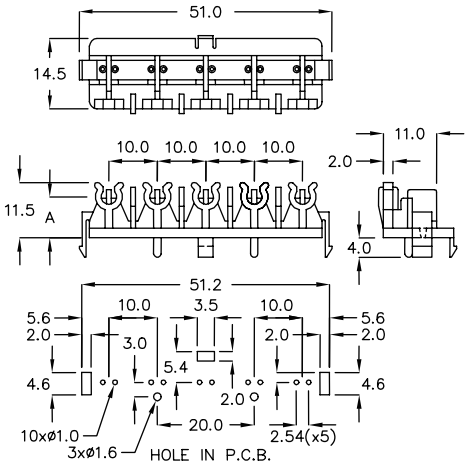


FOR ø3 2PIN LED		
PART NO	A	PACKAGE
5LED-3AT	8.5	200




LED 座 LED HOUSING 4-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

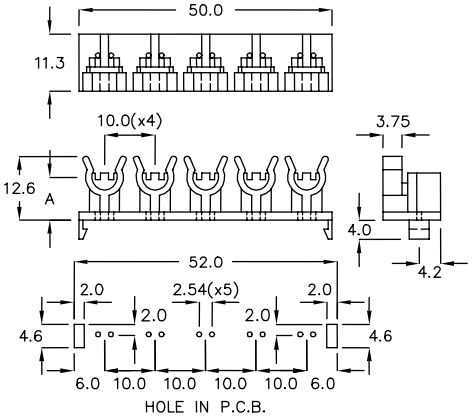


FOR ø5 2PIN LED		
PART NO	A	PACKAGE
5LED-5BT	8.5	200



LED 座 LED HOUSING 4-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

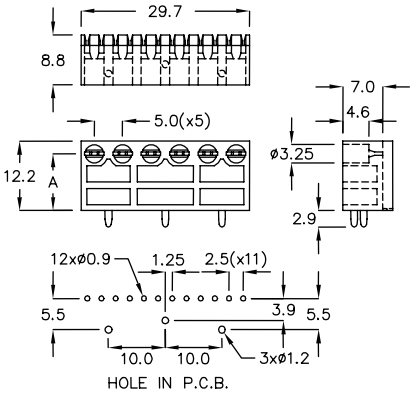


FOR ø3 2PIN LED		
PART NO	A	PACKAGE
6LED-3A	10.0	200



LED 座 LED HOUSING 4-61-4


- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

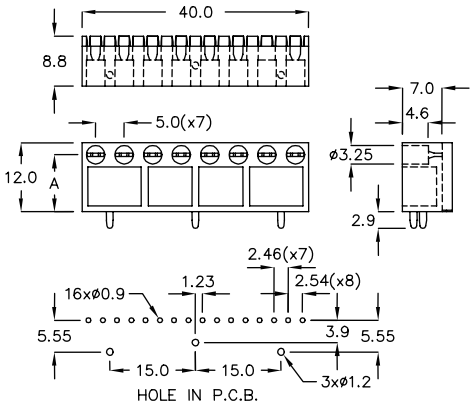


FOR ø3 2PIN LED		
PART NO	A	PACKAGE
8LED-3	10.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



LED 座 LED HOUSING 4-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

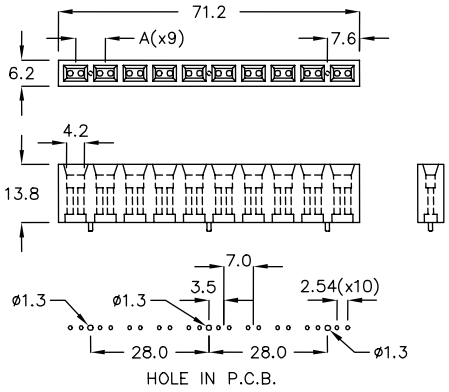


FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
10LED-1	7.0	200



LED 座 LED HOUSING 4-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

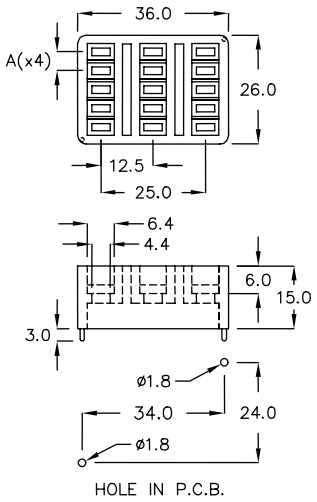

FOR QUADRATE 2PIN LED		
PART NO	A	PACKAGE
15LED-1	4.5	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

05

風扇鉚釘
FAN SNAP RIVET



扣具,鉚釘
FASTENER, SNAP RIVET




螺絲,螺帽
SCREW, SCREW NUT





緩衝墊片 SILICONE BUMPER 5-2-1

- MATERIAL: SILICONE
- COLOR: BLACK

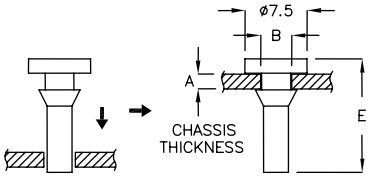


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	E	PACKAGE
SRJ-3NS	2.3	ø3.5	13.7	2000
SRJ-3TG	4.8~5.0	ø3.5	16.2	



緩衝墊片 SILICONE BUMPER 5-2-2

- MATERIAL: SILICONE
- COLOR: BLACK

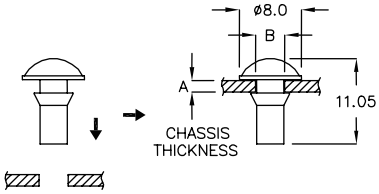


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	PACKAGE
SRF-3A	1.9	ø3.5	2000



風扇鉚釘 FAN SNAP RIVET 5-2-3

- MATERIAL: TPE
- COLOR: BLACK

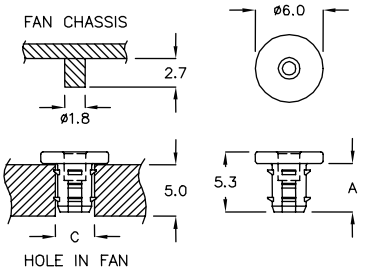


PART NO	A	C HOLE IN FAN	PACKAGE
SRQB-5A	4.3	ø3.5	2000
SRQB-5C	4.3	ø4.5	



風扇鉚釘 FAN SNAP RIVET 5-2-4

- MATERIAL: TPE
- COLOR: BLACK

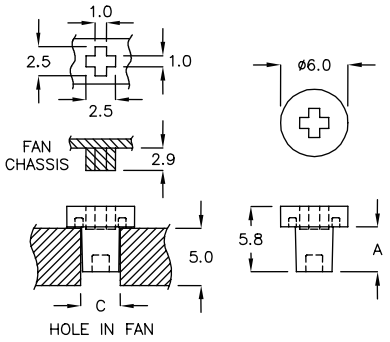


PART NO	A	C HOLE IN FAN	PACKAGE
SRQF-3AT	4.0	ø3.5	2000




風扇鉚釘 FAN SNAP RIVET 5-2-5

- MATERIAL: TPE
- COLOR: BLACK

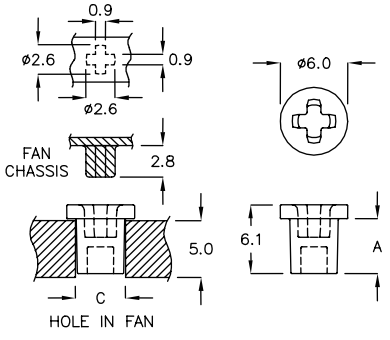


PART NO	A	C HOLE IN FAN	PACKAGE
SRQA-4HC	4.85	ø4.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-3-1

- COLOR: BLACK

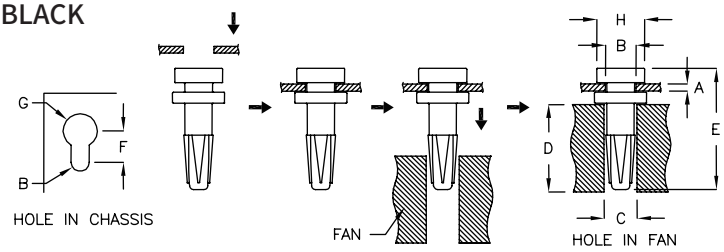


PART NO	MATERIAL	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	F	G	H	PACKAGE
SRYC−3HT	SILICONE	0.8~1.2	ø4.0	ø3.5	5.0	16.8	8.0	ø8.5	ø7.8	2000
SRYC−3XZ	TPE	1.0	ø3.5	ø3.6	>11.0	15.5	6.0	ø6.5	ø6.0	



風扇鉚釘 FAN SNAP RIVET 5-3-2

- MATERIAL: TPE
- COLOR: BLACK

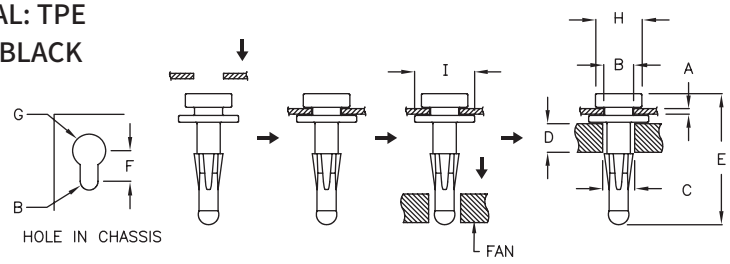


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	F	G	H	I	PACKAGE
SRYK−3AC	0.8	ø4.1	ø3.5	5.0	19.2	8.0	ø8.0	ø6.8	ø8.8	2000
★ SRYK−3BF	1.0	ø2.8	ø3.5	5.0	19.6	2.5	ø3.1	ø5.8	ø7.5	



風扇鉚釘 FAN SNAP RIVET 5-3-3

- MATERIAL: TPE
- COLOR: BLACK

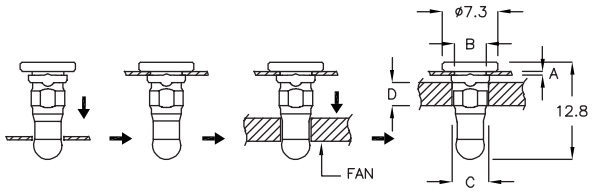


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN CHASSIS	D FAN CHASSIS THICKNESS	PACKAGE
SRCQ−4MT	0.5	ø4.3	ø4.5	4.0	2000



風扇鉚釘 FAN SNAP RIVET 5-3-4

- MATERIAL: TPE
- COLOR: BLACK

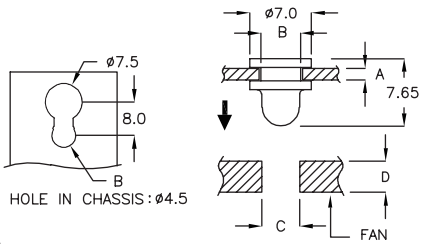


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRY−4XR	1.5	ø4.5	ø4.5	4.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-4-1

- MATERIAL: TPE
- COLOR: BLACK

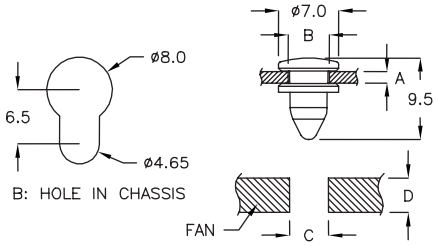


PART NO	A CHASSIS THICKNESS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRYD−4TC	1.3	ø4.5	4.0	2000



風扇鉚釘 FAN SNAP RIVET 5-4-2

- MATERIAL: TPE
- COLOR: BLACK

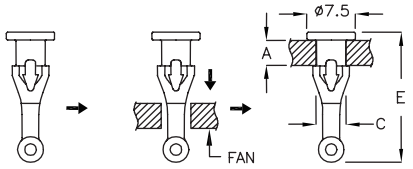


PART NO	A FAN CHASSIS THICKNESS	C HOLE IN FAN	E	PACKAGE
SRZ−4AT	4.0	ø4.5	20.1	2000



風扇鉚釘 FAN SNAP RIVET 5-4-3

- MATERIAL: SILICONE
- COLOR: BLACK

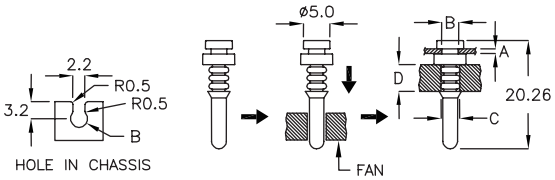


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN THICKNESS	PACKAGE
SRDM−20K	0.8	ø3.2	ø3.5	5.0	2000



風扇鉚釘 FAN SNAP RIVET 5-4-4

- MATERIAL: TPE
- COLOR: BLACK

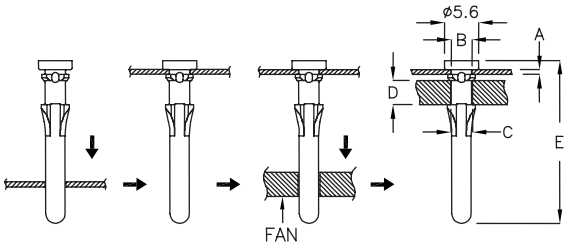


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRM−24NK	0.8	ø3.5	ø3.5	4.0	26.9	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-5-1

- MATERIAL: TPE
- COLOR: BLACK

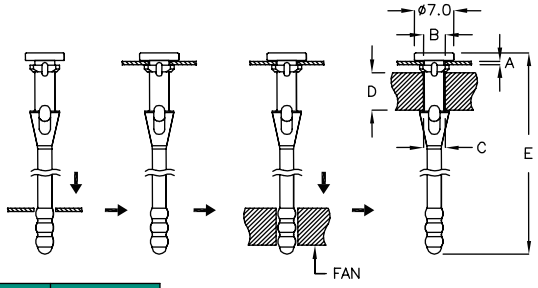


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−3GT	0.8	ø3.5	ø3.5	28.0	73.0	1000



風扇鉚釘 FAN SNAP RIVET 5-5-2

- MATERIAL: SILICONE
- COLOR: BLACK

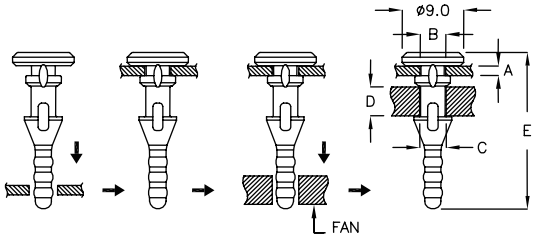


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−4WY	1.5	ø3.5	ø3.5	5.0	23.0	1000



風扇鉚釘 FAN SNAP RIVET 5-5-3

- MATERIAL: TPE
- COLOR: BLACK

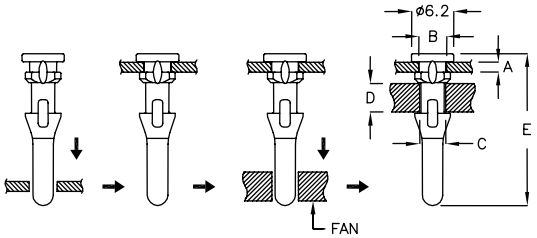



PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRDK−22A	1.5	ø4.0	ø3.5	5.0	22.2	1000



風扇鉚釘 FAN SNAP RIVET 5-5-4

- MATERIAL: SILICONE
- COLOR: BLACK





PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SR−17KM	1.0	ø3.0	ø3.5	6.5	27.6	2000
SR−20RQ	1.0	ø4.0	ø3.5	5.0	25.45	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




風扇鉚釘 FAN SNAP RIVET 5-6-1

- MATERIAL: SILICONE
- COLOR: BLACK

NEW

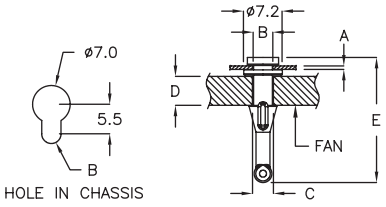


	PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
★	SRD−3BK	1.0	ø3.6	ø3.5	6.0~6.4	23.3	2000



風扇鉚釘 FAN SNAP RIVET 5-6-2

- COLOR: BLACK

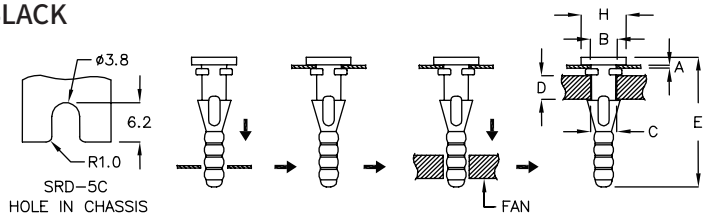


PART NO	MATERIAL	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	H	PACKAGE
SRD−3C	SILICONE	1.0	ø3.6	ø3.5	5.0	20.0	ø5.8	2000
SRD−3MF	TPE	0.8	ø3.5	ø3.5	4.0	20.0	ø5.8	
SRD−5C	SILICONE	0.8		ø4.3	5.0	23.8	ø8.0	1000



風扇鉚釘 FAN SNAP RIVET 5-6-3

- MATERIAL: SILICONE
- COLOR: BLACK

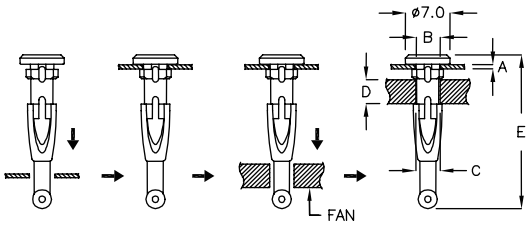


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRG−3A	0.8	ø3.7	ø3.5	5.0	24.3	1000



風扇鉚釘 FAN SNAP RIVET 5-6-4

- MATERIAL: SILICONE
- COLOR: BLACK

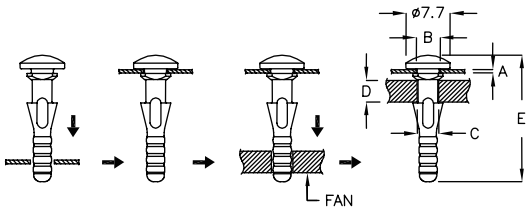


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRCK−3HR	1.0	ø4.0	ø3.5	5.0	22.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-7-1

- MATERIAL: SILICONE
- COLOR: BLACK

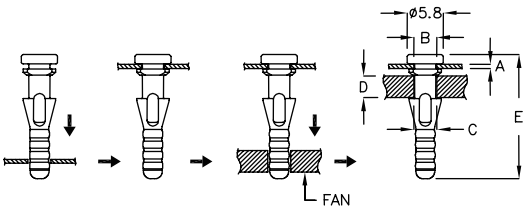


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−3FC	1.0	ø3.5	ø3.5	4.0	20.0	2000



風扇鉚釘 FAN SNAP RIVET 5-7-2

- MATERIAL: TPE
- COLOR: BLACK

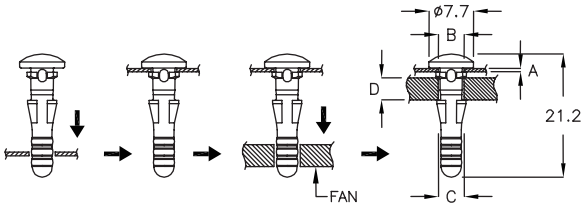


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN THICKNESS	PACKAGE
SRCK−4HT	1.0	ø4.0	ø4.0	4.0	2000



風扇鉚釘 FAN SNAP RIVET 5-7-3

- MATERIAL: SILICONE
- COLOR: BLACK

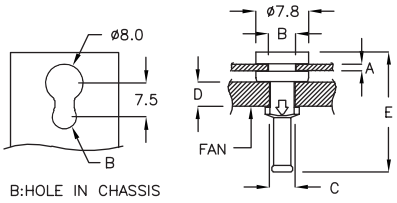


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRH−3M	1.0	ø4.0	ø3.5	4.0	17.7	2000




風扇鉚釘 FAN SNAP RIVET 5-7-4

- MATERIAL: TPE
- COLOR: BLACK

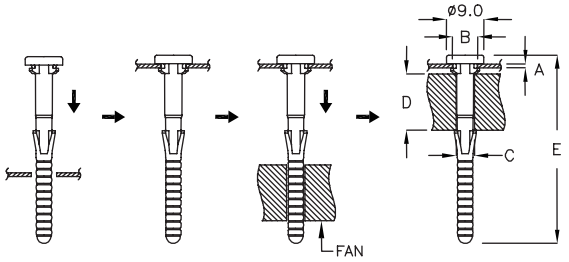


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−3TF	2.0	ø4.0	ø3.5	5.0	25.0	2000
SRD−4GM	0.8	ø6.0	ø4.3	15.0	44.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-8-1

- MATERIAL: SILICONE
- COLOR: BLACK

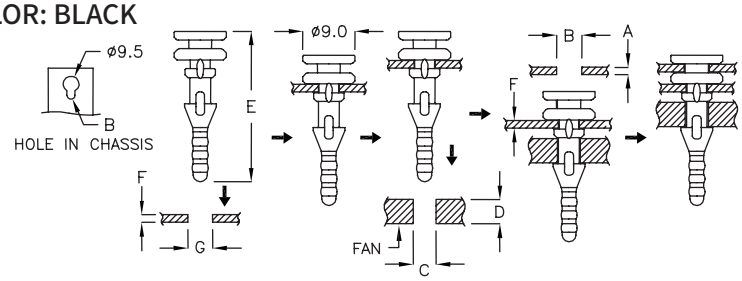


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	F CHASSIS THICKNESS	G HOLE IN CHASSIS	PACKAGE
SRD−4PW	1.5	ø4.2	ø3.5	5.0	26.0	1.5	ø3.5	1000



風扇鉚釘 FAN SNAP RIVET 5-8-2

- MATERIAL: SILICONE
- COLOR: BLACK

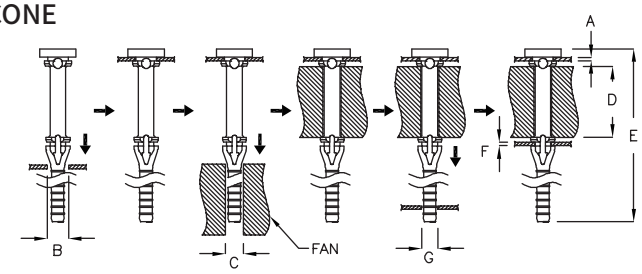


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	F CHASSIS THICKNESS	G HOLE IN CHASSIS	PACKAGE
SRD−3QW	0.8	ø4.5	ø3.5	28.0	72.7	0.8	ø3.5	500



風扇鉚釘 FAN SNAP RIVET 5-8-3

- MATERIAL: SILICONE
- COLOR: BLACK

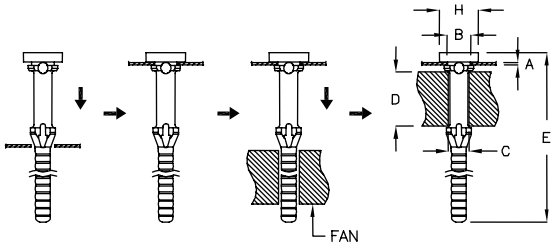


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	H	PACKAGE
SRD−3A	0.8	ø4.5	ø3.5	28.0	70.7	ø7.8	500
SRD−3R	0.8	ø3.5	ø3.5	28.0	70.7	ø6.8	
SRD−3DQ	0.8	ø3.5	ø3.5	28.0	70.7	ø5.5	
SRD−3JK	0.8	ø4.5	ø3.5	20.0	54.7	ø7.8	
SRD−3WP	1.0	ø3.5	ø3.5	28.0	70.9	ø6.8	




風扇鉚釘 FAN SNAP RIVET 5-8-4

- MATERIAL: SILICONE
- COLOR: BLACK

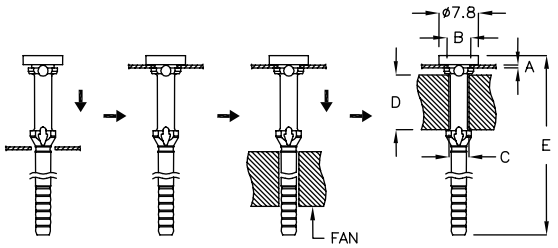


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−3AT	0.8	ø4.5	ø3.5	28.0	70.7	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-9-1

- MATERIAL: TPR
- COLOR: BLACK







PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SR−17Y	1.6	ø4.1	ø3.6	6.5	27.65	2000
SR−20Y	1.6	ø4.1	ø3.6	5.5	25.0	



風扇鉚釘 FAN SNAP RIVET 5-9-2

- MATERIAL: SILICONE
- COLOR: BLACK







PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SR−41Y	1.0	ø4.0	ø4.0	4.0	25.5	2000



風扇鉚釘 FAN SNAP RIVET 5-9-3

- MATERIAL: TPE
- COLOR: BLACK







PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SR−20MK	1.6	ø4.1	ø3.6	5.5	25.7	2000



風扇鉚釘 FAN SNAP RIVET 5-9-4

- MATERIAL: SILICONE
- COLOR: BLACK

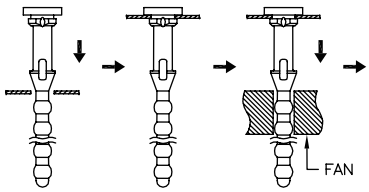




PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−4A	1.0	ø4.4	ø4.0	25.4	65.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-10-1

- MATERIAL: SILICONE
- COLOR: BLACK

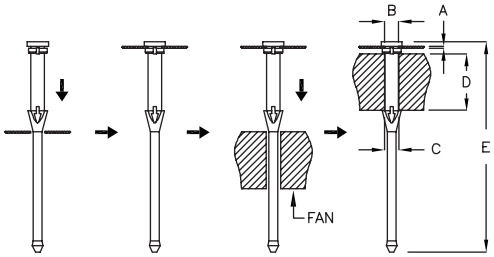


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD-5H	0.8	ø4.2	ø4.2	20.0	69.3	500



風扇鉚釘 FAN SNAP RIVET 5-10-2

- MATERIAL: TPE
- COLOR: BLACK

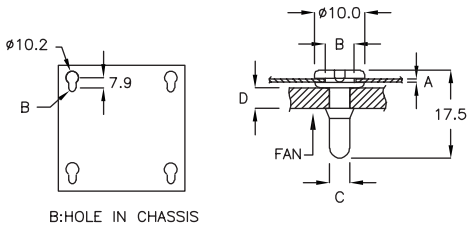


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-15C	0.8	ø5.9	ø4.2	4.0	2000



風扇鉚釘 FAN SNAP RIVET 5-10-3

- COLOR: BLACK

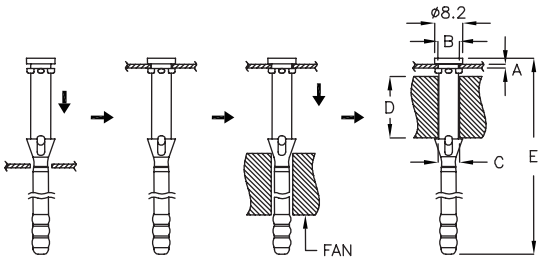


PART NO	MATERIAL	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD-4BN	SILICONE	1.0	ø4.3	ø4.3	10.0	41.5	1000
SRD-4KH	TPE	1.0	ø4.3	ø4.3	15.0	46.5	



風扇鉚釘 FAN SNAP RIVET 5-10-4

- MATERIAL: SILICONE
- COLOR: BLACK

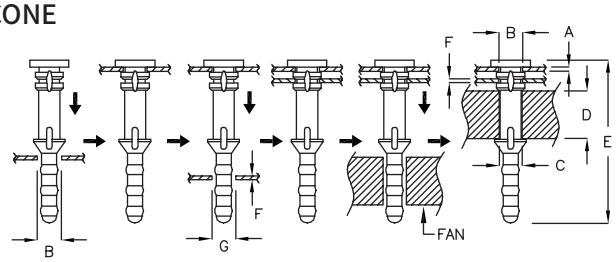


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	F CHASSIS THICKNESS	G HOLE IN CHASSIS	PACKAGE
SRD-4D	1.0~1.2	ø4.3	ø4.3	38.0	81.2	0.8~1.0	ø4.3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-11-1

- MATERIAL: TPE
- COLOR: BLACK

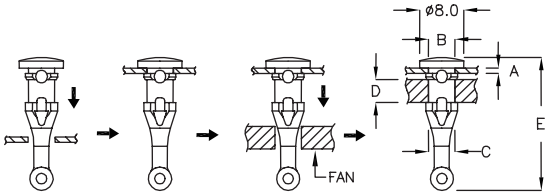


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SR-22GS	1.0	ø4.3	ø4.3	4.0	23.2	2000



風扇鉚釘 FAN SNAP RIVET 5-11-2

- MATERIAL: SILICONE,TPE,TPR
- COLOR: BLACK

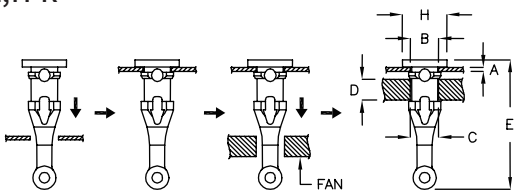


PART NO	MATERIAL	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	H	PACKAGE
SR-16Y	TPE	0.9	ø4.6	ø4.6	4.0	22.2	ø7.6	2000
SR-22A	TPE	1.0	ø4.5	ø4.5	4.0	22.2	ø7.6	
SR-22C	TPE	1.0	ø4.5	ø4.5	3.0	22.2	ø7.6	
SR-22D	TPE	0.8	ø4.5	ø4.5	4.0	22.2	ø7.6	
SR-22F	TPE	0.8	ø4.5	ø4.5	3.0	22.2	ø7.6	
SR-22H	SILICONE	1.0	ø4.3	ø4.3	4.0	22.2	ø7.6	
SR-22J	TPE	1.0	ø4.3	ø4.3	3.0	22.2	ø7.6	
SR-22K	TPE	0.8	ø4.3	ø4.3	4.0	22.2	ø7.6	
SR-22L	TPE	0.8	ø4.3	ø4.3	3.0	22.2	ø7.6	
SR-22XW	SILICONE	1.2	ø4.6	ø4.5	4.0	22.7	ø9.3	



風扇鉚釘 FAN SNAP RIVET 5-11-3

- MATERIAL: TPE
- COLOR: BLACK

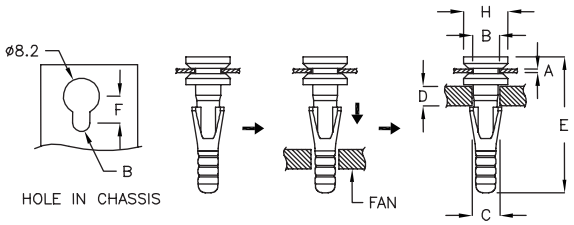


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	F	H	PACKAGE
SRD-7AK	0.8	ø4.4	ø4.3	4.0	23.9	5.7	ø7.8	1000
SRD-21Y	1.0	ø4.5	ø4.5	4.0	22.6	6.2	ø8.0	2000
SRD-23C	1.0	ø4.5	ø4.5	4.8	23.3	6.2	ø8.0	1000
SRD-25GW	1.0	ø4.5	ø4.3	5.4	25.7	6.2	ø7.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-12-1

- MATERIAL: TPE
- COLOR: BLACK

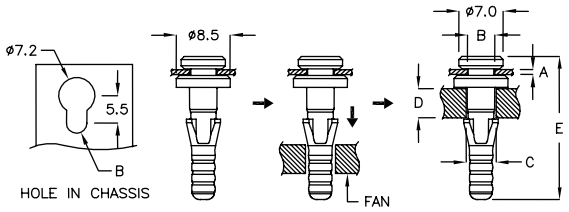


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−22MK	1.0	ø4.1	ø4.5	5.0	22.6	1000



風扇鉚釘 FAN SNAP RIVET 5-12-2

- MATERIAL: TPE
- COLOR: BLACK

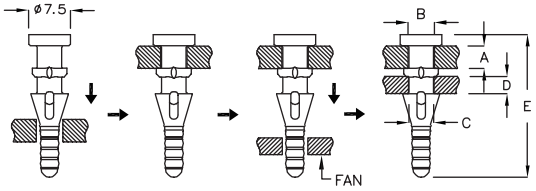


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRD−4NH	4.0	ø4.65	ø4.3	4.0	25.4	1000



風扇鉚釘 FAN SNAP RIVET 5-12-3

- MATERIAL: SILICONE
- COLOR: BLACK

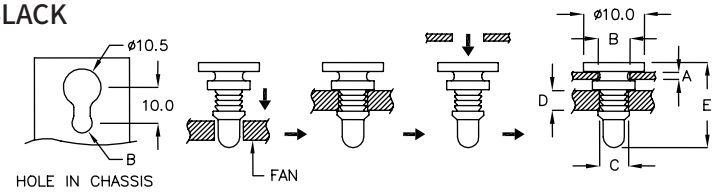


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SRCM−5JG	1.3	ø5.6	ø4.3	4.0	13.85	2000
SRCM−5K	1.6	ø5.6	ø4.3	4.0	14.05	



風扇鉚釘 FAN SNAP RIVET 5-12-4

- MATERIAL: SILICONE
- COLOR: BLACK

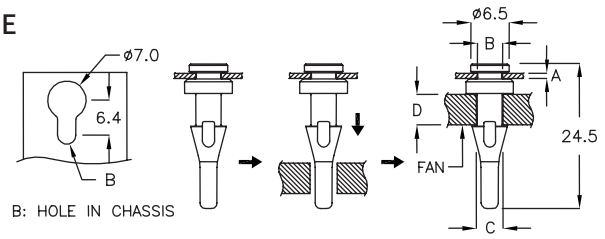


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRL−24JK	0.9	ø4.1	ø4.4	5.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




風扇鉚釘 FAN SNAP RIVET 5-13-1

- MATERIAL: TPE
- COLOR: BLACK

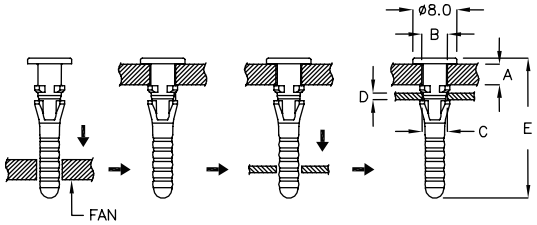



PART NO	A FAN CHASSIS THICKNESS	B HOLE IN FAN	C HOLE IN CHASSIS	D CHASSIS THICKNESS	E	PACKAGE
SRCK−4FA	4.0	ø4.4	ø4.4	1.5	25.4	2000



風扇鉚釘 FAN SNAP RIVET 5-13-2

- MATERIAL: TPE
- COLOR: BLACK







PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	PACKAGE
SR−26Y	1.0	ø4.1	ø4.5	4.0	22.6	1000



風扇鉚釘 FAN SNAP RIVET 5-13-3

- MATERIAL: TPR
- COLOR: BLACK







PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR−21RK	1.0	ø4.5	ø4.5	4.0	2000



風扇鉚釘 FAN SNAP RIVET 5-13-4

- MATERIAL: TPR
- COLOR: BLACK






PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR−21Y	1.0	ø4.5	ø4.5	4.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




風扇鉚釘 FAN SNAP RIVET 5-14-1

- MATERIAL: TPE
- COLOR: BLACK

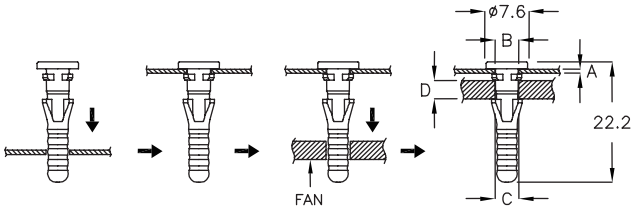


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRD−22AT	1.0	ø4.5	ø4.5	4.0	2000



風扇鉚釘 FAN SNAP RIVET 5-14-2

- MATERIAL: TPE
- COLOR: BLACK

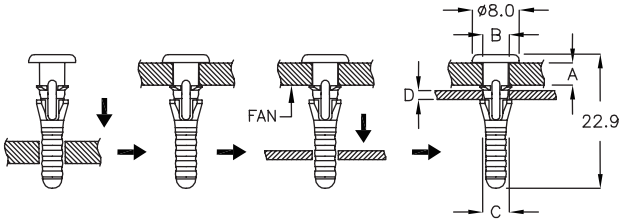


PART NO	A FAN THICKNESS	B HOLE IN FAN	C HOLE IN CHASSIS	D CHASSIS THICKNESS	PACKAGE
SRBK−4TK	4.0	ø4.5	ø4.5	2.0	2000



風扇鉚釘 FAN SNAP RIVET 5-14-3

- MATERIAL: TPE
- COLOR: BLACK

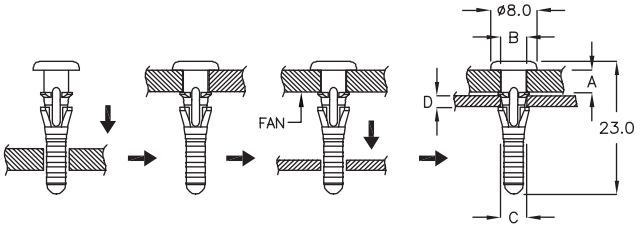


PART NO	A FAN THICKNESS	B HOLE IN FAN	C HOLE IN CHASSIS	D CHASSIS THICKNESS	PACKAGE
SRCK−4JL	4.0	ø4.5	ø4.5	2.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




風扇鉚釘 FAN SNAP RIVET 5-15-1

- MATERIAL: TPE
- COLOR: BLACK

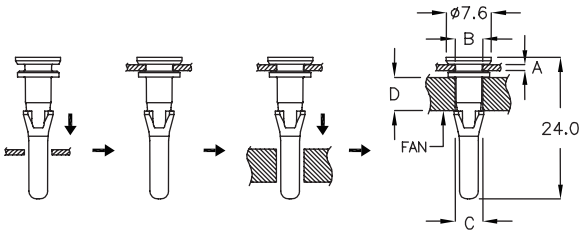


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRD-24D	1.0	ø4.5	ø4.5	6.0	2000



風扇鉚釘 FAN SNAP RIVET 5-15-2

- MATERIAL: SILICONE
- COLOR: BLACK

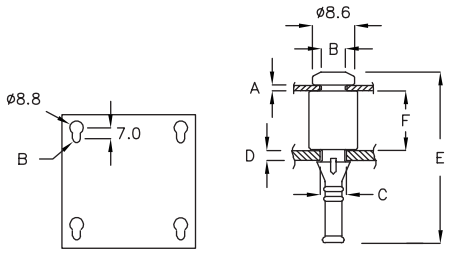


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN CHASSIS	D FAN CHASSIS THICKNESS	E	F	PACKAGE
SR-33Y	1.2	ø5.0	ø4.6	2.5	34.3	11.4	500
SR-36Y	1.2	ø5.0	ø4.6	2.5	34.9	12.0	



風扇鉚釘 FAN SNAP RIVET 5-15-3

- MATERIAL: TPE
- COLOR: BLACK

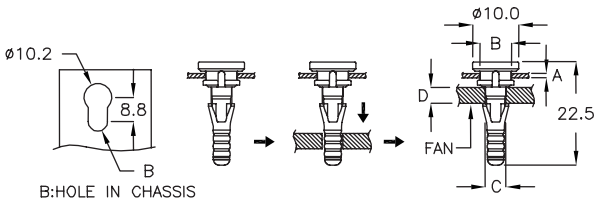


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRD-21SA	1.0	ø7.1	ø4.5	4.0	2000



風扇固定扣 FAN SNAP RIVET 5-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

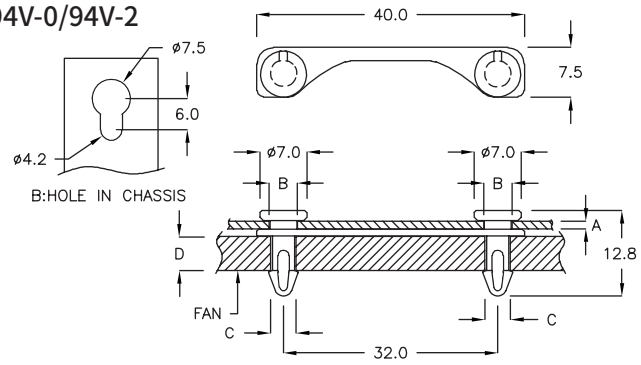


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
LHK-40	1.2	ø4.2	ø3.5	5.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇固定扣 FAN SNAP RIVET — 5-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

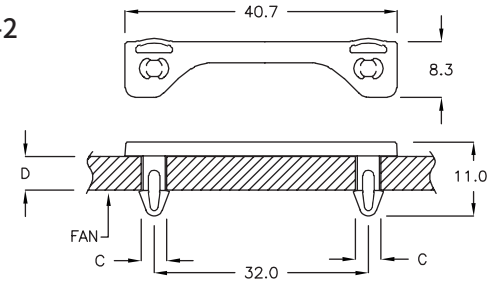


PART NO	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
LHQ-40M	ø3.5	5.0	200



風扇固定扣 FAN SNAP RIVET — 5-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

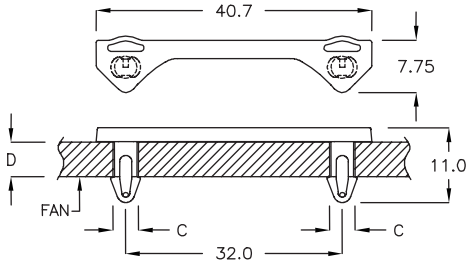


PART NO	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
LHQ-40KP	ø3.5	5.0	200



鉚釘 MOUNTING BUTTON — 5-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

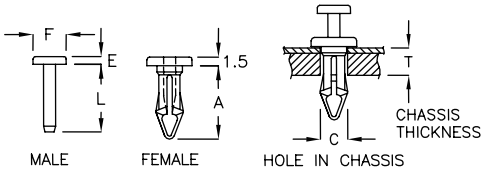


PART NO	A	C HOLE IN CHASSIS	E	F	L	T CHASSIS THICKNESS	PACKAGE
SR-02Y	8.9	ø3.1	1.3	ø3.2	7.65	2.5~3.2	2000
SR-03Y	10.0	ø3.2	1.0	ø3.1	9.0	4.2~4.5	
SR-4Y	12.1	ø4.3	1.3	ø5.5	11.2	5.6~6.4	
SR-06C	10.7	ø4.5	1.55	ø7.3	9.55	5.6~6.0	
SR-06Y	10.8	ø4.6	1.5	ø7.3	9.6	5.6~6.0	
SR-08Y	10.7	ø4.65	1.53	ø4.75	9.4	5.2~5.7	



尼龍鉚釘 SNAP RIVET — 5-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

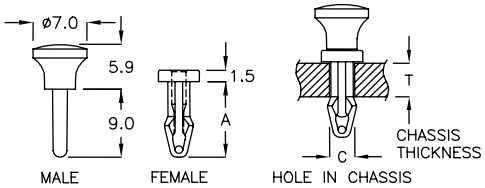


PART NO	A	C HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SRXM-3Y	10.0	ø3.0	4.8	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-17-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

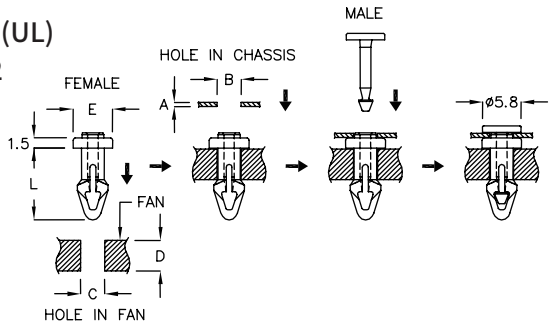


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	L	PACKAGE
SQR−3KM	0.8	ø3.5	ø3.5	4.0	ø6.8	9.95	2000
SQR−3GF	1.0	ø3.5	ø3.5	4.0	ø6.8	9.95	
SQR−3AK	0.8	ø3.5	ø3.5	5.0	ø6.0	10.85	
SQR−3DP	1.0	ø3.5	ø3.5	5.0	ø6.0	10.85	



風扇鉚釘 FAN SNAP RIVET 5-17-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

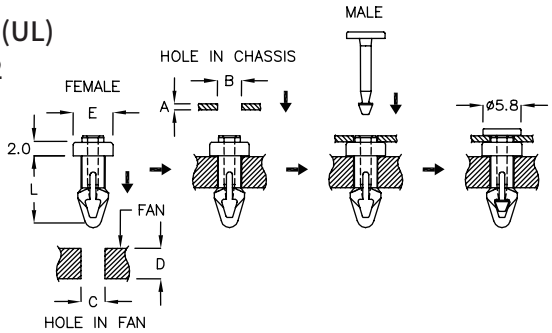


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	L	PACKAGE
SQRC−3TC	1.0	ø3.5	ø3.5	5.0	ø6.0	10.85	2000




風扇鉚釘 FAN SNAP RIVET 5-17-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

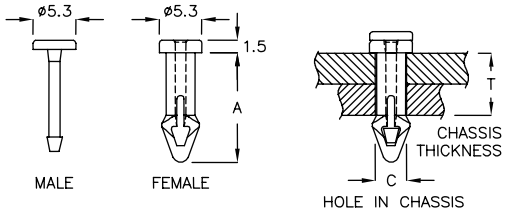


PART NO	A	C HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SR−14Y	13.6	ø3.6	8.1~8.3	2000



風扇鉚釘 FAN SNAP RIVET 5-17-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK

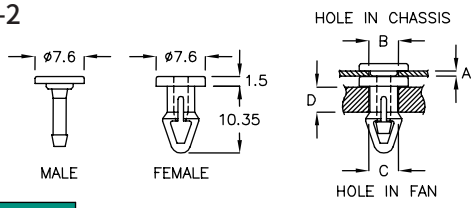


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR−11Y	0.8	ø4.6	ø4.45	4.3~4.5	2000
SR−12Y	0.8	ø4.6	ø4.45	4.5~5.7	
SR−45Y	0.8	ø4.6	ø4.3	3.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-18-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

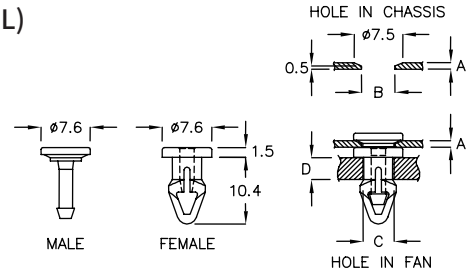


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-13Y	1.0	ø5.15	ø4.45	4.0~4.2	2000



風扇鉚釘 FAN SNAP RIVET 5-18-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK,BLUE

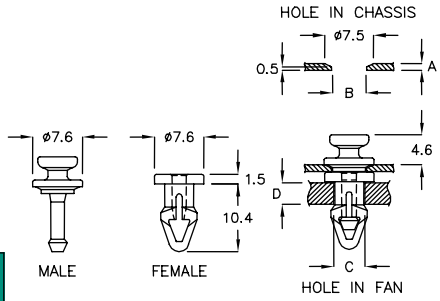


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-13YH	1.0	ø5.15	ø4.45	4.0~4.2	2000



風扇鉚釘 FAN SNAP RIVET 5-18-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

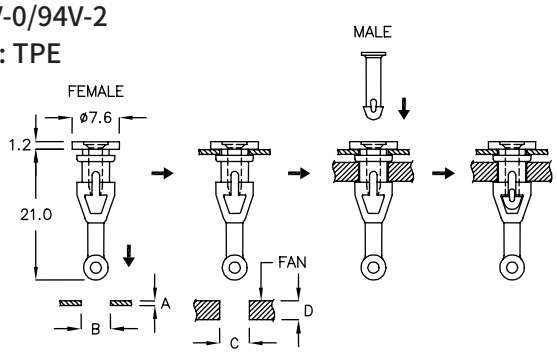


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-15Y	1.0	ø4.6	ø4.6	3.8~4.0	2000




風扇鉚釘 FAN SNAP RIVET 5-18-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK,BLUE

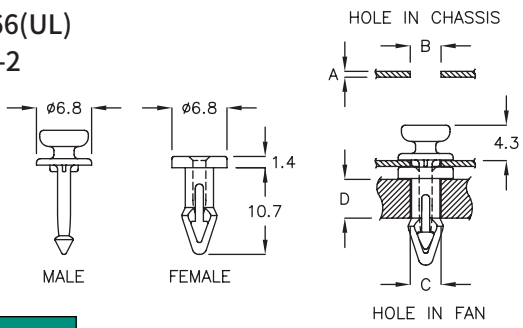

PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-51Y	0.8	ø3.6	ø3.5	5.0	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-19-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK,BLUE

NEW

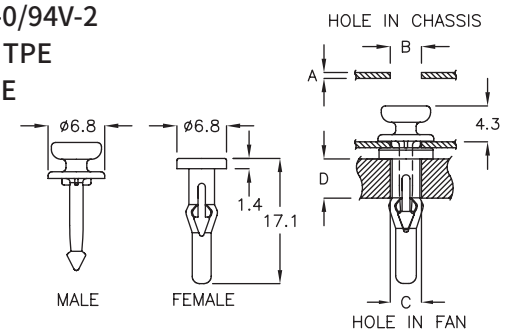


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
★ SR−52Y	0.8	ø3.6	ø3.5	5.0	2000



風扇鉚釘 FAN SNAP RIVET 5-19-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

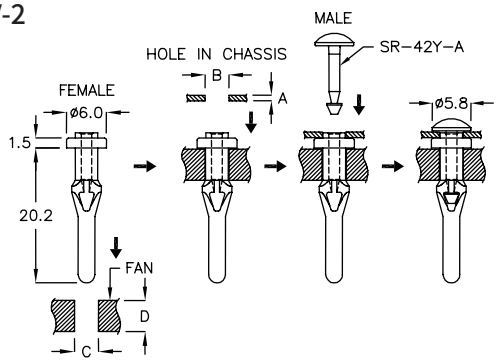


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRNT−3FY	0.8~1.0	ø3.5	ø3.5	5.0	2000



風扇鉚釘 FAN SNAP RIVET 5-19-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

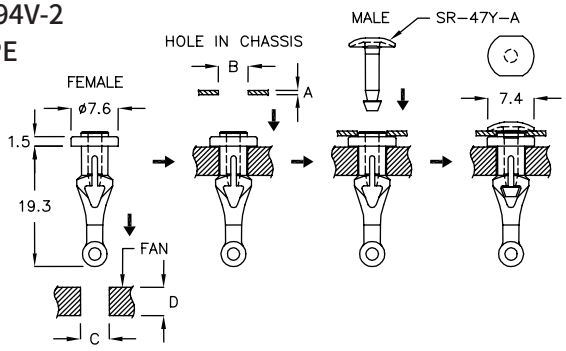


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SRN−4YB	0.8	ø4.5	ø4.3	4.8~5.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-20-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

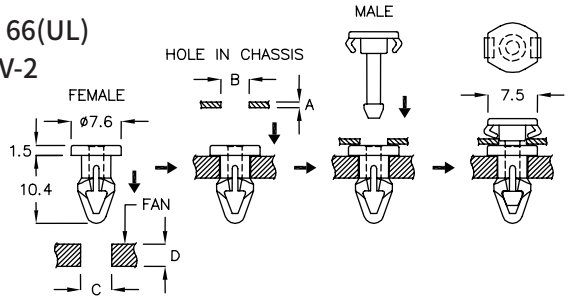


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-19Y	0.8	ø4.1	ø4.45	4.0~4.2	2000



風扇鉚釘 FAN SNAP RIVET 5-20-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

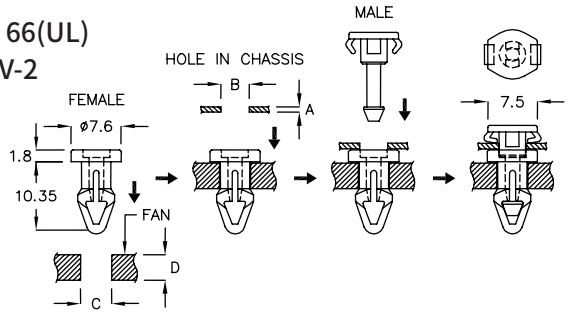


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	PACKAGE
SR-23Y	1.2	ø4.1	ø4.45	4.0~4.2	2000
SR-24Y	0.8	ø4.1	ø4.45	4.0~4.2	




風扇鉚釘 FAN SNAP RIVET 5-20-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

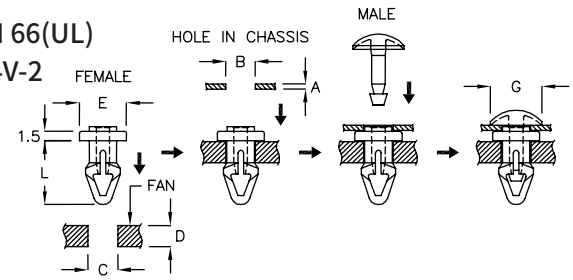


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	E	G	L	PACKAGE
SR-38Y	0.8~1.2	ø4.5	ø4.45	4.0	ø7.6	ø8.3	10.35	2000
SR-42Y	0.8~1.0	ø3.5	ø3.5	5.0	ø6.0	ø5.8	11.3	



風扇鉚釘 FAN SNAP RIVET 5-20-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

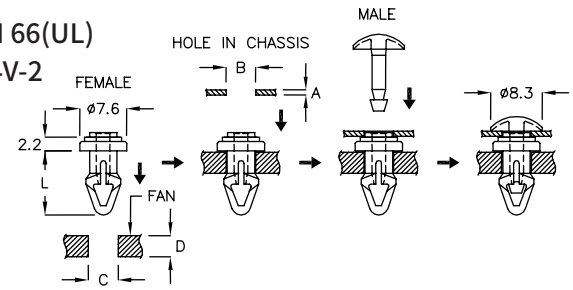


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	L	PACKAGE
SR-39Y	0.8~1.2	ø4.5	ø4.45	4.0	10.35	2000
SR-43Y	0.8~1.2	ø4.5	ø4.3	3.5	9.95	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇鉚釘 FAN SNAP RIVET 5-21-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

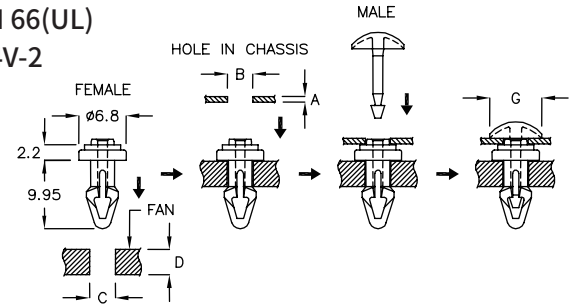


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	G	PACKAGE
SR−44Y	0.8	ø3.5	ø3.5	4.0	ø7.5	2000
SR−48Y	1.0	ø3.5	ø3.5	4.0	ø5.8	



風扇鉚釘 FAN SNAP RIVET 5-21-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

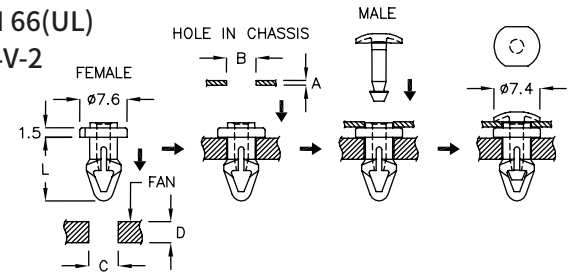


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	L	PACKAGE
SR−46Y	1.0~1.2	ø4.5	ø4.45	4.0	10.35	2000
SR−47Y	0.8	ø4.5	ø4.3	5.0	11.35	




風扇鉚釘 FAN SNAP RIVET 5-21-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

NEW

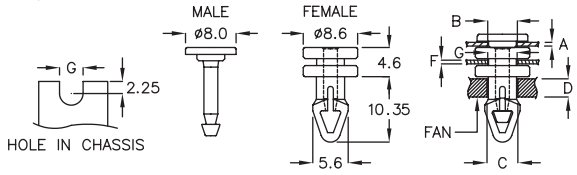


PART NO	A CHASSIS THICKNESS	B HOLE IN CHASSIS	C HOLE IN FAN	D FAN CHASSIS THICKNESS	G HOLE IN CHASSIS	F CHASSIS THICKNESS	PACKAGE
★ SQRD−4H	1.0	ø4.5	ø4.5	4.0	4.5	1.0	2000



尼龍鉚釘 SNAP RIVET 5-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

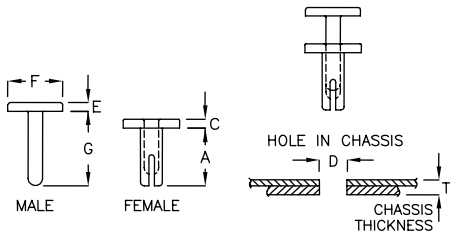


PART NO	A	C	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR−2MC	3.2	0.6	ø2.0	0.5	ø3.5	4.0	1.3~2.0	2000
SR−2QH	4.0	0.8	ø2.0	0.5	ø3.5	4.85	2.0~3.0	
SR−2TK	5.0	0.8	ø2.0	0.75	ø4.8	6.5	2.8~3.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

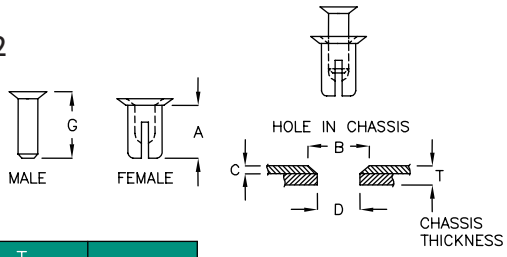


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	D HOLE IN CHASSIS	G	T CHASSIS THICKNESS	PACKAGE
SR-3P	8.0	ø6.5	1.25	ø3.0	8.65	5.1~5.3	2000
SR-3RY	3.0	ø5.9	0.8	ø3.4	3.7	2.7~2.95	
SR-4B	6.35	ø6.5	0.7	ø4.0	7.8	3.5~3.9	
SR-4CA	6.2	ø6.5	0.8	ø4.0	7.5	3.5~4.9	
SR-4P	8.5	ø6.5	0.8	ø4.0	9.85	4.3~5.6	
SR-4PF	7.25	ø5.8	0.9	ø4.0	9.3	5.7~6.0	
SR-4PL	10.4	ø6.5	0.8	ø4.0	12.8	6.8~8.8	
SR-4PJ	15.0	ø6.5	1.5	ø3.9	17.45	12.0~13.0	



尼龍鉚釘 SNAP RIVET 5-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

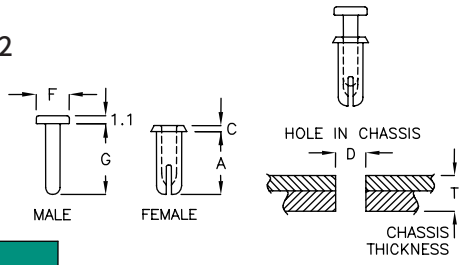


PART NO	A	C	D HOLE IN CHASSIS	F	G	T CHASSIS THICKNESS	PACKAGE
SR-3DM	8.6	0.8	ø3.5	ø4.5	9.65	5.5~6.5	2000
SR-4LM	11.3	0.9	ø4.5	ø5.8	13.4	8.0~9.0	



尼龍鉚釘 SNAP RIVET 5-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

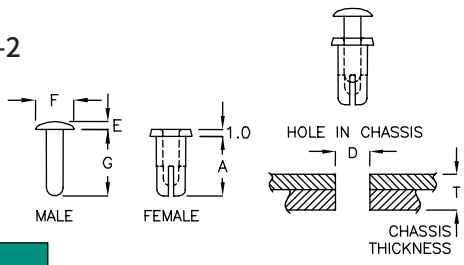


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR-4DR	9.0	ø4.5	1.2	ø5.8	10.5	5.2~6.0	2000



尼龍鉚釘 SNAP RIVET 5-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

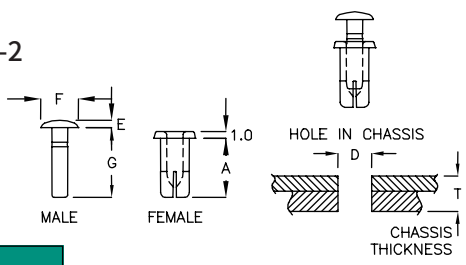


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR-4DX	9.0	ø4.5	1.15	ø5.7	10.6	5.2	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




尼龍鉚釘 SNAP RIVET 5-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

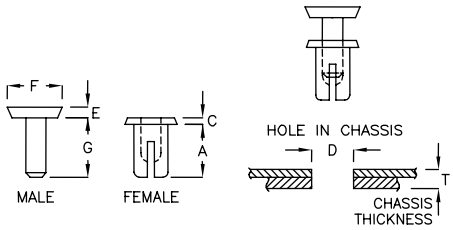


PART NO	A	C	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR−3XK	7.5	0.8	ø3.0	1.3	ø5.5	8.3	3.5~4.6	2000
SR−3T	7.5	0.8	ø3.0	1.25	ø6.9	9.4	3.5~4.6	
SR−3TW	11.7	1.0	ø3.1	1.2	ø5.5	12.7	8.7~9.7	
SR−4T	8.0	1.0	ø4.0	1.3	ø7.0	11.0	3.7~5.2	
SR−4YT	8.3	1.0	ø4.3	1.7	ø5.5	11.3	4.0~6.0	
SR−4K	8.3	1.0	ø4.3	1.5	ø7.9	11.4	4.0~6.0	
SR−4LQ	10.5	0.9	ø4.5	1.25	ø5.85	12.3	6.0~7.2	



尼龍鉚釘 SNAP RIVET 5-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

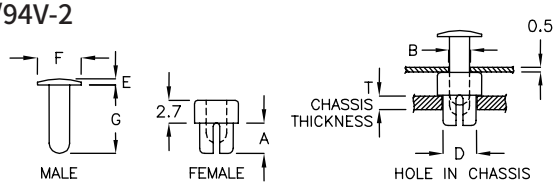


PART NO	A	B HOLE IN CHASSIS	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR−4FH	3.6	ø2.6	ø4.0	0.7	ø5.2	7.9	1.6	2000



尼龍鉚釘 SNAP RIVET 5-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

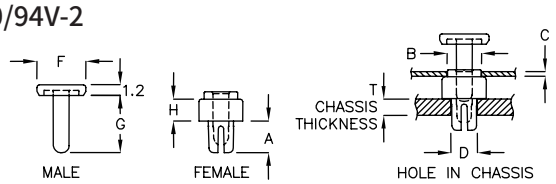


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	D HOLE IN CHASSIS	F	G	H	T CHASSIS THICKNESS	PACKAGE
SRMR−2H	3.6	ø3.0	0.25	ø2.0	ø4.6	6.4	2.5	1.6	2000
SRMR−2CF	3.0	ø3.0	0.6~0.8	ø2.0	ø4.6	6.4	2.5	1.6	
SRMR−3D	3.6	ø4.0	0.4	ø3.0	ø5.6	6.5	2.5	1.6	
SRMR−3SC	3.6	ø4.0	1.6	ø3.0	ø5.6	10.2	5.0	1.6	



尼龍鉚釘 SNAP RIVET 5-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

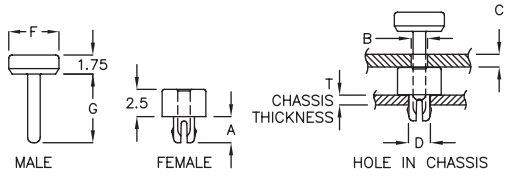


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	D HOLE IN CHASSIS	F	G	T CHASSIS THICKNESS	PACKAGE
SRMS−2N	2.4	ø1.5	1.2	ø2.0	ø4.6	6.3	0.9~1.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

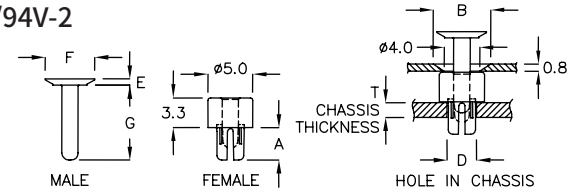


PART NO	A	B HOLE IN CHASSIS	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SRMT-3C	3.6	ø6.4	ø3.18	0.7	ø5.5	8.3	1.6	2000



尼龍鉚釘 SNAP RIVET 5-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

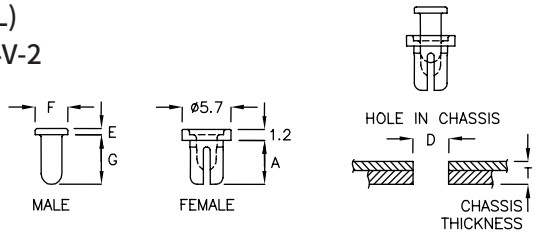


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SRMF-4C	5.0	ø4.0	0.7	ø3.8	5.6	2.6	2000




尼龍鉚釘 SNAP RIVET 5-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

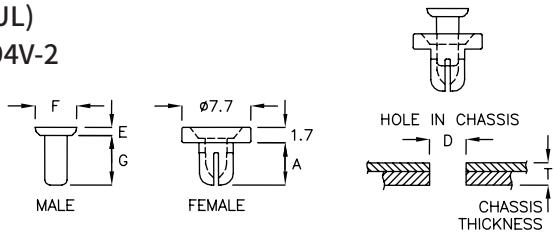


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR-4XT	4.7	ø4.0	0.9	ø4.65	5.5	1.8~2.5	2000




尼龍鉚釘 SNAP RIVET 5-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

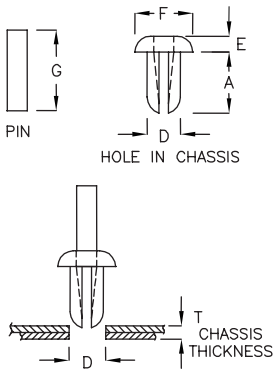


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
MAA-3C	5.8	ø3.2	1.5	ø5.55	7.7	2.5~3.0	2000
MAA-4C	13.7	ø4.7	2.75	ø8.15	16.0	8.4~9.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

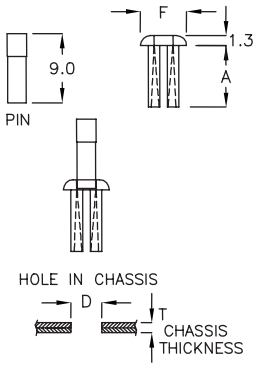


PART NO	A	D HOLE IN CHASSIS	F	T CHASSIS THICKNESS	PACKAGE
MAB−3A	8.0	ø4.0	ø6.0	0.8~1.2	2000



鉚釘 SNAP RIVET 5-25-2

- MATERIAL: POM
- COLOR: NATURAL

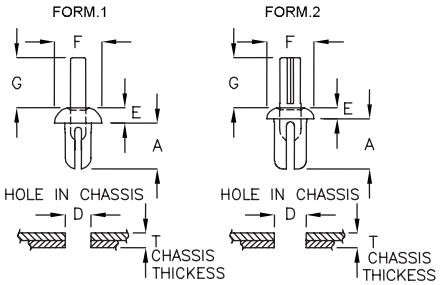


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	FORM	PACKAGE
SRX−3DF	7.0	ø3.0	2.0	ø5.6	8.8	2.0~3.0	1	2000
SRX−3A	7.05	ø3.6	2.0	ø6.2	8.8	2.0~5.0	1	
SRX−4P	7.0	ø4.0	2.0	ø6.6	8.8	2.0~5.0	1	
SRX−5M	7.1	ø5.0	2.0	ø7.6	8.8	2.0~5.0	2	
SRX−6K	7.1	ø6.0	2.0	ø8.6	8.8	2.0~5.0	2	



鉚釘 SNAP RIVET 5-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	D HOLE IN CHASSIS	F	T CHASSIS THICKNESS	PACKAGE
SRXD−3A	3.0	ø3.4	ø5.2	2.95	2000



尼龍鉚釘 SNAP RIVET 5-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

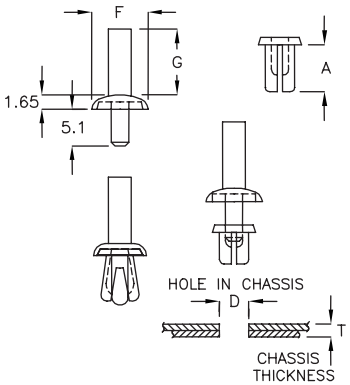


PART NO	A	D HOLE IN CHASSIS	F	G	T CHASSIS THICKNESS	PACKAGE
SR−3FK	3.5	ø3.5	ø8.0	10.0	1.0~1.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

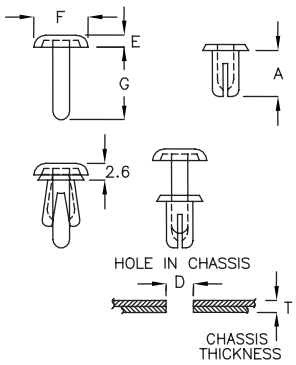


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR-4RK	7.0	ø4.0	1.8	ø8.2	11.0	4.5~5.4	2000



尼龍鉚釘 SNAP RIVET 5-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

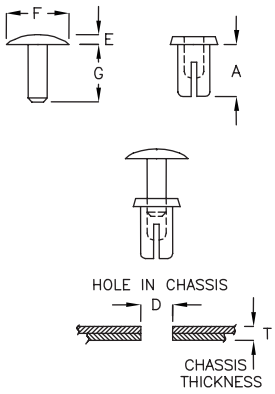


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR-04C	8.0	ø4.2	0.75	ø7.0	10.75	3.8~5.6	2000
SR-4CK	8.0	ø4.05	1.0	ø7.0	11.0	2.4~5.9	
SR-4LC	12.4	ø4.0	0.9	ø5.4	14.7	7.5~8.5	



尼龍鉚釘 SNAP RIVET 5-26-3

- MALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: WHITE
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SRMQ-3BW	4.0	5.6	ø3.5	1.9~2.3	1000



鉚釘 SNAP RIVET 5-26-4

- SR-3SP MALE COLOR: WHITE
- SR-3SP FEMALE COLOR: NATURAL
- SR-3PF COLOR: BLACK




PART NO	MATERIAL		A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SR-3SP	MALE	PC V0	4.3	ø3.0	1.75	ø9.4	4.7	1.2~2.0	2000
	FEMALE	N66 V0							
SR-3PF	N66 V2		3.65	ø3.2	1.6	ø8.5	5.0	1.5~1.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-27-1

- MALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: WHITE
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

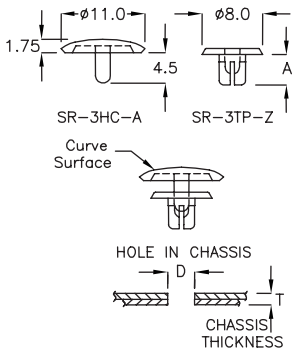


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SR-3HC-A	4.0	ø3.5	1.9~2.3	2000
SR-3TP-Z				



尼龍鉚釘 SNAP RIVET 5-27-2

- MALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: WHITE
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SR-3KD-A	4.0	ø3.5	1.9~2.3	2000
SR-3TP-Z				



尼龍鉚釘 SNAP RIVET 5-27-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

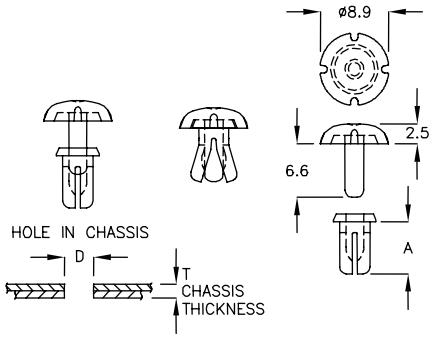


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SR-4AH	6.4	ø4.0	3.5~4.5	2000



尼龍鉚釘 SNAP RIVET 5-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

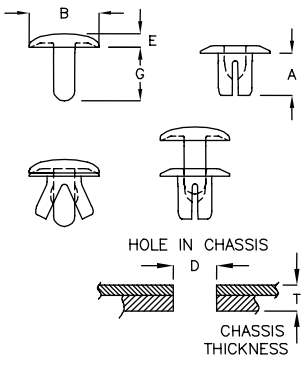


PART NO	A	B	D HOLE IN CHASSIS	E	G	T CHASSIS THICKNESS	PACKAGE
SR-3RU	7.0	ø6.2	ø3.5	1.6	7.5	4.5~5.5	2000
SR-4ZT	5.5	ø9.0	ø4.5	1.8	6.9	1.5~3.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-28-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

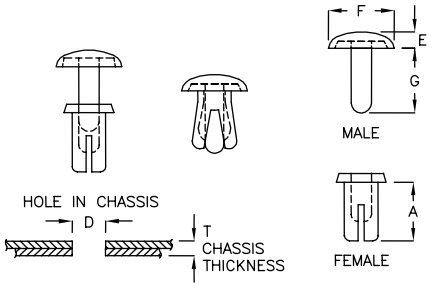


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	E	F	G	MATERIAL	PACKAGE
SR-1FM	3.5	ø1.5	2.0~2.5	1.2	ø4.0	3.3	N66	2000
SR-2CW	3.3	ø1.9	1.6~2.0	1.2	ø4.3	3.6		
SR-2XC	3.25	ø2.0	1.0~1.7	1.2	ø4.3	4.2		
SR-2	3.3	ø2.0	1.0~1.7	1.2	ø4.3	4.2		
SR-2AF	3.6	ø2.0	1.5~2.0	1.2	ø4.3	3.6		
SR-2BT	4.0	ø2.0	1.8~2.5	1.2	ø4.3	4.5		
SR-2DS	4.5	ø2.0	2.2~3.0	1.2	ø4.3	5.0		
SR-2FR	5.5	ø2.0	2.5~3.5	1.2	ø4.3	5.8		
SR-2K	6.1	ø2.0	3.5~4.5	1.2	ø4.3	6.2		
SR-2F	2.8	ø2.1	0.6~1.2	1.2	ø4.3	3.6		
SR-2H	4.4	ø2.1	1.7~2.8	1.2	ø4.3	5.2		
SR-2J	5.2	ø2.1	2.8~3.6	1.2	ø4.3	6.5		
SR-2RC	4.7	ø2.2	2.8~3.3	1.2	ø4.3	5.5		
SR-2GQ	3.5	ø2.5	0.5~1.0	1.5	ø5.0	3.5		
SR-2HY	4.0	ø2.5	0.8~1.6	1.5	ø5.0	4.3		
SR-2.5S	4.5	ø2.5	0.8~2.5	1.5	ø5.0	4.5		
SR-2JB	5.0	ø2.5	2.0~3.0	1.5	ø5.0	5.5		
SR-2KY	5.5	ø2.5	2.5~3.5	1.5	ø5.0	6.0		
SR-2NT	6.0	ø2.5	3.0~4.0	1.5	ø5.0	6.5		
SR-2GF	4.2	ø2.6	2.0~3.0	1.45	ø5.0	4.75		
SR-2.5	4.4	ø2.6	2.0~2.8	1.5	ø5.0	4.5		
SR-2PD	4.8	ø2.6	2.5~3.4	1.4	ø5.0	4.85		
SR-2.7F	3.6	ø2.7	1.0~2.0	1.5	ø5.0	4.0		
SR-2.7H	5.2	ø2.7	2.7~3.6	1.5	ø5.0	5.6		
SR-2.7J	5.9	ø2.7	3.4~4.3	1.5	ø5.0	6.3		
SR-3AQ	3.5	ø3.0	0.8~1.5	1.65	ø6.2	3.8		
SR-3YK	3.65	ø3.0	1.0~2.0	1.65	ø6.2	5.0		
SR-3S	3.9	ø3.05	1.2~2.2	1.8	ø6.4	5.5		
SR-3GC	4.5	ø3.0	1.0~2.0	1.8	ø6.0	5.5		
SR-3HG	4.5	ø3.0	2.0~3.0	1.6	ø6.4	6.1	N46	
SR-3TY	4.5	ø3.0	2.0~3.0	1.65	ø6.2	6.25	N66	
SR-3MK	5.5	ø3.0	2.0~3.0	1.6	ø6.3	7.05		
SR-3MC	5.5	ø3.0	2.5~3.3	1.6	ø6.3	6.2		
SR-3JW	5.6	ø3.0	3.0~4.0	1.55	ø6.2	6.2		
SR-3M	5.7	ø3.0	2.2~3.5	1.8	ø6.4	5.9		
SR-3Q	5.8	ø3.0	1.6~3.3	2.0	ø6.4	6.5		

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-29-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL),NYLON 6(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

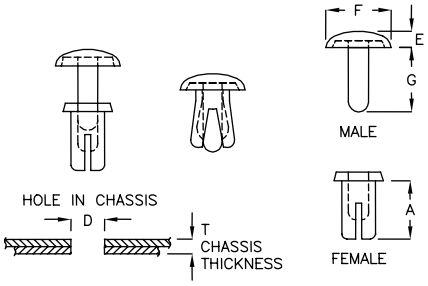


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	E	F	G	MATERIAL	PACKAGE
SR-3LK	5.8	ø3.0	3.5~4.0	1.7	ø5.86	6.1	N66	2000
SR-3L	6.15	ø3.0	1.5~3.5	2.0	ø6.4	6.4		
SR-3XL	6.5	ø3.05	4.0~5.0	1.7	ø6.3	7.5		
SR-3BR	7.0	ø3.0	4.5~5.5	1.7	ø6.2	7.5		
SR-3B	7.5	ø3.0	3.5~4.6	1.7	ø6.2	8.5		
SR-3C	8.0	ø3.0	3.5~5.5	1.6	ø6.2	9.1		
SR-3V	8.3	ø3.0	5.0~6.3	1.6	ø6.2	8.6		
SR-3LC	9.3	ø3.0	6.3~7.3	1.6	ø6.2	9.6		
SR-3MP	10.3	ø3.0	7.3~8.3	1.6	ø6.2	10.6		
SR-3MQ	11.3	ø3.0	8.3~9.3	1.6	ø6.2	11.6	N66 or N46	
SR-3LQ	12.3	ø3.0	9.3~10.3	1.6	ø6.2	12.6	N66	
SR-3QF	13.3	ø3.0	10.3~11.3	1.6	ø6.2	13.6		
SR-3NR	4.5	ø3.1	2.0~3.0	1.6	ø6.4	6.1	N66 or N6	
SR-3FY	4.5	ø3.1	2.0~3.0	1.6	ø6.4	6.1	N6	
SR-3WK	5.5	ø3.1	3.0~4.0	1.6	ø6.4	6.2		
SR-03K	10.5	ø3.1	8.0~8.5	1.2	ø5.9	11.6	N66	
SR-03D	15.6	ø3.1	11.5~12.8	1.7	ø6.3	15.9		
SR-03U	4.5	ø3.2	1.5~3.0	1.8	ø6.2	5.7		
SR-3W	13.0	ø3.3	9.0~10.5	1.7	ø5.3	13.3		
SR-3CL	4.5	ø3.5	2.0~2.5	1.6	ø6.4	6.1		
SR-3	5.7	ø3.5	2.5~4.0	1.8	ø6.7	6.6		
SR-3DX	6.0	ø3.5	3.5~4.5	1.6	ø6.2	6.5		
SR-3FL	6.5	ø3.5	4.5~5.5	1.6	ø6.2	7.0		
SR-3GR	7.0	ø3.5	4.5~5.5	1.6	ø6.2	7.5		
SR-3HA	7.5	ø3.5	5.0~6.0	1.6	ø6.2	8.0		
SR-3NB	8.0	ø3.5	5.5~6.5	1.6	ø6.2	8.5		
SR-3SD	8.5	ø3.5	5.2~6.3	1.8	ø6.7	9.9		
SR-3AC	8.6	ø3.5	5.5~6.5	1.6	ø6.2	8.9		
SR-3MF	9.6	ø3.5	6.5~7.5	1.6	ø6.2	9.9		
SR-3CK	4.5	ø3.6	2.0~2.8	1.6	ø6.4	5.0		
SR-3CF	4.7	ø3.6	2.0~2.8	1.6	ø6.4	5.0		
SR-3DR	5.1	ø3.6	2.7~3.6	1.65	ø6.3	6.25	N6	
SR-3DK	7.0	ø3.6	4.3~5.3	1.6	ø6.4	7.5	N66	
SR-3WJ	9.3	ø3.8	5.0~6.5	1.7	ø6.7	11.3		
SR-3KF	6.0	ø3.6	3.7~4.6	1.6	6.4	7.1	N6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-30-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

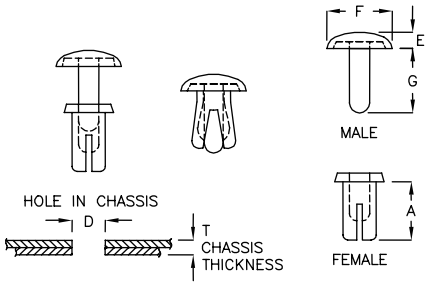


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	E	F	G	MATERIAL	PACKAGE
SR-4GS	4.4	ø4.0	1.0~2.2	2.1	ø7.9	4.55	N66	2000
SR-4Q	5.0	ø4.0	1.1~3.1	2.1	ø7.9	6.0		
SR-4QR	5.3	ø4.0	3.0~3.5	1.8	ø7.0	5.35		
SR-4FM	5.5	ø4.0	2.2~2.8	2.1	ø7.9	6.0	N66 or N46	
SR-4TF	5.0	ø4.0	2.5~3.5	1.9	ø7.8	6.2	N66	
SR-4KC	6.0	ø4.0	2.5~3.5	1.9	ø7.7	7.0		
SR-4	6.2	ø4.0	2.0~4.5	1.9	ø7.9	7.3		
SR-4WA	6.2	ø4.0	2.7~4.0	2.0	ø7.9	6.5	N66 or N46	
SR-4HP	6.2	ø4.0	3.5~4.0	1.9	ø7.7	7.2	N66	
SR-4BR	6.5	ø4.0	3.2~3.8	2.1	ø7.9	6.8		
SR-04F	7.0	ø4.0	3.8~4.6	2.0	ø8.0	9.0		
SR-4RW	7.1	ø4.0	4.5~5.0	2.0	ø8.0	8.1		
SR-4LF	7.5	ø4.0	5.0~5.5	1.9	ø7.7	8.5		
SR-4N	7.8	ø4.0	5.4~6.0	1.8	ø8.1	8.8		
SR-4S	8.0	ø4.0	3.5~5.0	1.7	ø7.0	8.8		
SR-4GB	8.1	ø4.0	5.5~6.5	2.0	ø8.0	9.0		
SR-4YH	8.5	ø4.0	5.2~5.8	2.1	ø7.9	8.8		
SR-4PW	9.0	ø4.0	6.5~7.5	2.0	ø8.0	10.2		
SR-4M	9.7	ø4.0	6.0~7.0	1.7	ø7.0	11.1		
SR-4J	10.0	ø4.0	5.5~7.6	1.8	ø8.2	11.0		
SR-4QP	10.0	ø4.0	7.5~8.5	2.0	ø8.0	10.5		
SR-4FQ	11.4	ø4.0	8.5~9.5	1.95	ø8.0	11.9	N66 or N46	
SR-4L	12.4	ø4.0	7.5~8.5	1.7	ø7.9	14.1	N66	
SR-4XN	12.4	ø4.0	7.8~8.5	1.7	ø5.5	14.1		
SR-4MK	12.4	ø4.0	9.5~10.5	1.95	ø8.0	12.9		
SR-4QJ	13.4	ø4.0	10.5~11.5	1.95	ø8.0	13.9		
SR-04D	15.6	ø4.0	11.2~12.5	1.7	ø6.7	15.9		
SR-4PT	20.0	ø4.0	15.0~17.5	1.9	ø8.0	20.3		



尼龍鉚釘 SNAP RIVET 5-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

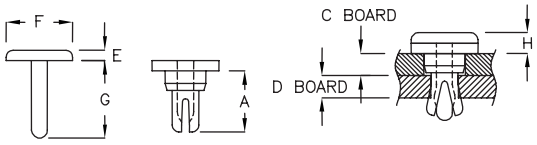


PART NO	A	C BOARD HOLE DIA	D BOARD HOLE DIA	C BOARD THICKNESS	D BOARD THICKNESS	E	F	G	H	PACKAGE
SRFK-2H	3.3	ø2.4	ø1.8	1.1	1.0~1.2	0.5	ø3.5	4.3	1.0	2000
SRFK-2D	4.4	ø3.0	ø2.0	1.6	0.8~1.6	0.75	ø4.8	5.6	1.5	
SRFK-2C	5.4	ø3.0	ø2.0	2.6	0.8~1.6	0.75	ø4.8	6.6	1.5	
SRFK-2F	6.4	ø3.0	ø2.0	3.6	0.8~1.6	0.75	ø4.8	7.6	1.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-31-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL), NYLON 6(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

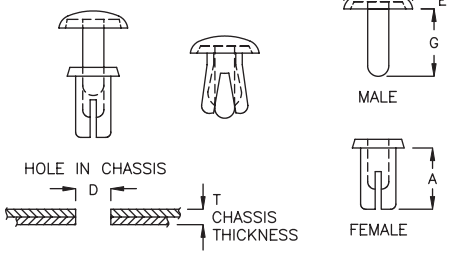


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	E	F	G	MATERIAL	PACKAGE
SR-4PK	20.0	ø4.0	17.5~18.0	1.7	ø6.8	20.3		
SR-4PH	21.0	ø4.0	18.0~18.5	1.7	ø6.8	21.3		
SR-4HK	5.1	ø4.1	2.0~3.2	1.8	ø8.15	6.3		
SR-4LK	6.1	ø4.1	3.5~4.2	1.8	ø8.15	7.1	N66	
SR-4FK	7.0	ø4.1	4.5~5.4	1.8	ø8.0	7.5		
SR-4JK	8.9	ø4.1	5.6~6.6	1.8	ø8.1	10.9		
SR-4JM	9.9	ø4.1	7.5~8.3	1.8	ø8.1	10.9		
SR-4TQ	11.4	ø4.1	8.5~9.5	2.0	ø7.9	11.9	N46	
SR-4KS	8.3	ø4.3	4.0~6.0	1.7	ø7.6	10.2		
SR-4KT	8.3	ø4.3	4.0~6.0	1.7	ø9.6	10.2		
SR-04I	10.5	ø4.3	7.1~8.1	2.0	ø7.9	12.5		
SR-4SF	12.3	ø4.3	8.0~9.0	1.2	ø5.9	13.8		
★ SR-4LD	10.2	ø4.5	7.0~8.0	1.7	ø7.9	11.1		
SR-4LT	10.2	ø4.5	5.0~6.0	1.7	ø7.9	12.1		2000
SR-4LA	12.3	ø4.5	7.8~9.0	1.7	ø7.9	14.1		
SR-5S	4.6	ø5.0	1.0~2.0	2.1	ø8.9	6.7		
SR-5YN	5.5	ø5.0	2.0~3.0	2.2	ø8.3	5.7		
SR-5TC	5.5	ø5.0	2.5~3.5	2.2	ø8.9	6.0	N66	
SR-5	7.7	ø5.0	3.8~5.0	2.2	ø8.9	8.3		
SR-05F	4.7	ø5.1	1.5~2.5	2.2	ø9.0	5.5		
SR-05M	5.5	ø5.1	2.5~3.2	2.2	ø9.0	6.0		
SR-05D	6.5	ø5.1	3.5~4.3	2.2	ø9.0	7.0		
SR-05H	7.7	ø5.1	4.5~5.5	2.2	ø9.0	8.5		
SR-05J	8.7	ø5.1	5.5~6.5	2.3	ø9.1	9.5		
SR-05K	9.7	ø5.1	6.5~7.5	2.3	ø9.1	10.6		
SR-05L	10.7	ø5.1	7.5~8.5	2.2	ø9.0	11.5		
SR-6MD	6.2	ø6.0	2.5~4.0	2.5	ø12.0	8.9	N66	1000
SR-6VP	17.2	ø6.0	13.0~14.5	2.5	ø12.0	18.0	N66	
SR-6NT	6.2	ø6.1	2.5~4.0	2.5	ø12.0	8.9	N6	
SR-07C	11.2	ø7.0	8.0~9.0	1.8	ø12.0	12.0	N66	2000



尼龍鉚釘 SNAP RIVET 5-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

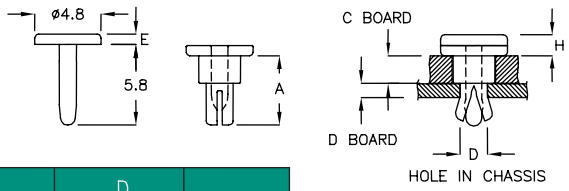


PART NO	A	E	H	C BOARD HOLE DIA	D BOARD HOLE DIA	C BOARD THICKNESS	D BOARD THICKNESS	PACKAGE
SRFK-2RT	5.0	0.75	1.5	ø3.0	ø2.0	2.1	0.8~1.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

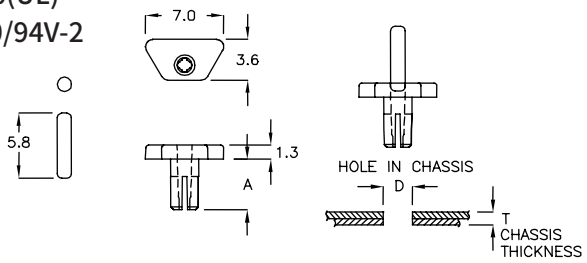


PART NO	HOLE D	A	T CHASSIS THICKNESS	PACKAGE
STR−4C	ø2.7	4.5	3.0~3.1	2000



固定扣 NIFLATCH 5-32-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

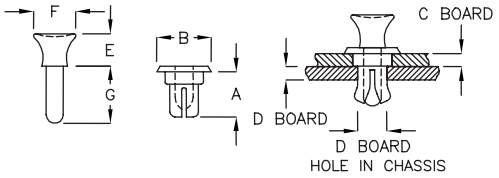


PART NO	A	B	C BOARD HOLE DIA	D BOARD HOLE DIA	C BOARD THICKNESS	D BOARD THICKNESS	E	F	G	PACKAGE
SRDW−2H	3.3	ø4.8	ø2.4	ø1.8	1.1	1.0~1.2	3.0	ø4.0	4.3	2000
SRDW−2D	4.4	ø4.8	ø3.0	ø2.0	1.6	0.8~1.6	3.5	ø4.5	5.6	
SRDW−2C	5.4	ø4.8	ø3.0	ø2.0	2.6	0.8~1.6	3.5	ø4.5	6.6	
SRDW−2F	6.4	ø4.8	ø3.0	ø2.0	3.6	0.8~1.6	3.5	ø4.5	7.6	
SR−4KK	7.0	ø8.5	ø6.0	ø4.5	2.0	2.0	5.0	ø6.6	8.9	



尼龍鉚釘 SNAP RIVET 5-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

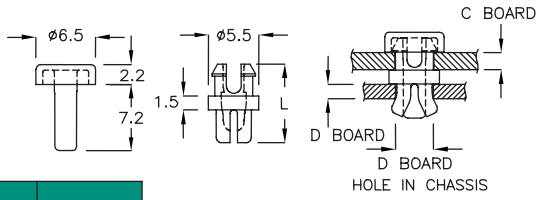


PART NO	C BOARD HOLE DIA	D BOARD HOLE DIA	C BOARD THICKNESS	D BOARD THICKNESS	L	PACKAGE
SRQM−4C	ø4.2	ø4.0	2.0	1.6	8.6	500



尼龍鉚釘 SNAP RIVET 5-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

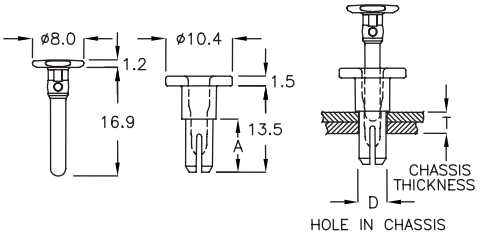


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SRMD−4Q	8.3	ø4.5	4.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



尼龍鉚釘 SNAP RIVET 5-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

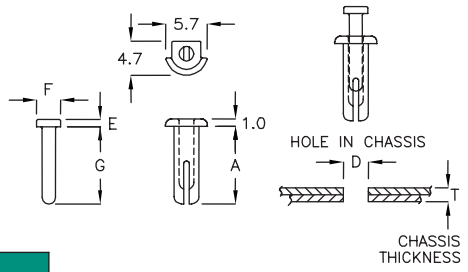


PART NO	A	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
SRQ-3AH	10.5	ø3.5	1.0	ø3.4	11.0	8.0	2000
SRQ-3PT	12.0	ø3.5	1.0	ø3.4	13.0	8.0	



尼龍鉚釘 SNAP RIVET 5-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

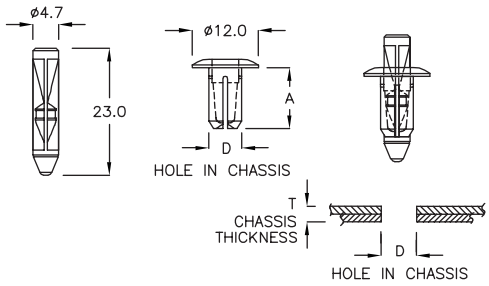


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
SR-12A	11.0	ø6.1	7.7~8.3	2000




鉚釘 CANOE CLIP 5-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MB-05F	5.6	ø3.3	5.4	2000



鉚釘 CANOE CLIP 5-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
MBL-4HW	5.05	5.2	ø2.1	2.5	2000
MBL-5FQ	5.65	5.2	ø2.1	3.1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




鉚釘 CANOE CLIP 5-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MBL−4JC	8.55	ø4.5	ø2.1	2.5	2000



鉚釘 CANOE CLIP 5-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D HOLE IN CHASSIS	E	T CHASSIS THICKNESS	PACKAGE
MB−01F	7.4	ø4.8	ø2.37	0.9	2.4~2.7	2000
MB−04C	15.4	ø9.0	ø4.5	1.6	4.3~4.8	1000
MB−05A	14.6	ø12.0	ø5.0	2.1	0.7~1.2	
MB−05D	15.3	ø12.0	ø5.0	2.8	0.7~1.0	
★ MB−9C	9.4	ø8.0	ø3.3	1.5	3.5	2000




鉚釘 CANOE CLIP 5-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	D HOLE IN CHASSIS	PACKAGE
MB−1	9.7	ø7.4	2.0~3.5	ø3.0~ø3.2	2000
MB−1A	9.7	ø6.8	1.1~1.7	ø3.1~ø3.2	
MB−1C	6.2	ø6.9	1.6~2.0	ø2.95~ø3.0	
MB−1D	6.8	ø7.0	1.6~1.9	ø3.15~ø3.2	
MB−1S	7.2	ø7.0	1.5~2.1	ø3.1~ø3.2	
MB−01H	10.3	ø7.7	3.0~3.2	ø3.3~ø3.4	
MB−2	10.3	ø7.9	3.5~4.0	ø3.5~ø3.7	
MB−2S	10.3	ø7.8	2.8~3.8	ø3.2~ø3.4	
MB−3	12.4	ø7.7	3.2~5.0	ø3.7~ø3.8	
MB−3FC	7.5	ø5.6	2.4~2.7	ø2.95~3.05	
MB−3KA	7.5	ø6.0	2.4~2.7	ø3.45~3.55	
MB−4	12.9	ø10.0	2.1~3.7	ø3.9~ø4.05	
MB−04Q	9.0	ø6.0	2.5~3.5	ø3.8~ø4.0	
MB−5S	10.9	ø10.0	1.6~2.1	ø3.2~ø3.25	1000
MB−05C	13.2	ø12.7	2.5~3.5	ø4.0~ø4.05	
MB−11A	12.6	ø9.5	2.5~4.0	ø4.65~ø4.8	
MB−12	12.0	ø7.4	1.6~2.1	ø3.3~ø3.4	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 CANOE CLIP 5-35-1

- MATERIAL: POM
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MBE-12A	19.0	ø12.0	1.5~6.5	1000




鉚釘 CANOE CLIP 5-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	D HOLE IN CHASSIS	PACKAGE
MB-2K	8.6	ø5.8	2.8~3.0	ø3.2~ø3.3	2000




鉚釘 MOUNTING BUTTON 5-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	D HOLE IN CHASSIS	PACKAGE
MB-08K	13.8	ø5.1	10.1	ø2.54	2000
MB-15GH	15.3	ø5.1	11.8	ø2.5	



鉚釘 MOUNTING BUTTON 5-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MB-2GC	6.2	ø4.0	2.7	2000
MB-08R	11.7	ø5.1	8.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




鉚釘 CANOE CLIP 5-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MB-08M	6.6	ø5.5	2.2	2000
MB-8AC	7.9	ø5.5	3.5	
MB-8DK	8.5	ø5.5	4.1	




鉚釘 CANOE CLIP 5-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MB-08P	7.2	ø6.4	3.2	2000



鉚釘 MOUNTING BUTTON 5-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	E	F	T CHASSIS THICKNESS	PACKAGE
MB-8A	7.5	ø5.1	ø3.0	1.8	3.4	7.3	2000
MB-08C	3.5	ø6.2	ø3.0	1.9	3.8	3.4	
MB-08D	4.7	ø6.0	ø3.5	1.5	4.1	4.5	



鉚釘 MOUNTING BUTTON 5-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	E	F	CHASSIS THICKNESS	PACKAGE
MB-08G	3.55	ø6.2	ø3.0	1.9	1.4	3.4	2000
MB-08H	8.25	ø5.1	ø3.3	1.4	2.2	8.1	
MB-015	8.8	ø5.1	ø3.0	1.7	2.2	8.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




鉚釘 CANOE CLIP 5-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

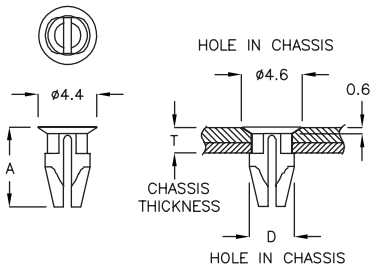


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MB-06	6.0	ø3.0	1.9	2000



鉚釘 CANOE CLIP 5-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MBS-3A	7.95	ø6.4	3.2~3.6	1000



鉚釘 MOUNTING BUTTON 5-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MBB-01	10.9	ø5.8	7.9	1000



鉚釘 MOUNTING BUTTON 5-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MHG-3A	8.0	ø9.5	2.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




鉚釘 MOUNTING BUTTON 5-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MB-08F	10.7	ø6.0	4.5	2000




鉚釘 CANOE CLIP 5-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	E	F	T CHASSIS THICKNESS	PACKAGE
MBM-1MY	5.6	2.2	2.85	0.6~0.8	2000
MBM-1A	5.95	1.9	2.85	1.4~1.7	
MBM-2D	6.15	2.2	2.85	1.2~1.4	
MBM-2SA	6.65	2.2	2.85	1.7~1.9	
MBM-3PY	5.7	2.2	2.5	0.9~1.1	



鉚釘 CANOE CLIP 5-38-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	F	T CHASSIS THICKNESS	PACKAGE
MBR-3SQ	5.45	ø12.0	2.65	1.1	2000
MBR-3AC	6.05	ø20.0	3.4	1.0	




鉚釘 CANOE CLIP 5-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	F	T CHASSIS THICKNESS	PACKAGE
MB-07A	7.5	ø7.0	3.5	2.2	2000
MB-7AK	8.3	ø7.0	3.1	3.5	
MB-7DF	9.0	ø7.0	3.1	4.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 CANOE CLIP 5-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D HOLE IN CHASSIS	E	F	T CHASSIS THICKNESS	PACKAGE
MBQ−1A	6.7	ø8.0	ø4.1	1.3	3.5	1.85	2000
MBQ−1DC	6.9	ø7.0	ø4.0	1.5	3.1	2.2	
MBQ−1PM	6.5	ø7.0	ø4.0	1.5	3.1	1.8	
MBQ−1FH	5.8	ø7.0	ø4.0	1.5	3.1	1.0	



鉚釘 CANOE CLIP 5-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MBK−4A	6.5	ø7.0	2.4~2.6	2000




鉚釘 CANOE CLIP 5-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MBQ−1RF	6.5	ø7.0	1.6~1.9	2000



鉚釘 MOUNTING BUTTON 5-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	T CHASSIS THICKNESS	PACKAGE
MB−10	2.5~3.2	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 MOUNTING BUTTON 5-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	F	T CHASSIS THICKNESS	PACKAGE
MBC−04	6.9	ø7.0	1.5	3.3	2000
MBC−4AK	5.8	ø7.0	1.5	2.2	
MBC−4DF	7.1	ø7.0	1.5	3.5	
MBC−4KM	8.1	ø7.0	2.0	4.5	



鉚釘 RIVET 5-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
ACK−1A	7.0	ø6.5	6.8	2000



鉚釘 MOUNTING BUTTON 5-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	B	T CHASSIS THICKNESS	D HOLE IN CHASSIS	E	F	PACKAGE
MB−9S	ø11.7	2.0	ø5.54	4.0	1.3	1000
MB−9	ø11.7	3.0	ø5.54	4.1	1.3	
MB−9K	ø15.1	4.3	ø7.4	4.7	1.3	
MB−09A	ø11.7	5.7	ø5.3	3.9	1.3	
MB−09M	ø8.0	2.6	ø5.0	3.3	0.5	



鉚釘 CANOE CLIP 5-40-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
★ MBU−3AD	10.7	ø8.0	4.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 CANOE CLIP 5-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

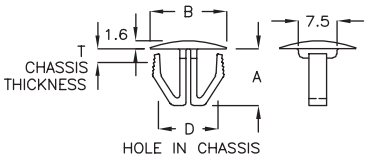


PART NO	A	B	T CHASSIS THICKNESS	D HOLE IN CHASSIS	PACKAGE
MBSK−10A	11.0	ø15.0	0.8~3.2	ø8.5~ø10.0	1000



鉚釘 MOUNTING BUTTON 5-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MBP−3JQ	2.0	12.5	1.8	2000



鉚釘 MOUNTING BUTTON 5-41-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	C	F	PACKAGE
MB−08Y	8.3	ø5.0	12.55	1.75	2000
MB−15Y	14.6	ø6.4	19.85	2.75	



鉚釘 MOUNTING BUTTON 5-41-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MB−21A	22.0	ø6.6	25.6	1000



鉚釘 MOUNTING BUTTON 5-41-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MB−22	22.1	ø6.6	25.4	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 MOUNTING BUTTON 5-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MB-25A	7.6	ø6.6	25.4	1000



鉚釘 MOUNTING BUTTON 5-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

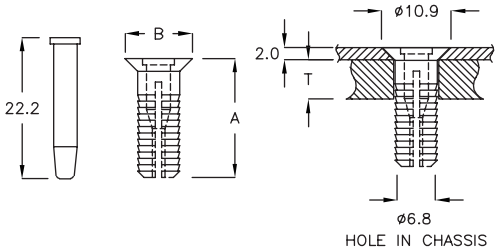


PART NO	A	T CHASSIS THICKNESS	B	PACKAGE
MEK-01	16.7	6.5~7.5	ø10.6	2000



散熱片鉚釘 MOUNTING BUTTON 5-42-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

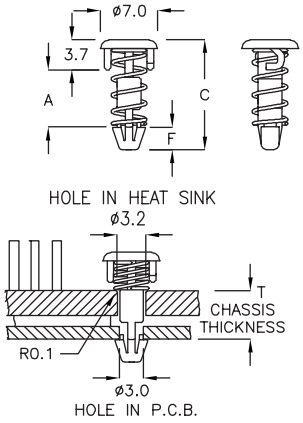


PART NO	A	C	F	T CHASSIS THICKNESS	PACKAGE
MB-05Y	4.2	10.7	2.8	3.0~4.2	2000
MB-07Y	7.0	13.5	2.8	4.5~6.0	
MB-07YA	9.0	15.2	2.5	4.5~7.0	



散熱片鉚釘 MOUNTING BUTTON 5-42-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

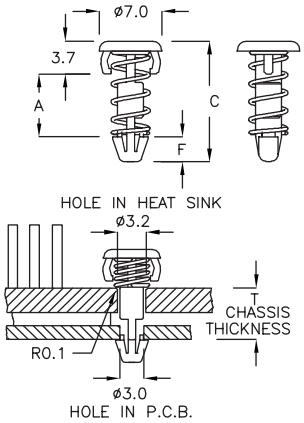


PART NO	A	C	F	T CHASSIS THICKNESS	PACKAGE
MB-07U	7.0	13.5	2.8	4.5~5.5	2000
MB-07UA	9.0	15.2	2.5	4.5~7.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



散熱片鉚釘 MOUNTING BUTTON 5-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

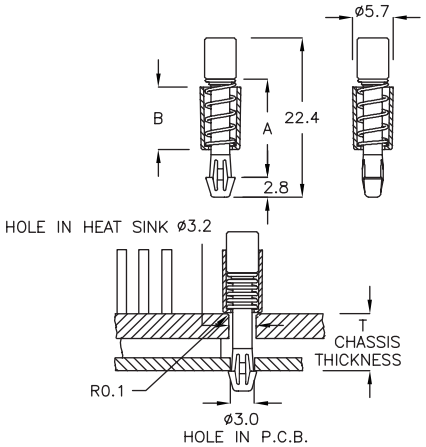


PART NO	A	B	CHASSIS THICKNESS	PACKAGE
MB-08J	13.8	8.8	5.0~8.5	2000




散熱片鉚釘 MOUNTING BUTTON 5-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

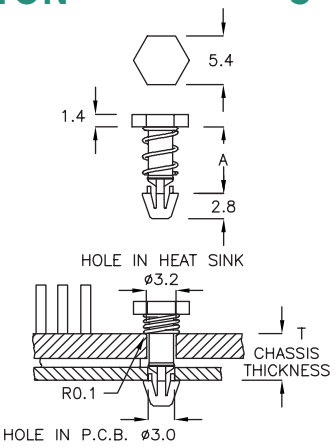


PART NO	A	CHASSIS THICKNESS	PACKAGE
MB-08N	7.4	3.0~4.0	2000



散熱片鉚釘 MOUNTING BUTTON 5-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

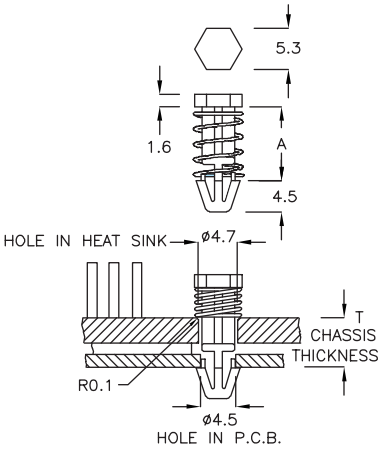


PART NO	A	CHASSIS THICKNESS	PACKAGE
MB-8KP	8.8	3.0~5.3	1000



散熱片鉚釘 MOUNTING BUTTON 5-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

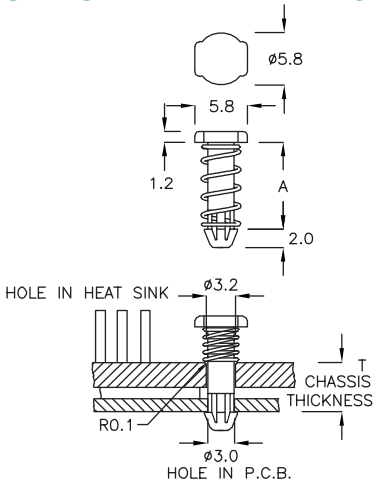


PART NO	A	CHASSIS THICKNESS	PACKAGE
MB-13	9.6	4.5~5.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




散熱片鉚釘 MOUNTING BUTTON 5-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

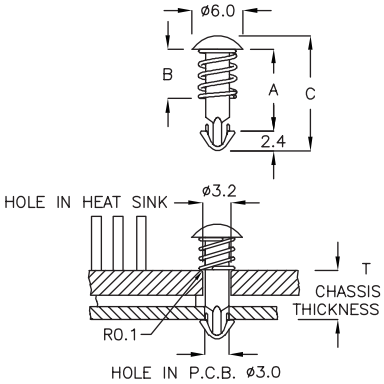



PART NO	A	B	C	CHASSIS THICKNESS	PACKAGE
MB-13A	9.6	7.8	13.5	3.6~5.0	2000
MB-21	17.6	14.7	21.6	7.5~9.0	




散熱片鉚釘 MOUNTING BUTTON 5-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







PART NO	A	B	HOLE IN P.C.B.	HOLE IN HEAT SINK	T CHASSIS THICKNESS	E	F	PACKAGE
MB-15C	12.5	ø6.4	ø3.0	ø3.2	5.5~6.5	1.5	3.3	1000
MB-15K	12.5	ø6.4	ø3.2	ø3.4	4.5~6.5	1.5	3.3	
MB-15F	14.0	ø5.5	ø3.0	ø3.2	7.0~8.0	1.5	2.8	2000




散熱片鉚釘 MOUNTING BUTTON 5-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



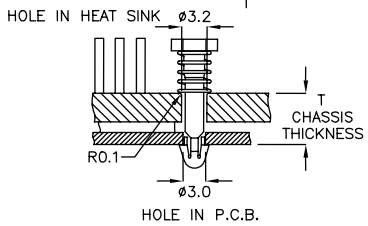



PART NO	A	T CHASSIS THICKNESS	PACKAGE
MB-17C	12.9	3.0~5.0	2000



散熱片鉚釘 MOUNTING BUTTON 5-44-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



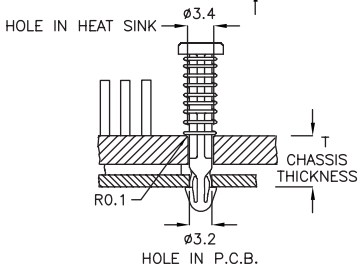


PART NO	A	T CHASSIS THICKNESS	PACKAGE
MB-17KM	17.7	7.5~9.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



散熱片鉚釘 MOUNTING BUTTON 5-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	C	E	PACKAGE
MB−11KH	9.0	ø6.2	1.5	1.2	2000
MB−14K	9.5	ø6.4	3.3	0.9	
MB−14A	9.5	ø6.4	3.3	1.5	
MB−13FD	11.0	ø6.2	1.5	1.2	
MB−07W	14.0	ø6.4	2.0	1.8	
MB−07C	14.0	ø6.4	3.3	1.8	
MB−15JQ	14.0	ø5.5	1.5	1.5	
MB−15D	15.0	ø5.0	2.0	1.8	



散熱片鉚釘 MOUNTING BUTTON 5-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	PACKAGE
MB−15A	11.5	ø6.4	2000
MB−12XQ	8.7	ø6.4	



散熱片鉚釘 MOUNTING BUTTON 5-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	PACKAGE
MB−14M	9.5	ø6.4	2000



散熱片鉚釘 MOUNTING BUTTON 5-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.4
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	PACKAGE
MB−15NK	10.0	ø5.3	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



散熱片鉚釘 MOUNTING BUTTON — 5-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.7
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	PACKAGE
MB−17F	13.1	ø5.2	1000



散熱片鉚釘 MOUNTING BUTTON — 5-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	PACKAGE
MB−99	11.0	ø6.4	2000
MB−99A	14.0	ø6.4	




散熱片鉚釘 MOUNTING BUTTON — 5-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.7
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




PART NO	A	B	PACKAGE
MBH−16K	13.1	5.2	1000



定位銷 PIN PLANAR LOCATOR — 5-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	PACKAGE
MBZ−06	5.5	2000



鉚釘 CANOE CLIP — 5-46-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	PACKAGE
MB−014	4.6	>2.4	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 CANOE CLIP 5-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C CHASSIS THICKNESS	D HOLE IN CHASSIS	F	T CHASSIS THICKNESS	PACKAGE
MB−14Q	3.1	ø3.5	0.8~1.0	ø1.8	1.2	>3.0	2000
MB−14R	3.8	ø5.0	0.8~1.0	ø3.0	0.7	>3.5	
MB−14S	3.8	ø5.0	0.8~1.0	ø3.0	0.5	>3.5	
MB−14H	5.5	ø5.0	0.8~1.0	ø3.0	0.5	>5.0	



鉚釘 CANOE CLIP 5-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

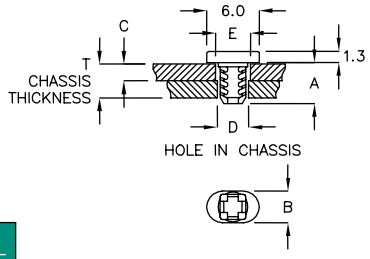


PART NO	A	B	C CHASSIS THICKNESS	D HOLE IN CHASSIS	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MBT−06	4.7	3.6	0.8~1.0	ø3.5	ø3.5	>5.0	2000
MBT−16J	15.0	3.9	1.0~1.2	ø3.5	ø4.0	>5.0	1000



鉚釘 CANOE CLIP 5-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

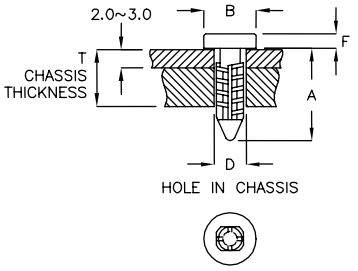


PART NO	A	B	D HOLE IN CHASSIS	F	T CHASSIS THICKNESS	PACKAGE
MB−011	9.7	ø5.5	ø2.9	1.5	>5.0	2000
MB−19A	17.6	ø10.9	ø5.0	1.0	>5.5	




鉚釘 CANOE CLIP 5-47-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	F	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MB−14C	2.6	1.0	2.0	ø1.8	>2.6	2000
MB−14F	3.8	1.6	3.5	ø1.8	>3.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




鉚釘 CANOE CLIP 5-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

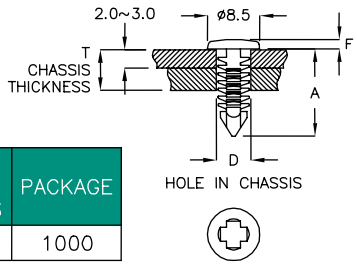


PART NO	A	F	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MB-17A	14.3	1.5	ø4.9~ø4.95	>8.0	1000



鉚釘 MOUNTING BUTTON 5-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

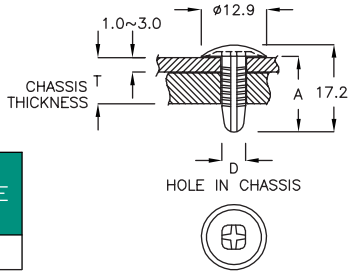


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MB-17	14.9	ø5.0~ø5.1	>6.0	1000



鉚釘 CANOE CLIP 5-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	D HOLE IN CHASSIS	PACKAGE
WCD-6A	10.0	ø5.6~ø5.7	2000



鉚釘 CANOE CLIP 5-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

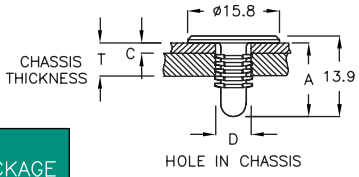


PART NO	A	C	D	T CHASSIS THICKNESS	PACKAGE
MBY-12JW	12.7	1.6	ø6.1	>6.0	1000




鉚釘 CANOE CLIP 5-48-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B HOLE IN CHASSIS	PACKAGE
MB-35	35.0	ø4.7~ø4.9	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



間隔柱用鉚釘 SUPPORTING RIVET — 5-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
MB−14D	5.0	ø2.5	3.0	2000




鉚釘 CANOE CLIP — 5-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




PART NO	A	D HOLE IN CHASSIS	CHASSIS THICKNESS	PACKAGE
★ MBTB−19	12.0	ø3.5	>12.0	2000



鉚釘 CANOE CLIP — 5-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW




PART NO	A	D HOLE IN CHASSIS	CHASSIS THICKNESS	PACKAGE
★ MBTH−19	17.3	ø4.8	0.7~13.0	1000




鉚釘 CANOE CLIP — 5-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	D HOLE IN CHASSIS	CHASSIS THICKNESS	PACKAGE
MBTR−32	30.0	ø7.1	1.5~25.4	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 CANOE CLIP 5-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

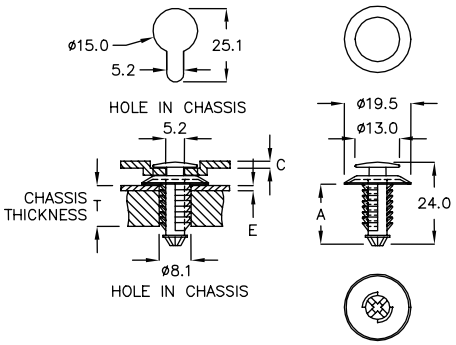


PART NO	A	C CHASSIS THICKNESS	E CHASSIS THICKNESS	T CHASSIS THICKNESS	PACKAGE
MBDA-24	17.5	2.3	0.8	12.0	1000



螺絲固定扣 PLASTIC SCREW 5-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

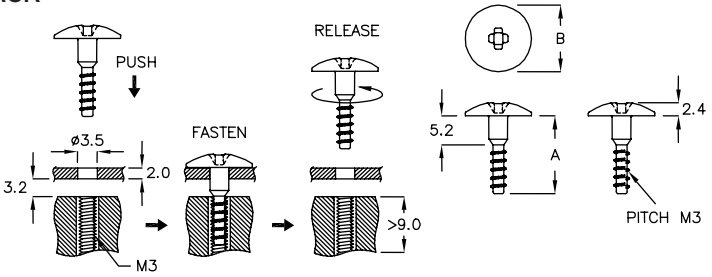



PART NO	A	B	PACKAGE
SZ-3M15HC	ø12.0	14.0	1000



螺絲固定扣 PLASTIC SCREW 5-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

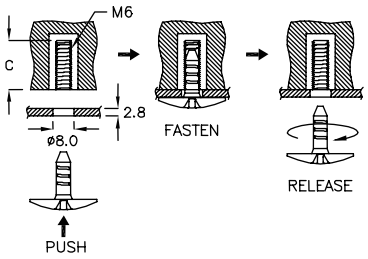

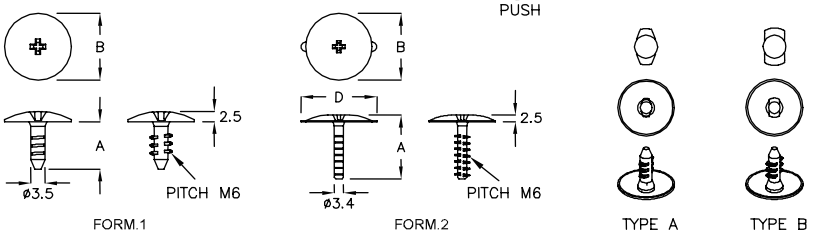


PART NO	MATERIAL	A	B	C	D	HEAD STYLE	FIN STYLE	PACKAGE
SZ-6M12	N66	12.0	ø16.8	18.5		FORM.1	TYPE A	1000
SZ-6M12KD	N66	12.0	ø16.8	18.5		FORM.1	TYPE B	
SZ-6M13F	N66	13.5	ø20.0	18.5	24.0	FORM.2	TYPE B	
SZ-6M17D	N66	17.5	ø20.0	22.0	24.0	FORM.2	TYPE B	
SZ-6M21MQ	N66	21.5	ø20.0	25.0	24.0	FORM.2	TYPE B	
SZ-6M21A	ABS+PC	21.5	ø25.0	25.0	28.6	FORM.2	TYPE A	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




鉚釘 SNAP RIVET 5-51-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

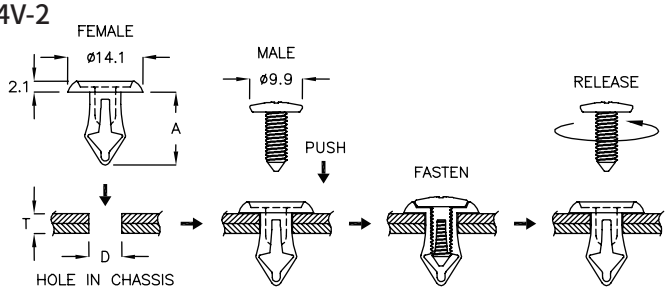


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MEL-6A	13.65	ø5.9	4.5	1000



鉚釘 SNAP RIVET 5-51-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

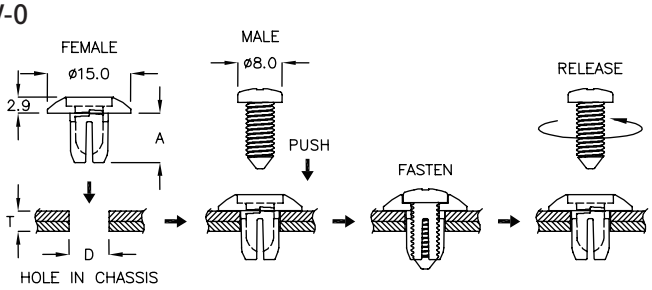


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
MEP-07	8.86	ø7.0	4.0~5.5	1000




鉚釘 SNAP RIVET 5-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	PACKAGE
MEC-18	18.45	ø5.0	9.5~11.5	1000



鉚釘 MOUNTING BUTTON 5-51-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK




PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	D	PACKAGE
SRU-3	15.7	ø3.2	10.5~11.5	ø5.8	2000
SRU-3A	11.0	ø2.7	9.0~9.5	ø5.6	
SRU-3S	14.3	ø2.7	10.7~11.2	ø5.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 MOUNTING BUTTON 5-52-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK

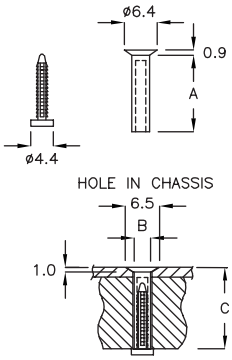


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	PACKAGE
SRU-3F	15.1	ø3.5	16.2~16.8	2000



鉚釘 MOUNTING BUTTON 5-52-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK

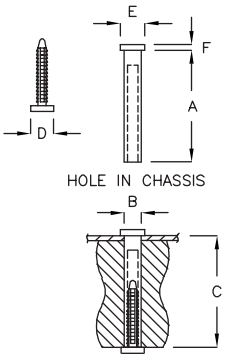


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	D	E	F	PACKAGE
SRU-3C	18.6	ø3.4	18.8~19.5	ø4.4	ø4.7	1.1	2000
SRU-3H	26.0	ø4.5	26.2~26.8	ø5.4	ø6.0	1.1	
SRU-3J	21.0	ø4.4	21.2~21.8	ø6.0	ø6.0	1.0	
SRU-3K	17.6	ø4.2	17.8~18.4	ø7.4	ø7.4	1.2	
SRU-3M	15.3	ø4.5	15.8~16.2	ø7.4	ø7.4	1.2	
SRU-3ND	25.5	ø4.3	25.8~26.3	ø6.0	ø6.0	1.0	
SRU-3P	15.3	ø4.1	15.8~16.2	ø7.4	ø7.4	1.2	
SRU-3R	23.5	ø4.3	23.7~24.3	ø6.0	ø6.0	1.0	
SRU-3T	20.4	ø3.4	21.0~20.6	ø4.4	ø4.7	1.1	



鉚釘 MOUNTING BUTTON 5-52-3

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

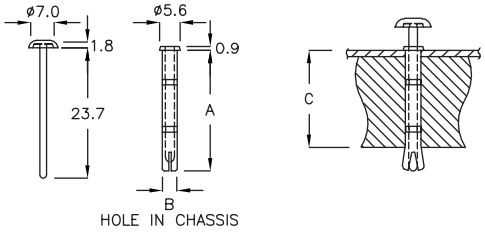


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	PACKAGE
SR-4WY	23.5	ø4.0	20.5~21.5	2000



鉚釘 MOUNTING BUTTON 5-52-4

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

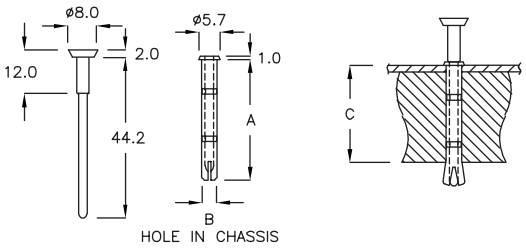

PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	PACKAGE
SR-4DK	33.2	ø4.0	29.0~30.0	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



鉚釘 SNAP RIVET 5-53-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

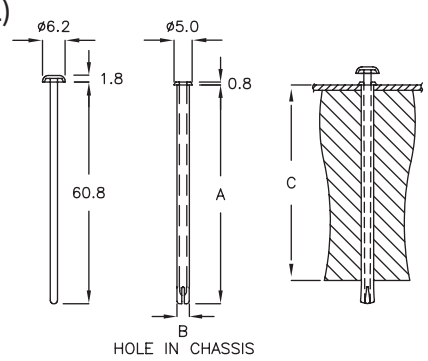


PART NO	A	B HOLE IN CHASSIS	C CHASSIS THICKNESS	PACKAGE
★ SR-60F	60.0	ø3.5	57.2	500



固定扣 SNAP LATCH 5-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

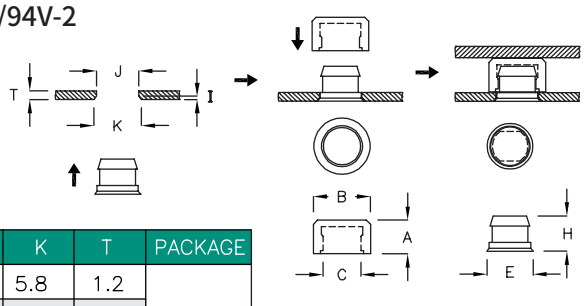


PART NO	A	B	C	E	H	I	J	K	T	PACKAGE
LH-013	4.0	ø6.9	ø4.5	ø5.6	4.2	0.6	5.1	5.8	1.2	2000
LH-015	9.4	ø8.9	ø4.5	ø5.6	4.2	0.5	5.1	5.8	1.0	
LH-016	5.1	ø6.9	ø4.5	ø5.6	4.2	0.6	5.1	5.8	1.2	
LH-017	3.6	ø6.9	ø4.5	ø5.6	3.5	0.6	5.1	5.8	1.2	
LH-018	3.4	ø6.9	ø4.5	ø5.6	3.5	1.3	5.1	5.8	1.9	
LH-019	3.8	ø6.9	ø4.6	ø5.4	4.2	0.55	4.9	5.6	1.1	
LH-021	3.0	ø6.9	ø4.6	ø5.6	3.4	0.6	5.15	5.8	1.2	
LH-024	2.9	ø6.9	ø4.5	ø5.6	2.75	0.45	5.15	6.05	0.8	
LH-026	4.0	ø6.9	ø4.5	ø5.6	3.9	0.6	5.1	5.8	0.8	
LH-027	3.3	ø6.9	ø4.6	ø5.95	3.3	0.66	5.1	6.6	1.0	



固定扣 SNAP LATCH 5-53-3

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

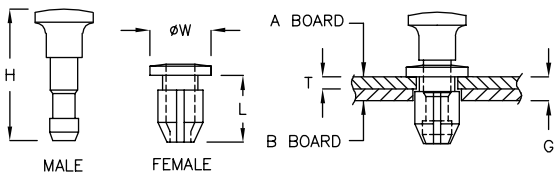


PART NO	T THICKNESS	G THICKNESS	A HOLE	B HOLE	L	W	H	PACKAGE
LH-01C	1.8~2.0	3.4~4.8	ø6.0	ø6.4	9.2	8.5	15.3	1000
LH-01D	2.1	4.1~4.8	ø6.0	ø6.4	9.2	8.5	18.2	
LH-01F	2.5	4.5~4.8	ø6.25	ø6.4	9.6	8.5	19.3	
LH-01M	1.6	2.7~3.6	ø6.1	ø6.4	8.6	8.5	17.5	
LH-01P	2.0	3.6~4.0	ø6.1	ø6.3	9.2	8.5	17.5	
LH-1	1.8~2.0	3.4~4.0	ø6.0	ø6.4	9.2	8.5	18.2	
LH-1L	3.9	7.7~8.2	ø6.0	ø6.4	11.3	8.5	20.2	
LH-2	1.5	3.8~4.6	ø7.6	ø8.0	9.9	10.8	18.2	500
LH-3	2.5	3.0~5.2	ø7.6	ø8.0	10.4	10.8	18.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定扣 SNAP LATCH 5-54-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

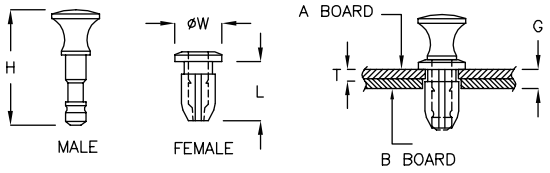


PART NO	T THICKNESS	G THICKNESS	A HOLE	B HOLE	L	W	H	PACKAGE
LH-01H	1.5~1.6	4.1~4.3	ø4.6	ø4.8	8.1	6.5	15.9	1000
LH-1RK	1.5~1.6	4.1~4.3	ø4.6	ø4.8	8.1	6.5	12.9	
LH-1Q	0.8	1.6~2.3	ø6.4	ø6.55	6.7	8.5	16.4	



固定扣 SNAP LATCH 5-54-2

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL,BLACK

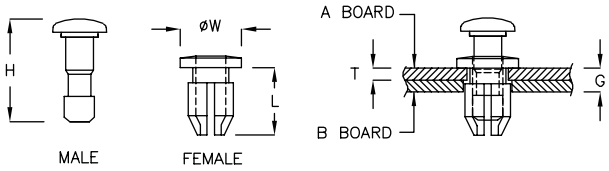


PART NO	T THICKNESS	G THICKNESS	A HOLE	B HOLE	L	W	H	PACKAGE
LH-01J	1.8~2.0	3.4~4.0	ø6.0	ø6.4	9.2	8.5	14.0	1000



固定扣 SNAP LATCH 5-54-3

- MATERIAL: PC(UL)
- COLOR: BLACK

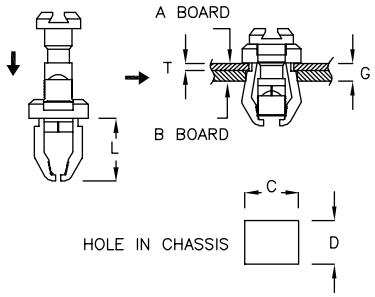



PART NO	T THICKNESS	G THICKNESS	A BOARD HOLE CxD	B BOARD HOLE CxD	L	PACKAGE
LH-009	1.2	2.4~2.7	9.0x9.0	9.5x9.0	12.2	200



固定扣 SNAP LATCH 5-54-4

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK






PART NO	T THICKNESS	G THICKNESS	A HOLE	B HOLE	C	D	L	W	PACKAGE
LH-2D	1.5	3.8~4.6	ø7.6	ø8.0	4.6	15.8	9.9	10.8	500
LH-2C	1.6	3.4~3.7	ø7.6	ø8.0	4.5	15.6	9.0	10.9	
LH-2T	1.6	3.4~3.7	ø7.6	ø8.0	4.6	15.8	9.0	10.9	
LH-04C	1.6	2.4~3.6	ø7.6	ø8.0	4.6	16.0	8.8	10.7	
LH-04D	2.4	3.5	ø7.5	ø8.0	5.0	16.0	9.9	10.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定扣 SNAP LATCH 5-55-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

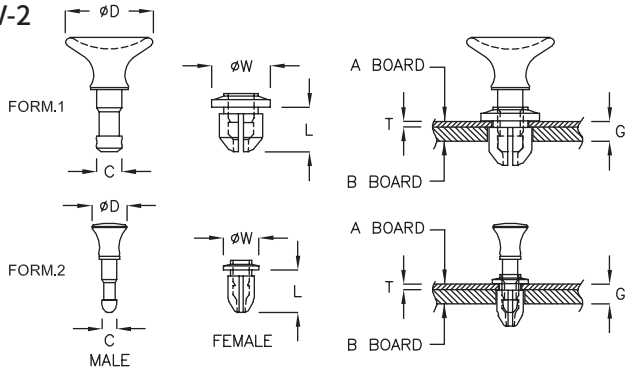


PART NO	T THICKNESS	G THICKNESS	A HOLE	B HOLE	C	D	L	W	FORM	PACKAGE
LH-04A	1.0	2.6~3.0	ø7.8	ø8.0	4.6	16.0	8.1	10.7	1	500
LH-4KP	1.0	2.8~3.8	ø4.7	ø4.8	2.7	6.35	7.7	6.5	2	1000




固定扣 SNAP LATCH 5-55-2

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

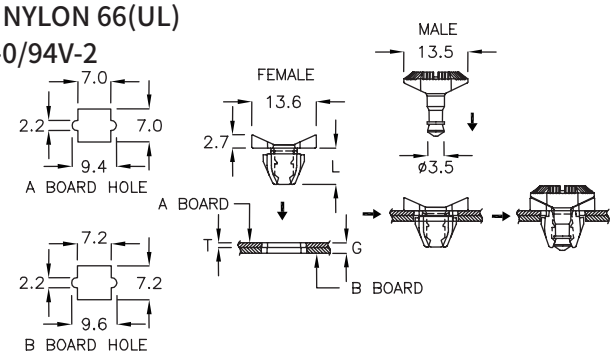


PART NO	T THICKNESS	G THICKNESS	L	PACKAGE
LHM-7JQ	1.0	2.2	7.7	500



固定扣 SNAP LATCH 5-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

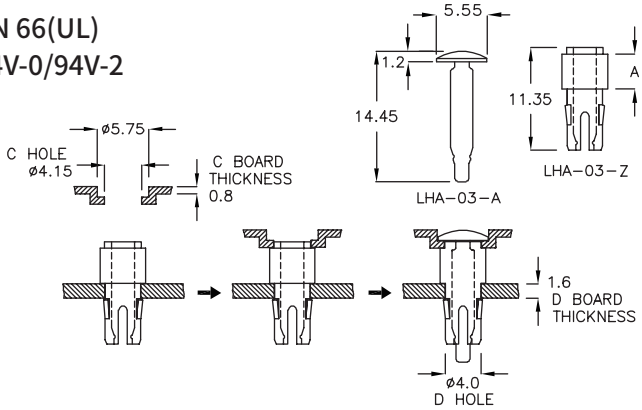


PART NO	A	PACKAGE
LHA-03	3.9	2000



固定扣 SNAP LATCH 5-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

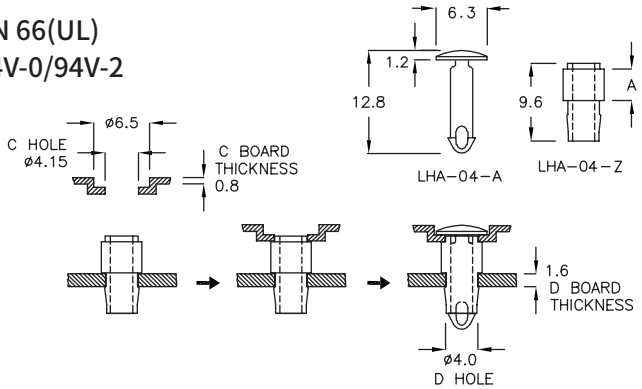


PART NO	A	PACKAGE
LHA-04	3.9	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




P.C.B. 固定座 P.C.B. MOUNT 5-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

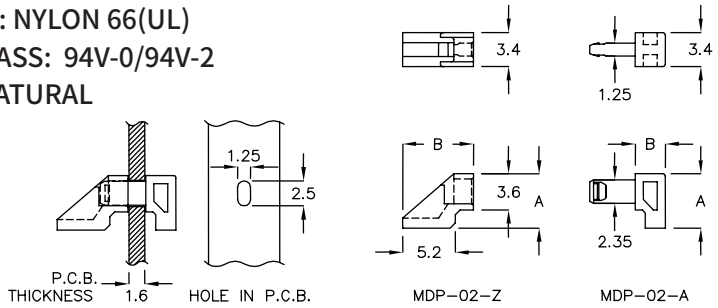


PART NO	A	B	PACKAGE
MDP-02-A	5.4	3.0	2000
MDP-02-Z	5.4	7.0	




固定扣 MOUNT 5-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
LHY-01	15.0	6.0	11.0	500



天線固定扣 MOUNT 5-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	PACKAGE
LHY-12	12.0	7.0	9.2	6.6	7.0	2.4	2000
LHY-20	19.9	5.7	16.75	10.1	13.9	6.1	1000



固定扣 MOUNT 5-56-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




PART NO	A	B	C	PACKAGE
LHG-06M	6.5	0.85	4.3	1000




固定扣 NIFLATCH 5-56-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
LHJ-33C	35.0	7.1	33.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




天線固定扣 MOUNT 5-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MRT−19Q	19.8	16.7	1.0~1.5	1000
MRT−19SK	19.8	16.7	1.5~2.0	



塑膠螺絲 PLASTIC SCREW 5-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D	PACKAGE
S−2M10C	ø7.0	10.0	2.2	M2	2000



塑膠螺絲 PLASTIC SCREW 5-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D	PACKAGE
S−2M07	ø4.0	6.9	1.6	M2.6	2000
S−2M8DK	ø4.0	8.2	1.8	M2.6	
S−2M9A	ø4.0	9.5	1.6	M2.6	
S−2M10	ø4.0	10.5	1.8	M2.6	



塑膠螺絲 PLASTIC SCREW 5-57-4

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D SCREW	E	PACKAGE
SU−304	ø2.9	4.0	2.5	M3	1.5	2000
SU−508	ø4.8	8.8	3.0	M5	2.5	



塑膠螺絲 PLASTIC SCREW 5-57-5

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
S−302Y	ø5.85	4.35	1.0	M3	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺絲 PLASTIC SCREW 5-58-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW
- OPTIONAL MATERIAL: NYLON 66(UL)




PART NO	A	B	C	D SCREW	PACKAGE
S-306A	ø5.7	5.9	2.5	M3	2000



塑膠螺絲 PLASTIC SCREW 5-58-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
S-410W	ø6.5	9.9	1.1	M4	1000
S-412W	ø6.5	11.9	1.1	M4	



塑膠螺絲 PLASTIC SCREW 5-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
S-410Y	ø4.9	10.2	1.0	M4	1000



塑膠螺絲 PLASTIC SCREW 5-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR, NATURAL
- D: SCREW




PART NO	MATERIAL	A	B	C	D	FORM	PACKAGE
SNT-406A	PC	ø7.0	6.0	4.0	M4	1	1000
SNT-816J	N66	ø13.0	16.0	8.0	M8	2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺絲 PLASTIC SCREW 5-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D SCREW	E	PACKAGE
SU6A-3A	ø6.8	3.5	2.8	#6-32	1.2	2000
S-6M2A	ø8.3	2.2	2.2	M6	1.0	



塑膠螺絲 PLASTIC SCREW 5-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
S-304F	ø11.0	4.45	2.5	M3	1000



塑膠螺絲 PLASTIC SCREW 5-59-3

- MATERIAL: POM(UL)
- COLOR: BLACK

NEW




PART NO	A	B	C	D SCREW	PACKAGE
★ S-3M2A	ø10.0	3.2	1.50	M3	5000



塑膠螺絲 PLASTIC SCREW 5-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- D: SCREW




PART NO	MATERIAL	A	B	C	D SCREW	PACKAGE
S-4M5P	N66/PPS	ø18.0	5.0	3.0	M4	1000
S-5M6T	N66/PPS	ø18.0	6.0	3.5	M5	
S-6M8F	N66	ø18.0	8.0	4.0	M6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺絲 PLASTIC SCREW 5-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
S-608KT	ø11.5	8.0	3.3	M6	1000
S-608W	ø11.5	5.9	3.3		



塑膠螺絲 PLASTIC SCREW 5-60-2

- MATERIAL: PEEK(UL)、PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL, BLACK
- D: SCREW




PART NO	MATERIAL	A	B	C	D SCREW	PACKAGE
SQA-406	PPS	7.0	6.0	2.4	M4	1000
SQA-408	PPS	7.0	8.0	2.4		
SQA-410	PEEK	7.0	10.0	2.4		
SQA-412	PPS	7.0	12.0	2.4		
SQA-508	PPS	8.0	8.0	2.8	M5	
SQA-510	PEEK	8.0	10.0	2.8		
SQA-512	PPS	8.0	12.0	2.8		
SQA-515	PPS	8.0	15.0	2.8		
SQA-610	PPS	8.0	10.0	2.8	M6	
SQA-612	PEEK	8.0	12.0	2.8		



塑膠螺絲 PLASTIC SCREW 5-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
SUN4-406	4.7	6.35	1.35	#4-40	1000
SUN4-409	4.7	9.5	1.35		
SUN4-412	4.7	12.7	1.35		
SUN4-419	4.7	19.0	1.35		
SUN4-425	4.7	25.4	1.35		
SUN6-606	6.2	6.35	2.25	#6-32	
SUN6-609	6.2	9.5	2.25		
SUN6-612	6.2	12.7	2.25		
SUN6-619	6.2	19.0	2.25		
SUN6-625	6.2	25.4	2.25		

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺絲 PLASTIC SCREW 5-61-1

- MATERIAL: PC(UL), NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR, NATURAL
- MATERIAL: PEEK(UL), PPS(UL)
- COLOR: NATURAL, BLACK
- D: SCREW




PART NO	MATERIAL	A	B	C	D SCREW	PACKAGE
SF-103BD	PEEK	ø3.2	2.0	1.2	M1.6	1000
SF-103NT	PEEK	ø3.2	2.5	1.2		
SF-104RM	PEEK	ø3.2	3.0	1.2		
SF-104WK	PEEK	ø3.2	3.5	1.2		
SF-105DP	PEEK	ø3.2	4.0	1.2		
SF-205	PC/N66	ø3.8	3.3	1.2	M2	1000
SF-304	N66	ø6.0	2.3	1.7	M3	2000
SF-306	PC/N66	ø5.4	4.6	1.4	M3	1000
SF-308	PC/N66	ø5.8	6.4	1.5		
SF-310	PC/N66	ø5.5	9.0	1.2		
SF-312	PC/N66	ø5.1	10.8	1.4		
SF-314	PC	ø5.6	12.8	1.4		
SF-406	PC	ø7.4	3.8	2.4	M4	1000
SF-408	PC/N66	ø7.4	5.8	2.4		
SF-410	PC	ø7.6	7.9	2.1	M4	500
SF-412	PC	ø7.4	9.8	2.4	M4	1000
SF-414	PC/PPS	ø7.4	11.6	2.4		
SF-416	PC/N66	ø7.4	13.8	2.4		
SF-417	PC/PPS	ø7.4	14.6	2.4		
SF-418	PC/PPS	ø7.4	15.6	2.4		
SF-511	PC	ø9.2	8.2	2.5	M5	
SF-513	PC	ø9.1	10.2	2.5		
SF-515	PC	ø9.2	12.2	2.5		
SF-517	PC/PPS	ø9.1	14.5	2.5		
SF-518	PC/PPS	ø9.1	15.5	2.5		
SF-520	PC/PPS	ø9.1	17.5	2.5		
SN4-12	PC/N66	ø5.6	10.55	2.1	#4-40	



塑膠螺絲 PLASTIC SCREW 5-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- D: SCREW




PART NO	MATERIAL	A	B	D SCREW	PACKAGE
S-4M2D	PPS	ø6.0	2.5	M4	2000
S-5M2K	PPS	ø7.0	2.8	M5	
S-6M02	N66	ø8.0	2.1	M6	
S-8M03	PPS	ø10.0	3.0	M8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺絲 PLASTIC SCREW 5-62-1

- MATERIAL: PC(UL), NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR, NATURAL
- MATERIAL: PEEK(UL), PPS(UL), PEI
- COLOR: NATURAL, BLACK
- D: SCREW




PART NO	MATERIAL	A	B	C	D SCREW	PACKAGE
S-102LM	PEEK	ø3.0	2.0	1.2	M1.6	2000
S-102SY	PEEK	ø3.0	2.5	1.2		
S-103FC	PEEK	ø3.8	3.17	1.2		
S-103A	PC/N66	ø3.8	3.3	1.2		
S-103YJ	PEEK	ø3.0	3.5	1.2		
S-104KP	PEEK	ø3.0	4.0	1.2		
S-104QH	PEEK	ø3.8	4.76	1.2		
S-105K	PC/N66	ø3.0	4.95	1.0		
S-106	PC/N66	ø3.8	6.0	1.2		
S-107WK	PEEK	ø3.8	7.94	1.2		
S-2M3P	PC	ø3.5	3.0	1.3	M2.0	
S-2M4K	PC/N66	ø6.0	4.5	2.5		
S-2M6A	PC/N66	ø3.5	6.5	1.3		
S-2M08	PC/N66	ø3.5	8.0	1.3		
S-2M10A	PC	ø5.7	10.0	2.5		
S-2AM11	PC/N66	ø4.3	11.0	1.6	M2.5	
S-2M05	PC/N66	ø5.7	5.0	2.8	M2.6	
S-2M06	PC/N66	ø5.7	6.0	2.8		
S-304C	PC/N66	ø5.7	4.0	2.5	M3	
S-305A	PC/N66	ø5.7	5.0	2.5	M3	1000
★ S-305C	N66	ø5.5	5.5	1.0		
S-306MK	PC/N66	ø5.7	6.0	1.2		
S-306	PC/N66	ø5.7	6.3	2.5		
S-308	PC/N66	ø5.7	8.0	2.5		
S-310	PC/N66	ø5.7	10.0	2.5		
S-312	PC/N66	ø5.7	12.1	2.5		
S-315	PC/N66	ø5.7	15.1	2.5		
S-318FK	PEI	ø5.7	18.0	2.5		
S-318	PC	ø5.7	18.3	2.5		
S-320	PEI	ø5.7	20.0	2.5		

PART NO	MATERIAL	A	B	C	D SCREW	PACKAGE
S-406	PC/N66	ø7.4	6.3	2.7	M4	1000
S-408	PC/N66	ø7.4	8.0	2.8		
S-410	PC/N66	ø7.5	10.2	2.6		
S-412	PC/N66	ø7.4	12.2	2.7		
S-414	PC/N66	ø7.5	14.2	2.7		
S-416	PC/N66	ø7.4	16.2	2.7		
S-420	PC/N66	ø7.4	20.0	2.8		
S-425	PC/PPS	ø7.5	25.0	2.7		
S-510	PC/N66	ø9.1	10.2	3.5	M5	
S-512	PC/N66	ø9.1	12.2	3.5		
S-516	PC	ø9.1	16.1	3.5		
S-520	PC	ø9.1	20.2	3.6		
S-525	PC/PPS	ø9.1	25.0	3.5		
S-530	PC/PPS	ø9.1	30.0	3.5		
S-605	PC/N66	ø9.0	4.1	3.3	M6	
S-606	PC/PPS	ø9.0	6.0	3.3		
S-608	PC/PPS	ø9.0	8.0	3.3		
S-610	PC/PPS	ø9.0	10.0	3.3		
S-612	PC/PPS	ø9.0	12.0	3.3		
S-615	PC/PPS	ø9.0	15.0	3.3		
S-618	PC/PPS	ø9.0	18.0	3.3		
S-620	PC/PPS	ø9.0	20.0	3.3		
SU2-12A	PC/N66	ø4.2	12.7	1.5	#2-56	2000
SU6-06	PC/N66	ø6.9	6.4	2.5	#6-32	



塑膠螺絲 PLASTIC SCREW 5-62-2

- MATERIAL: ABS+PC
- COLOR: BLACK
- D: SCREW

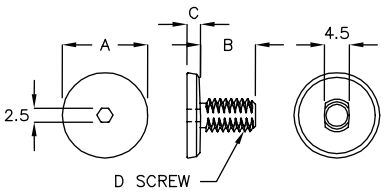


PART NO	A	B	C	D SCREW	PACKAGE
S-610TY	ø15.6	10.0	2.5	M6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺絲 PLASTIC SCREW 5-63-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- D: SCREW M7X0.75(UNF)




PART NO	A	B	C	D SCREW	PACKAGE
S-7M06	8.8	6.8	1.5	M7X0.75	1000



塑膠螺絲 PLASTIC SCREW 5-63-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
S-318C	ø9.0	10.0	2.0	M3	1000
S-423C	ø10.4	15.0	5.0	M4	
S-523C	ø10.6	15.1	5.0	M5	
S-626C	ø10.5	18.0	5.0	M6	



螺絲 SCREW 5-63-3

- MATERIAL: ABS+PC
- COLOR: GRAY
- SCREW MATERIAL: ALLOY BRASS
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
SW4-08	ø8.3	8.0	6.4	M4	500



螺絲 SCREW 5-63-4

- MATERIAL: ABS+PC
- COLOR: GRAY
- SCREW MATERIAL: ALLOY BRASS
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
SW5-16	ø12.8	10.3	5.7	M5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



螺旋塞環 SCREW PLUG — 5-64-1

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
SM-UNEF58	ø23.5	8.0	3.5	5/8"-24UNEF	200
SM-PF12	ø26.3	8.1	3.5	PF1/2"	
SM-M8	ø12.0	8.5	2.4	M8	1000
SM-M10	ø14.0	8.5	2.4	M10	
SM-M12	ø16.15	8.5	3.35	M12	
SM-M12AC	ø16.15	8.5	3.35	M12	
SM-M16	ø20.2	8.0	3.45	M16	200
SM-M20	ø25.5	7.95	3.6	M20	
SM-M20A	ø25.5	6.0	3.6	M20	
SM-M25	ø30.3	8.45	3.55	M25	



防水螺旋塞環 WATERPROOF PLUG — 5-64-2

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
  D: SCREW
  WATERPROOF PROVE: IP67




PART NO	A	B	C	D SCREW	ASSEMBLE WITH P.G. PART	PACKAGE
SM-UNEF58-X	ø23.5	8.0	3.5	5/8"-24UNEF	WSR-22AP	200
SM-PF12-X	ø26.3	8.1	3.5	PF1/2"	OPW-20	
SM-M8-X	ø12.0	8.5	2.4	M8	OPW- A	1000
SM-M10-X	ø14.0	8.5	2.4	M10	OPW-9CD	
SM-M12-X	ø16.15	8.5	3.35	M12	WSR-11RM	
SM-M12AC-X	ø16.15	8.5	3.35	M12	WSR-11RM	
SM-M16-X	ø20.2	8.0	3.45	M16	OPW-15D	200
SM-M20-X	ø25.5	7.95	3.6	M20	OPW-19M	
SM-M20A-X	ø25.5	6.0	3.6	M20	OPW-19M	
SM-M25-X	ø30.3	8.45	3.55	M25	OPW-24A	

ASSEMBLE WITH P.G. PART OPW-SERIES, WSR-SERIES



螺旋塞環 SCREW PLUG — 5-64-3

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D SCREW	PACKAGE
SM-M10TC	ø14.0	8.5	2.4	M10	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防水螺旋塞環 WATERPROOF PLUG 5-65-1

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW
- WATERPROOF PROVE: IP67




PART NO	A	B	C	D SCREW	ASSEMBLE WITH P.G. PART	PACKAGE
SM-M10TC-X	ø14.0	8.5	2.4	M10	OPW-9CD	1000

ASSEMBLE WITH P.G. PART OPW-SERIES



塑膠螺絲 PLASTIC SCREW 5-65-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	C	D SCREW	ASSEMBLE WITH P.G. PART	PACKAGE
S-608KT-X	ø11.5	8.0	3.3	M6	UWX-11	1000
S-608W-X	ø11.5	5.9	3.3			

ASSEMBLE WITH P.G. PART UWX-SERIES



塑膠螺帽 PLASTIC NUT 5-65-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- D: SCREW




PART NO	MATERIAL	A	B	D SCREW	PACKAGE
S-2M	PC/N66	5.0	2.4	M2.6	1000
S-2MD	PC	5.0	1.9	M2.6	
S-3M	PC/N66	5.4	2.5	M3	
S-4M	PC/N66	8.0	3.2	M4	
S-5M	PC/N66	8.0	4.4	M5	
S-7M	N66	10.2	3.95	M7x0.75	
S-8MG	N66	13.0	4.8	M8	500
S-12M	N66	18.0	5.1	M12x1.5	1000
UN4-40AN	N66	4.75	2.54	#4-40	
UN4-40DK	N66	6.35	2.54	#4-40	
UN6-32	PC/N66	6.2	2.5	#6-32	
UN6-32BP	N66	6.35	3.05	#6-32	
UN6-32RT	N66	7.75	3.05	#6-32	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠螺帽 PLASTIC NUT 5-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	D	E	PACKAGE
S-3MF	ø8.5	3.2	M3	5.4	1000
S-4MF	ø10.0	4.0	M4	6.9	
S-5MF	ø11.0	5.0	M5	7.9	



塑膠螺帽 PLASTIC NUT 5-66-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW




PART NO	A	B	D	E	PACKAGE
UN10-24	ø10.55	6.35	#10-24	9.15	1000



塑膠螺帽 PLASTIC NUT 5-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	D	PACKAGE
SMA4-40C	ø9.55	7.9	#4-40	1000
SMA6-32F	ø9.55	7.9	#6-32	



塑膠螺帽 PLASTIC NUT 5-66-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




PART NO	A	B	D	PACKAGE
SMC4-40D	ø7.6	7.1	#4-40	1000



V 型扣 V CLIP 5-66-5

- MATERIAL: POM
- COLOR: BLACK

NEW



PART NO	A	B	C	PACKAGE
★ VKW-14A	11.0	8.0	14.13	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

06 如何使用膠帶程序

準備安裝表面:

為了獲得最佳黏著效果，請將膠帶固定座貼在清潔、乾燥、無油的表面上。
貼上前請務必清潔黏合表面，請用水 1:1稀釋的異丙醇混合液擦拭表面後，待表面完全乾燥。

如何正確安裝膠帶:

若要正確安裝及使用膠帶固定座，請先移除離型紙後將固定座放置到位，平均施以約15psi(1.05kg/cm^2)之壓力按壓以獲得有效貼合。

理想施工溫度:

溫度介於在15°C至38°C之間，勿低於10°C。



1.用乾淨的布並用稀釋的異丙醇混合液擦拭清潔表面。



2.待表面完全乾燥。



3.請先移除離型紙後將其固定座放置到位,平均施以15psi(1.05Kg/cm^2)之壓力按壓以獲得有效貼合，溫度介於在15°C至38°C之間，勿低於10°C。



4.等待一段時間直至貼合強度穩定。

膠帶保存:


膠帶固定座儲存環境為21°C和50%相對濕度，避免因未確實密封及開放包裝，會有背膠黃化現象。
如果儲存條件(環境)與建議條件不同，可能會縮短保質期並導致黏合強度下降。
我們持續提高產品可靠性，但錯誤使用可能會造成損壞，如果您對產品的正確使用有任何疑問/疑慮，請諮詢我們。

06

線材固定
CABLE CLAMPS




線材隔離
SADDLES

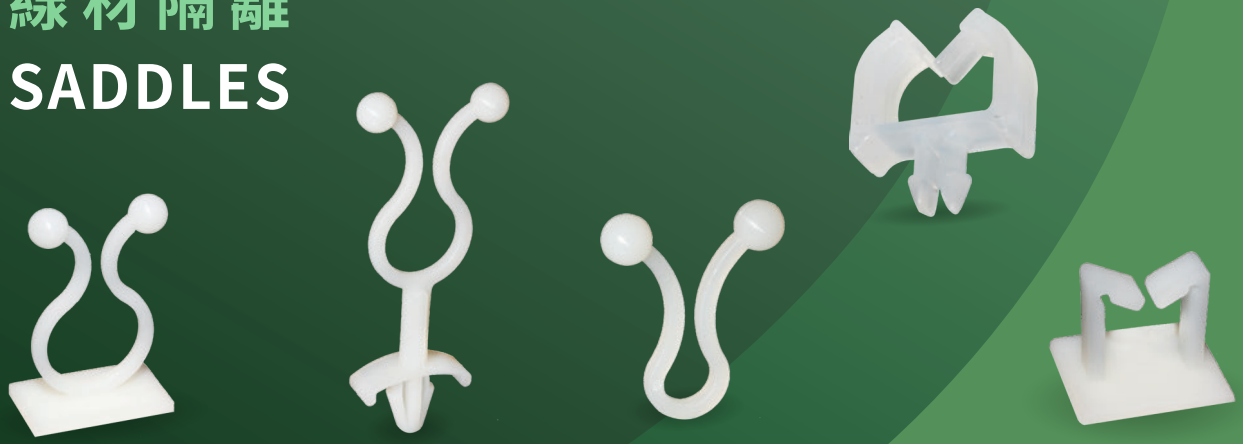




電線固定板 WIRE MOUNT 6-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

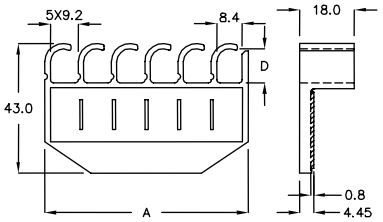


PART NO	A	D	PACKAGE
6FW−10	67.2	11.0	50



電線固定板 WIRE MOUNT 6-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




PART NO	A	C	D	PACKAGE
★ CMR−8GH	8.1	1.4	ø1.38	2000



電線固定板 WIRE MOUNT 6-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	PACKAGE
CMY−10CT	4.5	9.45	6.85	1000
CMY−10A	4.5	10.2	7.6	




電線固定板 WIRE MOUNT 6-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

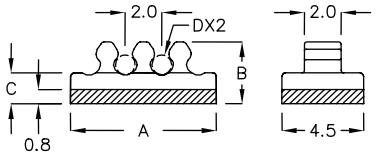


PART NO	A	B	C	D	PACKAGE
CMR−6TH	6.1	4.2	1.8	ø1.3	2000
CMR−8AT	8.0	3.4	1.7	ø1.0	
CMR−8KF	8.1	4.2	1.8	ø1.38	



電線固定板 WIRE MOUNT 6-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

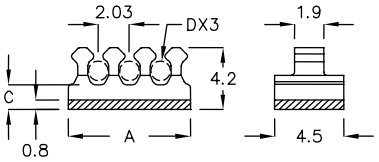


PART NO	A	C	D	PACKAGE
CMR−8D	8.1	1.8	ø1.3	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定板 WIRE MOUNT 6-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

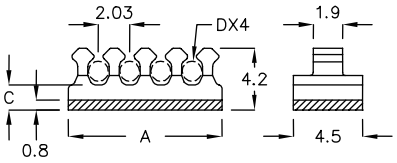


PART NO	A	C	D	PACKAGE
CMR-10FK	10.0	1.8	ø1.3	2000



電線固定板 WIRE MOUNT 6-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

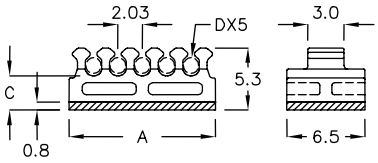


PART NO	A	C	D	PACKAGE
CMX-12A	12.2	3.0	ø1.3	2000



電線固定板 WIRE MOUNT 6-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

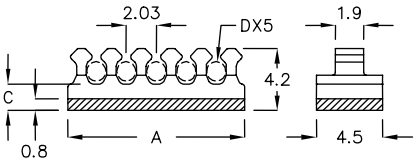


PART NO	A	C	D	PACKAGE
CMR-12QW	12.0	1.8	ø1.3	2000



束線固定板 ADHESIVE BACKED MOUNT 6-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	ASSEMBLE WITH P.G. PART	PACKAGE
AB-2S	13.0	13.0	4.8	2.1	2.8	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142S YJ-160, YJ-203S	1000
AB-2	19.0	19.0	4.7	1.7	3.8		500

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 2.6mm



束線固定板 ADHESIVE BACKED MOUNT 6-3-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 COUNTERSUNK SCREW



PART NO	A	B	C	D	E	F	ASSEMBLE WITH P.G. PART	PACKAGE
AB-3S	19.8	19.8	6.4	1.6	4.3	ø4.4	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S	500
AB-3	28.3	28.3	6.7	1.8	5.0	ø4.8		200


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



束線固定板
ADHESIVE BACKED MOUNT — 6-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH #6-32 COUNTERSUNK SCREW




PART NO	A	B	C	D	ASSEMBLE WITH P.G. PART	PACKAGE
AB-20PJ	19.8	19.8	7.4	1.7	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S	500

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



束線固定板
ADHESIVE BACKED MOUNT — 6-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M2 or M3 SCREW




PART NO	A	B	C	D	E	F	WITH SCREW	ASSEMBLE WITH P.G. PART	PACKAGE
AB-3R	15.0	9.0	5.3	1.95	3.8	10.5	M2	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S	500
AB-3P	24.0	12.0	5.3	1.95	4.0	18.0	M3		

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



束線固定板
ADHESIVE BACKED MOUNT — 6-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	C	D	ASSEMBLE WITH P.G. PART	PACKAGE
AB-20QW	39.6	19.8	7.4	1.7	YJ-80, YJ-90, YJ-98, YJ-100 YJ-120, YJ-142, YJ-142S, YJ-156 YJ-160, YJ-203, YJ-203S	200


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



束線固定板
ADHESIVE BACKED MOUNT 6-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




PART NO	A	B	C	D	ASSEMBLE WITH P.G. PART	PACKAGE
ABT-60L	60.0	20.0	8.2	1.8	YJ-80, YJ-90, YJ-98, YJ-100 YJ-120, YJ-142, YJ-142S, YJ-156 YJ-160, YJ-203, YJ-203S	200

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm




壓線座 WIRE CLAMP 6-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	PACKAGE
FS-05	2.4	5.0	4.1	3.2	13.2	2000
FS-12PT	1.5	5.0	3.2	2.4	12.3	




壓線座 WIRE CLAMP 6-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	PACKAGE
FCP-05	5.2	13.0	500




壓線座 WIRE CLAMP 6-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




PART NO	A	B	PACKAGE
★ FCP-7	7.0	13.0	500




隔離束線座 WIRE SADDLE 6-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	PACKAGE
AB-5	6.0	15.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	PACKAGE
FU-10AK	8.5	10.0	6.1	2.1	2.3	2000
FU-10DF	8.5	10.0	6.9	3.1	3.15	
FU-15A	8.5	15.2	5.8	2.5	2.7	






隔離束線座 WIRE SADDLE 6-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
FUS-10C	6.5	10.5	4.5	2000






電線固定座 WIRE MOUNT 6-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	E	PACKAGE
FUM-12	11.25	8.0	9.03	2000
FUM-12FD	13.1	8.0	10.45	






隔離束線座 WIRE SADDLE 6-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
FUA-16	6.0	10.0	2000






電線固定座 WIRE MOUNT 6-6-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	F	PACKAGE
FWF-1A	14.0	12.0	3.5	5.1	3.8	2.6	1000
FWF-1C	24.0	12.0	3.6	9.6	4.8	2.6	500
FWF-1D	20.0	12.0	3.6	7.6	4.8	2.6	
FWF-1M	24.0	12.0	3.8	9.4	5.2	2.8	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	F	PACKAGE
FWF−1F	24.0	12.0	3.6	9.6	4.8	2.6	500
FWF−1N	24.0	12.0	4.1	9.6	4.8	3.1	
FWF−1P	24.0	12.0	4.1	9.4	5.2	3.1	



電線固定座 WIRE MOUNT 6-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

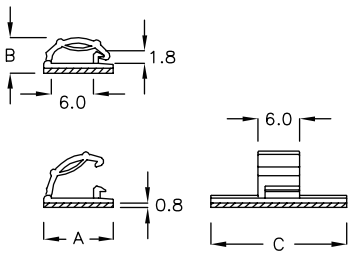


WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
CHW−1C	10.0	5.5	19.5	500



電線固定座 WIRE MOUNT 6-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

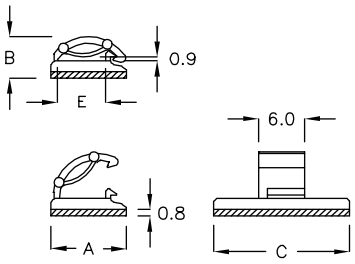


WITH LOCK FEATURE

PART NO	A	B	C	E	PACKAGE
CHW−01	10.0	5.8	19.5	6.0	500
CHW−2M	14.1	8.4	19.6	10.35	
CHW−04	10.0	5.8	12.0	6.0	
CHW−05	10.0	5.8	18.8	6.3	
CHW−07	10.0	5.8	19.5	6.1	



電線固定座 WIRE MOUNT 6-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

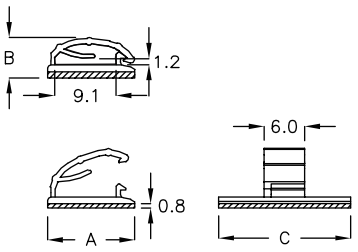


WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
CHW−2K	13.0	6.3	20.0	500



電線固定座 WIRE MOUNT 6-7-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

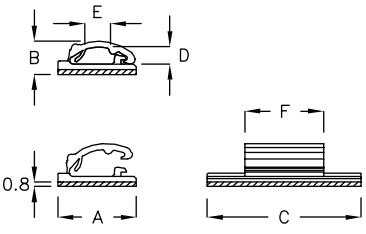

WITH LOCK FEATURE


PART NO	A	B	C	D	E	F	PACKAGE
CHW−2Q	10.0	4.7	19.5	2.2	3.3	10.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

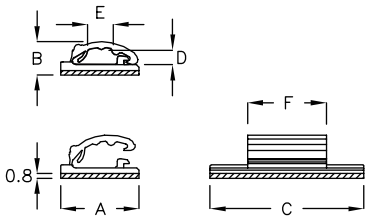


WITH LOCK FEATURE

PART NO	A	B	C	D	E	F	PACKAGE
CHW-2AC	10.0	4.7	19.5	1.8	3.3	10.0	500



電線固定座 WIRE MOUNT 6-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	D	E	PACKAGE
CHW-10MK	10.0	7.3	4.2	6.4	500



電線固定座 WIRE MOUNT 6-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	E	F	PACKAGE
CHW-1A	10.0	6.1	19.5	3.0	6.0	6.0	500
CHW-1J	8.5	4.7	12.0	1.8	3.5	7.0	1000
CHW-2C	10.0	6.3	20.0	3.0	5.9	11.0	500
CHW-3R	10.0	7.9	30.0	4.3	5.4	20.0	




電線固定座 WIRE MOUNT 6-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

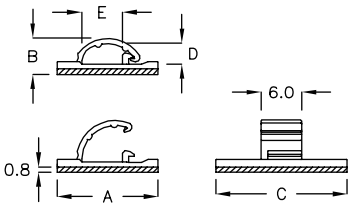


WITH LOCK FEATURE

PART NO	A	B	C	D	E	PACKAGE
CHW-1D	15.0	5.4	19.5	3.0	6.0	500
CHW-1H	15.0	5.3	19.5	2.5	6.0	



電線固定座 WIRE MOUNT 6-8-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

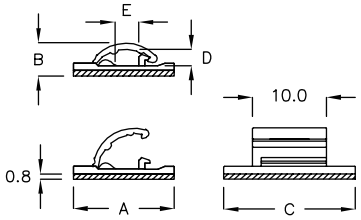

WITH LOCK FEATURE


PART NO	A	B	C	D	E	PACKAGE
CHW-1F	15.0	5.4	19.5	2.5	3.4	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	E	PACKAGE
CHW-4NJ	13.5	5.1	13.0	2.6	8.5	500



電線固定座 WIRE MOUNT 6-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

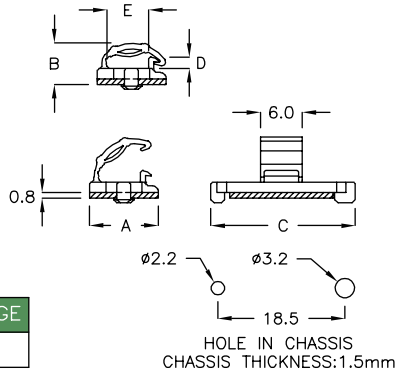


WITH LOCK FEATURE

PART NO	A	B	C	D	E	PACKAGE
CZQ-1SK	10.0	6.1	21.0	1.7	6.0	500



電線固定座 WIRE MOUNT 6-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	E	PACKAGE
CZJ-20K	20.5	10.1	12.5	2.7	8.8	500




電線固定座 WIRE MOUNT 6-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	PACKAGE
FGH-01	ø3.2	10.3	10.0	500



電線固定座 MOUNTING PURSE LOCK 6-9-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE



WITH LOCK FEATURE


PART NO	A	B	C	CLOSE DIA	PACKAGE
AB-8C	9.5	28.2	25.0	ø8.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 MOUNTING PURSE LOCK —— 6-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	E	CLOSE DIA	PACKAGE
AB-4	6.7	28.6	10.0	19.8	ø5.8	500
AB-9	11.0	31.3	9.0	19.2	ø10.5	200



電線固定座 MOUNTING PURSE LOCK —— 6-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	CLOSE DIA	PACKAGE
AB-3DT	4.0	18.0	18.0	14.0	ø3.0	500
AB-04C	4.9	25.2	20.0	13.0	ø4.0	
AB-04D	4.9	21.1	14.5	15.5	ø4.0	
AB-05C	6.0	24.7	20.0	13.0	ø5.0	
AB-7	8.7	22.8	20.0	13.0	ø7.0	
AB-07C	8.7	23.0	15.5	16.0	ø7.0	
AB-8	9.5	28.2	25.0	13.0	ø8.2	
AB-08D	9.5	25.4	15.5	20.0	ø8.2	
AB-8FA	9.5	27.0	20.0	14.0	ø8.5	
AB-10	10.8	31.3	21.1	19.2	ø10.0	200
AB-10D	10.8	27.3	18.5	21.0	ø10.0	
AB-12A	14.0	35.5	22.0	13.0	ø12.5	
AB-13	14.8	35.5	22.0	13.0	ø13.0	
AB-13A	14.8	35.5	25.0	20.0	ø13.3	
AB-16	17.8	39.4	25.0	13.0	ø16.2	
AB-16C	17.9	39.3	25.0	18.0	ø16.0	
AB-18	20.0	39.0	25.0	18.0	ø18.0	
AB-20R	22.2	43.0	25.4	25.4	ø20.5	
AB-22	21.0	40.8	25.2	13.0	ø19.0	



電線固定座 MOUNTING PURSE LOCK —— 6-10-3


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



WITH LOCK FEATURE


PART NO	A	B	D	E	F	CLOSE DIA	PACKAGE
AB-8S	9.6	26.3	6.25	1.9	25.4	ø8.5	200
AB-8H	9.6	26.3	12.6	1.9	25.4	ø8.5	
AB-10A	11.6	28.0	27.3	1.9	25.4	ø10.2	
AB-11A	11.4	27.4	4.8	2.0	13.0	ø9.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 MOUNTING PURSE LOCK — 6-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	C	D	CLOSE DIA	PACKAGE
AB−18JK	21.0	25.2	26.8	ø18.5	200
AB−18MD	21.0	25.2	16.8	ø18.5	




隔離束線座 WIRE SADDLE — 6-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
CHAD−42JF	18.0	28.0	25.2	14.8	100



隔離束線座 WIRE SADDLE — 6-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED
- WITH M2.5 SCREW

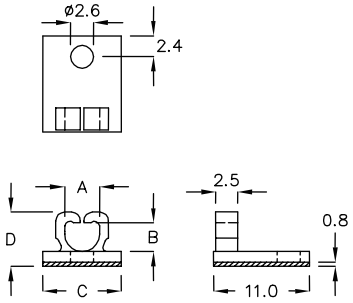


PART NO	A	B	C	D	PACKAGE
CHF−4A	4.0	3.3	9.0	6.5	1000



隔離束線座 WIRE SADDLE — 6-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED
- WITH M2.5 or M3 SCREW

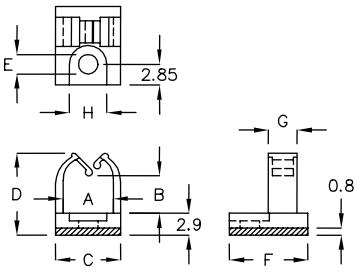


PART NO	A	B	C	D	E	F	G	H	USE SCREW	PACKAGE
CHF−8	6.9	5.0	9.1	11.3	ø2.7	11.0	4.1	5.1	M2.5	500
CHF−8A	6.9	5.0	9.1	11.2	ø3.1	11.0	4.1	5.1	M3	
CHF−8C	7.0	8.8	9.0	15.0	ø2.7	10.9	4.0	5.2	M2.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

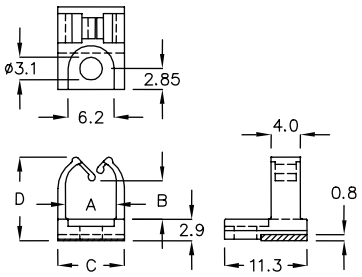


PART NO	A	B	C	D	PACKAGE
CHFQ-6DM	6.9	5.25	9.1	11.4	1000



隔離束線座 WIRE SADDLE 6-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M2.5 or M3 SCREW




PART NO	A	B	C	D	E	F	G	H	J	USE SCREW	PACKAGE
CHFA-4RQ	4.7	8.3	6.5	13.0	ø2.7	11.0	4.1	2.9	5.1	M2.5	1000
CHFA-6QW	6.8	13.9	10.0	19.6	ø3.1	15.0	5.0	5.0	5.1	M3	
CHFA-11AM	11.5	16.3	15.5	23.2	ø3.1	19.0	5.3	5.0	5.1		500
CHFA-15GM	15.5	33.4	19.5	40.7	ø3.1	19.0	8.0	4.5	5.6		200
CHFA-18TK	18.0	38.7	22.0	46.0	ø3.1	22.0	8.0	5.0	5.6		100



隔離束線座 WIRE SADDLE 6-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

WITH LOCK FEATURE

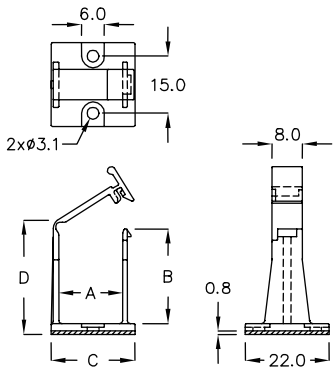


PART NO	A	B	C	D	PACKAGE
CHFR-16M	16.8	37.2	22.0	42.0	100



隔離束線座 WIRE SADDLE 6-12-4

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 CPUNTERSUNK SCREW




PART NO	A	B	C	D	PACKAGE
CHFZ-17A	10.4	17.2	13.6	23.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

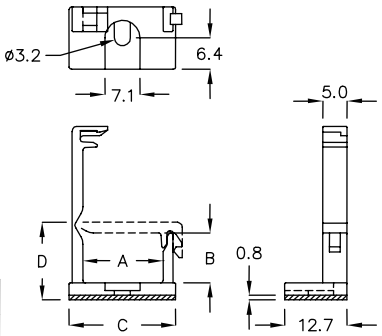


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
CKMH-16	16.3	10.1	21.6	15.6	200




隔離束線座 WIRE SADDLE 6-13-2

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	PACKAGE
AB-20C	4.55	2.7	9.6	7.2	9.6	2000
AB-20H	4.5	2.7	8.0	7.3	8.8	
AB-20JQ	4.5	2.7	8.0	7.3	6.0	



隔離束線座 WIRE SADDLE 6-13-3

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
ABH-4K	4.5	2.2	7.6	5.65	2000




隔離束線座 WIRE SADDLE 6-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
ABH-4GN	4.5	3.7	8.0	9.7	1000



隔離束線座 WIRE SADDLE 6-13-5

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	G	PACKAGE
CAR-4A	4.5	2.95	9.4	8.25	9.4	2.0	2000
CAR-9CD	9.2	6.0	12.7	14.2	12.7	4.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-14-1

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
CAM−7DF	7.5	9.0	10.0	14.5	500



隔離束線座 WIRE SADDLE 6-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
ABD−10P	3.4	2.7	5.0	7.2	2000



隔離束線座 WIRE SADDLE 6-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




PART NO	A	B	C	D	F	H	J	PACKAGE
CHFD−6RM	6.8	6.3	9.0	14.1	10.9	2.85	5.2	1000
CHFD−9GD	9.0	9.0	12.7	18.3	12.7	3.5	5.3	



隔離束線座 WIRE SADDLE 6-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
CHFT−5AM	5.3	9.0	7.5	15.8	1000



隔離束線座 WIRE SADDLE 6-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

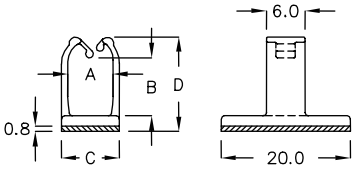


PART NO	A	B	C	D	PACKAGE
CML−7RJ	7.0	9.0	9.0	14.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

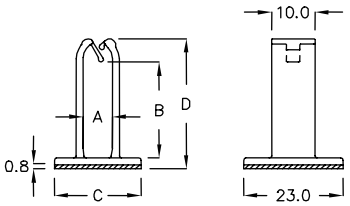


PART NO	A	B	C	D	PACKAGE
CMLA−6	6.8	25.0	20.0	32.8	200



隔離束線座 WIRE SADDLE 6-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

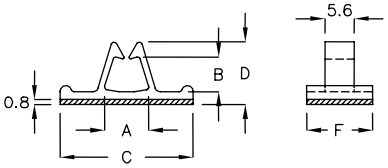


PART NO	A	B	C	D	F	PACKAGE
AB−15A	8.4	6.7	25.5	12.0	12.7	500
AB−15F	8.4	6.0	17.6	11.3	8.9	




電線固定座 WIRE MOUNT 6-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

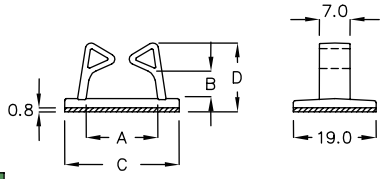


PART NO	A	B	C	D	PACKAGE
AB−15H	16.6	6.3	26.4	15.7	500




隔離束線座 WIRE SADDLE 6-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

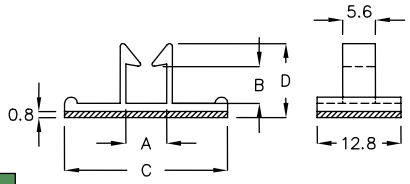


PART NO	A	B	C	D	PACKAGE
AB−15	6.4	5.8	25.5	11.5	500
AB−15C	6.4	4.5	19.0	10.2	




隔離束線座 WIRE SADDLE 6-15-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	G	PACKAGE
AB−11KW	11.5	26.8	17.0	34.7	13.5	5.3	200
AB−20GP	20.0	15.3	28.0	23.3	25.0	10.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

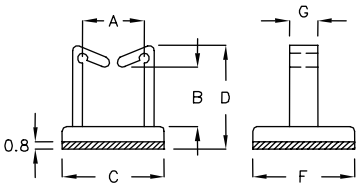


PART NO	A	B	C	D	F	G	PACKAGE
AB−20A	11.2	8.2	21.0	16.3	19.0	5.3	500
AB−11CF	11.5	10.0	16.0	18.2	12.5	5.3	
AB−20F	11.5	10.0	17.0	17.9	12.5	5.3	
AB−20	11.5	10.0	21.0	17.9	19.0	5.3	
AB−20K	16.6	9.8	26.4	17.9	19.0	7.0	
AB−17K	17.0	27.8	22.0	35.2	22.0	10.0	100
AB−20D	20.0	10.0	25.7	17.9	19.0	5.3	500




隔離束線座 WIRE SADDLE 6-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	G	PACKAGE
AB−16LM	6.8	14.0	10.0	20.0	16.0	5.0	500
AB−20M	6.8	14.0	10.0	20.0	20.0	5.0	
AB−11SJ	11.5	19.8	15.5	26.8	19.0	5.3	200
AB−15RK	15.1	26.2	19.5	34.0	19.5	10.0	100
AB−20L	16.5	10.2	20.5	18.2	18.9	7.0	200




隔離束線座 WIRE SADDLE 6-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

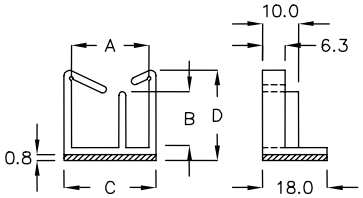


PART NO	A	B	C	D	PACKAGE
AB−21A	21.7	15.5	25.7	24.3	200



隔離束線座 WIRE SADDLE 6-16-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




PART NO	A	B	C	D	PACKAGE
★ ABF−20GS	19.8	17.4	23.0	22.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: ABS+PC
- COLOR: BLACK
- ADHESIVE TAPE: 3M

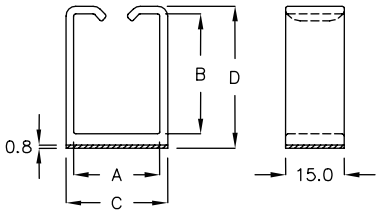


PART NO	A	B	C	D	PACKAGE
ABF−34DM	36.0	29.1	40.0	34.7	100
ABF−36CK	22.0	30.7	26.0	36.3	
★ ABF−55FN	55.0	13.0	58.3	17.0	




隔離束線座 WIRE SADDLE 6-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	G	PACKAGE
ABK−5Q	5.8	24.0	9.0	29.3	20.0	8.0	200



隔離束線座 WIRE SADDLE 6-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

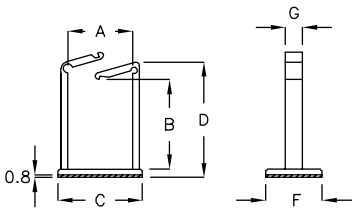


PART NO	A	B	C	D	F	G	PACKAGE
CMF−10CS	10.4	13.6	13.0	19.8	22.0	10.0	200
CMF−15A	15.1	27.7	19.5	34.0	19.5	10.0	100
CMF−17	17.0	27.8	22.0	34.0	22.0	10.0	
CMF−23	23.0	31.8	30.0	40.8	20.0	6.0	




隔離束線座 WIRE SADDLE 6-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW



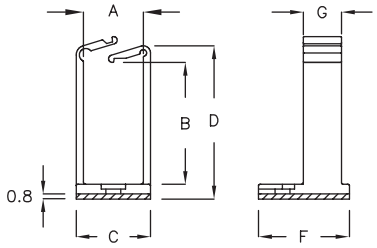


PART NO	A	B	C	D	F	G	PACKAGE
★ CNL−12FP	12.5	25.4	15.5	32.0	19.0	8.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	E	PACKAGE
CHU-06	10.8	18.5	21.0	14.8	500
CHU-06K	10.8	18.5	16.0	14.8	




隔離束線座 WIRE SADDLE 6-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
PAC-40GS	22.0	34.7	26.0	40.3	100
PAC-50M	27.0	44.7	31.0	50.3	



隔離束線座 WIRE SADDLE 6-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	PACKAGE
CZK-28F	28.6	22.8	200



隔離束線座 WIRE SADDLE 6-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

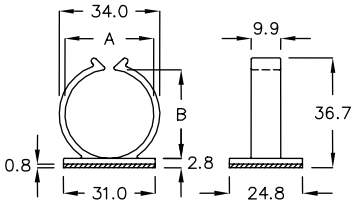


PART NO	A	B	PACKAGE
CZT-30JR	30.0	29.8	100



隔離束線座 WIRE SADDLE 6-18-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

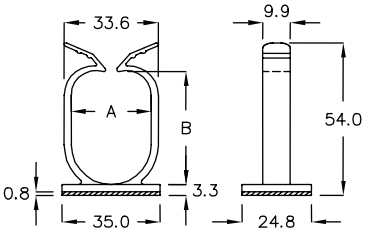

PART NO	A	B	PACKAGE
CZW-28JK	28.6	40.5	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
PAK11−4A	11.1	4.4	200

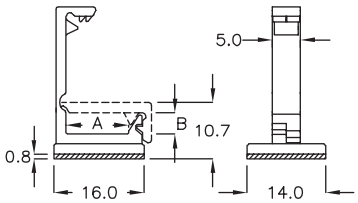




隔離束線座 WIRE SADDLE 6-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
PAD11−11	11.1	11.4	200

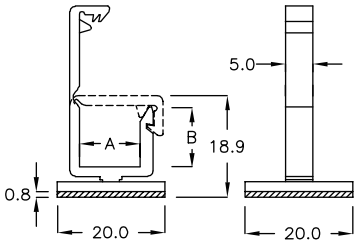





隔離束線座 WIRE SADDLE 6-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
PAD10−19	11.0	19.3	200

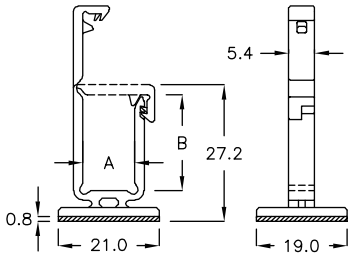





隔離束線座 WIRE SADDLE 6-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
CKM−01	10.8	12.0	200

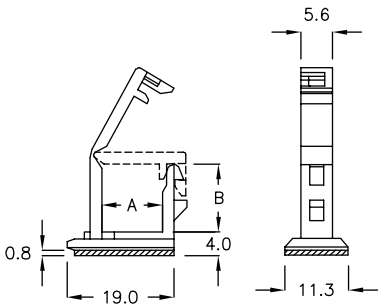




隔離束線座 WIRE SADDLE 6-19-5


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
CKZ−16	16.0	14.0	200

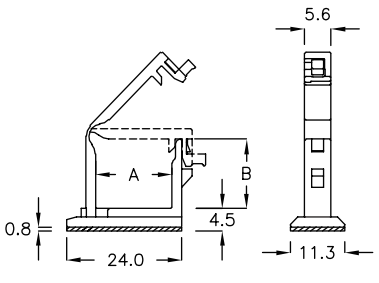

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
CKM-02	10.5	11.5	4.0	200
CKM-03	11.1	15.0	4.0	






電線固定板 CABLE CLAMP 6-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
CKZA-16K	16.0	15.7	200

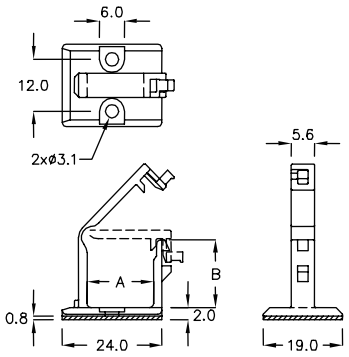





隔離束線座 WIRE SADDLE 6-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
CKMA-21	14.0	27.6	32.8	100

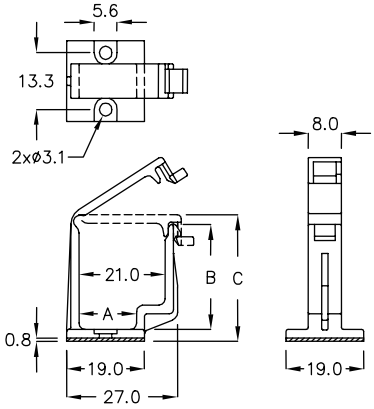




隔離束線座 WIRE SADDLE 6-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
CKW-01	13.6	5.3	200

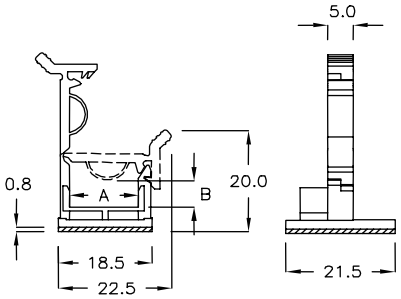




電線固定座 WIRE MOUNT 6-20-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	D	PACKAGE
FRAC-3K	ø16.0	7.3	ø3.8	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ4~Φ5
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	PACKAGE
FW-1P	12.0	7.3	19.0	ø4.5	500






電線固定座 WIRE MOUNT 6-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ4~Φ5
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	PACKAGE
FW-1	16.0	7.3	18.9	ø4.4	500






電線固定座 WIRE MOUNT 6-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ4~Φ5
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	PACKAGE
FW-1GH	16.0	7.2	15.6	ø4.4	500







電線固定座 WIRE MOUNT 6-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D CABLE DIM:	PACKAGE
FW-1A	19.0	8.8	20.2	ø6.0	500
FW-1AM	19.0	8.8	19.0	ø5.2	






電線固定座 WIRE MOUNT 6-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	F	PACKAGE
FW-1AS	19.0	8.5	19.0	ø5.2	10.2	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	PACKAGE
FW-1AK	16.0	7.3	19.0	ø4.0	10.2	500
FW-1AP	16.0	6.4	16.0	ø3.0	8.5	
FW-1AQ	16.0	7.4	19.0	ø4.0	10.2	
FW-1AR	16.0	7.4	19.0	ø3.6	10.2	
FW-1AT	16.0	7.4	19.0	ø4.2	10.2	



電線固定座 WIRE MOUNT 6-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FW-1B	20.7	9.0	13.0	ø5.6	500
FW-1C	20.7	7.5	10.0	ø3.6	




電線固定座 WIRE MOUNT 6-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	F	PACKAGE
FW-1AJ	12.0	7.3	12.0	ø3.8	9.0	500



電線固定座 WIRE MOUNT 6-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FW-2F	20.8	8.6	13.0	ø4.7	500



電線固定座 WIRE MOUNT 6-22-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	C	D	PACKAGE
FW-01H	13.0	6.0	12.0	ø3.3	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE

PART NO	A	B	C	PACKAGE
FW-01F	12.0	4.6	10.0	1000







電線固定座 WIRE MOUNT 6-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	E	PACKAGE
FW-2	16.0	7.2	19.0	8.3	500
FW-02P	14.0	7.2	16.0	6.3	
FW-02Q	18.0	7.2	19.0	10.2	






電線固定座 WIRE MOUNT 6-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	F	PACKAGE
FW-6NJ	6.5	4.5	12.0	1.4	4.0	6.0	1000
FW-02N	9.8	4.5	9.5	1.4	6.5	6.4	
FW-2JG	8.0	7.6	12.0	4.4	5.1	4.0	500
FW-2MQ	10.0	5.9	9.4	2.5	4.25	6.4	
FW-2MP	12.0	6.3	9.4	2.5	6.25	6.4	
FW-2S	12.5	6.0	9.5	2.5	8.4	6.7	
FW-2SP	12.7	6.3	12.5	2.5	8.2	6.3	
FW-2AG	12.7	6.4	12.7	2.8	8.4	6.4	
FW-2M	14.5	6.4	9.5	2.5	10.2	6.4	
FW-2MA	16.7	6.6	13.0	3.1	11.6	9.0	







電線固定座 WIRE MOUNT 6-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	PACKAGE
FW-2SC	9.0	5.3	4.0	2.9	6.4	1000
FW-9NT	9.0	5.3	8.0	2.9	6.5	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	F	PACKAGE
FW-1Q	11.7	5.2	10.0	2.0	5.2	6.0	1000
FW-1S	11.7	5.6	16.0	2.5	5.2	7.1	
FW-1M	12.3	6.4	15.9	3.2	6.0	7.0	
FW-19A	19.9	6.1	11.9	2.6	13.2	10.0	500
FW-019	19.9	6.7	14.0	3.2	13.2	10.0	



電線固定座 WIRE MOUNT 6-24-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D SUITABLE CABLE	PACKAGE
FYS-4HJ	12.0	5.8	14.0	ø2.1	500




電線固定座 WIRE MOUNT 6-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	F	PACKAGE
FW-2D	19.0	11.8	19.0	7.8	12.5	9.7	500
FW-2DP	19.05	12.25	19.05	7.85	11.7	9.5	
FW-2RN	19.25	12.15	15.5	7.9	11.7	14.0	
FW-2DG	26.0	19.4	19.0	15.0	18.6	9.5	
FW-2DT	29.4	12.2	19.0	7.8	22.0	9.5	200




電線固定座 WIRE MOUNT 6-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	F	PACKAGE
FW-2DS	14.9	9.5	19.0	6.0	7.9	9.6	500
FW-2DM	16.0	9.5	19.0	6.0	9.0	9.6	
FW-6D	20.8	12.1	19.0	8.2	13.6	9.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

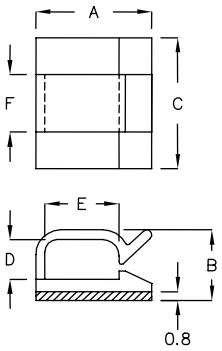


PART NO	A	B	C	D	E	F	PACKAGE
FW-1DS	11.4	8.1	16.0	4.7	6.0	7.0	500
FW-3DK	13.0	8.7	14.0	5.2	9.0	7.1	
FW-1D	13.4	8.1	15.9	4.7	8.0	7.0	
FW-3D	14.4	8.3	16.0	4.8	9.0	7.0	
FW-4D	14.4	8.7	15.9	5.2	8.2	7.1	
FW-1DL	15.4	8.1	16.0	4.7	9.9	7.0	
FW-5D	16.8	10.2	16.0	6.5	10.1	7.0	
FW-20HQ	20.0	10.1	16.0	6.6	15.8	9.0	
FW-22AD	22.7	9.5	20.0	6.0	18.0	10.0	200
FW-33H	33.0	10.4	20.0	6.0	26.8	10.0	



電線固定座 WIRE MOUNT 6-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	F	PACKAGE
FW-2KP	12.0	7.0	12.1	3.5	6.2	9.0	500
FW-2KQ	13.0	7.05	12.0	3.5	8.2	9.0	
FW-2K	14.0	7.24	12.1	3.5	10.5	10.0	
FW-2LP	14.0	9.8	16.0	6.0	7.5	9.0	
FW-2LQ	16.0	9.8	16.0	6.0	9.6	9.0	
FW-2L	16.0	9.9	16.0	6.0	12.0	9.0	



電線固定座 WIRE MOUNT 6-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: ABS+PS
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	D	E	PACKAGE
FW-15ZK	15.4	8.1	5.2	13.2	1000
★ FW-25AF	22.5	23.3	18.9	18.9	500



電線固定座 WIRE MOUNT 6-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FDW-1	16.0	7.3	16.0	3.7	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




PART NO	A	B	C	D	PACKAGE
FDW−3	27.0	9.3	17.0	5.7	500



電線固定座 WIRE MOUNT 6-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




PART NO	A	B	C	D	PACKAGE
★ FDW−18A	18.9	6.1	15.9	2.7	500



電線固定座 WIRE MOUNT 6-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW




PART NO	A	B	C	D	PACKAGE
★ FDW−25A	25.0	6.1	16.0	2.7	500




電線固定座 WIRE MOUNT 6-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

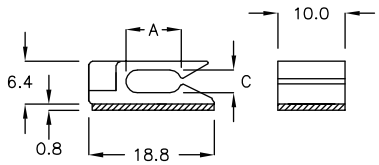


PART NO	A	C	PACKAGE
CU−01A	8.2	3.3	1000




電線固定座 WIRE MOUNT 6-26-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	C	D	PACKAGE
CU−01D	8.6	3.3	4.9	3.3	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M4 COUNTERSUNK SCREW

PART NO	A	C	D	E	F	PACKAGE
FSC-01	25.3	25.4	3.3	13.6	ø4.7	500
FSC-02	25.4	25.4	3.05	12.5	ø5.0	







排線固定座 FLAT CABLE CLAMP 6-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

PART NO	A	C	D	E	PACKAGE
FDX-40	40.0	22.0	4.0	14.5	500







電線固定座 WIRE MOUNT 6-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
FDM-42	42.0	19.1	35.0	100







固定座 MOUNT 6-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
FSL-12GK	8.0	6.3	1000







電線固定座 WIRE MOUNT 6-27-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
FDK-25	17.0	7.65	25.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
FW-11	15.5	7.6	500







電線固定座 WIRE MOUNT 6-28-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	PACKAGE
FYK-16A	16.15	4.3	8.0	1.5	13.0	500






電線固定座 WIRE MOUNT 6-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	PACKAGE
FYM-20M	20.5	5.8	8.0	3.0	18.5	500
FYM-21	21.0	4.3	8.0	1.5	19.0	






電線固定座 WIRE MOUNT 6-28-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	PACKAGE
FW-2DN	25.4	12.2	15.6	7.9	8.0	500
FW-2DA	25.4	12.2	15.6	7.9	11.7	
FW-2DC	25.4	15.5	15.9	11.1	11.7	
FW-2DL	25.4	12.1	25.4	7.9	11.8	
FW-2DW	25.4	12.1	25.4	7.9	15.0	

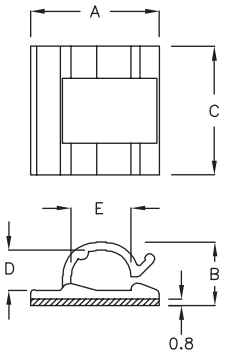





電線固定座 WIRE MOUNT 6-28-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	E	PACKAGE
FW-2DR	25.4	16.3	25.4	11.8	15.0	200
FW-2DK	25.4	16.3	25.4	11.8	18.4	
FW-2DY	40.0	26.2	40.0	20.2	20.0	50
FW-2DJ	40.0	26.2	40.0	20.2	28.8	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE




PART NO	A	B	C	D	E	PACKAGE
FW-1CH	18.2	13.2	19.0	ø5.0	8.4	500
FW-2CH	18.2	15.2	19.0	ø7.8	9.9	
FW-3CH	18.2	13.2	19.0	ø6.7	8.4	
FW-4CH	23.0	15.3	15.0	ø7.8	9.9	



電線固定座 WIRE MOUNT 6-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




PART NO	A	B	C	D	E	PACKAGE
★ FWGH-17B	18.2	21.2	13.0	ø5.1	17.2	500



電線固定座 WIRE MOUNT 6-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ7.8
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE




PART NO	A	B	C	D	PACKAGE
FW-2C	18.2	11.0	19.0	ø7.8	500



電線固定座 WIRE MOUNT 6-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ9.1
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FW-2DQ	25.1	12.6	25.1	ø9.1	500



電線固定座 WIRE MOUNT 6-29-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	PACKAGE
FW-6F	38.0	22.8	37.2	18.0	28.6	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	PACKAGE
FW-7	19.2	11.4	20.0	500
FW-7S	19.2	11.4	15.0	



電線固定座 WIRE MOUNT 6-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FWB-12	57.3	24.8	26.5	19.1	100



電線固定座 WIRE MOUNT 6-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

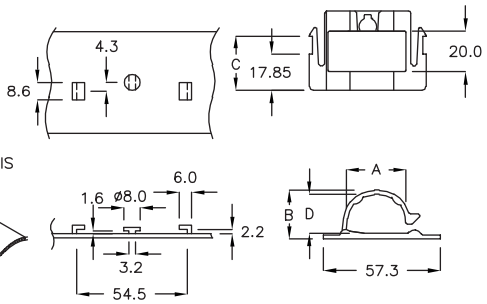


PART NO	A	B	C	D	PACKAGE
FWJ-01	28.6	24.0	26.5	19.1	100



電線固定座 WIRE MOUNT 6-30-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FSD-6A	16.5	9.8	32.0	6.0	500



電線固定座 WIRE MOUNT 6-30-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	C	D	PACKAGE
FWG-38	24.7	37.5	ø5.8	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-31-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FWG−10	13.4	5.95	10.0	ø2.7	1000
FWG−12	14.5	6.75	12.0	ø3.7	200



電線固定座 WIRE MOUNT 6-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	PACKAGE
FWGA−10C	7.0	4.4	10.3	ø2.0	500



電線固定座 WIRE MOUNT 6-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

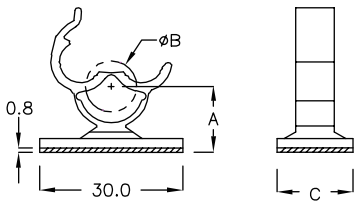


WITH LOCK FEATURE

PART NO	A	B CLOSE DIA	C	PACKAGE
FW−CD30	13.8	ø8.6	16.0	200




電線固定扣 CABLE CLAMP 6-31-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M4 SCREW




PART NO	A	B	C	PACKAGE
PCX−39M	ø36.9	12.6	ø4.9	100



電線固定座 TIE MOUNT 6-31-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE:3M
- ALSO CAN BE FASTENED WITH M4 SCREW

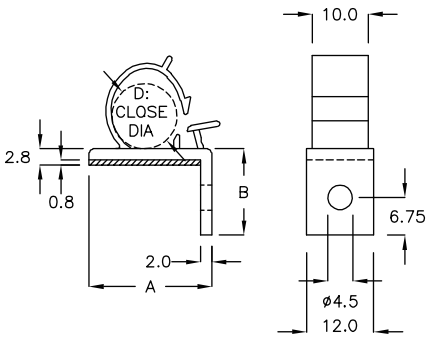

WITH LOCK FEATURE


PART NO	A	B	D	PACKAGE
LFW−3	22.0	15.5	ø11.7	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 TIE MOUNT 6-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

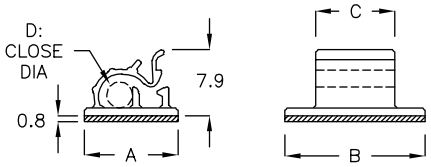


WITH LOCK FEATURE


PART NO	A	B	C	D	PACKAGE
FWZ-3A	11.3	18.5	11.2	ø3.4	500



電線固定座 TIE MOUNT 6-32-2


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M






WITH LOCK FEATURE

PART NO	A	B	C	D	E	PACKAGE
FW-04S	22.0	16.0	10.0	ø11.7	18.6	200
FW-3	25.0	19.6	12.0	ø9.0	16.7	
FW-03A	19.0	19.0	9.0	ø6.8	13.6	
FW-3S	21.0	19.0	9.0	ø7.8	13.1	
FW-3L	21.6	16.8	12.0	ø10.4	15.8	
FW-4	29.8	19.8	14.7	ø12.6	27.2	100
FW-04L	33.5	24.8	16.2	ø19.0	31.0	



電線固定座 TIE MOUNT 6-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

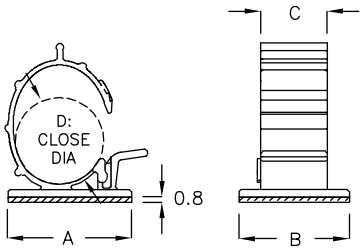


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FDD-28	28.0	25.0	15.0	ø19.5~ø20.0	100



電線固定座 TIE MOUNT 6-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

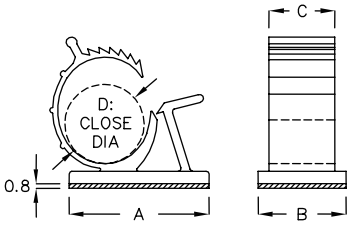

WITH LOCK FEATURE


PART NO	A	B	C	D CLOSE DIA	PACKAGE
FW-33	30.0	16.0	12.0	ø10.5~ø14.5	200
FW-33A	25.5	16.0	12.0	ø10.5~ø14.5	
FW-39KP	36.0	19.0	12.7	ø18.5~ø22.5	100
FW-35	38.2	20.0	12.9	ø14.5~ø18.5	
FW-39	38.8	20.0	12.9	ø18.5~ø22.5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 TIE MOUNT 6-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

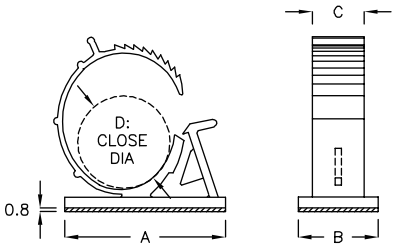


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FW-35C	35.0	19.0	12.9	ø27.0~ø29.0	100
FW-40	40.0	20.0	12.9	ø22.5~ø26.5	



電線固定座 TIE MOUNT 6-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

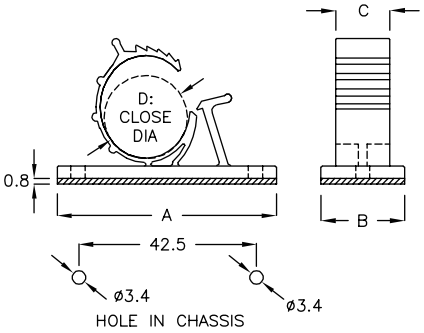


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FWP-33	52.5	20.0	13.0	ø10.5~13.5	200
FWP-52	52.5	20.0	13.0	ø14.5~17.5	100



電線固定座 TIE MOUNT 6-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 TAPPING SCREW

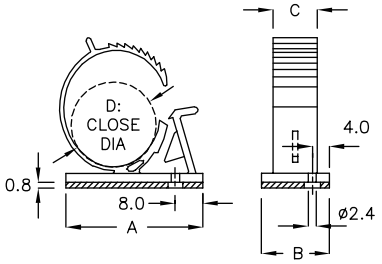


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FWP-40	39.9	19.9	12.9	ø22.5~ø26.5	100




電線固定座 WIRE MOUNT 6-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 COUNTERSUNK SCREW

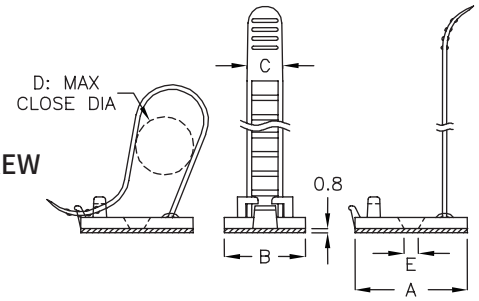


PART NO	A	B	C	D: MAX CLOSE DIA	E	PACKAGE
FWA-12	20.0	15.0	5.0	ø12.0	ø3.4	200
FWA-13	25.0	18.0	7.9	ø13.0	ø3.5	
FWA-17	25.0	18.0	7.9	ø17.0	ø3.5	
FWA-19	20.0	15.0	5.0	ø19.5	ø3.4	
FWA-21	25.0	18.0	8.1	ø18.5	ø3.5	
FWA-22	30.5	21.0	12.0	ø22.0	ø3.5	100
FWA-22C	31.8	21.0	12.0	ø22.0	ø3.6	
FWA-26	30.5	21.0	12.0	ø26.0	ø3.5	
FWA-32K	35.0	25.0	14.0	ø32.5	ø3.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 COUNTERSUNK SCREW

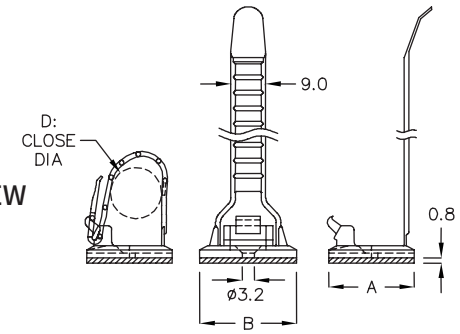


PART NO	A	B	D CLOSE DIA	PACKAGE
FWX-08	22.0	25.0	ø8.0~ø10.0	200
FWX-10	22.0	25.0	ø10.0~ø12.0	
FWX-15	22.0	25.0	ø17.0~ø18.0	
FWX-15A	22.0	25.0	ø18.5~ø19.5	



電線固定板 FLAT CABLE CLAMP — 6-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




PART NO	A	B	C	D	PACKAGE
FCW-40GQ	40.0	53.5	11.2	19.3	100



排線固定板 FLAT CABLE CLAMP — 6-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

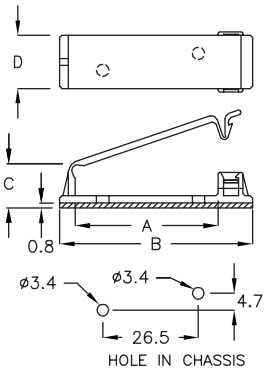


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FCW-40MH	39.7	53.5	11.7	14.7	100



電線固定座 CABLE CLAMP — 6-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- ADHESIVE TAPE: 3M

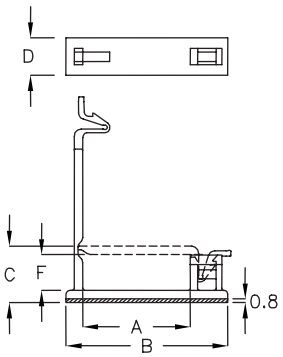


PART NO	A	B	C	D	F	PACKAGE
FCW-23GK	23.0	34.5	12.0	8.0	7.6	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 CABLE CLAMP 6-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



WITH LOCK FEATURE


PART NO	A	B	C	D	F	PACKAGE
FCW-4CK	4.7	12.0	8.6	9.5	5.0	1000
FCW-13RT	13.7	23.0	21.8	20.0	17.0	100
FCW-16A	16.7	26.0	27.9	20.0	23.6	
FCW-17HD	17.0	26.2	14.2	10.0	10.2	
FCW-35QT	21.6	35.0	17.6	15.0	13.0	
FCW-27A	26.9	38.0	16.4	15.0	12.5	
FCW-27KM	27.0	38.5	14.4	11.2	9.5	
FCW-27CS	27.0	38.5	14.4	15.0	9.5	
FCW-29	31.6	45.4	10.4	18.9	5.5	
FCW-30	32.0	45.7	12.2	19.2	7.0	
FCW-32MT	32.7	44.7	21.7	15.0	15.8	
FCW-31F	31.6	45.0	18.4	15.0	13.0	
FCW-35XR	35.0	48.9	11.5	13.0	6.5	
FCW-36CT	36.0	44.8	17.6	12.7	13.1	
FCW-40	39.7	53.5	13.1	19.2	7.7	
FCW-40K	39.7	53.5	15.3	19.3	10.0	
FCW-41	41.3	55.2	10.4	18.7	5.0	
FCW-41RK	41.4	55.2	10.4	18.8	5.0	
FCW-50	64.0	77.5	12.3	19.2	6.5	
FCW-50H	65.2	79.2	18.8	18.9	13.3	
FCW-52KT	52.2	61.0	13.4	12.7	8.8	
FCW-52A	52.6	66.5	15.8	19.8	10.1	




電線固定座 CABLE CLAMP 6-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW

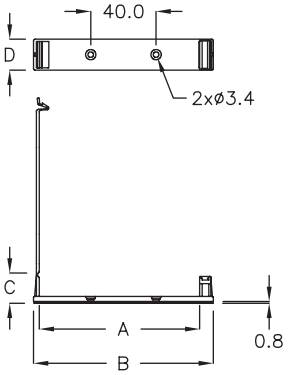


	PART NO	A	B	C	D	PACKAGE
★	FCW-98C	98.2	110.0	18.1	18.9	50



電線固定座 CABLE CLAMP 6-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



WITH LOCK FEATURE


PART NO	A	B	C	D	F	PACKAGE
FCW-11JM	11.0	19.0	15.9	12.0	11.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 CABLE CLAMP — 6-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	F	PACKAGE
FCW−16QS	16.0	20.6	4.3	10.0	2.0	500




電線固定座 CABLE CLAMP — 6-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FCW−16GR	16.0	20.6	5.3	10.0	200
FCW−24GR	24.0	28.6	6.2	10.0	
FCW−30GR	30.0	34.6	5.3	10.0	




電線固定座 WIRE MOUNT — 6-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

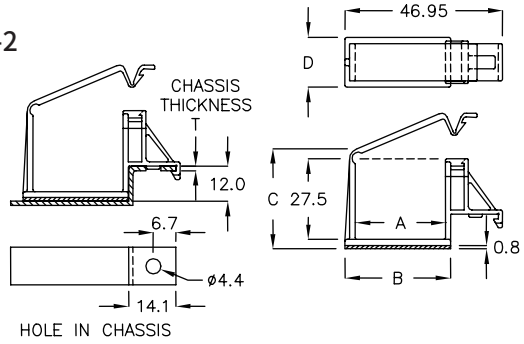


WITH LOCK FEATURE

PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
FCWT−27QH	26.9	31.5	30.4	14.8	1.2	100



電線固定座 CABLE CLAMP — 6-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



WITH LOCK FEATURE


PART NO	A	B	C	D	PACKAGE
FWT−17C	17.0	26.2	14.2	10.0	100
FWT−21	21.0	31.0	19.3	19.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 CABLE CLAMP 6-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FWT−25	31.6	45.0	18.8	19.05	100
FWT−25A	33.0	44.45	11.2	19.05	



電線固定座 CABLE CLAMP 6-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FWT−53C	53.9	66.7	22.5	15.0	100



電線固定座 CABLE CLAMP 6-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FCY−27SY	28.5	44.4	11.0	19.0	100




排線固定板 FLAT CABLE CLAMP 6-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	B	PACKAGE
FC−10N	10.4	18.8	500



排線固定板 FLAT CABLE CLAMP 6-37-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	C	D	PACKAGE
FC−15N	10.5	19.0	15.0	25.0	200
FC−25N	10.5	25.0	23.0	25.2	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




排線固定板 FLAT CABLE CLAMP — 6-38-1

- MATERIAL: NYLON 66(UL)
- COLOR: GRAY
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
FB−15A	10.3	15.0	1000







排線固定板 FLAT CABLE CLAMP — 6-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	PACKAGE
FC−25A	9.6	25.4	500






排線固定板 FLAT CABLE CLAMP — 6-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M


PART NO	A	B	PACKAGE
FCR−09	6.8	22.0	1000






排線固定板 FLAT CABLE CLAMP — 6-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

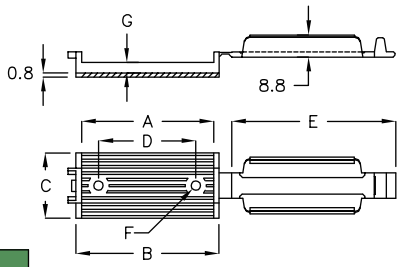


PART NO	A	B	C	D	E	F	G	SUITABLE CABLE	PACKAGE
FCM−50	53.0	57.3	26.0	39.0	64.6	2−ø3.8	4.1	40 PIN	100



排線固定板 FLAT CABLE CLAMP — 6-38-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




PART NO	A	B	C	D	E	F	G	SUITABLE CABLE	PACKAGE
FCM−26AM	26.6	29.7	25.0	14.85	37.9	ø3.8	3.0	16 PIN	100
FCM−30	30.5	34.5	25.4	17.5	42.0	ø3.8	3.1	24 PIN	
FCM−31	26.8	30.7	25.4	15.5	38.5	ø3.65	3.0	16 PIN	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



排線固定板 FLAT CABLE CLAMP — 6-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




PART NO	A	B	C	SUITABLE CABLE	PACKAGE
FCM-25H	24.8	31.0	3.6	16 PIN	200



排線固定板 FLAT CABLE CLAMP — 6-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	E	SUITABLE CABLE	PACKAGE
FCM-25S	22.0	28.0	3.0	4.7	10.0	15 PIN	200
FCM-25	29.3	36.5	3.0	4.7	10.0	20 PIN	
FCM-25M	55.8	61.2	4.0	4.7	15.0	40 PIN	100



排線固定板 FLAT CABLE CLAMP — 6-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCD-25	31.5	40.7	6.8	12.7	25 PIN	100
FCD-40	52.0	61.2	6.9	12.7	40 PIN	



排線固定板 FLAT CABLE CLAMP — 6-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FDQ-18	17.5	22.0	3.9	13.0	13 PIN	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



排線固定板 FLAT CABLE CLAMP —— 6-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



WITH LOCK FEATURE

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCD-17	17.0	26.2	6.6	12.7	13 PIN	200
FCD-19GK	19.0	27.5	12.5	12.7	13 PIN	
FCD-19A	19.0	28.0	5.8	10.0	13 PIN	
FCD-21BH	21.5	30.0	13.5	12.7	13 PIN	100
FCD-26GK	26.5	35.0	8.2	10.0	20 PIN	
FCD-26EZ	26.5	35.0	13.5	12.7	20 PIN	
FCD-27	27.0	36.0	10.8	12.7	20 PIN	
FCD-27C	27.0	36.0	13.8	12.7	20 PIN	
FCD-27F	27.0	36.0	16.5	15.0	20 PIN	
FCD-29KT	29.5	38.0	13.5	12.7	20 PIN	
FCD-31AN	31.0	39.5	7.5	12.7	25 PIN	
FCD-25A	31.1	40.4	7.9	12.7	25 PIN	
FCD-50	50.0	59.0	10.8	12.7	40 PIN	
FCD-40H	52.0	61.2	7.6	12.7	40 PIN	
FCD-60H	62.8	72.2	7.9	12.9	60 PIN	




排線固定板 FLAT CABLE CLAMP —— 6-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

  ＊加中隔板


  ＊ WITH ISOLATE BOARD

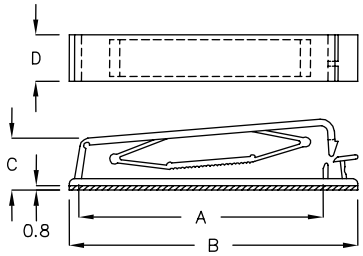

WITH LOCK FEATURE


PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCC-25C	32.0	45.0	16.0	19.0	25 PIN	100
＊FCC-25K	31.3	40.7	7.2	10.0	25 PIN	
FCC-30	32.0	45.0	16.6	18.6	30 PIN	
FCC-40	54.0	67.0	16.6	15.8	40 PIN	
FCC-40C	53.8	66.0	12.8	10.2	40 PIN	
＊FCC-41	54.0	67.0	16.6	15.8	40 PIN	
＊FCC-41A	53.7	66.7	17.0	12.8	40 PIN	
FCC-50	65.2	78.4	16.6	18.8	50 PIN	
FCC-50F	63.7	76.2	15.9	19.0	50 PIN	
＊FCC-64	83.5	97.5	16.6	16.0	64 PIN	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



排線固定板 FLAT CABLE CLAMP — 6-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FWY-50	64.0	77.0	12.6	20.0	50 PIN	100



排線固定板 FLAT CABLE CLAMP — 6-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M





WITH LOCK FEATURE

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCD-60A	62.8	72.2	7.9	12.9	45 PIN	100




排線固定板 FLAT CABLE CLAMP — 6-41-3

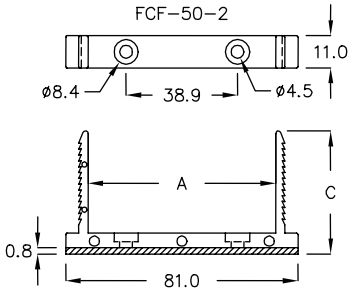

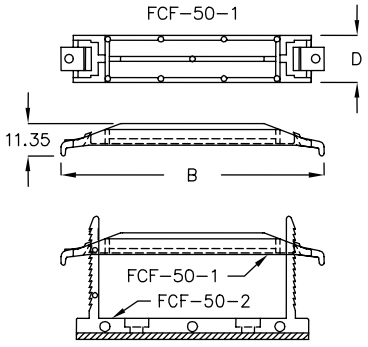



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M4 SCREW

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCF-50	65.4	91.8	41.1	16.0	50 PIN X30	100



排線固定板 FLAT CABLE CLAMP — 6-41-4

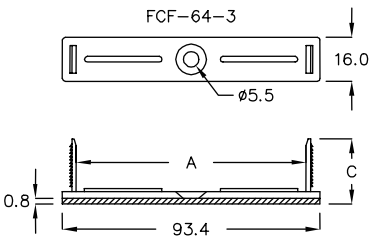


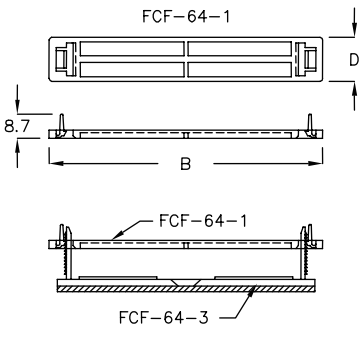

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M5 COUNTERSUNK SCREW


PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCF-64	83.4	99.2	22.7	16.1	64 PIN X12	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT — 6-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,BLUE

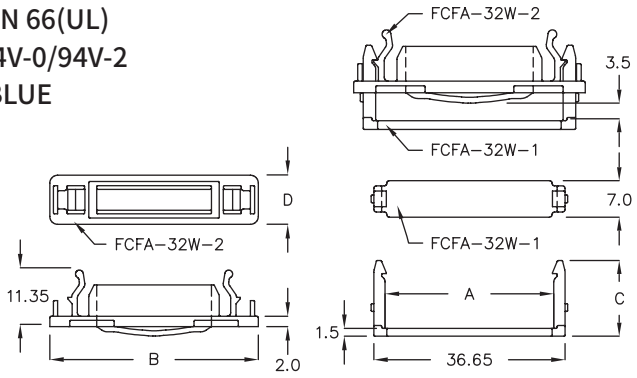


PART NO	A	B	C	D	PACKAGE
FCFA-32W	32.3	40.0	14.5	9.4	200



隔離束線座 WIRE SADDLE — 6-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CID-01	10.0	1.6	1.6	2000




電線固定座 WIRE MOUNT — 6-42-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

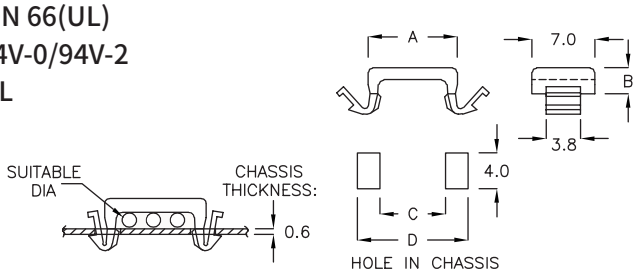


PART NO	A	B	C	D	SUITABLE DIA	PACKAGE
FBF-01	9.9	2.9	7.3	12.3	ø1.5X3	2000
FBF-3A	9.9	3.75	7.3	12.3	ø2.0X3	
FBF-4C	11.9	3.75	9.3	14.3	ø2.0X4	




隔離束線座 WIRE SADDLE — 6-42-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CSF-1MK	1.3	2.8	1.2	2000
CSF-1KC	1.3	2.8	1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	E	T MAXIMUM THICKNESS	PACKAGE
CHT−4GF	4.3	6.7	8.5	1.75	2.2	2000




隔離束線座 WIRE SADDLE 6-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	T MAXIMUM THICKNESS	PACKAGE
CMC−3A	4.4	6.9	3.0	1.6	2000



隔離束線座 WIRE SADDLE 6-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	E	T MAXIMUM THICKNESS	PACKAGE
CH−1MR	3.4	5.8	3.0	1.8	1.2	2000
CH−01K	3.4	5.8	3.3	1.9	1.6	
CH−01F	4.3	6.9	3.1	1.9	1.6	
CH−02F	4.4	6.9	3.1	1.9	2.5	
CH−5TA	4.4	6.9	5.1	1.8	2.5	
CH−01H	5.2	7.8	5.8	1.9	1.6	



電線固定座 WIRE MOUNT 6-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	T CHASSIS THICKNESS	PACKAGE
CMRW−6K	6.3	1.0	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CMRZ-6A	8.0	1.5~1.6	2000

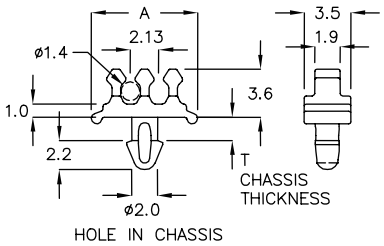





電線固定座 WIRE MOUNT 6-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CMRT-10A	10.0	ø1.3	1.6	1000
★ CMRT-10B	10.0	ø1.4	1.6	







隔離束線座 WIRE SADDLE 6-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
CJA-1A	5.4	6.8	2.0	2000







隔離束線座 WIRE SADDLE 6-44-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	D	T MAXIMUM THICKNESS	PACKAGE
CH-01A	6.7	9.0	5.5	1.2	2000
CH-01J	6.7	9.0	5.0	1.6	
CH-1AM	6.7	9.2	5.45	0.8	






隔離束線座 WIRE SADDLE 6-44-5


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548(S)

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CH-01S	7.4	10.0	1.2~1.6	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548(S)




PART NO	A	B	D	E HOLE IN CHASSIS	F	UL	T MAXIMUM THICKNESS	PACKAGE
CH−1HK	8.2	10.6	6.9	ø2.75	3.0		1.6	2000
CH−01B	8.2	10.6	6.9	ø3.0	3.1		1.6	
CH−1BK	8.3	10.7	6.9		2.1		1.6	
CH−01C	7.4	10.0	5.0		2.2		1.6	
CH−1FW	6.8	9.3	5.0		2.8		1.6	
CH−01M	6.5	9.0	5.0		3.1	UL	0.8	
CH−01P	7.4	10.0	5.3		2.2		2.0	
CH−1PD	10.6	13.0	6.0		2.5		1.6	
CH−01U	8.3	10.7	7.0		2.5		1.6	
CH−01Q	6.6	9.0	4.9	ø3.5	3.0		1.0	
CH−01W	6.6	9.0	4.5		3.2		1.8	
CH−01N	9.0	11.6	5.3		2.7		1.2	




電線固定座 WIRE MOUNT 6-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

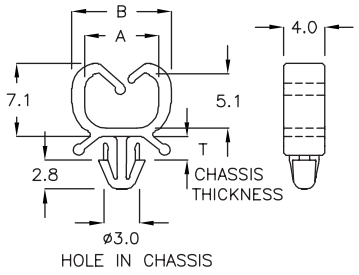


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CZC−7D	7.2	9.7	0.6~1.6	1000



隔離束線座 WIRE SADDLE 6-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

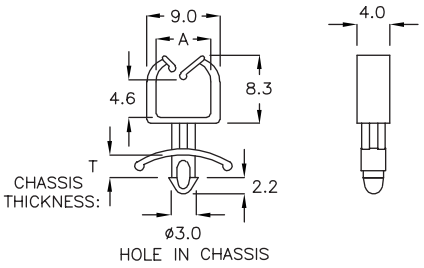


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CMA−4A	6.7	1.0~2.0	1000



電線固定座 WIRE MOUNT 6-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	C	PACKAGE
PCS−4A	6.6	5.0	2000
PCS−5A	6.6	3.0	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
PCS-6A	10.0	3.0	2000







電線固定座 WIRE MOUNT 6-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
PCS-1A	6.6	1.8	2.0	2000

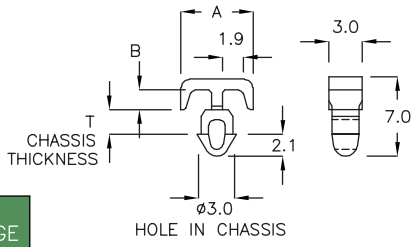





電線固定座 WIRE MOUNT 6-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
PCS-3A	6.6	1.8	2.0	2000

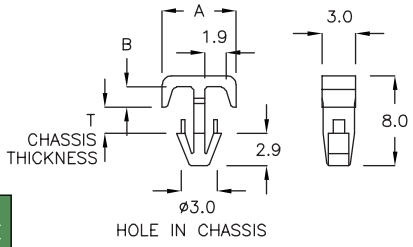




隔離束線座 WIRE SADDLE 6-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CHR-05	11.1	4.0	0.6~2.5	500

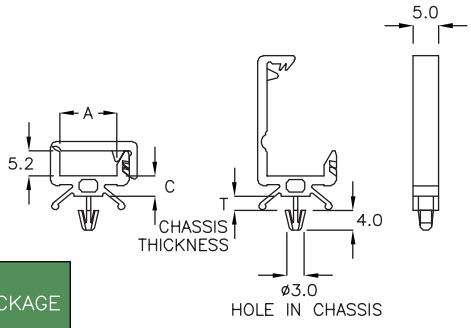





隔離束線座 WIRE SADDLE 6-46-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CZH-2H	2.6	5.0	0.8~1.0	2000



提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built –In Anti–Spin Function

PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
TDD–4PA	6.0	4.2	0.6~1.6	500

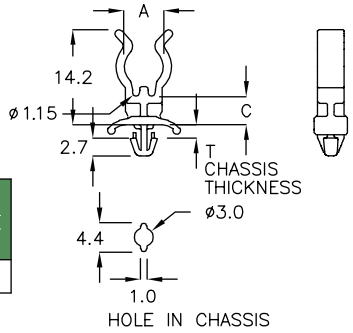





隔離束線座 WIRE SADDLE 6-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built –In Anti–Spin Function

PART NO	A	T CHASSIS THICKNESS	PACKAGE
TDF–12CM	ø1.0	1.6~2.4	500







隔離束線座 WIRE SADDLE 6-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	D	T CHASSIS THICKNESS	PACKAGE
CH–01Y	8.8	12.0	8.5	1.0~1.6	2000







隔離束線座 WIRE SADDLE 6-47-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CZB–9C	9.5	12.1	0.6~1.6	500







隔離束線座 WIRE SADDLE 6-47-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
CZA–7A	7.5	9.5	1.5	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CZR-12A	12.8	16.0	1.2~2.0	500






隔離束線座 WIRE SADDLE 6-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CH-1QF	6.6	9.0	0.8~1.0	2000






隔離束線座 WIRE SADDLE 6-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CZF-6A	5.1	0.8~2.0	1000

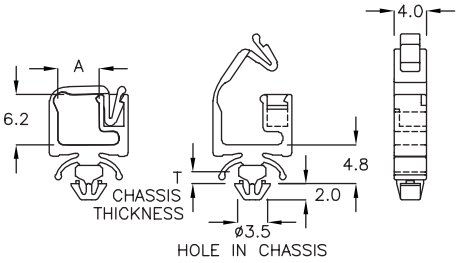





隔離束線座 WIRE SADDLE 6-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CZX-18K	18.5	2.0~3.0	500

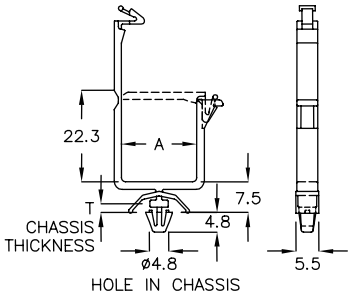




隔離束線座 WIRE SADDLE 6-48-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	E HOLE IN CHASSIS	F	PACKAGE
CH-01L	4.3	6.5	2.8~3.0	ø3.5	3.0	2000
CH-1LA	4.3	6.5	0.9~1.1	ø3.6	3.0	
CH-1LB	4.3	6.5	3.8~4.0	ø3.6	3.0	
CH-01D	4.5	6.5	4.0~4.4	ø3.5	3.1	
CH-1KP	4.3	6.5	0.9~1.1	ø3.6	3.0	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

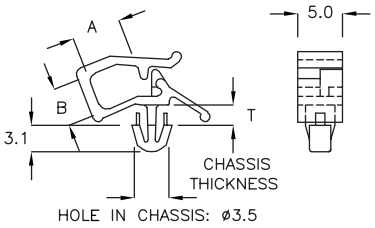


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CH-03	5.5	4.3	1.2~2.0	1000
CH-03F	4.2	2.6	1.6~2.4	
CH-03S	4.2	2.8	1.2~2.0	




隔離束線座 WIRE SADDLE 6-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	D	E HOLE IN CHASSIS	F	G	T CHASSIS THICKNESS	PACKAGE
TDA-4A	7.4	4.5	8.0	ø3.3	5.5	9.7	0.8~1.8	500
TDA-10	5.6	10.0	5.2	ø3.5	4.0	7.0	0.8~1.6	
TDA-10F	5.6	10.0	5.2	ø3.5	4.0	7.0	1.4~2.2	
TDA-13	7.4	13.0	8.0	ø3.5	4.2	9.7	0.6~1.6	
TDA-13C	7.4	13.0	8.0	ø3.5	3.1	9.7	0.6~1.6	




隔離束線座 WIRE SADDLE 6-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

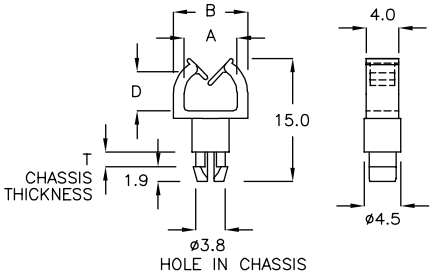


PART NO	A	B	T CHASSIS THICKNESS	D	PACKAGE
CH-04A	6.5	9.1	1.4~1.6	4.8	1000




隔離束線座 WIRE SADDLE 6-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	D	F	G	T CHASSIS THICKNESS	PACKAGE
CS-04A	2.3	4.0	2.9	4.9	5.0	1.6~2.4	1000
CS-04C	2.0	4.5	2.0	4.8	5.0	1.6~2.4	
CS-10D	3.6	8.0	4.1	5.0	6.0	0.8~1.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

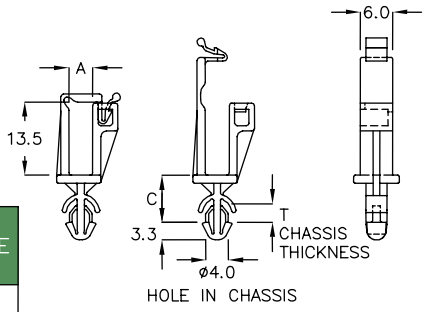


WITH LOCK FEATURE

PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CZS-4FG	4.5	8.2	2.0~2.7	500
CZS-4RK	4.5	8.8	2.7~3.6	



隔離束線座 WIRE SADDLE 6-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Anti-Spin Function

PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CS-01C	ø3.3	3.2	0.8~1.2	2000
CS-1DK	ø4.2	3.4	0.8~1.2	



隔離束線座 WIRE SADDLE 6-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

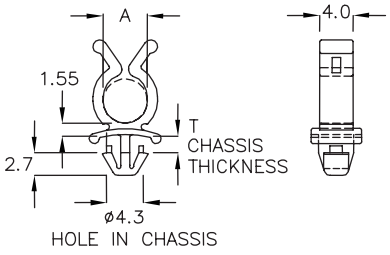


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CSA-5K	5.3	1.6	1000



隔離束線座 WIRE SADDLE 6-50-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

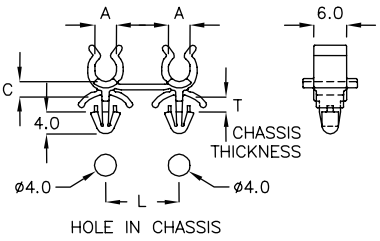


PART NO	A	C	L	T CHASSIS THICKNESS	PACKAGE
2CS-2WQ	3.95	2.85	12.0	1.0~1.5	500
2CS-2YR	3.95	2.85	13.5	1.0~2.0	



電線固定座 WIRE MOUNT 6-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

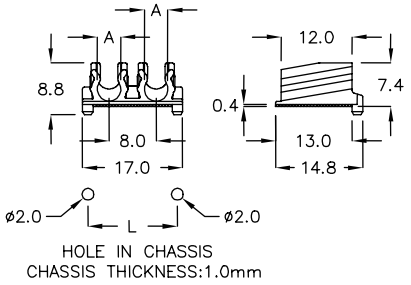


PART NO	A	L	PACKAGE
CMZ-17K	4.0	15.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-51-1

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: NATURAL

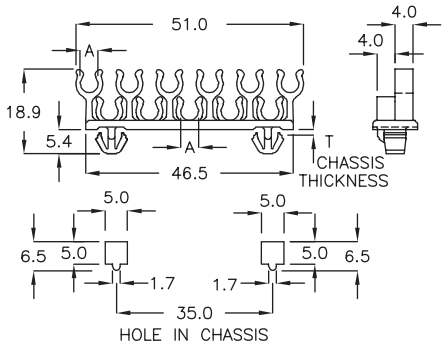


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CTX-46K	4.0	1.0~1.5	200



隔離束線座 WIRE SADDLE 6-51-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

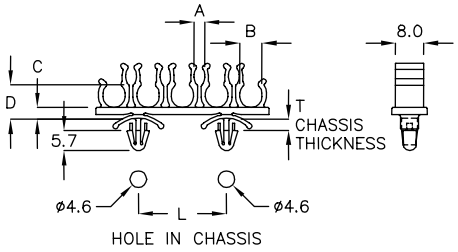


PART NO	A	B	C	D	L	T CHASSIS THICKNESS	PACKAGE
CTX-49DW	3.0	6.3	3.3	9.75	25.0	0.8~2.0	200




隔離束線座 WIRE SADDLE 6-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

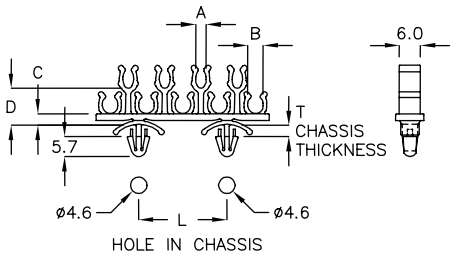


PART NO	A	B	C	D	L	T CHASSIS THICKNESS	PACKAGE
CTX-49RC	3.0	4.4	3.3	10.5	25.0	0.8~2.0	200




隔離束線座 WIRE SADDLE 6-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

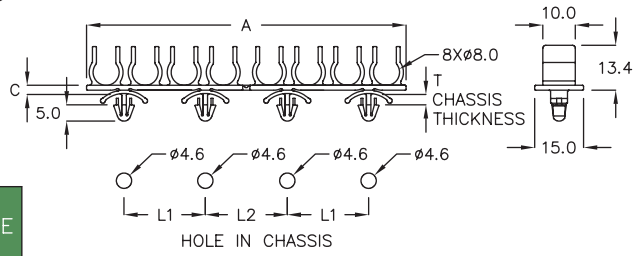


PART NO	A	C	L1	L2	T CHASSIS THICKNESS	PACKAGE
CTX-98A	98.2	2.8	25.0	25.2	1.2~2.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

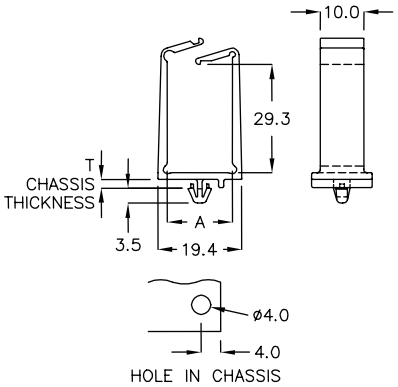


Built –In Anti–Spin Function

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CMK–15Q	15.0	1.4~1.7	100



隔離束線座 WIRE SADDLE 6-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

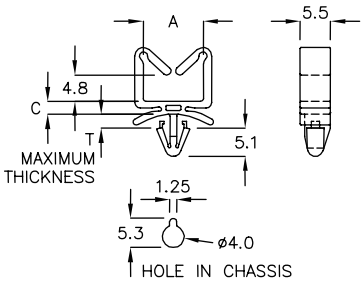


Built –In Anti–Spin Function

PART NO	A	C	T MAXIMUM THICKNESS	PACKAGE
CZL–10JY	10.9	2.35	1.6	500




隔離束線座 WIRE SADDLE 6-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	D	PACKAGE
CUK–12ST	12.4	10.2	500



隔離束線座 WIRE SADDLE 6-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

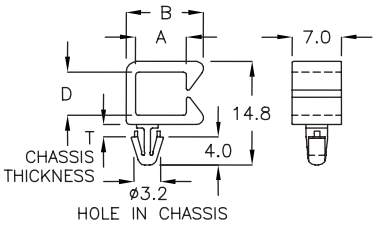

PART NO	A	B	D	T CHASSIS THICKNESS	PACKAGE
CBG–6PK	7.3	11.0	6.2	1.6	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

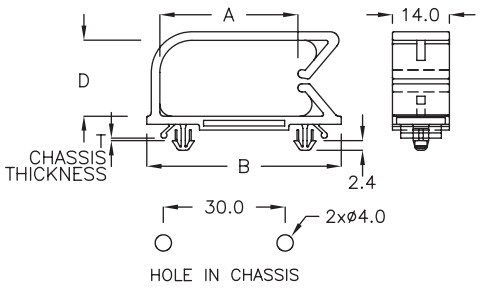


PART NO	A	B	D	T CHASSIS THICKNESS	PACKAGE
★ CUG−34	34.0	47.9	18.7	0.8~2.0	200



隔離束線座 WIRE SADDLE 6-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	T CHASSIS THICKNESS	PACKAGE
CHM−01	7.3	11.3	4.4	4.8	ø4.5	6.0	0.8~1.8	500




隔離束線座 WIRE SADDLE 6-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	T CHASSIS THICKNESS	PACKAGE
CUH−10A	10.2	14.0	3.35	5.6	ø4.75	9.5	0.8~1.6	500



隔離束線座 WIRE SADDLE 6-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	T CHASSIS THICKNESS	PACKAGE
CH−02	10.4	14.3	4.6	0.8~1.2	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CZM-11F	11.6	3.17	3.5	500



隔離束線座 WIRE SADDLE 6-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built-In Anti-Spin Function

PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CZY-11BH	11.6	3.17	2.4	500



隔離束線座 WIRE SADDLE 6-54-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built-In Anti-Spin Function

PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CZP-11JK	11.6	3.15	1.6~2.4	500



隔離束線座 WIRE SADDLE 6-54-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

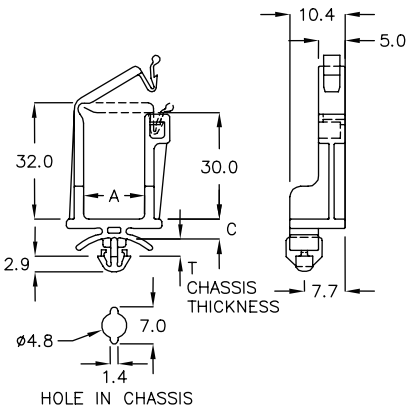

Built-In Anti-Spin Function


PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CZPA-11A	11.6	3.8	1.6~2.4	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	D	E	F	T MAXIMUM THICKNESS	PACKAGE
CH-05	10.9	4.1	9.7	ø4.8	5.9	1.9	500
CH-10	11.0	3.9	15.0	ø4.8	5.8	1.9	
CH-10A	10.9	4.1	11.2	ø4.8	2.8	2.0	
CH-10L	11.0	3.7	23.7	ø4.8	5.6	2.1	
CH-14	14.6	4.1	15.1	ø5.0	6.2	2.1	
CH-14A	14.6	4.0	15.5	ø5.0	4.2	3.0	
CH-16	15.9	4.1	16.4	ø5.0	5.9	2.1	
CH-29	23.0	4.8	15.9	ø5.0	6.2	1.8	




隔離束線座 WIRE SADDLE 6-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	C	D	E	F	T MAXIMUM THICKNESS	PACKAGE
CH-16A	15.7	4.0	15.9	ø4.8	5.7	2.1	500



隔離束線座 WIRE SADDLE 6-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548(S)
CH-30(N66 94V-0) UL:E154548(S)




PART NO	A	C	D	E	F	T MAXIMUM THICKNESS	PACKAGE
CH-30	22.7	4.8	13.9	ø5.0	7.1	3.2	200




隔離束線座 WIRE SADDLE 6-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	C	D	F	T MAXIMUM THICKNESS	PACKAGE
CH-10C	11.1	3.6	19.5	5.5	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	D	F	T MAXIMUM THICKNESS	PACKAGE
CM-10	10.8	4.1	19.4	5.0	2.0	500
CM-10L	23.7	4.7	32.2	5.0	2.0	
CM-10M	10.8	4.1	10.3	5.0	2.0	
CM-10Q	10.8	4.1	10.3	2.4	2.0	
CM-10S	10.8	4.1	7.3	5.0	2.0	




隔離束線座 WIRE SADDLE 6-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	C	D	E HOLE IN CHASSIS	F	H	T MAXIMUM THICKNESS	PACKAGE
CH-10F	10.9	3.75	7.8	ø4.8	2.7	5.4	2.4	1000
CH-11	11.0	3.9	9.4	ø4.8	3.0	5.4	2.4	
CH-16DK	16.0	3.6	6.7	ø4.5	3.8	5.0	1.0	500




隔離束線座 WIRE SADDLE 6-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CAC-10A	10.6	8.1	1.0	500



隔離束線座 WIRE SADDLE 6-56-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



Built-In Anti-Spin Function

PART NO	A	C	D	T MAXIMUM THICKNESS	PACKAGE
CHL-02	10.0	5.7	10.0	1.6	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

NEW

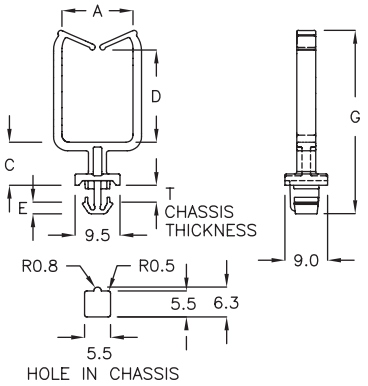


	PART NO	A	C	D	E	G	T CHASSIS THICKNESS	PACKAGE
★	CHLA-15A	15.0	9.1	19.5	2.5	38.0	2.36~2.6	500
★	CHLA-15T	15.0	9.1	19.5	2.2	38.8	3.09~3.4	
★	CHLA-15W	15.0	9.1	19.5	2.0	36.5	1.0~1.1	



隔離束線座 WIRE SADDLE 6-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

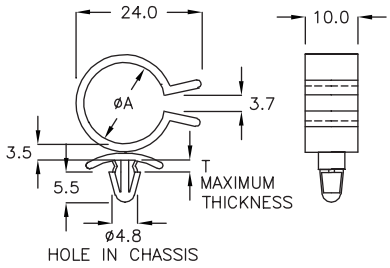


PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH-20	ø15.5	1.6	500



隔離束線座 WIRE SADDLE 6-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

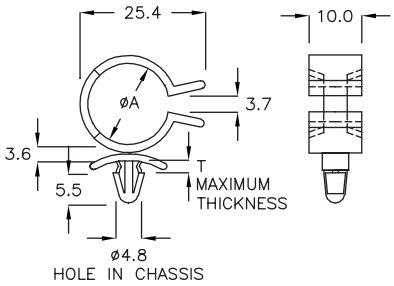


PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH-20C	ø15.0	1.6	500



隔離束線座 WIRE SADDLE 6-57-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

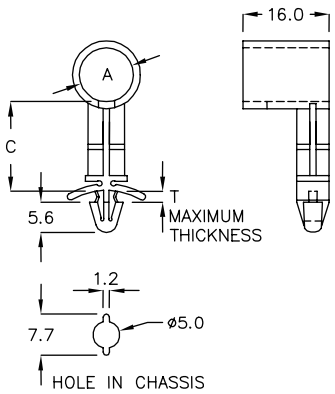

Built-In Anti-Spin Function


PART NO	A	C	T MAXIMUM THICKNESS	PACKAGE
CSK-6A	ø10.0	6.4	1.6	500
CSK-26A	ø10.0	27.0	1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

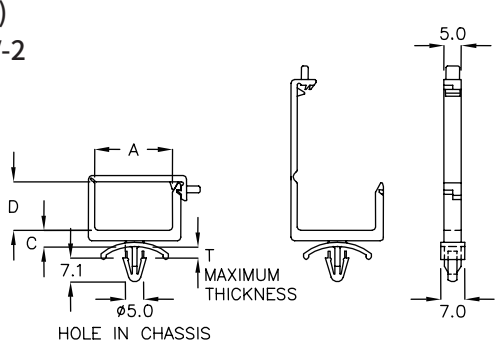


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	C	D	T MAXIMUM THICKNESS	PACKAGE
CH-20A	22.9	5.3	14.2	3.2	500



隔離束線座 WIRE SADDLE 6-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

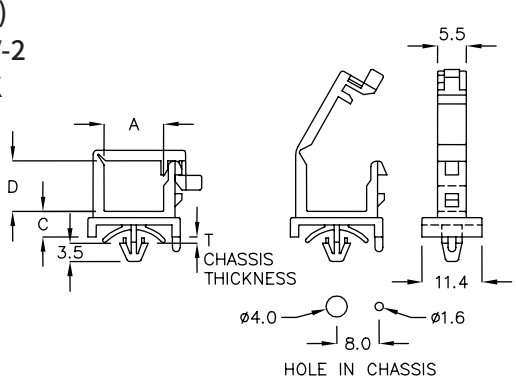


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	C	D	T CHASSIS THICKNESS	PACKAGE
CKS-10A	11.0	4.8	9.5	0.8~1.0	500




隔離束線座 WIRE SADDLE 6-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

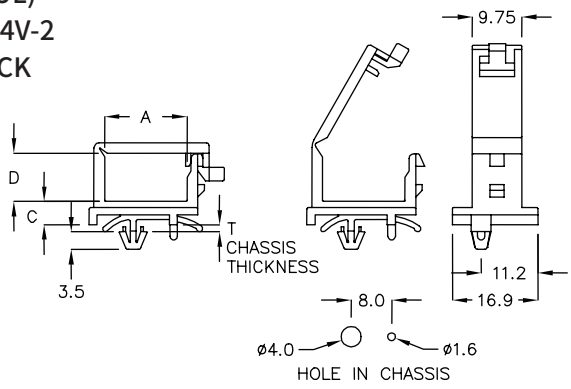


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	C	D	T CHASSIS THICKNESS	PACKAGE
CKS-16C	16.0	4.6	9.5	0.8~1.2	500



隔離束線座 WIRE SADDLE 6-58-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

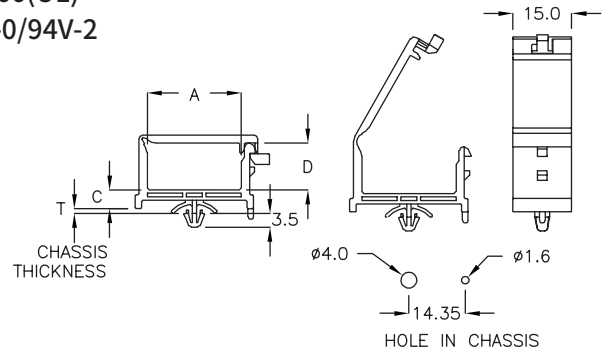

Built-In Anti-Spin Function
WITH LOCK FEATURE


PART NO	A	C	D	T CHASSIS THICKNESS	PACKAGE
CKS-24	24.0	4.7	12.0	0.8~1.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

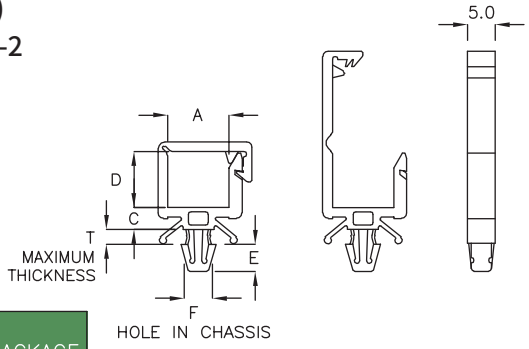


WITH LOCK FEATURE

PART NO	A	C	D	E	F	T MAXIMUM THICKNESS	PACKAGE
CK-5	11.0	4.0	5.2	5.1	ø4.8~ø5.0	2.4	500
CK-10	11.0	4.0	10.2	5.1	ø4.8~ø5.0	2.4	
CK-13HJ	22.8	4.0	13.6	4.9	ø4.8	0.5~1.0	
CK-014	16.0	4.0	14.2	5.1	ø4.8~ø5.0	2.4	



隔離束線座 WIRE SADDLE 6-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

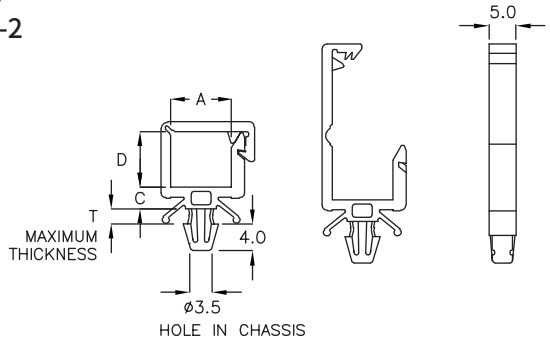


WITH LOCK FEATURE

PART NO	A	C	D	T MAXIMUM THICKNESS	PACKAGE
CHJ-05	11.0	4.0	5.2	2.4	500
CHJ-10	11.0	4.0	10.2	2.4	



隔離束線座 WIRE SADDLE 6-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

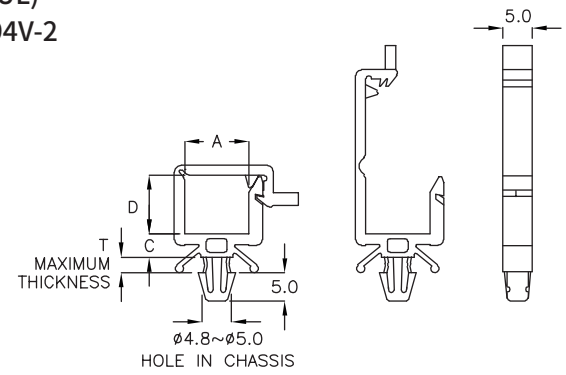


WITH LOCK FEATURE

PART NO	A	C	D	T MAXIMUM THICKNESS	PACKAGE
CK-10A	11.0	4.0	10.4	2.4	500
CK-14A	16.0	4.0	14.0	2.4	



隔離束線座 WIRE SADDLE 6-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

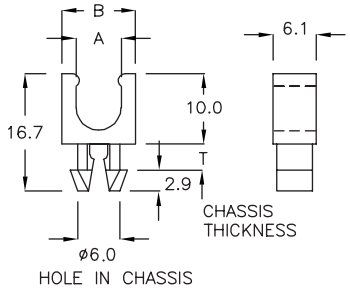


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CH-01	7.5	10.5	3.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

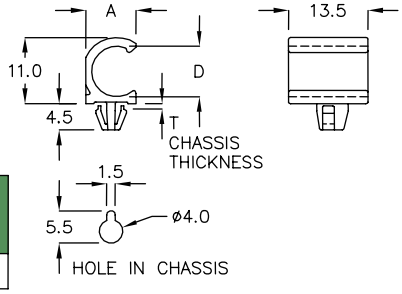


Built-In Anti-Spin Function

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CHK-01	8.6	ø8.4	0.8	500




電線固定座 TIE MOUNT 6-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

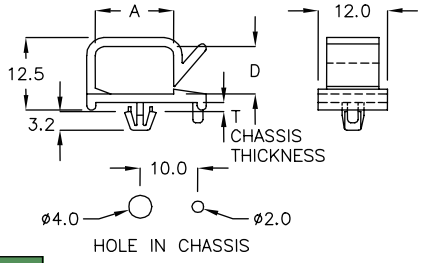


Built-In Anti-Spin Function

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FWS-01	13.6	8.2	0.8~1.2	500



電線固定座 TIE MOUNT 6-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

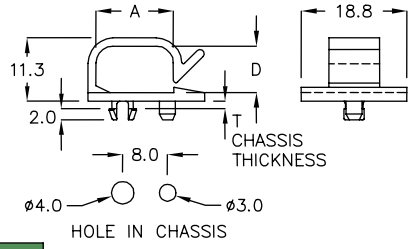


Built-In Anti-Spin Function

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FWS-02	13.8	8.3	0.8~1.0	500



隔離束線座 WIRE SADDLE 6-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

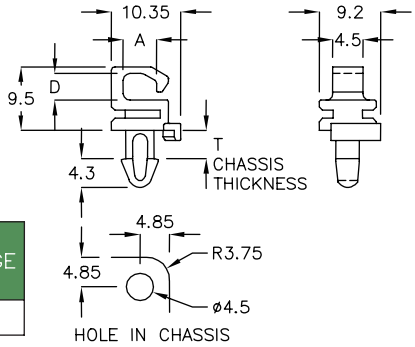


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CYW-5K	5.0	4.0	4.0	1000




隔離束線座 WIRE SADDLE 6-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

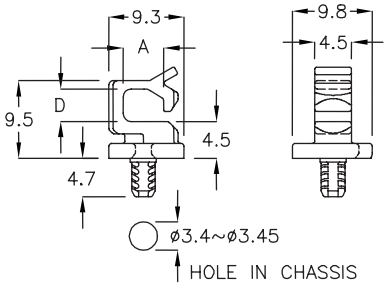


PART NO	A	D	PACKAGE
CFK-14TS	5.0	4.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

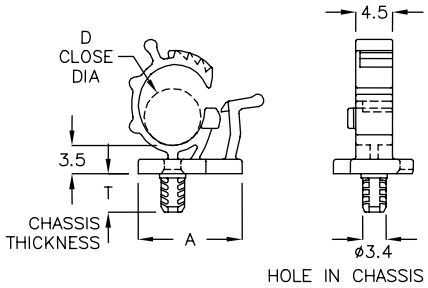


PART NO	A	D CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
CFKA-6	12.75	ø6.0~ø7.0	5.0	1000



隔離束線座 WIRE SADDLE 6-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

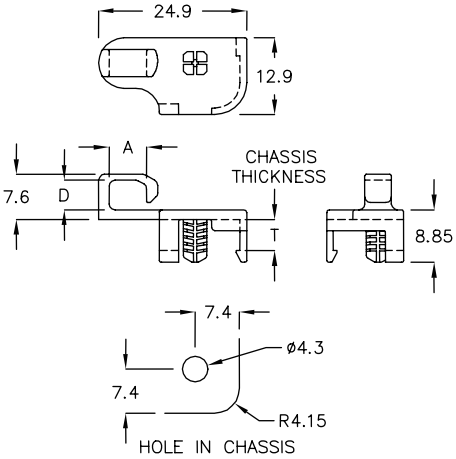


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CYWF-24GH	6.35	5.0	5.0	500




隔離束線座 WIRE SADDLE 6-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

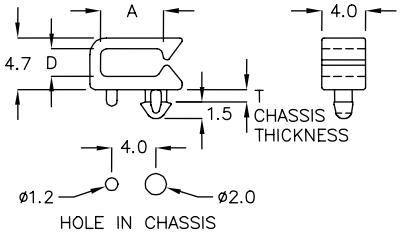


Built-In Anti-Spin Function

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CUA-8K	5.6	2.5	1.0	1000



隔離束線座 WIRE SADDLE 6-61-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

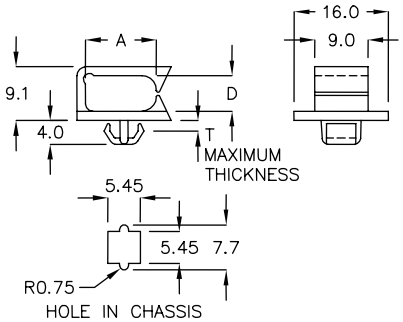

Built-In Anti-Spin Function


PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
CU-04	12.0	6.0	1.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

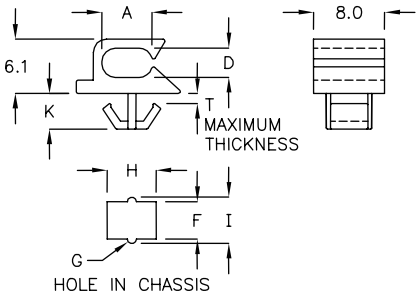


Built –In Anti–Spin Function

PART NO	A	D	F	G	H	I	K	T MAXIMUM THICKNESS	PACKAGE
CU–01H	5.6	3.3	4.2	R0.5	5.5	5.2	4.0	1.0	1000
CU–01K	5.6	3.3	4.2	R0.5	5.5	5.2	4.3	1.2	2000
CU–1RS	5.6	3.3	4.1	R0.55	4.3	5.1	4.3	1.1	1000



隔離束線座 WIRE SADDLE 6-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

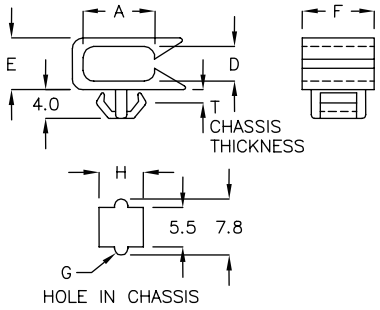


Built –In Anti–Spin Function

PART NO	A	D	E	F	G	H	T CHASSIS THICKNESS	PACKAGE
CU–2C	4.2	2.5	5.1	9.4	R0.9	6.2	1.0~1.2	1000
CU–03	10.0	4.8	7.2	10.0	R0.85	5.5	0.6~0.8	




隔離束線座 WIRE SADDLE 6-62-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

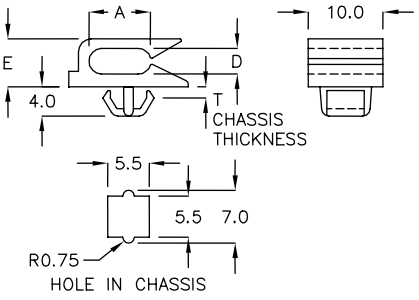


Built –In Anti–Spin Function

PART NO	A	D	E	T CHASSIS THICKNESS	PACKAGE
CU–01	8.2	3.3	6.4	0.8~1.0	1000
CU–01F	9.0	4.6	7.6	0.8~1.0	



隔離束線座 WIRE SADDLE 6-62-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

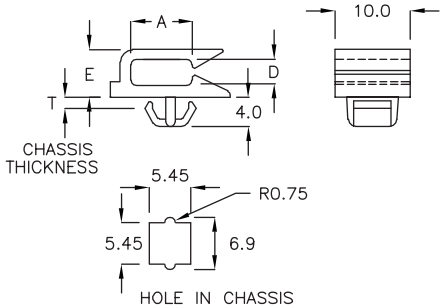

Built –In Anti–Spin Function


PART NO	A	D	E	T CHASSIS THICKNESS	PACKAGE
CU–01J	9.0	4.6	7.6	0.8~1.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-63-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

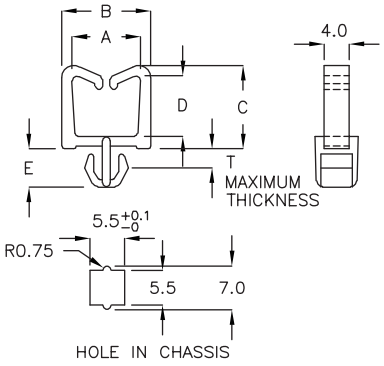


Built-In Anti-Spin Function

PART NO	A	B	C	D	E	T MAXIMUM THICKNESS	PACKAGE
CH-08	10.9	14.3	13.5	9.7	6.3	2.2	500
CH-08L	12.0	16.8	13.5	9.4	5.8	1.6	
CH-08A	11.0	14.3	15.7	12.0	6.1	2.2	



隔離束線座 WIRE SADDLE 6-63-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

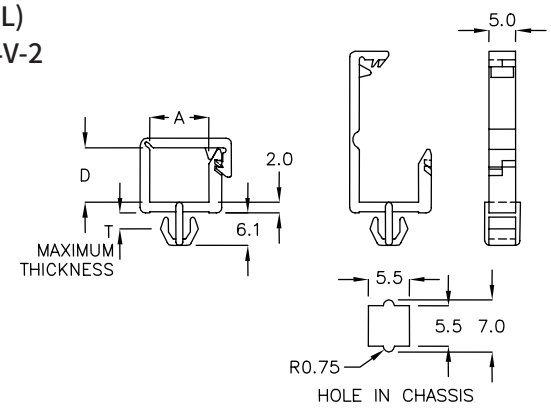


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
CKH-11	11.1	10.5	2.0	500
CKH-13	16.0	14.5	2.0	




隔離束線座 WIRE SADDLE 6-63-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: WHITE

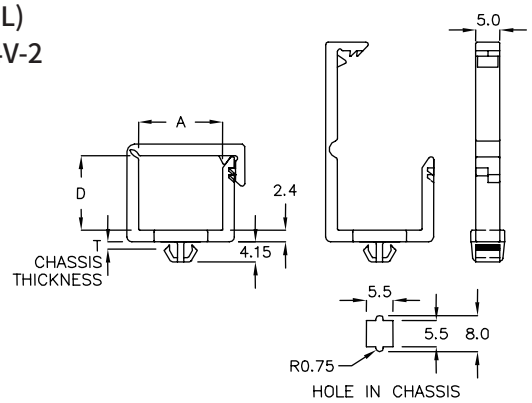


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CKH-22A	22.2	21.5	0.8~1.0	500



隔離束線座 WIRE SADDLE 6-63-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

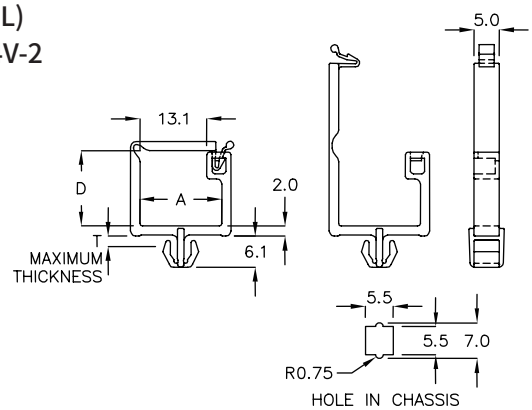

Built-In Anti-Spin Function
WITH LOCK FEATURE


PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
CKHA-16	16.0	14.5	2.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-64-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

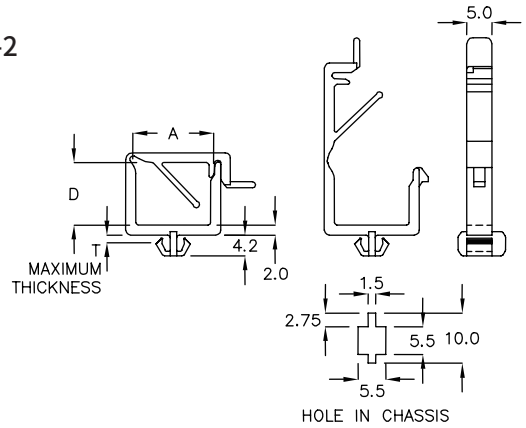


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
CYH-16C	16.0	14.0	0.6	500




隔離束線座 WIRE SADDLE 6-64-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

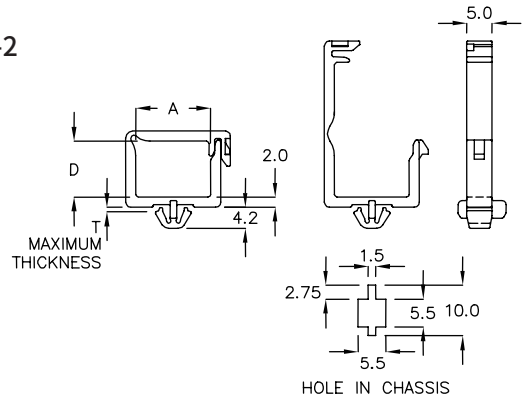

Built-In Anti-Spin Function
WITH LOCK FEATURE


PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
CYK-16G	16.0	14.2	0.6	500




電線固定座 WIRE MOUNT 6-64-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

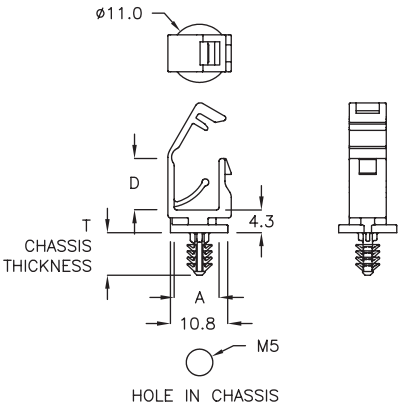


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
★ CYHG-8A	8.5	9.7	7.5~8.5	500



隔離束線座 WIRE SADDLE 6-64-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

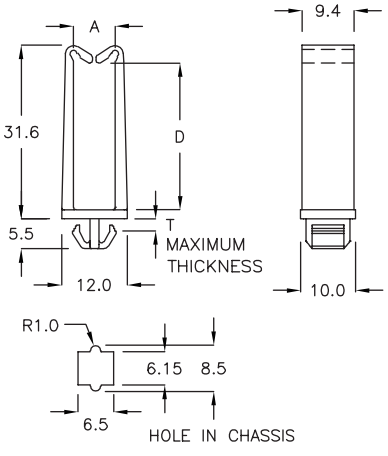


Built-In Anti-Spin Function


PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
CMB-7A	7.6	26.8	1.6	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

隔離束線座 WIRE SADDLE 6-65-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

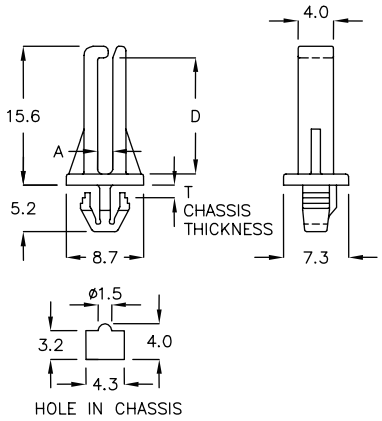


Built-In Anti-Spin Function

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CMBF-1K	1.7	13.0	1.2	200

電線固定座 WIRE MOUNT 6-65-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

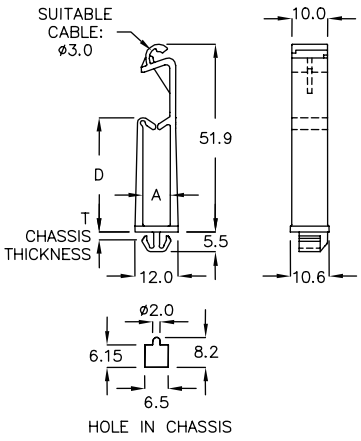


Built-In Anti-Spin Function

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CYS-7TK	7.6	31.6	1.2~1.6	100

電線固定座 WIRE MOUNT 6-65-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	C	D	PACKAGE
CD-4	ø12.6	19.6	25.8	100

電線固定座 WIRE MOUNT 6-65-4




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

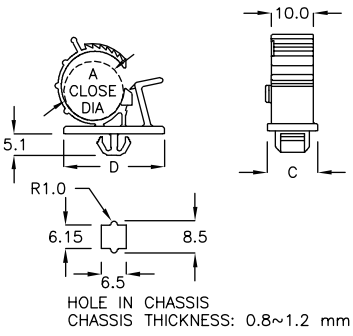

Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	C	D	PACKAGE
CDF-24	ø11.0~13.0	12.0	24.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





隔離束線座 WIRE SADDLE 6-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built－In Anti－Spin Function

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH－04C	ø4.0	1.0	1000

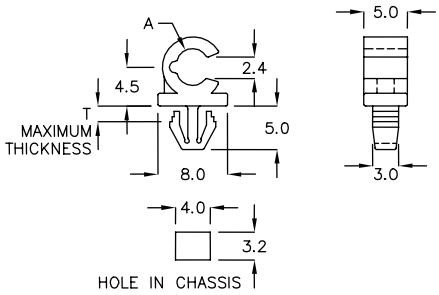





隔離束線座 WIRE SADDLE 6-66-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Build－In Anti－Spin Function

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CNA－04F	ø4.0	1.0	1000

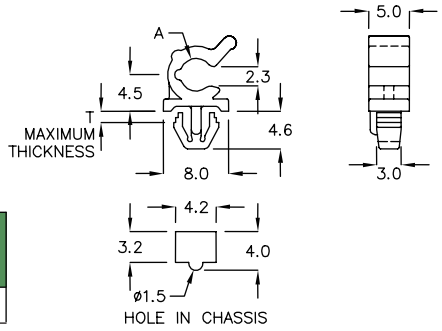




隔離束線座 WIRE SADDLE 6-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built－In Anti－Spin Function

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH－06S	ø5.5	2.0	500

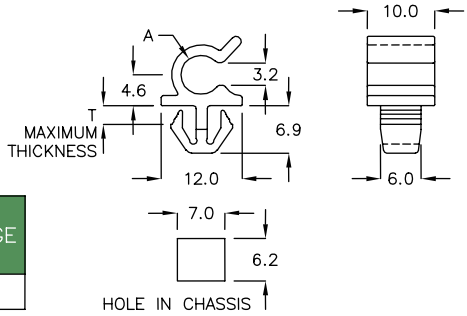




隔離束線座 WIRE SADDLE 6-66-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built－In Anti－Spin Function

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CH－09	ø9.7	1.5	200

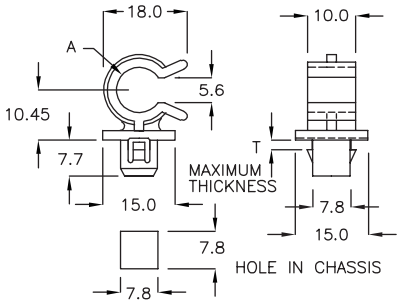




隔離束線座 WIRE SADDLE 6-66-5


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

Built－In Anti－Spin Function

PART NO	A	B	C	D	E	F	T MAXIMUM THICKNESS	PACKAGE
CH－09S	ø7.9	3.5	6.0	9.9	12.0	7.0	1.7	500
CH－09A	ø8.0	4.9	7.1	8.0	11.6	5.55	1.7	
CH－09C	ø9.5	3.8	6.75	9.9	13.5	7.0	1.7	

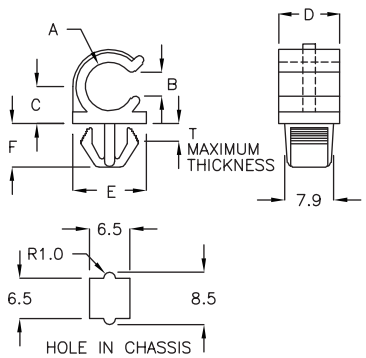


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-67-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

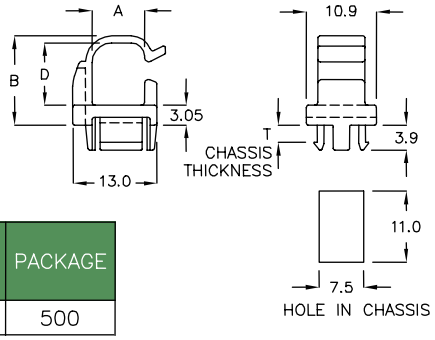


PART NO	A	B	D	T CHASSIS THICKNESS	PACKAGE
CYWK-8H	8.1	13.9	9.7	2.5	500



隔離束線座 WIRE SADDLE 6-67-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

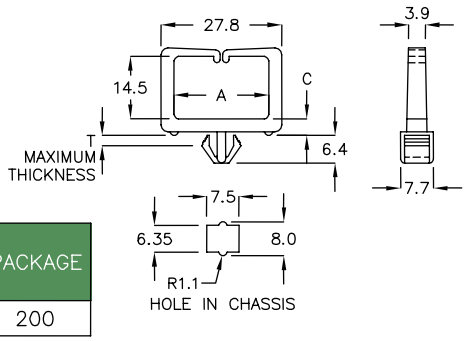


Built-In Anti-Spin Function

PART NO	A	C	T MAXIMUM THICKNESS	PACKAGE
CHN-01	21.6	3.9	2.2	200



電線固定座 WIRE MOUNT 6-67-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

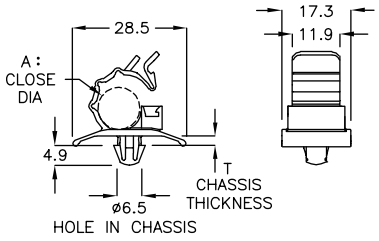


WITH LOCK FEATURE

PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
CCD-01	ø10.0	0.8~1.2	200




電線固定座 WIRE MOUNT 6-67-4

- MATERIAL: PE
- COLOR: BLACK

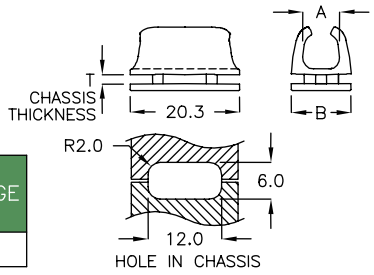


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
BAK-20A	6.7	11.0	1.6	500



電線固定座 WIRE MOUNT 6-67-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

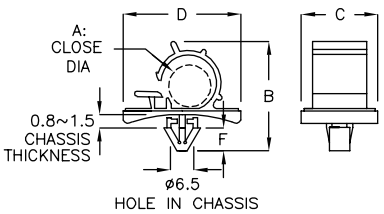

WITH LOCK FEATURE


PART NO	A	B	C	D	F	PACKAGE
CC-3	ø9.5	23.9	17.0	26.0	5.0	200
CC-3PH	ø7.8	24.9	19.0	21.0	4.8	
CC-4	ø13.5	32.0	19.4	30.3	5.2	100
CC-04A	ø17.0	33.7	19.3	30.2	5.1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-68-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	F	PACKAGE
CS-6	ø6.2	14.0	6.35	5.8	500
CS-12	ø6.2	14.0	13.0	5.9	




光纖固定座 FIBER HOUSING 6-68-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

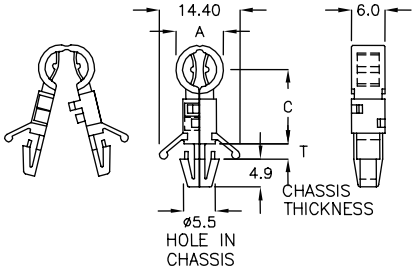


PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CCA-13	ø8.5	13.0	0.8~2.3	500




光纖固定座 FIBER HOUSING 6-68-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Anti-Spin Function
WITH LOCK FEATURE

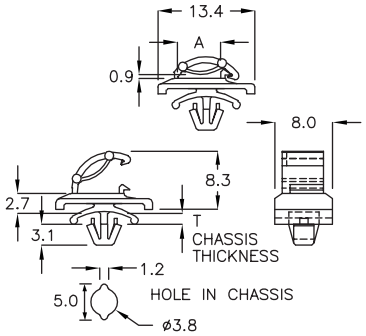


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CHX-01	6.0	0.8~1.6	1000
CHX-1A	6.0	0.8~2.5	



電線固定座 WIRE MOUNT 6-68-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Anti-Spin Function
WITH LOCK FEATURE

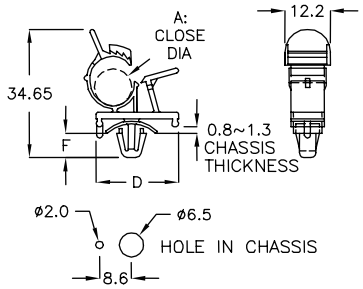


PART NO	A	D	F	PACKAGE
FWD-01	ø7.7~ø10.0	22.1	6.8	500
FWD-02	ø8.0~ø9.5	19.3	6.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-69-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

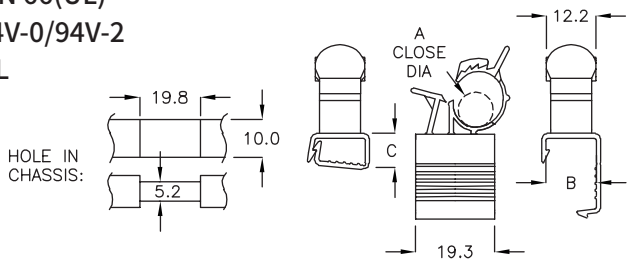


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
FWC-01	ø7.5~ø9.0	12.4	8.2	100



電線固定座 WIRE MOUNT 6-69-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

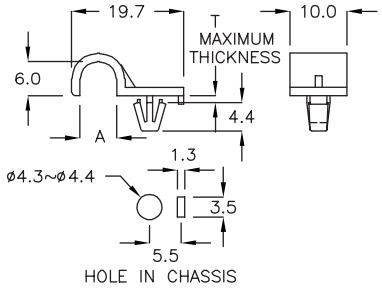


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	T MAXIMUM THICKNESS	PACKAGE
CU-06A	6.4	1.1	1000



電線固定座 WIRE MOUNT 6-69-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

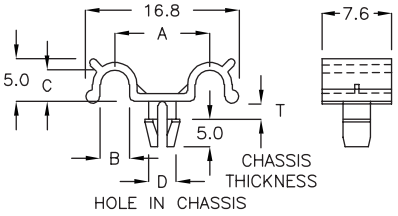


PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CIC-01	10.4	3.2	3.4	ø3.2	1.6~1.8	1000




電線固定座 WIRE MOUNT 6-69-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

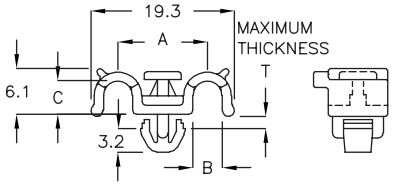


Built-In Anti-Spin Function

PART NO	A	B	C	T MAXIMUM THICKNESS	PACKAGE
CIS-18K	12.0	3.95	4.5	1.5	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-70-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

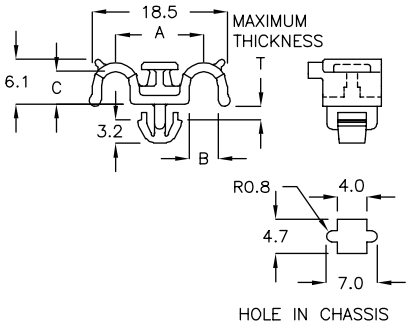


Built –In Anti–Spin Function

PART NO	A	B	C	T MAXIMUM THICKNESS	PACKAGE
CIS–18RS	12.0	3.95	4.5	1.6~2.0	1000




電線固定座 WIRE MOUNT 6-70-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

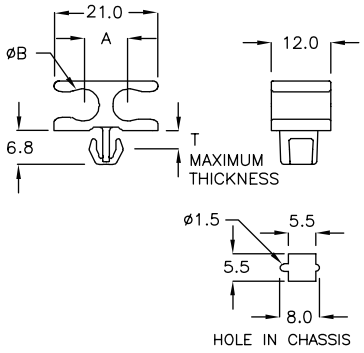


Built –In Anti–Spin Function

PART NO	A	B	T MAXIMUM THICKNESS	PACKAGE
CIK–21	8.7	ø6.5	2.5	500




電線固定座 WIRE MOUNT 6-70-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

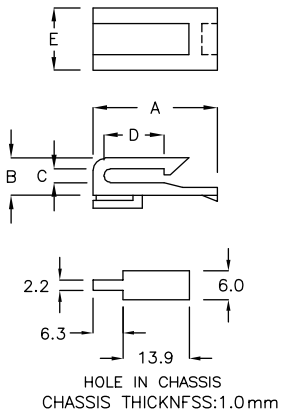


Built –In Anti–Spin Function

PART NO	A	B	C	D	E	PACKAGE
LFE–01	20.1	6.0	2.2	9.7	10.0	1000



電線固定座 WIRE MOUNT 6-70-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

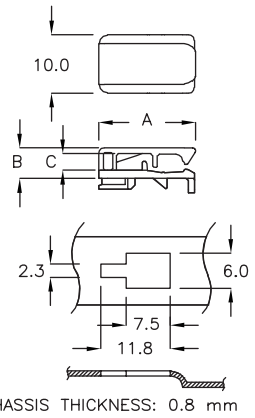

Built –In Anti–Spin Function


PART NO	A	B	C	PACKAGE
LFK–16A	16.5	5.3	2.85	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-71-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
CNG-13	8.5	12.0	8.8	5.6	1.6	500




電線固定座 WIRE MOUNT 6-71-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

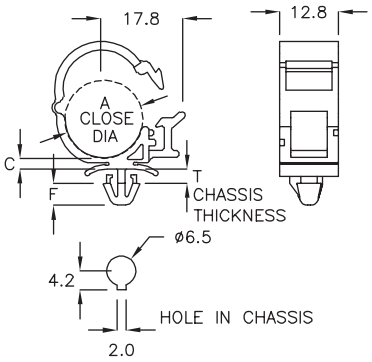


PART NO	A	C	T CHASSIS THICKNESS	F	PACKAGE
CCF-17RS	ø17.0	2.3	0.8	4.8	100



電線固定座 WIRE MOUNT 6-71-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

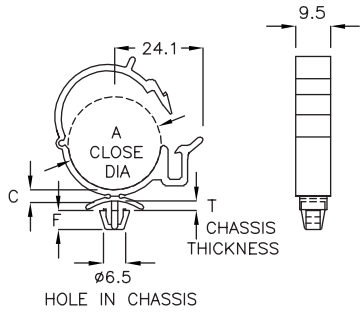


PART NO	A	C	T CHASSIS THICKNESS	F	PACKAGE
CKL-25	ø25.4	3.6	0.8~1.8	5.6	100
CKL-25A	ø25.4	3.6	2.5~3.0	5.7	



電線固定座 WIRE MOUNT 6-71-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

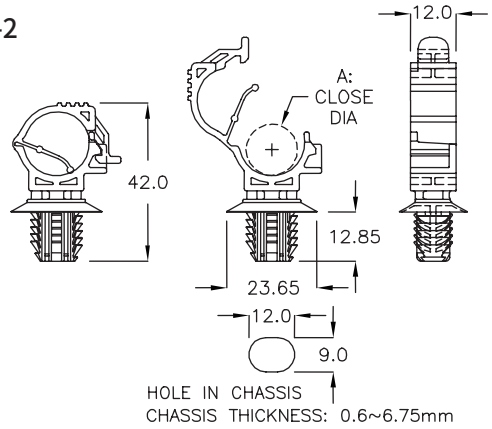


PART NO	A	PACKAGE
CKIM-16HQ	ø10.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-72-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

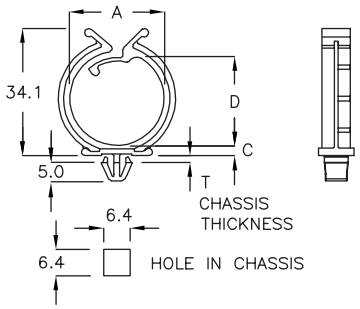


PART NO	A	C	D	T CHASSIS THICKNESS	PACKAGE
TDH−25	25.5	2.55	24.0	0.6~1.2	200



隔離束線座 WIRE SADDLE 6-72-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

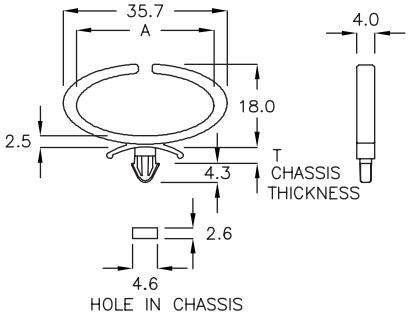


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CHP−2A	29.9	1.2~2.8	500



隔離束線座 WIRE SADDLE 6-72-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

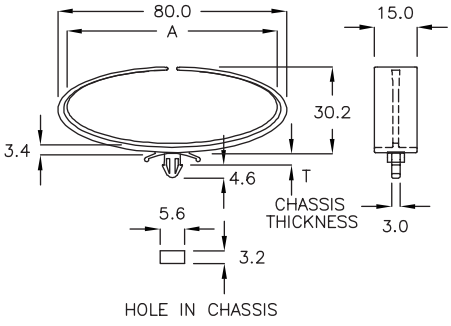


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CHP−8A	73.5	2.5~3.0	100



隔離束線座 WIRE SADDLE 6-72-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

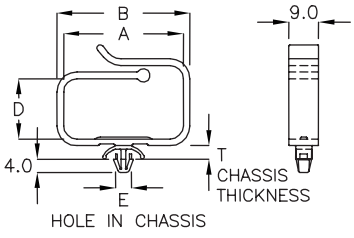


PART NO	A	B	D	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CND−40	36.0	40.0	18.1	ø4.8	1.3~2.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-73-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

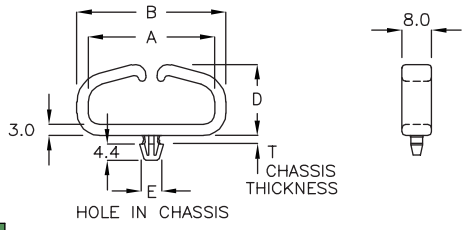


PART NO	A	B	D	E HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
CKQ-40	33.8	39.8	18.5	ø4.9~ø5.0	1.8~2.0	500
CKQ-44	41.6	48.8	23.4	ø4.9~ø5.0	1.8~2.0	200
CKQ-55	49.0	55.0	18.3	ø4.9~ø5.0	1.8~2.0	



隔離束線座 WIRE SADDLE 6-73-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

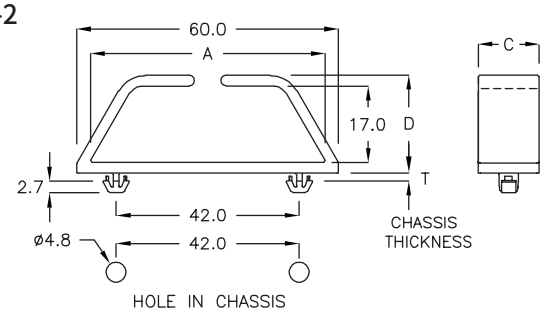


PART NO	A	C	D	T CHASSIS THICKNESS	PACKAGE
CKQ-60	53.8	14.0	22.0	1.5	200




隔離束線座 WIRE SADDLE 6-73-3

- MATERIAL: PP
- COLOR: NATURAL

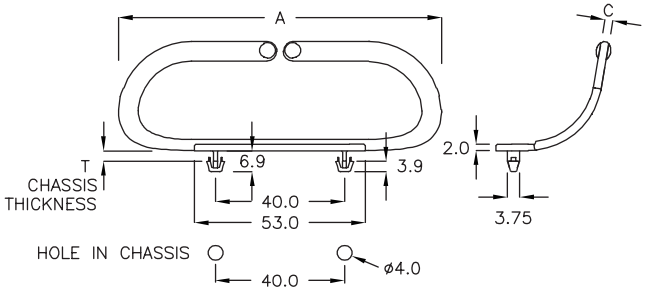


PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
CKF-40	100.0	2.5	3.0	100



隔離束線座 WIRE SADDLE 6-73-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

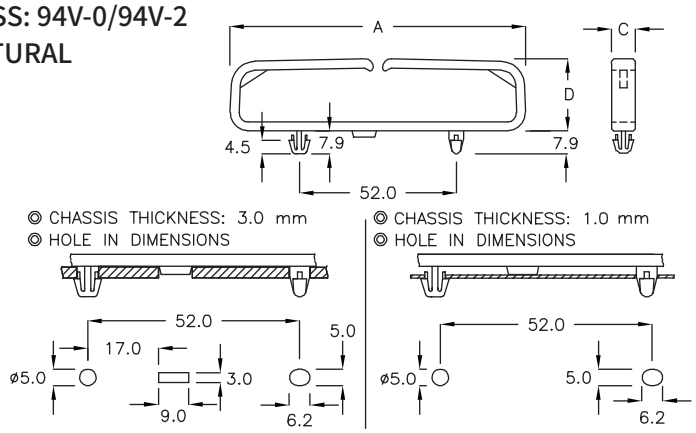


PART NO	A	C	D	PACKAGE
CKQ-98	98.0	8.0	24.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

隔離束線座 WIRE SADDLE 6-74-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

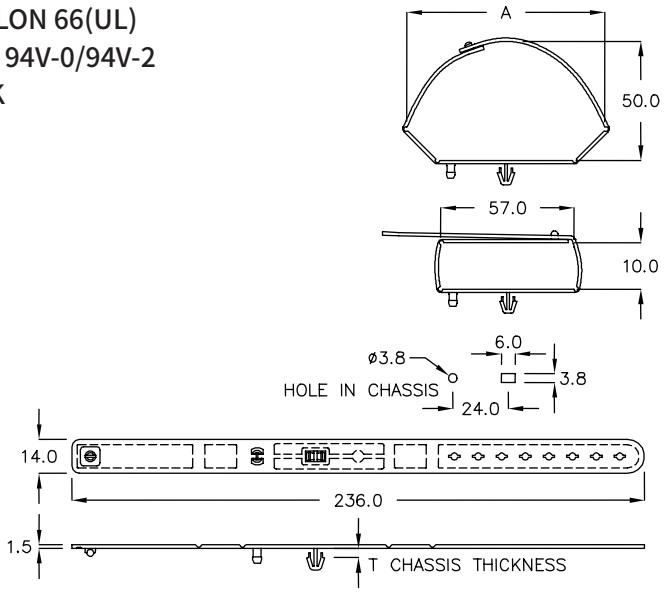


WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
BSR−235	80.0	3.2	200

隔離束線座 WIRE SADDLE 6-74-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

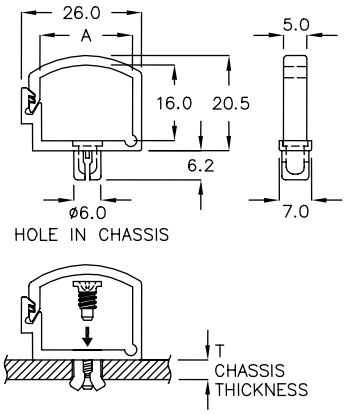


WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CKP−16	20.0	1.6~2.6	500

電線固定座 WIRE MOUNT 6-74-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

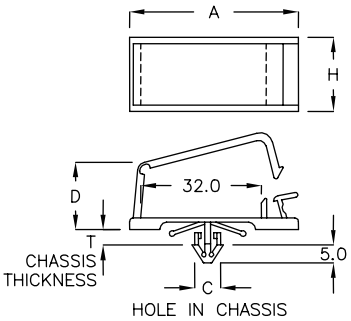


WITH LOCK FEATURE

PART NO	A	C HOLE IN CHASSIS	D	H	T CHASSIS THICKNESS	PACKAGE
FWH−01	44.8	ø6.4	17.5	18.8	1.8~3.2	200
FWH−02	44.45	ø6.3	12.3	19.0	0.5~1.8	

電線固定板 CABLE CLAMP 6-74-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

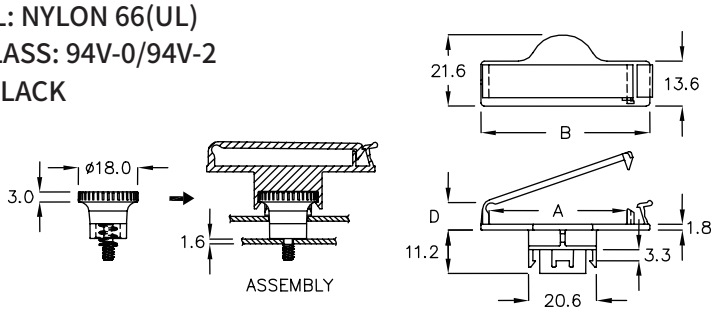

WITH LOCK FEATURE


PART NO	A	B	D	PACKAGE
FWTA−42A	42.0	51.2	8.4	100


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定板 CABLE CLAMP 6-75-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

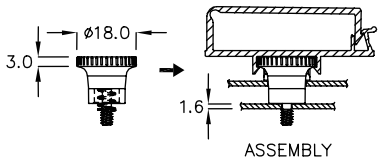




WITH LOCK FEATURE


PART NO	A	B	D	PACKAGE
FWTA-42C	42.0	51.2	14.3	100



電線固定座 WIRE MOUNT 6-75-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






WITH LOCK FEATURE


PART NO	A	B	C	D	E	T MAXIMUM THICKNESS	PACKAGE
CKK-3C	16.6	28.0	16.0	17.7	4.7	1.0	500
CKK-3A	16.6	28.0	16.0	18.8	4.9	3.0	
CKK-03	19.1	31.0	16.0	18.6	4.9	3.0	
CKK-04	24.1	34.3	20.0	17.9	4.8	3.0	
CKK-05	24.1	36.0	20.0	12.2	4.8	3.0	
★ CKK-33G	33.1	44.2	20.0	17.0	2.8	0.8	200



電線固定座 WIRE MOUNT 6-75-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






WITH LOCK FEATURE


PART NO	A	B	C	D	H	T CHASSIS THICKNESS	PACKAGE
CKK-3F	16.6	27.0	16.0	17.3	15.0	0.8~1.0	200
CKK-05A	24.1	36.0	20.0	12.4	8.0	0.8~1.0	500
CKK-05D	28.1	40.0	20.0	13.3	8.0	0.8~1.0	



電線固定座 WIRE MOUNT 6-75-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL





WITH LOCK FEATURE


PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
CKK-05C	24.1	36.0	20.0	12.4	0.8~2.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-76-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

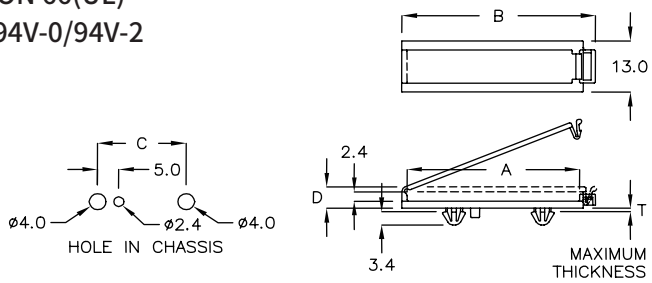


WITH LOCK FEATURE

PART NO	A	B	C	D	T MAXIMUM THICKNESS	PACKAGE
FAB-41K	41.0	45.9	21.0	5.4	0.5	200



電線固定座 WIRE MOUNT 6-76-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

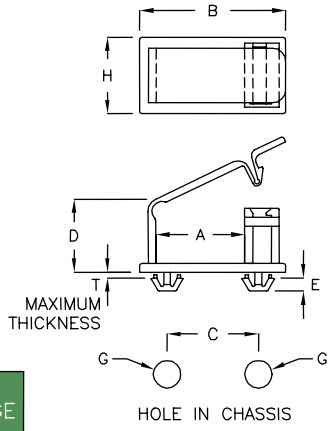


WITH LOCK FEATURE

PART NO	A	B	C	D	E	G	H	T MAXIMUM THICKNESS	PACKAGE
CKK-06	19.4	31.9	20.0	15.2	2.85	ø6.0	16.8	1.0	200
CKK-06A	19.4	31.9	20.0	15.2	2.85	ø6.0	16.8	1.2	500
CKK-5K	24.1	36.0	20.0	8.9	3.0	ø4.0	8.0	1.0	
CKK-24AF	24.1	34.3	20.0	17.9	2.8	ø4.0	8.0	0.8	



電線固定座 WIRE MOUNT 6-76-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

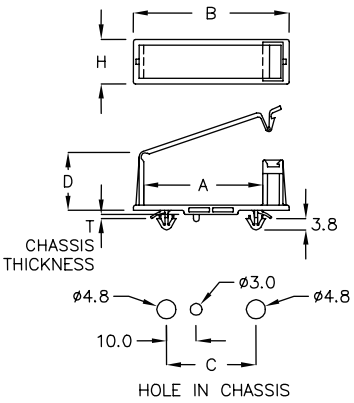

WITH LOCK FEATURE


PART NO	A	B	C	D	H	T CHASSIS THICKNESS	PACKAGE
CYA-40	40.0	52.3	30.0	10.3	15.0	0.8~1.0	100
CYA-40KM	40.0	52.3	33.0	23.4	15.0	0.8~1.0	
CYA-40PS	40.0	52.3	33.0	23.4	15.0	1.2~1.4	
CYA-45	45.0	57.3	30.0	13.8	17.0	0.8~1.0	
CYA-45AM	45.0	57.3	33.0	33.6	17.0	0.8~1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-77-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

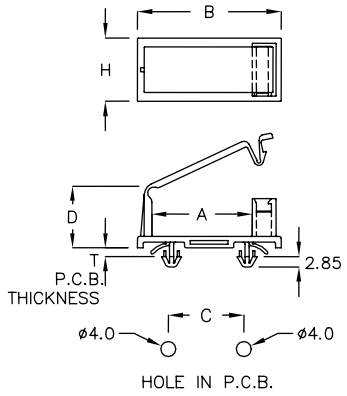


WITH LOCK FEATURE

PART NO	A	B	C	D	H	T P.C.B. THICKNESS	PACKAGE
CKK-26F	26.5	38.0	20.0	16.5	16.8	0.8~2.0	200



電線固定座 WIRE MOUNT 6-77-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

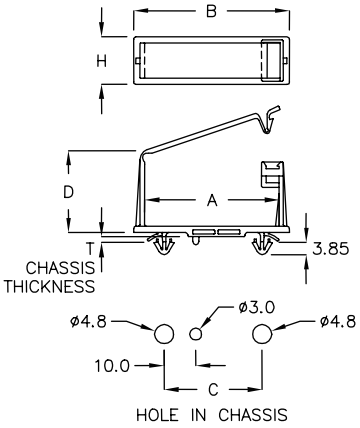


WITH LOCK FEATURE

PART NO	A	B	C	D	H	T CHASSIS THICKNESS	PACKAGE
CYAA-43	42.6	49.3	31.0	35.0	15.0	1.2~1.4	100



電線固定座 WIRE MOUNT 6-77-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

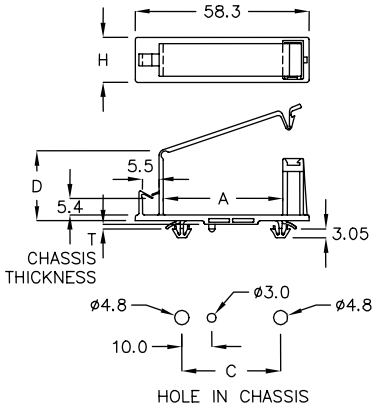


PART NO	A	C	D	H	T CHASSIS THICKNESS	PACKAGE
CYG-40RT	40.0	33.0	23.2	15.0	0.8~1.0	100



排線固定板 FLAT CABLE CLAMP 6-77-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



WITH LOCK FEATURE


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FCC-20	31.3	7.1	0.8~2.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-78-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

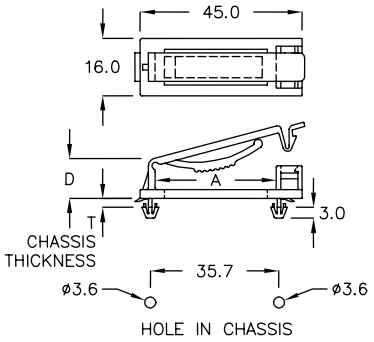


WITH LOCK FEATURE

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FCS-20	33.6	10.7	1.4~1.6	200



排線固定板 FLAT CABLE CLAMP 6-78-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

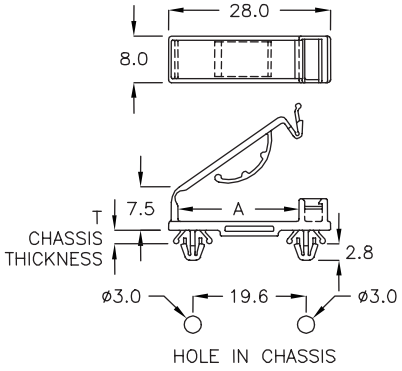


WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
FCSD-21A	21.0	0.8~1.2	200




電線固定座 WIRE MOUNT 6-78-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

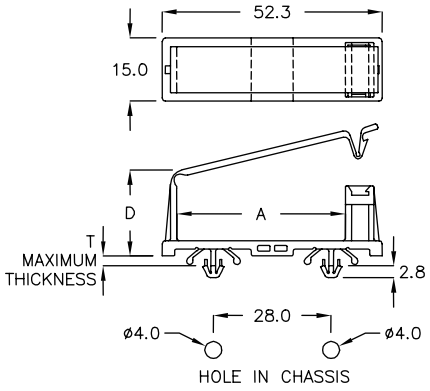


WITH LOCK FEATURE

PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
FAA-40C	40.0	26.0	2.0	100



電線固定座 WIRE MOUNT 6-78-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

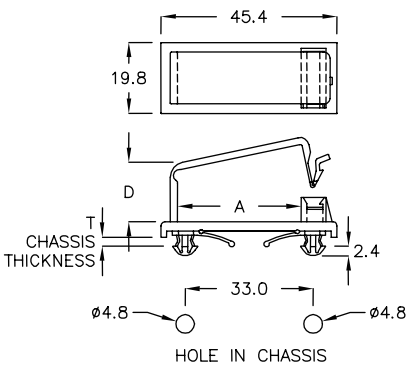

WITH LOCK FEATURE


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FAA-31K	31.8	15.0	0.8~2.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-79-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

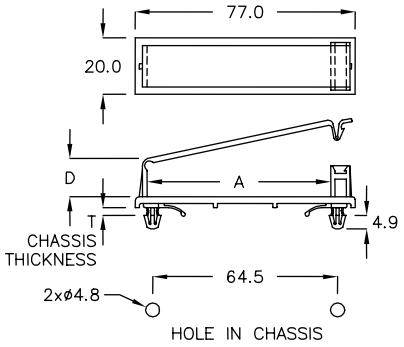


WITH LOCK FEATURE

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FAA-50	64.0	9.0	1.8~2.3	100
FAA-51	64.0	15.4	1.8~2.3	



電線固定座 WIRE MOUNT 6-79-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

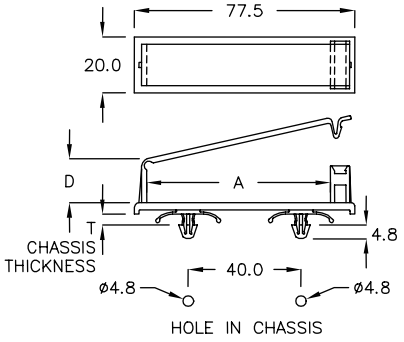


WITH LOCK FEATURE

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FAA-51A	65.1	15.4	2.0~3.4	100



電線固定座 WIRE MOUNT 6-79-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

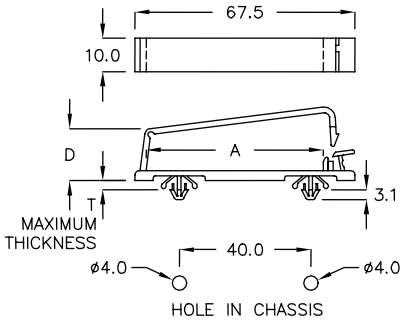


WITH LOCK FEATURE

PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
FCC-40A	54.0	16.0	2.0	100



電線固定座 WIRE MOUNT 6-79-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

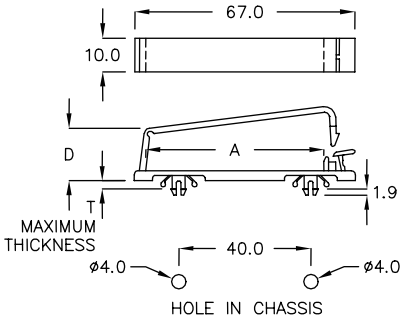

WITH LOCK FEATURE


PART NO	A	D	T MAXIMUM THICKNESS	PACKAGE
FCC-40D	54.0	16.0	2.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

電線固定座 WIRE MOUNT 6-80-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

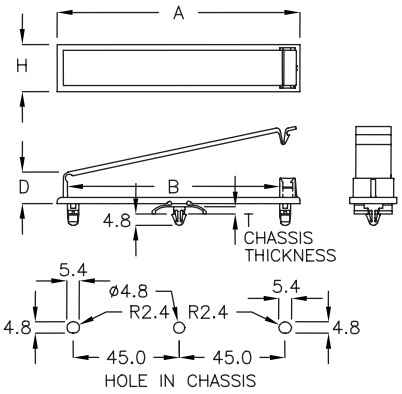

WITH LOCK FEATURE


PART NO	A	B	D	H	T CHASSIS THICKNESS	PACKAGE
CXK-90A	103.0	90.0	13.6	20.0	2.0~2.3	100

電線固定板 CABLE CLAMP 6-80-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

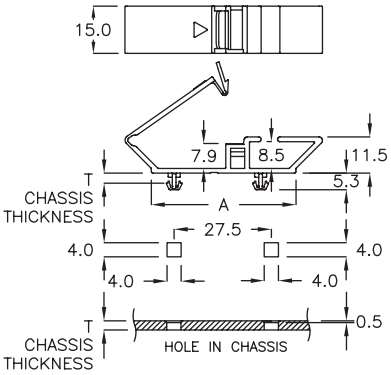


WITH LOCK FEATURE


PART NO	A	T CHASSIS THICKNESS	PACKAGE
★ FCMW-62A	46.0	2.6~2.9	100

電線固定座 WIRE MOUNT 6-80-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



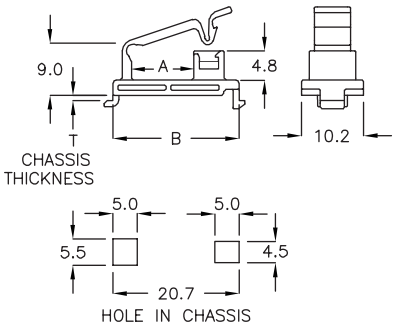


WITH LOCK FEATURE


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
FCZ-10C	10.2	20.7	0.8	200

電線固定座 WIRE MOUNT 6-80-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



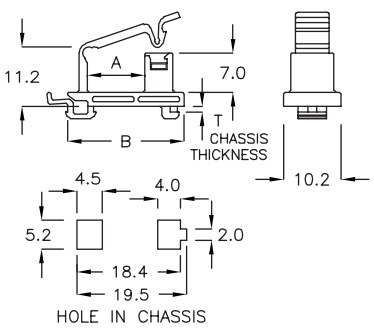

WITH LOCK FEATURE


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
FCX-10A	10.2	20.7	0.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-81-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

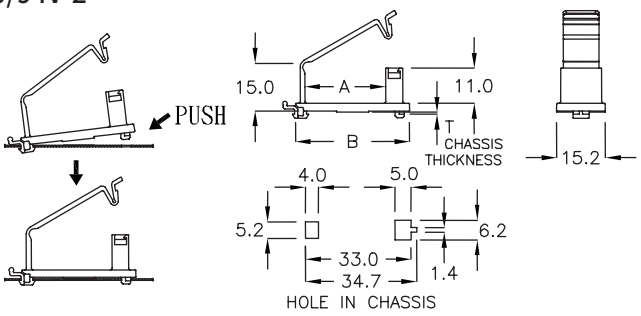


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
FCX-25GL	25.25	35.65	0.6	200



電線固定座 WIRE MOUNT 6-81-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

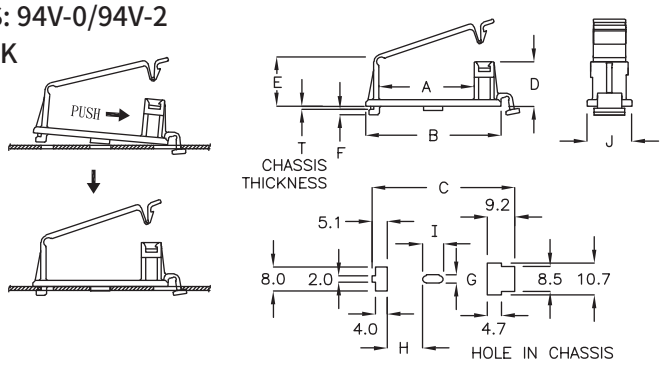


WITH LOCK FEATURE

PART NO	A	B	C	D	E	F	G	H	I	J	T CHASSIS THICKNESS	PACKAGE
FCQ-19A	19.4	31.9	33.35	14.0	16.0	1.8	2.3	6.75	6.65	16.8	0.7~0.8	200
FCQ-27	27.0	40.5	43.3	14.75	17.0	1.8	2.3	11.7	6.65	15.0	0.7~0.8	
FCQ-31HS	31.3	44.8	47.8	14.75	17.0	1.0	2.6	12.8	6.65	15.0	0.7~0.8	
FCQ-31GR	31.6	45.0	47.8	14.75	16.6	1.0	2.6	12.8	6.6	15.0	1.2	



電線固定座 WIRE MOUNT 6-81-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

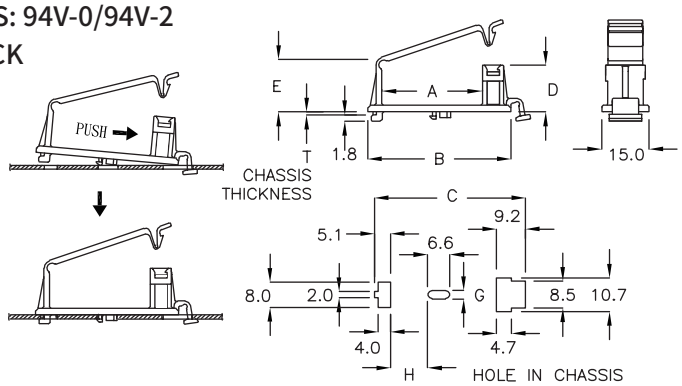

WITH LOCK FEATURE


PART NO	A	B	C	D	E	G	H	T CHASSIS THICKNESS	PACKAGE
FCQ-31K	31.3	44.8	47.8	14.75	17.0	2.6	12.8	0.8	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-82-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



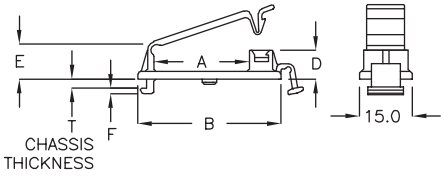





PART NO	A	B	C	D	E	F	G	H	T CHASSIS THICKNESS	PACKAGE
FCQ-27LR	27.0	40.5	42.2	8.2	10.0	1.5	2.3	11.7	2.4	200




電線固定座 WIRE MOUNT 6-82-2


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



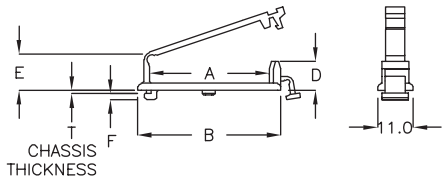

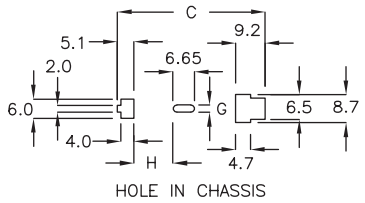


PART NO	A	B	C	D	E	F	G	H	T CHASSIS THICKNESS	PACKAGE
FCQ-35JK	37.1	44.3	45.75	9.05	11.4	1.8	2.3	12.1	0.8	100




WITH LOCK FEATURE


電線固定座 WIRE MOUNT 6-82-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



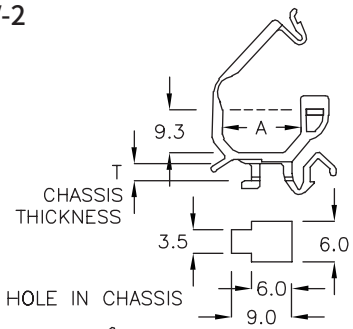

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CKX-11A	11.8	1.2~1.6	500

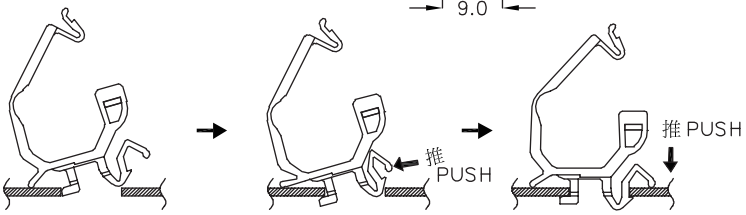


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-83-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  可由板上拆卸

WITH LOCK FEATURE

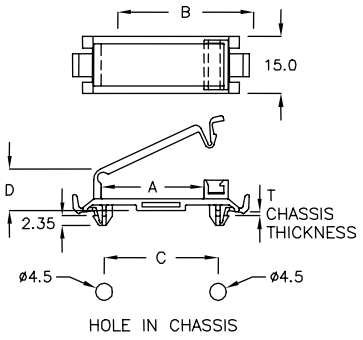

PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
CXR−27A	27.0	36.0	30.0	10.9	0.8	200

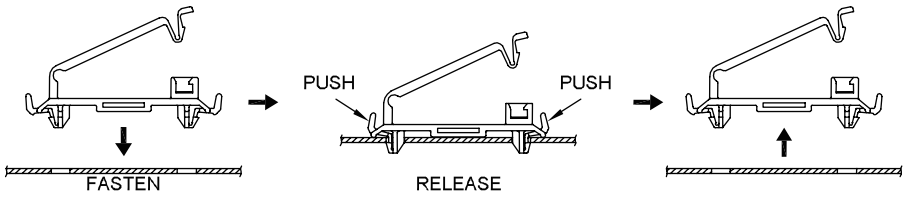




電線固定座 WIRE MOUNT 6-83-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

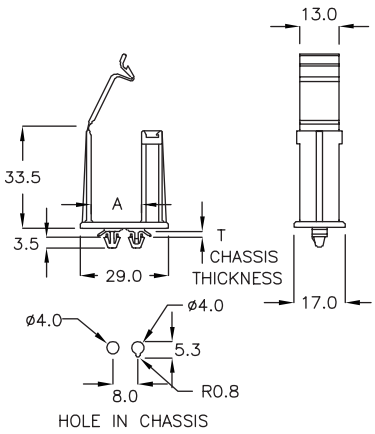


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYB−16A	16.7	0.8~1.2	100




隔離束線座 WIRE SADDLE 6-83-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

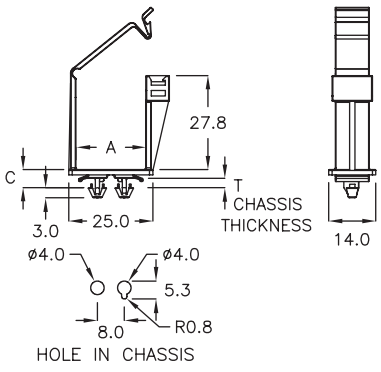


PART NO	A	C	T CHASSIS THICKNESS	PACKAGE
★ CZSA−20C	20.8	5.4	2.1~2.5	100



電線固定座 WIRE MOUNT 6-83-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

WITH LOCK FEATURE

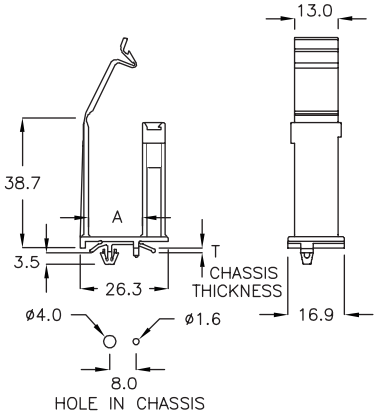


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYC−16F	16.0	0.8~1.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-84-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

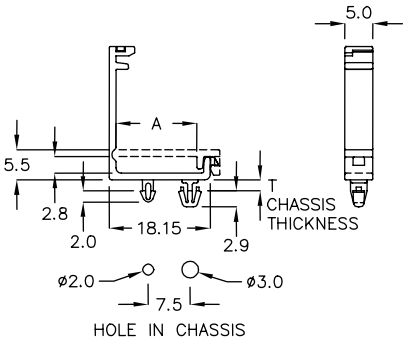


WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYQ-15A	14.5	1.5	500




電線固定座 WIRE MOUNT 6-84-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

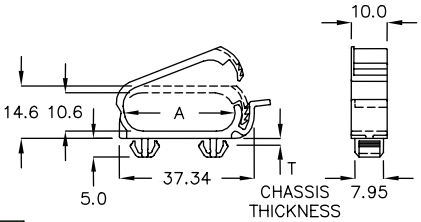

WITH LOCK FEATURE


PART NO	A	T CHASSIS THICKNESS	PACKAGE
FQCM-37A	30.3	0.8~1.2	500






隔離束線座 WIRE SADDLE 6-84-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

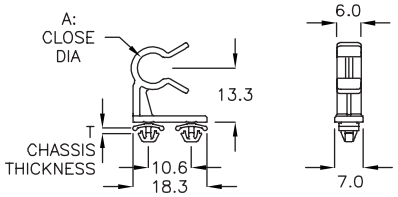


PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
CMW-08	ø7.7	0.8	500



電線固定座 WIRE MOUNT 6-84-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

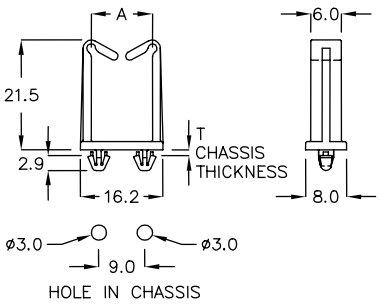


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYL-12M	12.0	1.0	500




隔離束線座 WIRE SADDLE 6-84-5

- MATERIAL: PP
- COLOR: BLACK

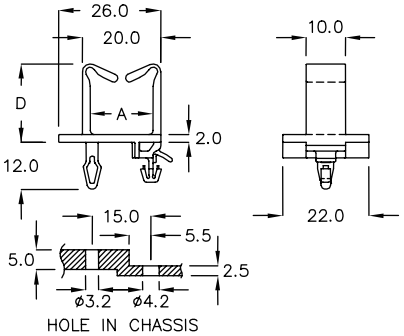


PART NO	A	D	PACKAGE
CRN-16	16.0	20.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-85-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

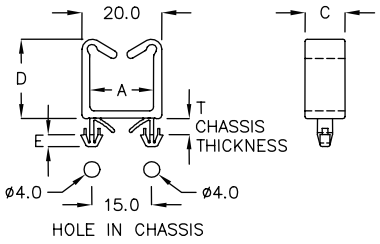


PART NO	A	C	D	E	T CHASSIS THICKNESS	PACKAGE
CRC−16K	16.0	10.0	20.0	3.0	0.8~2.3	200
CRC−16PS	16.0	10.0	24.0	2.4	1.0~2.3	
CRC−16F	16.4	10.4	24.5	2.1	1.0~2.3	




電線固定座 WIRE MOUNT 6-85-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

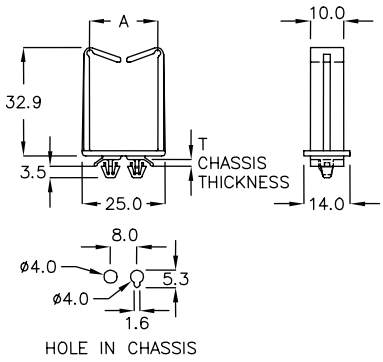


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYD−20A	20.8	0.8~1.2	100




隔離束線座 WIRE SADDLE 6-85-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

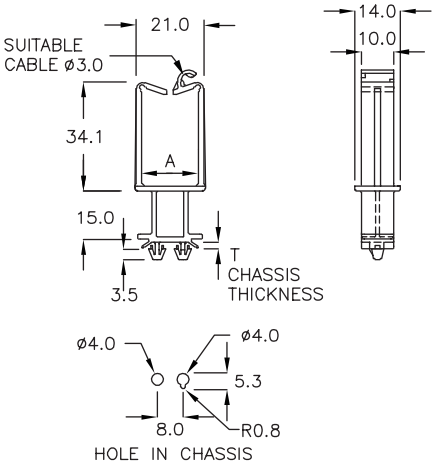


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYM−17A	17.8	0.8~1.2	100



電線固定座 WIRE MOUNT 6-85-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

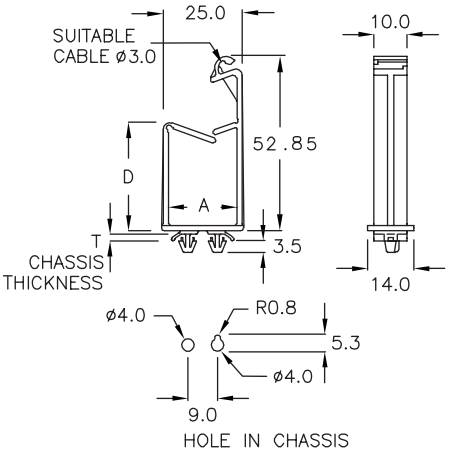


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CYR−20K	20.8	32.8	0.8~1.2	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-86-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

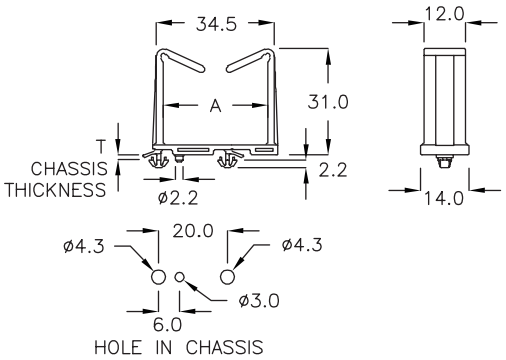


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CYP-30MC	30.5	0.8~1.2	200



隔離束線座 WIRE SADDLE 6-86-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

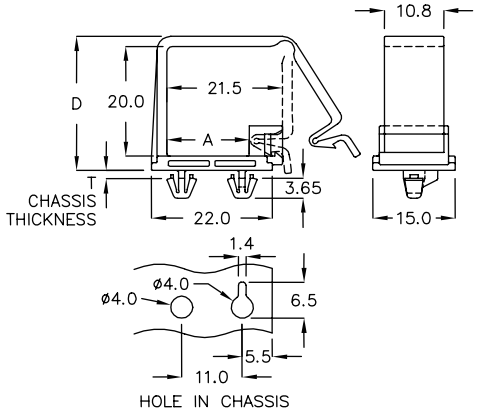


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CKKS-20KY	15.0	24.4	1.2	500




隔離束線座 WIRE SADDLE 6-86-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

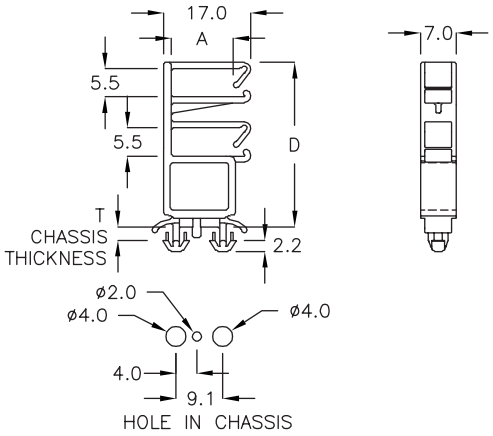


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
FYH-5K	12.0	31.95	1.6~2.4	100




隔離束線座 WIRE SADDLE 6-86-4

- MATERIAL: POM
- COLOR: NATURAL

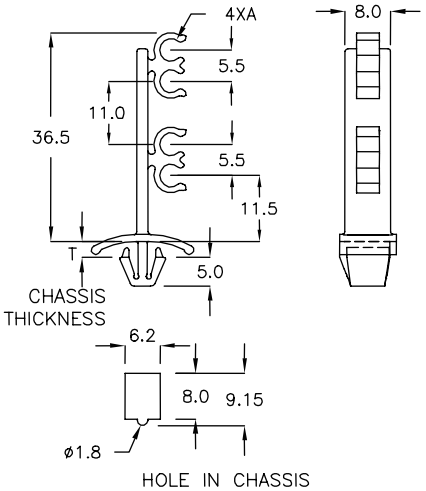


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CTK-44Q	ø4.0	1.0~2.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-87-1

- MATERIAL: POM
- COLOR: NATURAL

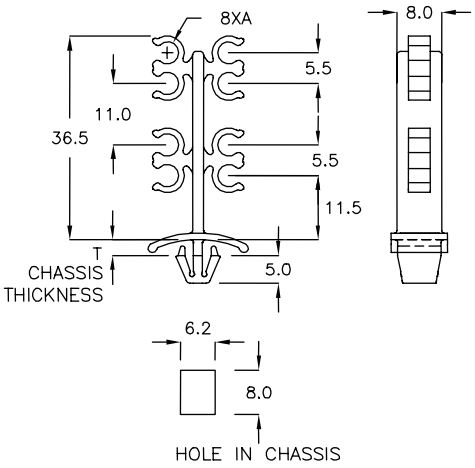


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CTM-44P	ø4.0	1.0~2.0	200



電線固定座 WIRE MOUNT 6-87-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

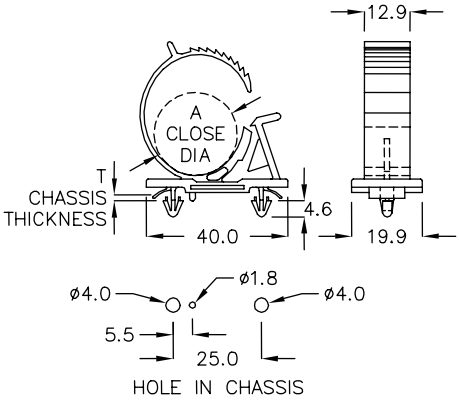


WITH LOCK FEATURE

PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
FWW-40	ø22.5~ø26.5	0.8~2.0	100
FWW-40C	ø22.5~ø26.5	0.8	




電線固定座 WIRE MOUNT 6-87-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

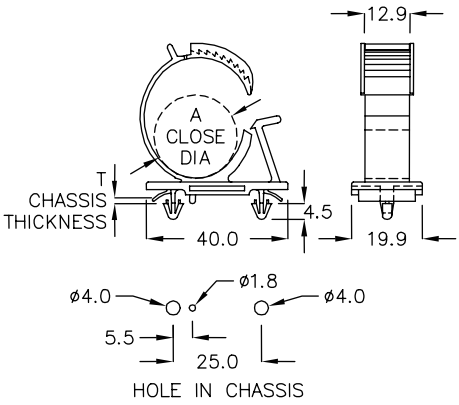


WITH LOCK FEATURE


PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
FWQ-40	ø22.5~ø26.5	0.8~2.0	100



電線固定座 WIRE MOUNT 6-87-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

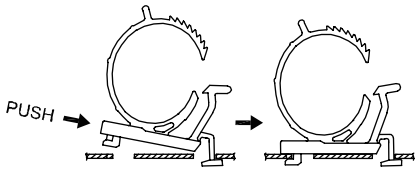


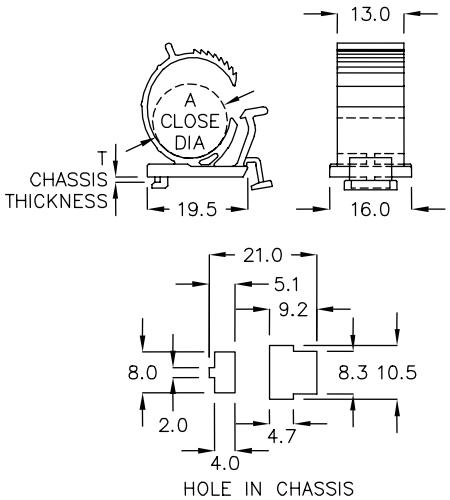

WITH LOCK FEATURE


PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
FW-24	ø13.0~ø14.5	0.8	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-88-1


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

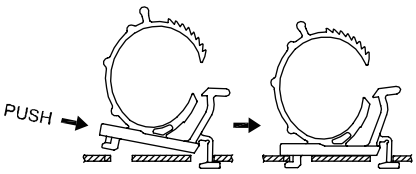

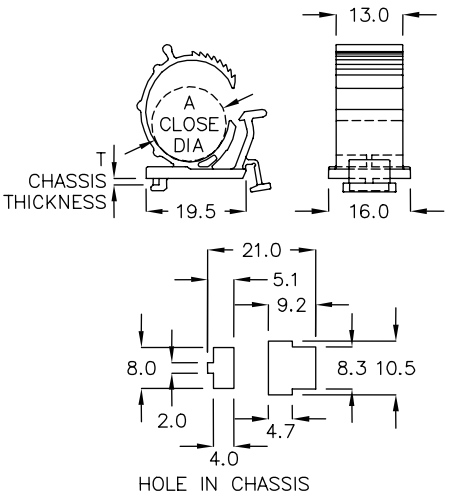


WITH LOCK FEATURE


PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
FW-24CM	ø12.5~ø15.0	1.0	200



電線固定座 WIRE MOUNT 6-88-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

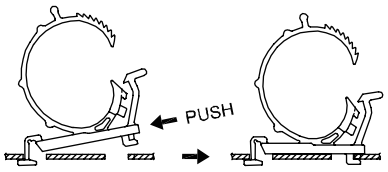

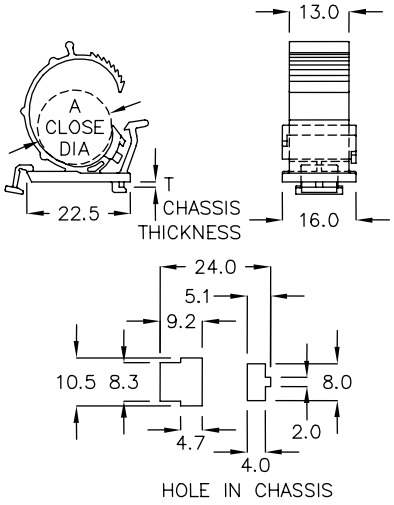


WITH LOCK FEATURE


PART NO	A CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
FDH-14J	ø14.5~ø17.0	1.0	100



電線固定座 WIRE MOUNT 6-88-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

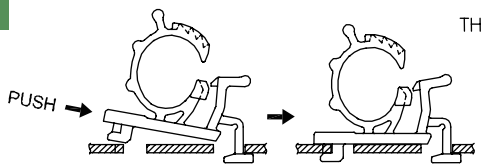

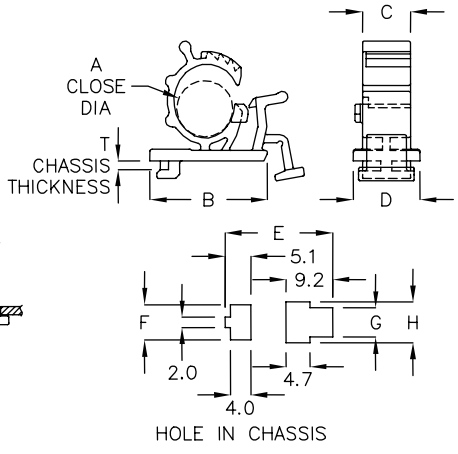

WITH LOCK FEATURE


PART NO	A CLOSE DIA	B	C	D	E	F	G	H	T CHASSIS THICKNESS	PACKAGE
FWR-6A	ø6.0~ø7.0	15.85	6.5	9.0	17.7	7.0	5.8	8.0	0.9~1.1	500
FWR-7M	ø7.5~ø8.5	16.0	6.5	9.0	17.7	7.0	5.8	8.0	0.9~1.1	
FWR-9C	ø8.5~ø10.0	18.8	13.0	16.0	21.0	8.0	8.3	10.5	0.9~1.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



排線固定板 FLAT CABLE CLAMP — 6-89-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

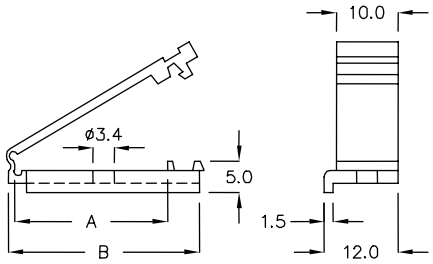


WITH LOCK FEATURE

PART NO	A	B	PACKAGE
FCM-25J	24.8	31.0	200



排線固定板 FLAT CABLE CLAMP — 6-89-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

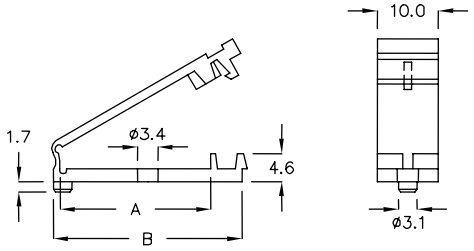


WITH LOCK FEATURE


PART NO	A	B	PACKAGE
FCM-26	24.8	31.0	200




排線固定板 FLAT CABLE CLAMP — 6-89-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

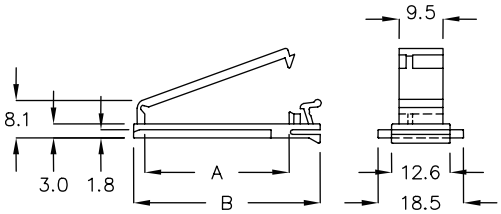

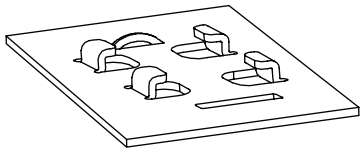

HOLE IN CHASSIS (REF.)

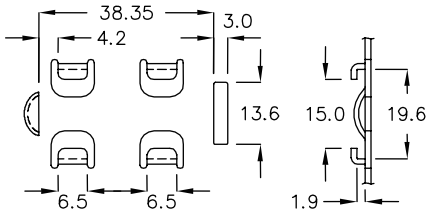

HOLE IN CHASSIS


WITH LOCK FEATURE


PART NO	A	B	PACKAGE
LFD-25	31.2	40.5	200




排線固定板 FLAT CABLE CLAMP — 6-89-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

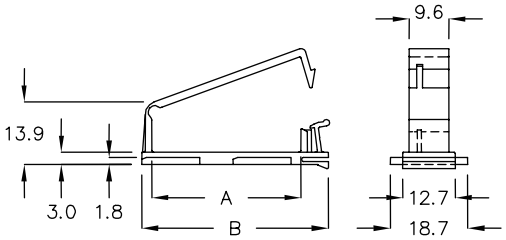

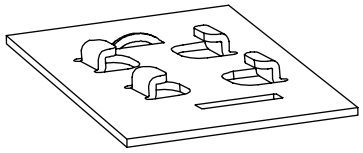

HOLE IN CHASSIS (REF.)

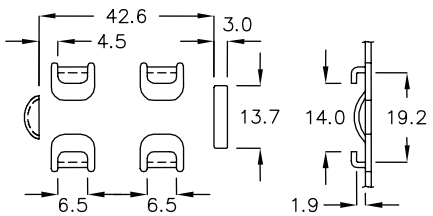

HOLE IN CHASSIS

WITH LOCK FEATURE


PART NO	A	B	PACKAGE
LFN-36C	36.0	45.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




排線固定板 FLAT CABLE CLAMP 6-90-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

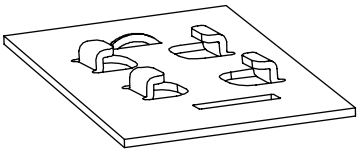

HOLE IN CHASSIS (REF.)

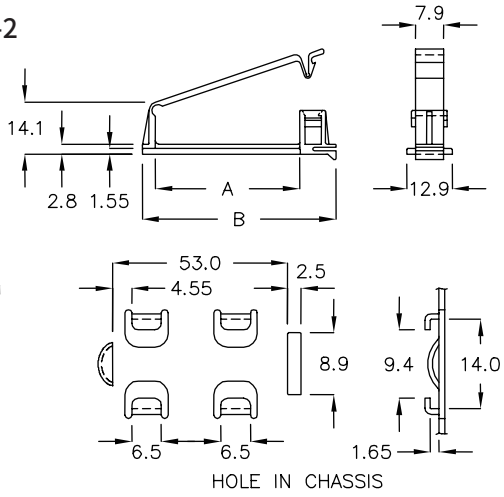


WITH LOCK FEATURE

PART NO	A	B	PACKAGE
LFN-40K	40.75	54.65	100




排線固定板 FLAT CABLE CLAMP 6-90-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



HOLE IN CHASSIS (REF.)

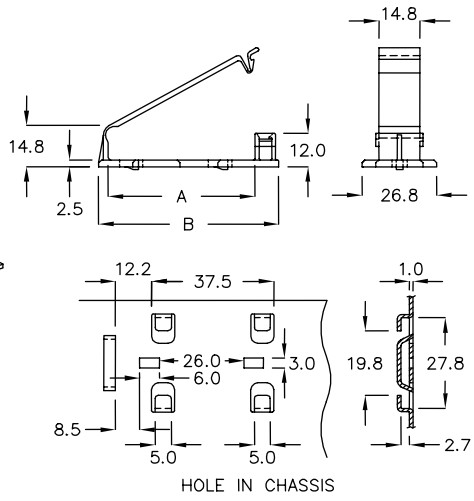


WITH LOCK FEATURE

PART NO	A	B	PACKAGE
LFZ-52K	52.6	64.5	100




排線固定板 FLAT CABLE CLAMP 6-90-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



HOLE IN CHASSIS (REF.)

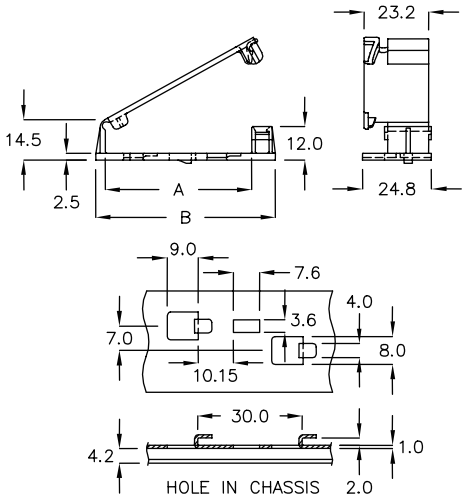

WITH LOCK FEATURE


PART NO	A	B	PACKAGE
LFZN-52A	52.6	64.5	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定板 CABLE CLAMP 6-91-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

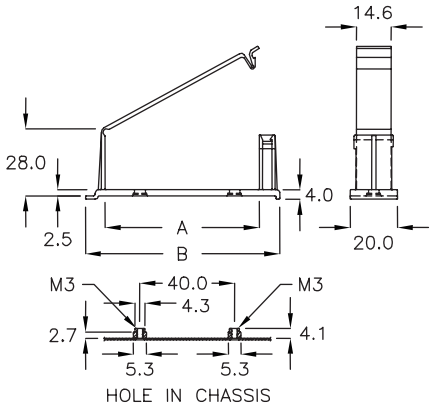


WITH LOCK FEATURE

PART NO	A	B	PACKAGE
FCWA-65KC	65.1	82.1	100



電線固定板 CABLE CLAMP 6-91-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

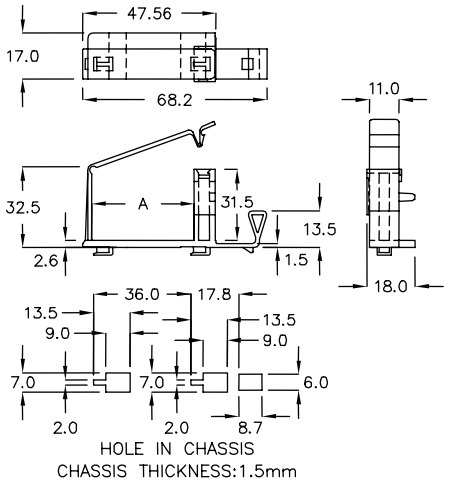


WITH LOCK FEATURE

PART NO	A	PACKAGE
FCAT-38D	38.0	100



電線固定板 CABLE CLAMP 6-91-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

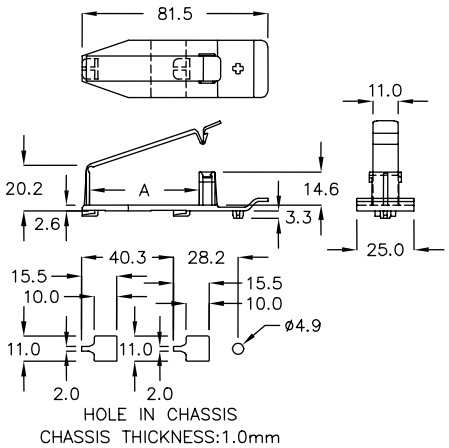


WITH LOCK FEATURE


PART NO	A	PACKAGE
FCA-48C	48.0	100



隔離束線座 WIRE SADDLE 6-91-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



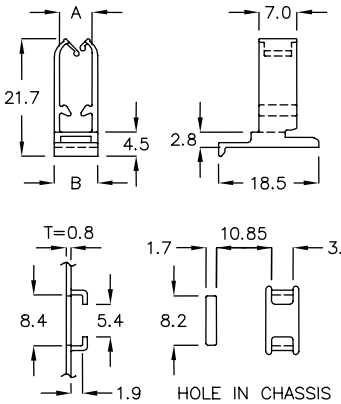


PART NO	A	B	PACKAGE
CYJ-6A	6.0	8.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.


排線固定板 FLAT CABLE CLAMP — 6-92-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

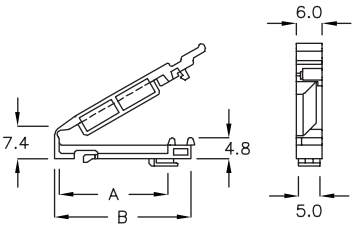

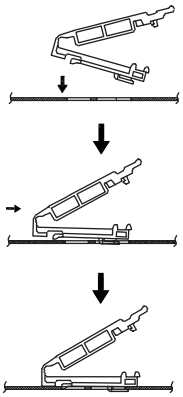




WITH LOCK FEATURE

PART NO	A	B	PACKAGE
FCK-31M	24.9	31.3	500

排線固定座 FLAT CABLE CLIP — 6-92-2



- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

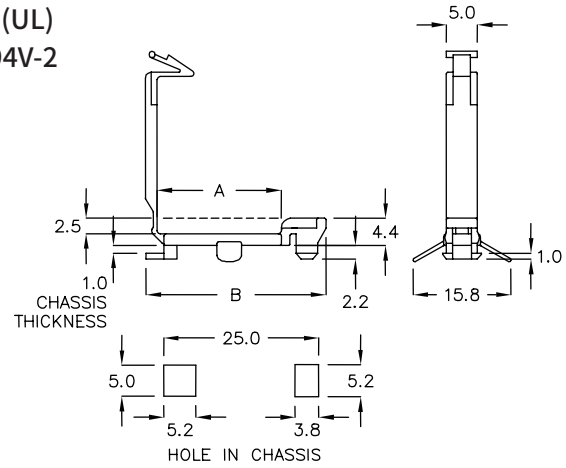


WITH LOCK FEATURE


PART NO	A	B	PACKAGE
CUD-20	20.0	29.0	200

電線固定座 WIRE MOUNT — 6-92-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

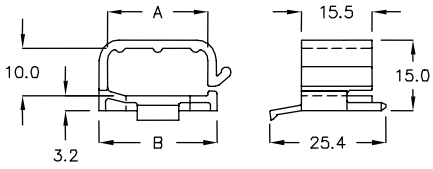

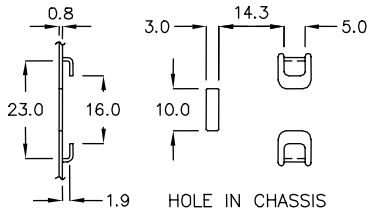



PART NO	A	B	PACKAGE
FYC-22GL	22.0	25.8	200


電線固定座 WIRE MOUNT — 6-92-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



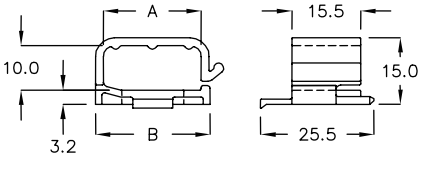

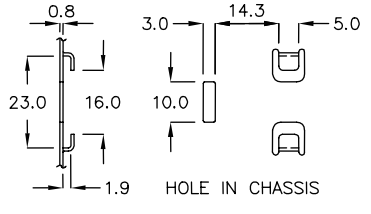


PART NO	A	B	PACKAGE
FYC-22H	22.0	25.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-93-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

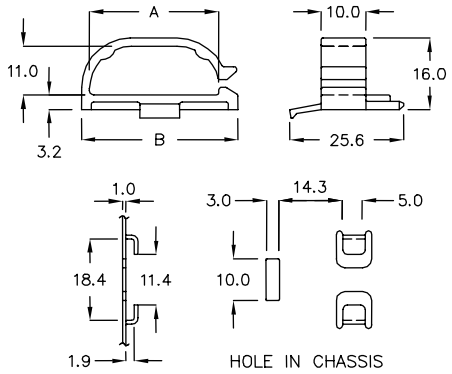


PART NO	A	B	PACKAGE
FYC−29T	29.0	35.2	200



電線固定座 WIRE MOUNT 6-93-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK

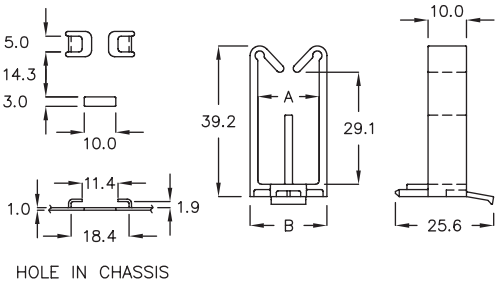


PART NO	A	B	MATERIAL	PACKAGE
FYCA−16H	16.0	20.0	N66	200
FYCA−20K	20.8	25.8	N66	
★ FYCA−16PC	16.0	20.0	PC	
★ FYCA−20PC	20.8	25.8	PC	




電線固定座 WIRE MOUNT 6-93-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

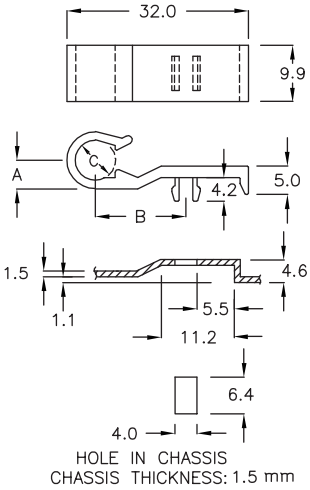


PART NO	A	B	C	PACKAGE
CU−07C	5.0	16.0	ø6.9	500



壓線座 WIRE MOUNT 6-93-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

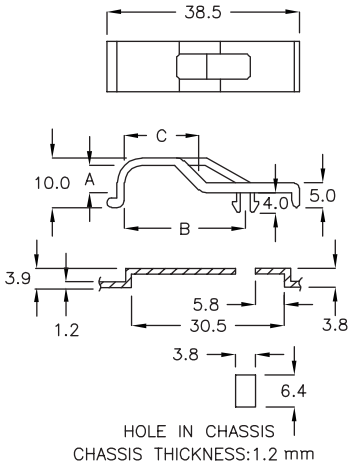

PART NO	A	B	C	PACKAGE
CU−07F	5.5	24.2	15.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




排線固定夾 FLAT CABLE CLAMP — 6-94-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
FBC−15	27.0	15.0	500

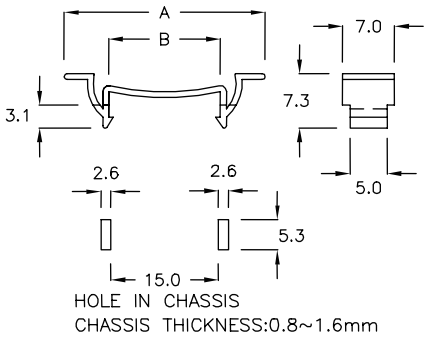




排線固定夾 FLAT CABLE CLAMP — 6-94-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
FBC−21	33.0	21.0	500

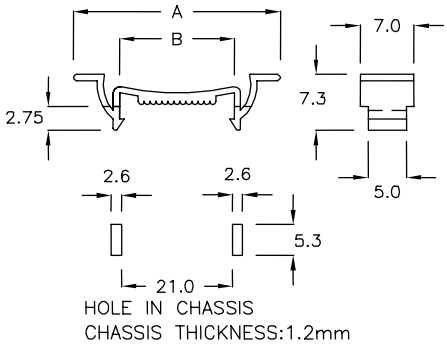




電線固定扣 WIRE CLIP — 6-94-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
FBM−10A	12.35	10.45	2000

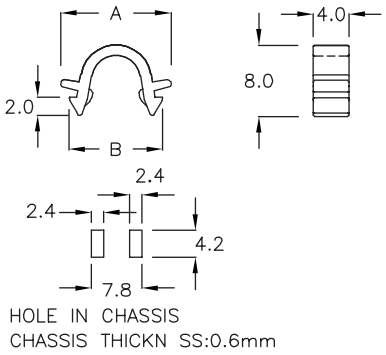





電線固定座 CABLE CLAMP — 6-94-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
FDP−19	18.8	11.55	500



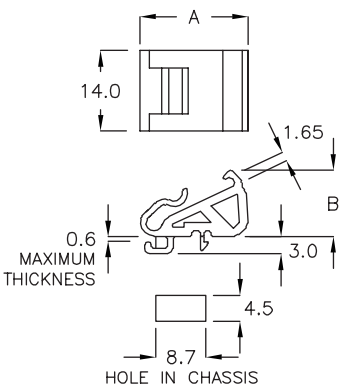


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



排線固定板 FLAT CABLE CLAMP — 6-95-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

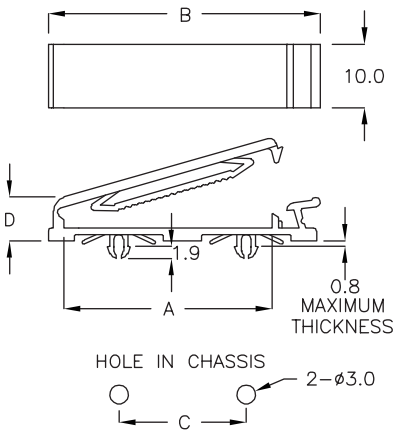


WITH LOCK FEATURE

PART NO	A	B	C	D	PACKAGE
FCJ-25K	32.7	42.7	20.0	6.9	100



排線固定夾 FLAT CABLE CLAMP — 6-95-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

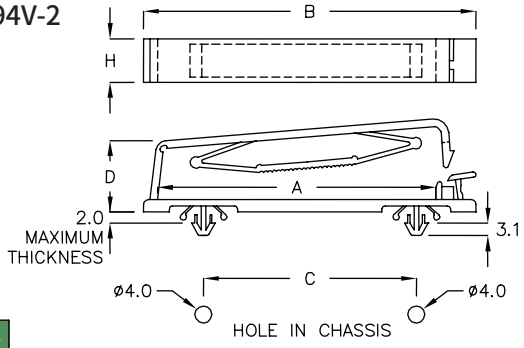


WITH LOCK FEATURE

PART NO	A	B	C	D	H	SUITABLE CABLE	PACKAGE
FCC-15A	14.4	32.6	15.0	13.7	9.1	10 PIN	200
FCC-25A	25.0	39.6	20.0	13.0	13.3	20 PIN	
FCC-30A	39.6	55.0	35.0	13.0	12.5	30 PIN	100
FCC-40B	53.5	67.0	40.0	16.2	10.1	40 PIN	
FCC-50A	64.6	77.6	49.7	13.6	10.1	50 PIN	
FCC-50C	64.3	77.0	49.7	12.8	10.0	50 PIN	



排線固定板 FLAT CABLE CLAMP — 6-95-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ASSEMBLY:
  1.INSERT ASLOPE
  2.DEPRESS THE CLAMP

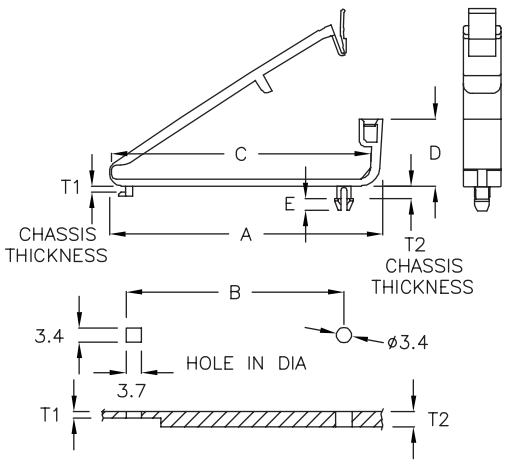

WITH LOCK FEATURE

PART NO	A	B	C	D	E	T1	T2	PACKAGE
FCG-60A	58.2	46.7	55.3	14.6	2.5	1.0	2.4	100
FCG-60C	58.2	46.7	55.3	11.9	1.8	1.0	1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




排線固定板 FLAT CABLE CLAMP 6-96-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
FC-27N	27.8	10.5	500

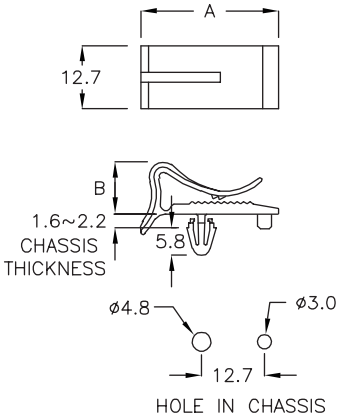




排線固定板 FLAT CABLE CLAMP 6-96-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ASSEMBLY:
  1.INSERT ASLOPE
  2.DEPRESS THE MOUNT

PART NO	A	B	C	D	PACKAGE
LFC-01	26.4	9.6	19.0	17.6	200

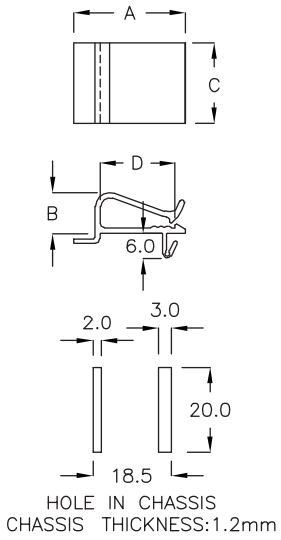




排線固定板 FLAT CABLE CLIP 6-96-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
FC-45N	45.0	10.9	200

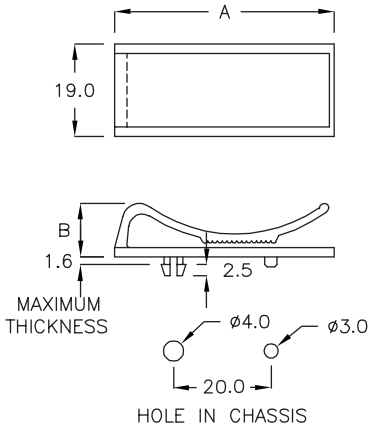




電線固定扣 WIRE CLIP 6-96-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A CLOSE DIA	B	PACKAGE
PC-08T	ø7.8	24.4	500
PC-10T	ø10.0	29.3	

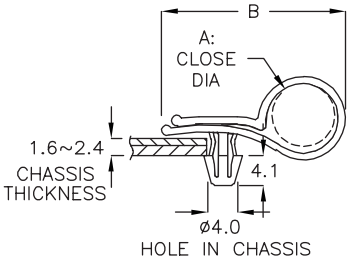


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定扣 WIRE CLIP 6-97-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
TA–5	4.2	2.5	4.7	1000



電線固定扣 WIRE CLIP 6-97-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE




PART NO	A CLOSE DIA	B	D HOLE IN CHASSIS	E	T MAXIMUM THICKNESS	PACKAGE
TA–3C	ø3.8	15.5	ø6.5	5.7	1.6	1000



電線固定扣 WIRE CLIP 6-97-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

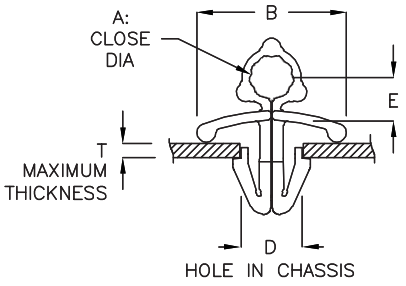


PART NO	A CLOSE DIA	B	D HOLE IN CHASSIS	E	T CHASSIS THICKNESS	PACKAGE
TA–2K	ø2.9	12.0	ø4.5	3.5	0.6~1.6	1000



電線固定扣 WIRE CLIP 6-97-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE




PART NO	A CLOSE DIA	B	D HOLE IN CHASSIS	E	T MAXIMUM THICKNESS	PACKAGE
TA–3M	ø3.8	14.8	ø6.5	5.7	1.2	1000
TA–5M	ø5.0	11.7	ø6.5	4.3	2.0	
TA–6	ø5.5	12.5	ø5.5	5.0	2.0	
TA–7	ø7.5	14.1	ø5.5	4.6	2.0	
TA–8	ø8.4	16.5	ø6.0	6.2	1.6	
TA–08A	ø8.4	13.5	ø5.5	6.2	1.6	
TA–11	ø11.1	16.2	ø6.0	7.0	1.9	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE CLIP 6-98-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	PACKAGE
TF8-3DC	8.1	3.5	19.2	ø6.5	0.8~1.2	1000




隔離束線座 WIRE CLIP 6-98-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

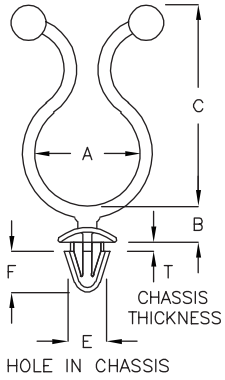


WITH LOCK FEATURE

PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	E HOLE IN CHASSIS	F	PACKAGE
TN16-5	16.2	5.4	30.5	ø14.0	1.4~1.7	ø5.0	6.3	500




隔離束線座 WIRE CLIP 6-98-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

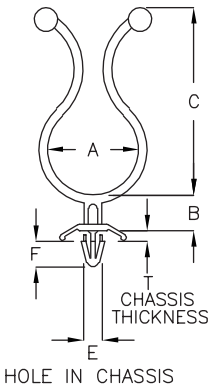


WITH LOCK FEATURE

PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	E HOLE IN CHASSIS	F	PACKAGE
TB20-8	20.6	8.1	42.0	ø18.5	1.0~2.0	ø3.5	6.0	500
TB8-8	9.5	8.0	23.3	ø7.7	0.8~2.4	ø3.0	3.7	



隔離束線座 WIRE CLIP 6-98-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

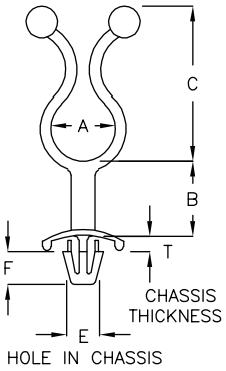

WITH LOCK FEATURE


PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	E HOLE IN CHASSIS	F	PACKAGE
TA7-23	6.7	23.7	17.2	ø5.5	0.5~2.0	ø5.0	3.2	500
TA8-15A	8.6	15.0	26.3	ø7.5	1.2~3.0	ø4.0	5.2	
TA9-15	10.7	15.0	26.3	ø9.4	1.2~3.0	ø4.0	5.2	
TA11-4A	10.8	4.6	26.3	ø9.3	0.3~2.2	ø5.0	5.6	
TA11-50A	11.5	50.2	26.7	ø10.1	0.8~2.7	ø4.8~ø5.0	5.1	
TA14-2C	14.8	2.4	30.5	ø13.0	0.8~1.6	ø4.8	5.1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE CLIP — 6-99-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	PACKAGE
TA10−4	10.5	4.0	28.0	ø9.3	1.9~2.9	500
TA10−20	10.5	20.0	27.6	ø9.4	1.8~2.8	
TA16−3	15.9	3.5	32.0	ø14.4	1.0~2.6	
TA16−18	16.0	18.0	32.0	ø14.4	1.2~2.4	



隔離束線座 WIRE CLIP — 6-99-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

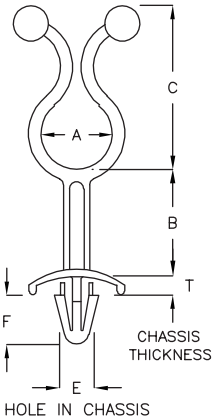

E154548

WITH LOCK FEATURE


PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	E HOLE IN CHASSIS	F	UL	PACKAGE
TA5−60	5.1	60.4	20.7	ø4.4	0.8~2.7	ø4.8~ø5.0	7.2		500
TA8−3	8.6	3.5	19.0	ø7.0	1.2~1.8	ø4.0	3.0	UL	1000
TA8−3L	8.6	3.2	19.0	ø7.0	1.2~2.3	ø4.0	3.3		
TA8−6	8.8	5.6	19.1	ø7.0	1.2~1.8	ø4.8~ø5.0	7.6	UL	
TA8−10	8.0	10.5	22.7	ø6.8	1.2~2.8	ø5.0	7.2	UL	500
TA8−20	8.0	20.2	22.7	ø6.8	1.2~2.8	ø5.0	7.2	UL	
TA10−3	10.9	3.0	27.0	ø9.5	1.1~2.6	ø5.0	7.3	UL	
TA10−3A	10.9	3.1	27.0	ø9.5	1.2~3.8	ø5.0	6.6		
TA10−15	11.0	15.5	27.0	ø9.7	1.1~2.6	ø5.0	7.1	UL	
TA10−35	10.9	35.0	27.0	ø9.6	1.5~3.0	ø5.0	7.2	UL	
TA11−4	11.0	4.4	26.4	ø9.5	0.6~2.4	ø5.0	7.5	UL	
TA11−5	11.5	4.7	28.0	ø10.3	0.8~2.0	ø4.0	5.5		
TA11−50	11.5	50.2	26.7	ø10.1	0.8~2.7	ø4.8~ø5.0	7.1	UL	
TA11−21	11.8	21.2	27.5	ø10.2	0.6~2.7	ø5.0	6.6	UL	
TA11−43	11.5	43.5	26.7	ø10.1	0.8~2.7	ø4.8~ø5.0	7.0		
TA12−10	12.0	10.1	27.0	ø10.2	1.2~3.2	ø4.8~ø5.0	6.6		
TA14−2	14.4	2.4	30.5	ø13.0	0.3~1.8	ø4.8	7.6		
TA16−4	16.0	3.5	30.8	ø14.0	1.3~2.9	ø5.0	7.2	UL	
TA16−60	16.0	60.4	32.0	ø14.5	0.8~2.7	ø4.8~ø5.0	7.1	UL	200
TA19−30	18.7	30.0	36.4	ø16.5	0.9~3.0	ø4.8~ø5.0	7.0		
TA20−8	20.6	8.1	36.7	ø18.4	0.8~3.0	ø4.8~ø5.0	7.1		500
TA20−16	20.3	16.2	36.3	ø18.3	1.5~3.1	ø5.0	7.2	UL	
TA24−3	24.3	3.0	43.6	ø22.0	0.6~2.7	ø5.0	6.9	UL	
TA37−3	37.5	3.3	59.3	ø35.0	1.1~2.4	ø4.8~ø5.0	6.7	UL	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-100-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

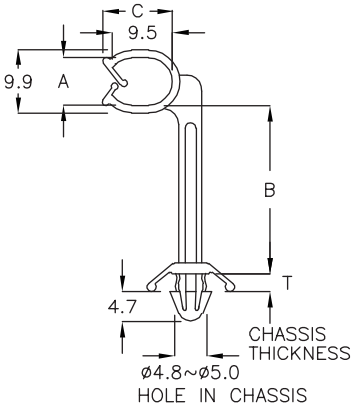


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
TUA-34	7.5	34.2	11.0	0.5~2.1	500



隔離束線座 WIRE SADDLE 6-100-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

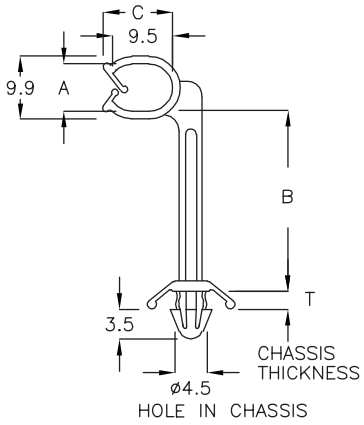


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
TUA-40	7.5	34.0	11.0	0.8~1.6	500




隔離束線座 WIRE CLIP 6-100-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

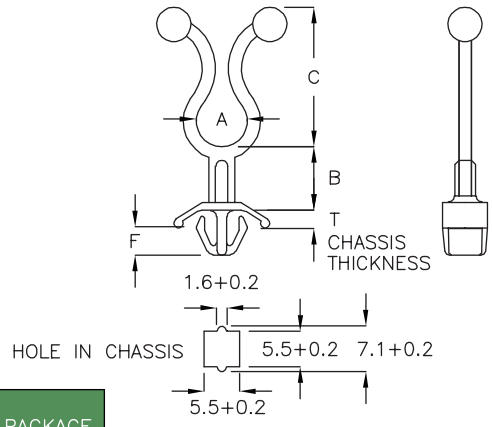


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	B	C	CLOSE A	T CHASSIS THICKNESS	F	PACKAGE
TD5-36	5.4	36.5	18.4	ø4.5	0.8~1.2	3.8	500
TD8-3	8.0	3.2	21.7	ø6.7	0.8~1.4	5.3	1000
TD12-3	11.8	3.3	29.0	ø10.6	0.8~1.4	5.3	
TD11-20A	11.5	19.9	28.2	ø10.0	0.8~2.2	3.6	500



隔離束線座 WIRE CLIP 6-100-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

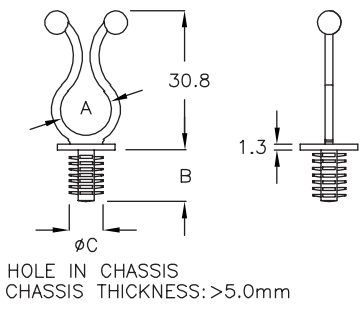

WITH LOCK FEATURE


PART NO	A	B	C	CLOSE A	PACKAGE
TG12-03	11.8	11.5	6.35	ø10.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE CLIP 6-101-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

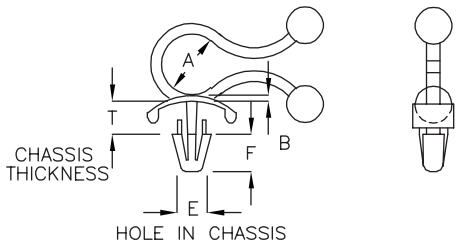


WITH LOCK FEATURE

PART NO	A	B	CLOSE A	T CHASSIS THICKNESS	E	F	PACKAGE
TDY8-1	8.2	1.0	ø7.0	2.7~3.9	ø4.0	5.1	1000
TDY8-1A	8.3	1.0	ø7.1	0.8~2.1	ø3.0	3.7	
TDY8-1C	8.2	1.0	ø7.1	0.8~2.3	ø4.5	4.9	




隔離束線座 WIRE CLIP 6-101-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

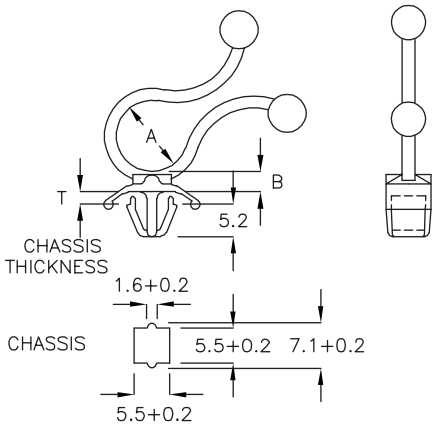


Built-In Anti-Spin Function
WITH LOCK FEATURE

PART NO	A	B	CLOSE A	T CHASSIS THICKNESS	PACKAGE
TDY11-3	11.0	3.2	ø9.6	0.8~1.2	500



隔離束線座 WIRE CLIP 6-101-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

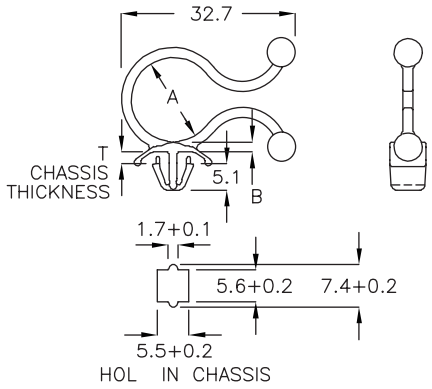

Built-In Anti-Spin Function
WITH LOCK FEATURE


PART NO	A	B	CLOSE A	T CHASSIS THICKNESS	PACKAGE
TDR16-1K	16.2	1.9	ø14.5	1.2~1.5	500



隔離束線座 WIRE SADDLE 6-101-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548

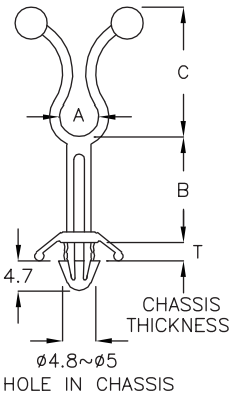


WITH LOCK FEATURE


PART NO	A	B	C	CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
TK6-34	6.1	34.0	20.2	ø5.1	0.5~2.3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

隔離束線座 WIRE CLIP 6-102-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

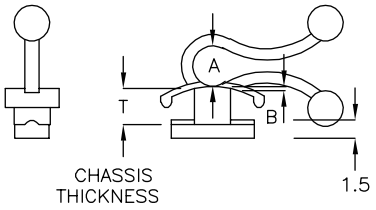


Insert With 90 Degree Angle
And Press Down
WITH LOCK FEATURE


PART NO	A	B	CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
TEY4-1	4.5	0.25	ø3.7	2.7~3.7	1000



隔離束線座 WIRE CLIP 6-102-2




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

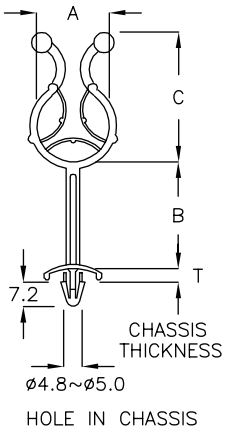


WITH LOCK FEATURE

PART NO	A	B	C	MAX BUNDLE DIA	T CHASSIS THICKNESS	PACKAGE
TE21-04	20.5	4.0	37.2	ø14.5	1.0~3.1	500
TE21-32	20.5	32.1	37.2	ø14.5	1.0~3.1	
TE21-40	20.5	40.1	37.2	ø14.5	1.0~3.1	

隔離束線座 WIRE SADDLE 6-102-3




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

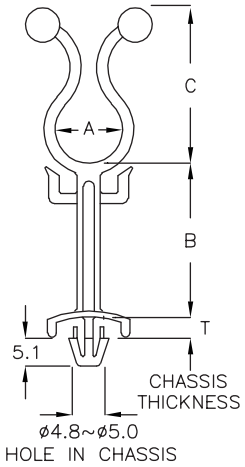


WITH LOCK FEATURE


PART NO	A	B	C	CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
TX11-52	11.8	52.5	26.6	ø10.2	0.3~2.5	500

隔離束線座 WIRE SADDLE 6-102-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




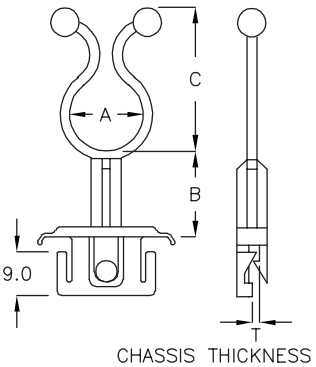

WITH LOCK FEATURE


PART NO	A	B	C	T CHASSIS THICKNESS	CLOSE DIA	PACKAGE
TT15-10	14.9	10.0	29.2	1.6~2.0	ø13.3	500
TT15-10A	14.9	10.0	29.2	2.1~2.5		
TT15-17	14.9	17.4	29.2	1.6~2.0		

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-103-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

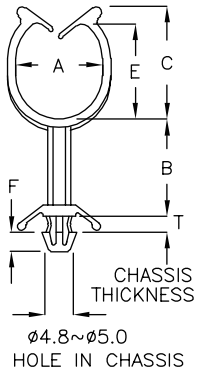


PART NO	A	B	C	E	T CHASSIS THICKNESS	F	PACKAGE
TU14-7	14.5	7.0	19.5	16.2	0.5~2.0	3.4	500
TU14-12	14.8	12.0	19.5	16.7	0.5~2.3	2.8	
TU14-17	14.8	16.8	19.5	16.2	0.5~2.3	3.5	
TU14-25	14.8	25.0	19.5	16.2	0.5~2.3	3.5	
TU14-27	14.8	26.8	19.5	16.2	0.5~2.3	3.6	
TU14-37	14.8	36.8	19.5	16.2	0.5~2.3	3.5	



隔離束線座 WIRE SADDLE 6-103-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

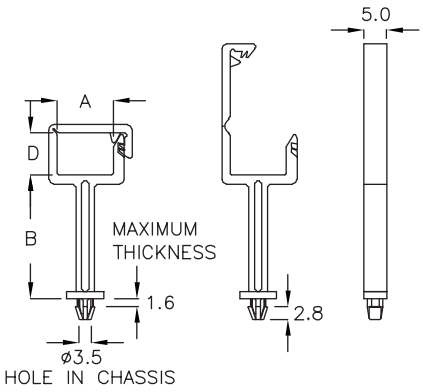


PART NO	A	B	D	PACKAGE
CHB-26A	12.1	26.7	9.1	500




隔離束線座 WIRE SADDLE 6-103-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE




PART NO	A SUITABLE BUNDLE DIA	B	C	T CHASSIS THICKNESS	PACKAGE
TUT-10	ø9.0~ø12.5	10.0	15.6	0.5~2.3	500



隔離束線座 WIRE SADDLE 6-103-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

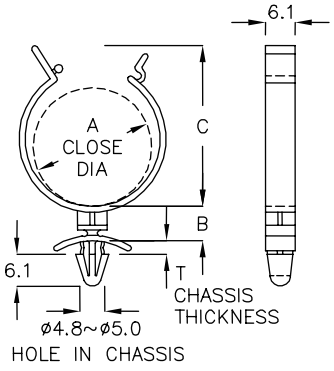


PART NO	A CLOSE DIA	B	C	T CHASSIS THICKNESS	PACKAGE
TC20-6	ø20.5	6.55	29.7	0.8~2.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-104-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

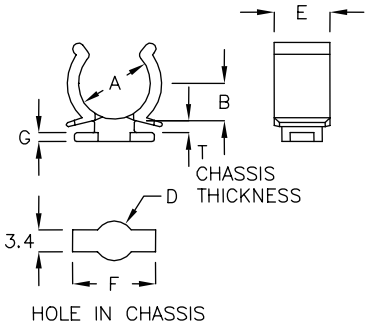


Insert With 90 Degree Angle
And Press Down

PART NO	A	B	D HOLE IN CHASSIS	E	F	G	T CHASSIS THICKNESS	PACKAGE
CHQ-03	ø3.1	3.2	ø4.2	5.6	10.1	1.3	1.2	2000
CHQ-07	ø7.3	4.2	ø5.2	7.0	10.4	1.3	1.2	
CHQ-08	ø7.9	4.3	ø5.2	7.0	10.4	1.3	1.2	1000
CHQ-9	ø8.5	4.7	ø5.2	7.0	10.4	1.05	1.2	
CHQ-11	ø10.7	5.3	ø5.2	7.0	10.4	1.3	1.3	




隔離束線座 WIRE SADDLE 6-104-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

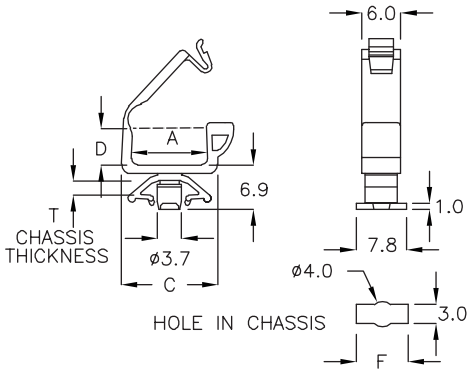


INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

PART NO	A	C	D	E	T CHASSIS THICKNESS	PACKAGE
CKB-7A	11.0	15.0	7.0	8.2	1.6	500
CKB-10A	16.0	19.8	10.0	8.0	0.8	



隔離束線座 WIRE SADDLE 6-104-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

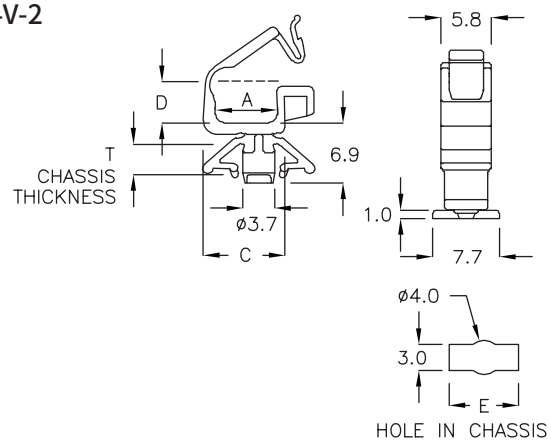

INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE


PART NO	A	C	D	E	T CHASSIS THICKNESS	PACKAGE
CKB-4JH	7.2	9.4	4.8	8.0	1.0~1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE — 6-105-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

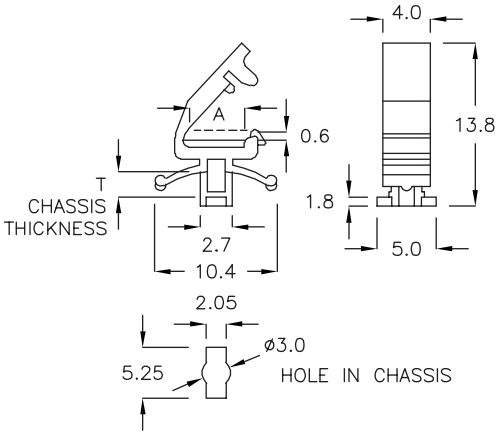


INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CKA-2A	4.0	1.0	2000




隔離束線座 WIRE SADDLE — 6-105-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

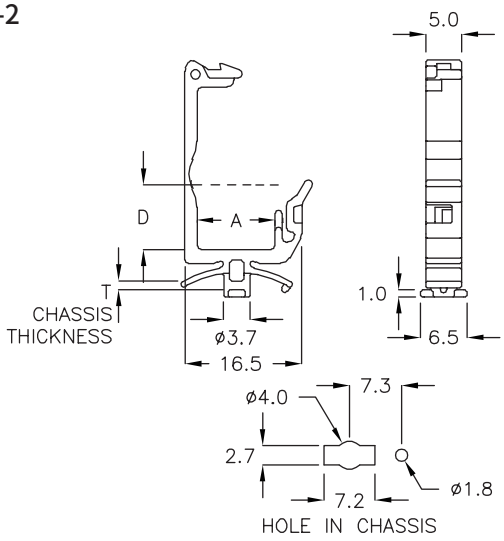


INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
CKN-11Y	10.9	9.2	0.8~1.6	500



電線固定座 WIRE MOUNT — 6-105-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

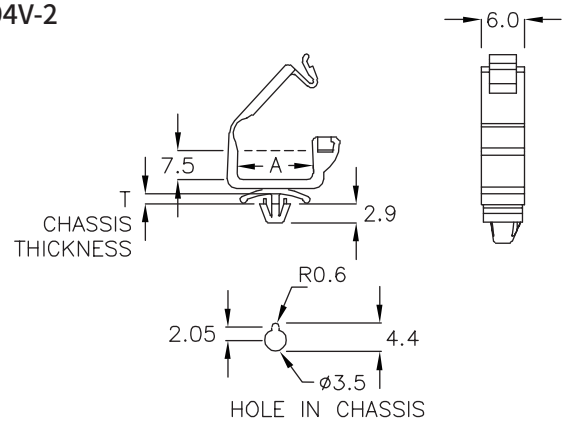

Build-In Anti-Spin Function
WITH LOCK FEATURE


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CKY-11A	11.9	0.8~1.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

隔離束線座 WIRE SADDLE 6-106-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

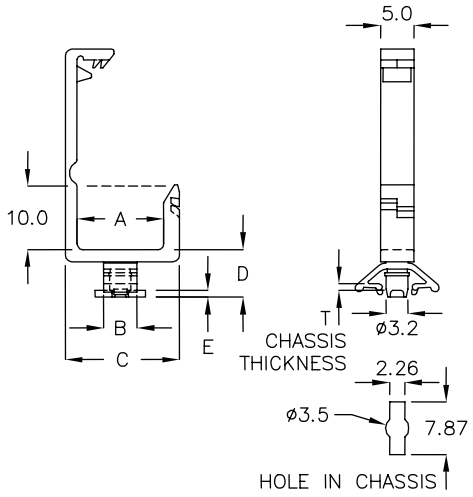


Insert With 90 Degree Angle
And Press Down
WITH LOCK FEATURE

PART NO	A	B	C	D	E	T CHASSIS THICKNESS	PACKAGE
CMG-10	13.0	5.0	17.2	7.15	1.0	0.6~1.0	500
CMG-24J	24.0	9.0	28.2	7.35	1.2	0.8~1.0	

隔離束線座 WIRE SADDLE 6-106-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

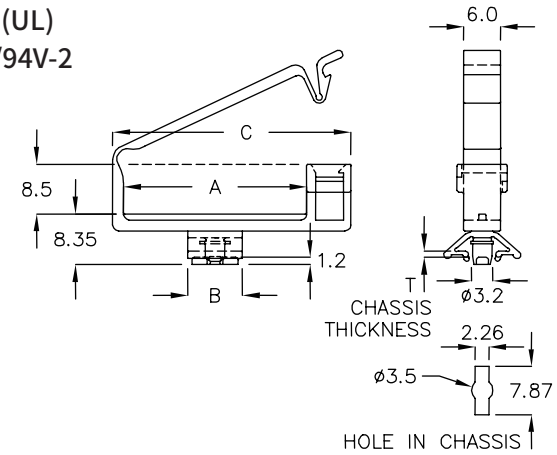


Insert With 90 Degree Angle
And Press Down
WITH LOCK FEATURE

PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
CMGA-30	30.0	9.0	39.1	0.8~1.0	200

電線固定座 WIRE MOUNT 6-106-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

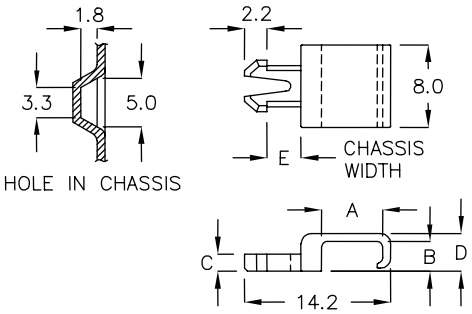


PART NO	A	B	C	D	E CHASSIS WIDTH	PACKAGE
CKT-1A	5.9	2.9	1.7	3.7	3.1	1000
CKT-1C	5.9	2.7	1.7	3.5	3.1	

電線固定座 WIRE MOUNT 6-106-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

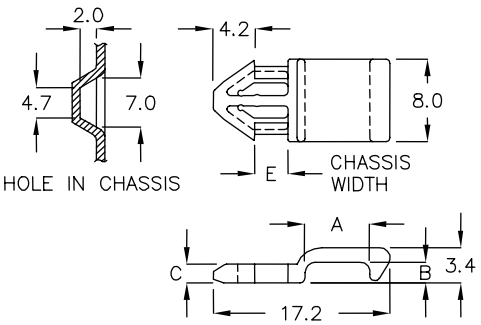


PART NO	A	B	C	E CHASSIS WIDTH	PACKAGE
CKT-03	6.3	2.0	1.8	3.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-107-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

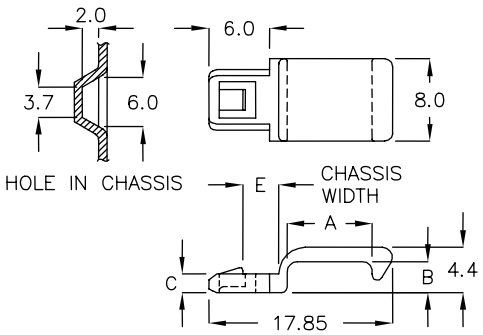


PART NO	A	B	C	E CHASSIS WIDTH	PACKAGE
CKT−04	8.3	3.0	1.8	3.0	1000



電線固定座 WIRE MOUNT 6-107-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW




PART NO	A	B	C	PACKAGE
★ FAS−5A	5.2	1.4	1.8	1000




隔離束線座 WIRE SADDLE 6-107-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

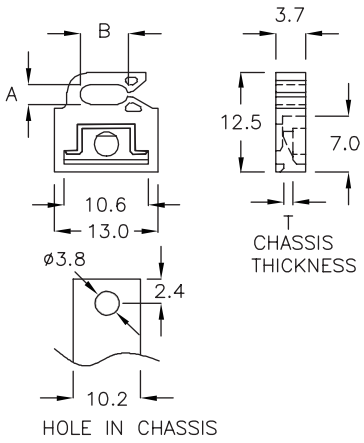


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
CTR−01	2.5	6.0	1.2~1.3	2000



隔離束線座 WIRE SADDLE 6-107-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

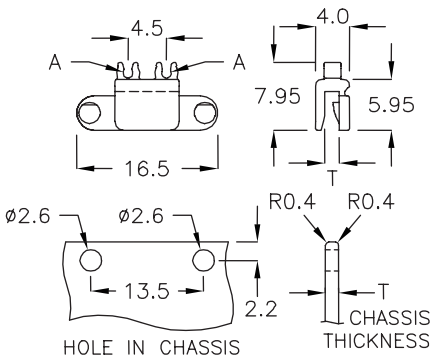


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CMM−1AS	ø1.1	1.6	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-108-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

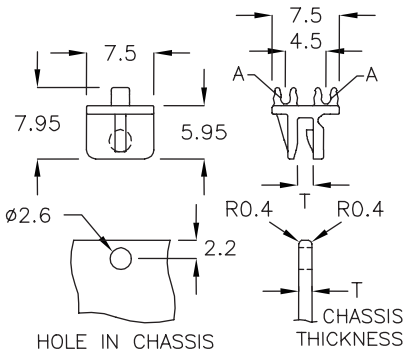


PART NO	A	T CHASSIS THICKNESS	PACKAGE
CMQ−1TJ	ø1.1	1.6	2000



電線固定座 WIRE MOUNT 6-108-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

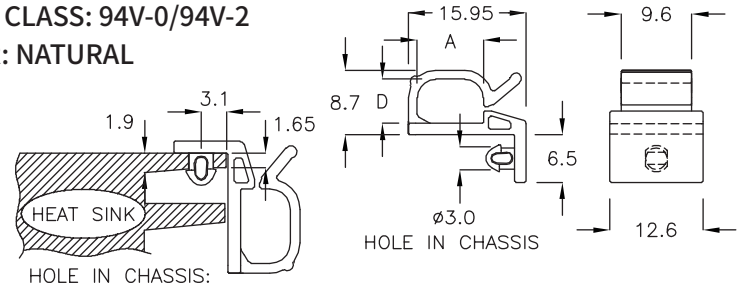


PART NO	A	D	PACKAGE
FAM−16	9.0	6.0	500



電線固定座 WIRE MOUNT 6-108-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

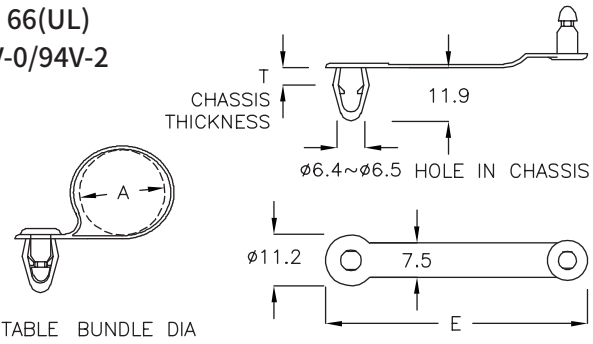


PART NO	A SUITABLE BUNDLE DIA	E	T CHASSIS THICKNESS	PACKAGE
PDT−06	ø5.0~ø6.5	47.6	0.8~2.4	500
PDT−08	ø7.0~ø8.5	53.6	0.8~2.4	
PDT−10	ø9.5~ø11.0	57.3	0.8~2.4	




電線固定座 WIRE MOUNT 6-108-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

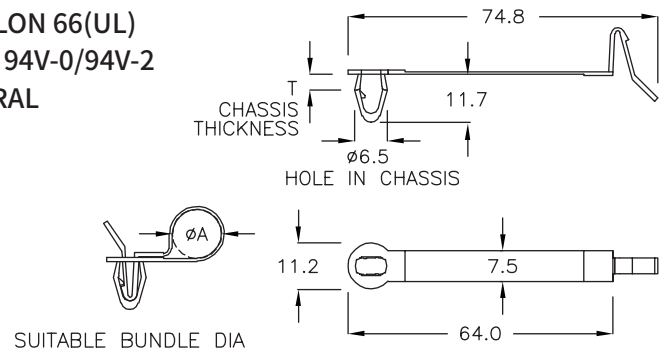


PART NO	A SUITABLE BUNDLE DIA	T CHASSIS THICKNESS	PACKAGE
PDT−1A	ø13.0	0.8~2.4	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-109-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

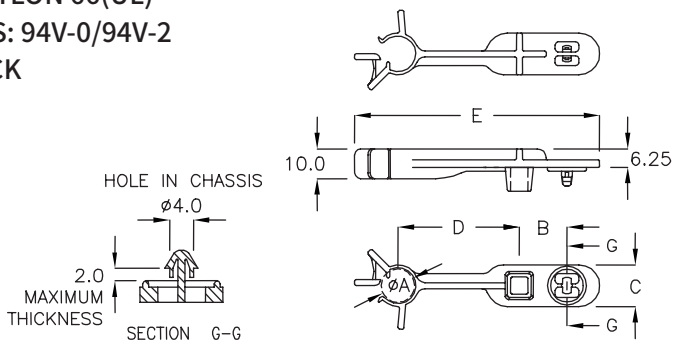


PART NO	A	B	C	D	E	PACKAGE
FLA–50	9.6	16.0	14.0	40.3	82.3	100



隔離束線座 WIRE SADDLE — 6-109-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

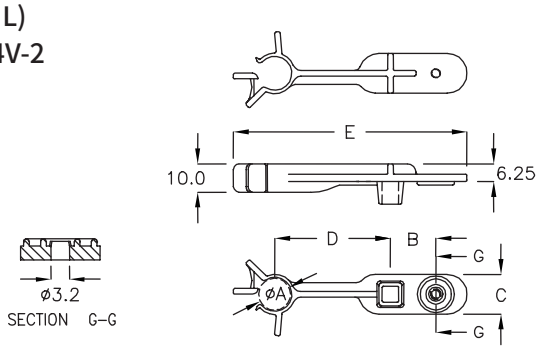


PART NO	A	B	C	D	E	PACKAGE
FLA–50A	9.6	16.0	14.0	40.3	82.3	100




電線固定夾 WIRE CLIP — 6-109-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

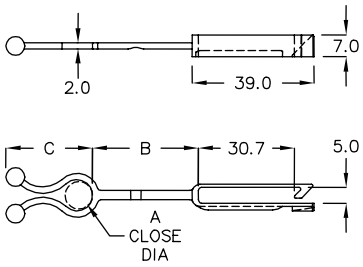


WITH LOCK FEATURE

PART NO	A CLOSE DIA	B	C	PACKAGE
CXT–10	ø8.8	33.6	27.8	100



電線固定座 WIRE MOUNT — 6-109-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

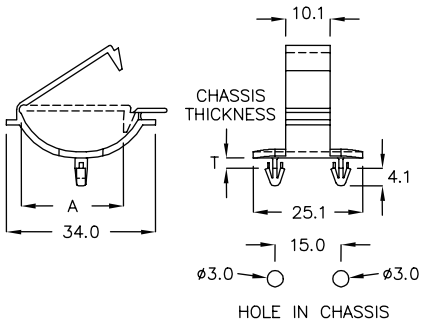

WITH LOCK FEATURE

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CKK–02	22.8	1.8~2.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




理線座 WIRE MOUNT 6-110-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
DFA-22C	22.5	500

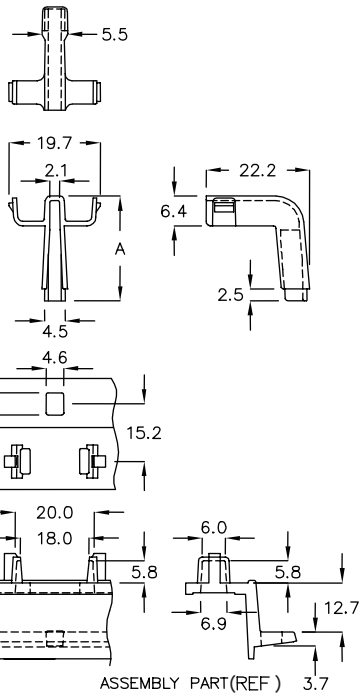


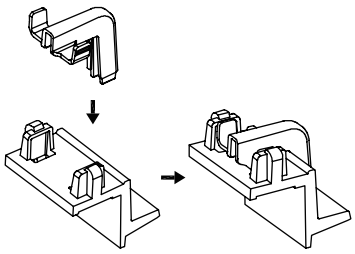



電線固定座 WIRE MOUNT 6-110-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

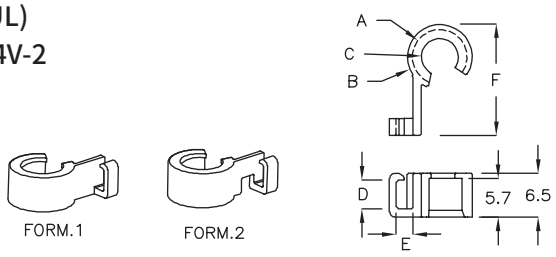


PART NO	A	B	C	D	E	F	FORM	PACKAGE
KYK-08	ø8.1	ø9.7	ø5.5	4.3	2.5	16.5	1	1000
KYK-10A	ø10.1	ø11.9	ø7.7	4.3	2.5	17.6	1	
KYK-11	ø10.1	ø11.9	ø7.7	4.3	2.5	17.6	2	
KYK-14D	ø12.1	ø14.1	ø9.7	4.3	2.5	20.7	2	



電線固定座 WIRE MOUNT 6-110-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
KYC-10RM	ø10.0	1000






電線固定座 WIRE MOUNT 6-110-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
KYF-10	ø10.1	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-111-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
KYF−10BQ	ø10.0	1000






電線固定座 WIRE MOUNT 6-111-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
KYM−10TP	ø10.4	1000

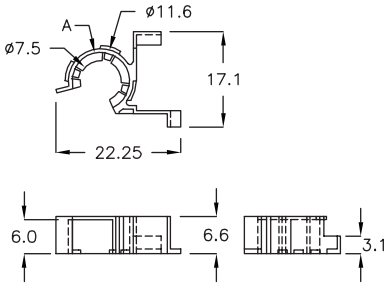




電線固定座 WIRE MOUNT 6-111-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	PACKAGE
KYR−10C	ø10.1	1000

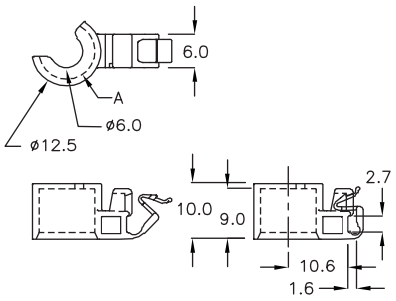




電線固定座 WIRE MOUNT 6-111-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	PACKAGE
KYR−10DA	ø10.1	1000

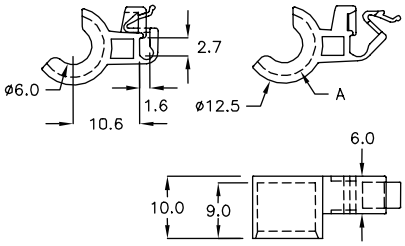




電線固定座 WIRE MOUNT 6-111-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	PACKAGE
KYT−08	ø7.9	1000

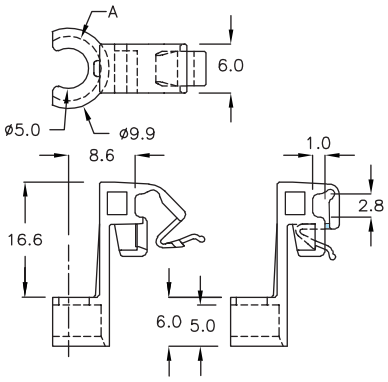

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-112-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	PACKAGE
KYT-8MY	ø7.9	1000

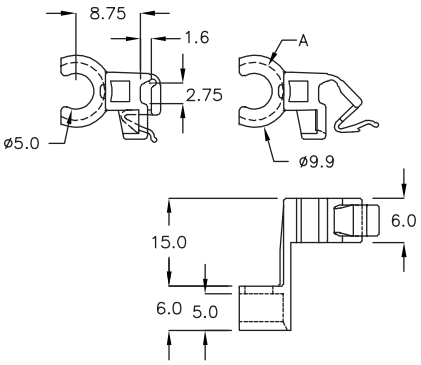




電線固定座 WIRE MOUNT 6-112-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	PACKAGE
KYW-8HL	ø7.9	1000

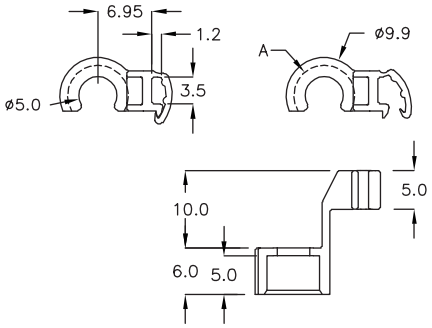




電線固定座 WIRE MOUNT 6-112-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

PART NO	A	PACKAGE
KYH-08	ø7.9	1000

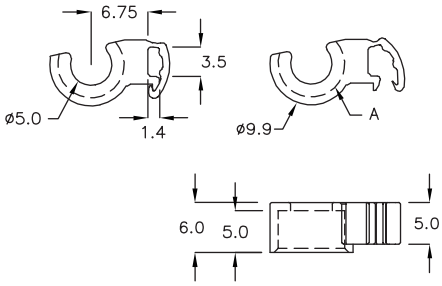




隔離束線座 WIRE SADDLE 6-112-4

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	PACKAGE
CIM-27A	ø3.8	1000

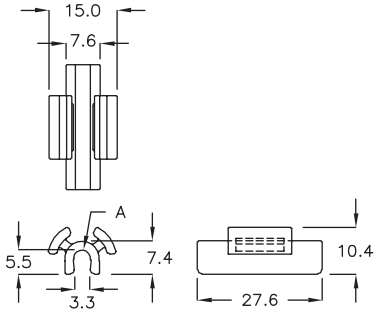





電線固定扣 WIRE MOUNT 6-112-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CHST-25	ø12.7	ø5.0	25.07	500
CHST-28	ø15.7	ø5.0	28.1	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定環 TWIST LOCK — 6-113-1


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



WITH LOCK FEATURE


E154548(S)

	PART NO	A	B	C	D	CLOSE DIA	UL	PACKAGE
	A−3DS	3.9	6.3	14.5	1.3	ø3.0		1000
	A−4A	4.4	7.2	14.95	1.6	ø3.5		
	A−5KA	5.3	8.7	18.05	1.65	ø4.2		
	A−5	5.0	8.5	22.0	1.8	ø4.2	UL	
	A−8	8.3	12.0	26.2	2.3	ø7.0	UL	
	A−11	11.0	15.2	30.0	2.3	ø9.7	UL	
	A−13	13.2	17.2	32.5	2.3	ø11.5		
	A−14A	14.7	18.7	35.0	2.0	ø13.2		
	A−15	14.7	18.8	33.0	2.0	ø13.0		
	A−15A	15.0	19.0	33.7	1.8	ø14.0		500
	A−18	19.2	23.3	38.5	2.0	ø16.3	UL	
	A−19	18.9	22.9	35.0	2.2	ø17.3		
	A−22	22.0	27.5	42.0	2.0	ø20.0	UL	
★	A−22K	22.4	27.4	40.1	2.0	ø20.0		
	A−25	25.0	29.7	44.8	2.35	ø23.0		
	A−28	28.7	33.5	55.0	2.0	ø26.6		
★	A−29	29.3	34.0	48.6	2.3	ø27.0		
	A−30	29.6	33.7	55.5	2.0	ø27.0		
	A−38	38.0	44.0	63.0	2.3	ø35.0		



電線固定環 TWIST LOCK — 6-113-2


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



WITH LOCK FEATURE


E154548

PART NO	A	B	C	D	CLOSE DIA	UL	PACKAGE
2A−7	7.0	32.7	73.8	1.9	ø5.9	UL	500
2A−7L	7.0	60.0	101.5	2.0	ø5.8		
2A−8	8.0	10.2	56.5	1.9	ø6.5	UL	
2A−10	10.0	30.4	82.2	2.0	ø8.6		
2A−10A	10.0	30.0	82.2	3.0	ø8.6		
2A−13S	14.8	85.0	147.8	2.0	ø12.2		200



隔離束線座 WIRE SADDLE — 6-113-3

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	PACKAGE
CHA−01	65.0	80.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-114-1

- MATERIAL: PP
- COLOR: NATURAL




PART NO	A	PACKAGE
6FW-11	22.0	100




光纖固定座 FIBER HOUSING — 6-114-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

PART NO	A	B	C SUITABLE CABLE DIA	PACKAGE
CKR-01	11.5	6.0	ø4.0 ~ ø4.2	1000



光纖固定座 FIBER HOUSING — 6-114-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 994V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

PART NO	A	B	C SUITABLE CABLE DIA	PACKAGE
CKR-02	15.0	5.3	ø5.3 ~ ø5.5	1000
CKR-3A	16.1	5.3	ø5.8 ~ ø6.0	




光纖固定座 FIBER HOUSING — 6-114-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

PART NO	A	B	C SUITABLE CABLE DIA	PACKAGE
CKR-1P	10.5	5.3	ø1.5~ø1.7	1000



電線固定座 TIE MOUNT — 6-114-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



WITH LOCK FEATURE


PART NO	A	C SUITABLE CABLE DIA	PACKAGE
CHH-01	8.0	ø8.6 ~ ø8.8	500
CHH-02	6.5	ø5.0 ~ ø5.2	1000
CHH-03	6.5	ø6.0 ~ ø6.2	
CHH-04	8.0	ø7.0 ~ ø7.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



線夾 TUBE BINDER 6-115-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

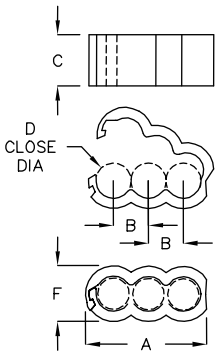


WITH LOCK FEATURE

PART NO	A	B	C	D CLOSE DIA	F	PACKAGE
FCM-20	14.2	4.1	6.0	ø4.0	6.9	1000
FCM-20C	8.9	2.3	5.0	ø2.0	4.0	



線夾 TUBE BINDER 6-115-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




WITH LOCK FEATURE

PART NO	A	B	C	D CLOSE DIA	F	PACKAGE
FQC-17B	19.1	7.15	6.0	ø4.6	8.5	1000
FQC-22D	25.8	7.15	6.0	ø6.7	11.2	



線夾 TUBE BINDER 6-115-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

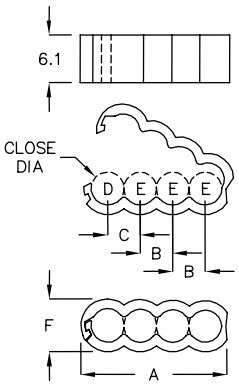


WITH LOCK FEATURE

PART NO	A	B	C	D CLOSE DIA	E CLOSE DIA	F	PACKAGE
FCM-20A	18.4	4.1	4.1	ø4.2	ø4.2	7.1	1000
FCM-20F	22.9	5.1	5.1	ø5.2	ø5.2	8.3	
FCM-20H	26.5	6.2	5.55	ø4.9	ø6.2	9.2	



線夾 TUBE BINDER 6-115-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

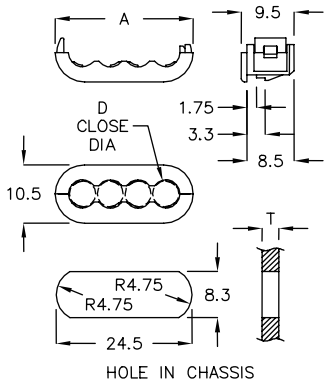

WITH LOCK FEATURE


PART NO	A	D CLOSE DIA	T CHASSIS THICKNESS	PACKAGE
FCH-24A	24.8	ø4.7~ø5.0	1.5 or 3.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定板 CABLE CLAMP — 6-116-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

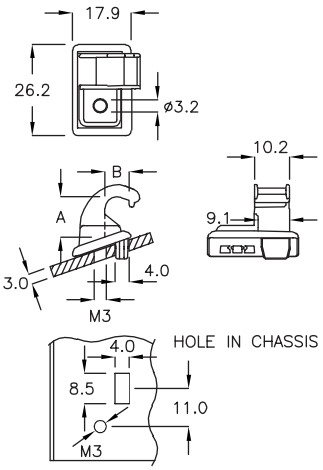


PART NO	A	B	PACKAGE
BAR-01	11.6	7.0	100



排線固定板 FLAT CABLE CLAMP — 6-116-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

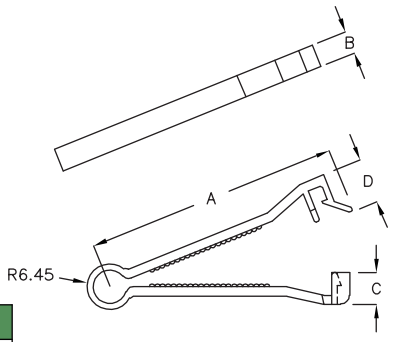


WITH LOCK FEATURE

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCM-35A	70.55	6.4	8.9	12.5	40 PIN	200



排線固定板 FLAT CABLE CLAMP — 6-116-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

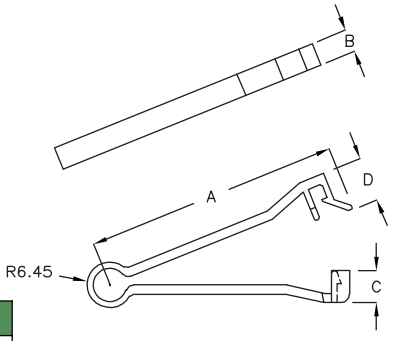


WITH LOCK FEATURE

PART NO	A	B	C	D	SUITABLE CABLE	PACKAGE
FCM-35S	62.55	6.4	8.9	12.5	30 PIN	200
FCM-35	70.55	6.4	8.9	12.5	40 PIN	
FCM-35M	97.65	7.9	8.9	12.7	60 PIN	100



隔離束線座 WIRE SADDLE — 6-116-4

- MATERIAL: NYLON 66+25%FRP
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

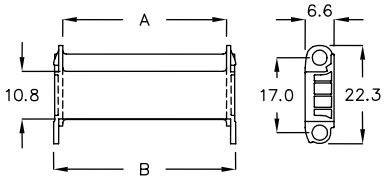


PART NO	A	B	PACKAGE
DFK-38A	38.0	42.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



塑膠拖鏈 CABLE CARRIER — 6-117-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK






PART NO	A	B	PACKAGE
DFG-16BL	16.0	22.5	200



電線固定座 WIRE SADDLE — 6-117-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	D	E	F	ASSEMBLE WITH P.G. PART	PACKAGE
AB-1S	12.8	7.0	5.8	3.0	ø3.3	4.1	YJ-80, YJ-90 YJ-98, YJ-100, YJ-120 YJ-142, YJ-142S, YJ-156 YJ-160, YJ-203, YJ-203S	1000
AB-1	15.3	9.9	6.6	3.4	ø3.5	5.2	YJ-80, YJ-90 YJ-98, YJ-100, YJ-115 YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205	1000
AB-1L	23.0	15.9	9.7	5.0	ø6.55	8.25		500


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6 or 4.8mm



電線固定座 WIRE SADDLE — 6-117-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

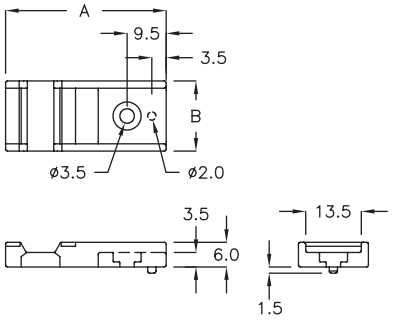


PART NO	A	B	PACKAGE
★ ABL-39C	39.0	17.0	200



電線固定座 WIRE SADDLE — 6-117-4


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

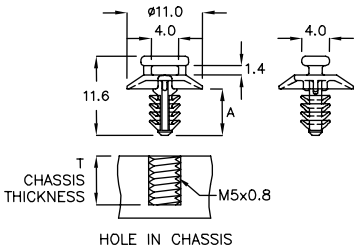

PART NO	A	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
MBDG-11C	6.8	7.5~8.5	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142S YJ-160, YJ-203S	500


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 CABLE SADDLE 6-118-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

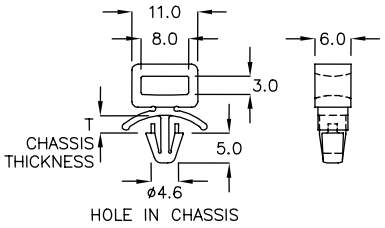


PART NO	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YLC-16T	0.8~2.0	YJ-80, YJ-90, YJ-98, YJ-100 YJ-115, YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205	500

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm




電線固定座 CABLE SADDLE 6-118-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

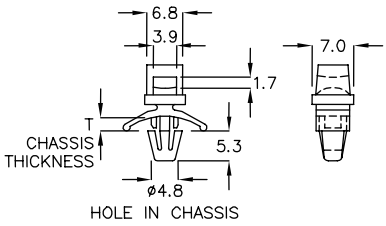


PART NO	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YL-1	0.8~2.0	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S	1000

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



電線固定座 CABLE SADDLE 6-118-3


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

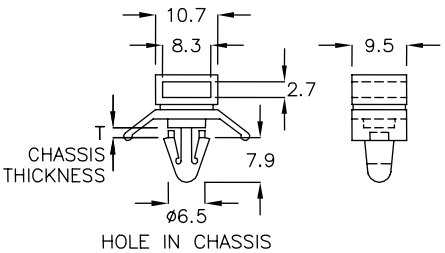

PART NO	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YL-06	1.6	YJ-80, YJ-90, YJ-98, YJ-100 YJ-115, YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205	500


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 CABLE SADDLE 6-119-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

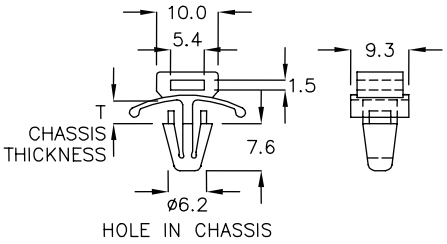


PART NO	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YLA-01	3.2	YJ-80, YJ-90, YJ-98 YJ-100, YJ-115, YJ-120 YJ-142S, YJ-156, YJ-160 YJ-203S, YJ-205	500

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



電線固定座 CABLE SADDLE 6-119-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

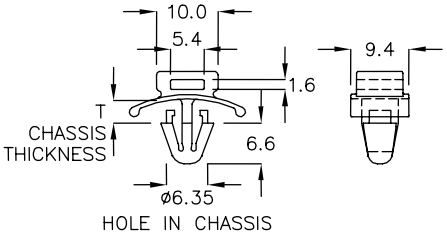


PART NO	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YLB-1J	1.2~2.5	YJ-80, YJ-90, YJ-98, YJ-100 YJ-115, YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205	500

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



電線固定座 CABLE SADDLE 6-119-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

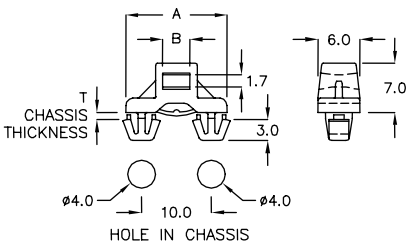

PART NO	A	B	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YLF-14BR	14.5	3.9	0.8	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S	500
YLF-14AJ	14.5	3.9	3.0		


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 CABLE SADDLE — 6-120-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	ASSEMBLE WITH P.G. PART	PACKAGE
YL-5	22.0	10.0	YJ-80, YJ-90, YJ-98, YJ-100 YJ-115, YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205	1000

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm




電線固定座 CABLE SADDLE — 6-120-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	G	ASSEMBLE WITH P.G. PART	PACKAGE
YL-3	19.5	9.5	4.8	5.3	1.4	ø3.5	2.2	YJ-80, YJ-90, YJ-98 YJ-100, YJ-115, YJ-120 YJ-140, YJ-142, YJ-142S YJ-156, YJ-160, YJ-203 YJ-203S, YJ-205	1000
YL-03A	19.05	9.65	5.1	5.05	1.6	ø4.5	2.0		
YL-3MC	21.0	11.5	5.2	5.3	1.8	ø5.2	2.0		

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



護線套 EDGING — 6-120-3


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
UTF-7A	7.5	5.8	3.0	YJ-80, YJ-90, YJ-98, YJ-100 YJ-115, YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205	1000


ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-121-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

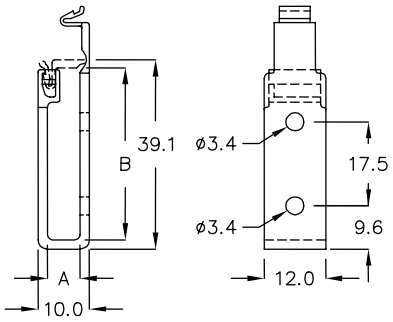

WITH LOCK FEATURE


PART NO	A	B	ASSEMBLE WITH P.G. PART	PACKAGE
CZD-39A	6.4	35.8	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142S YJ-160, YJ-203S	100

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 2.6mm



固定座 MOUNT — 6-121-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
FWK-23	23.0	28.0	9.8	19.6	200
FWK-25	25.0	30.0	10.0	20.0	
FWK-27	27.5	32.5	9.8	19.6	



固定座 MOUNT — 6-121-3

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
FWK-08	5.7	8.4	7.0	14.9	500



電線固定座 WIRE MOUNT — 6-121-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

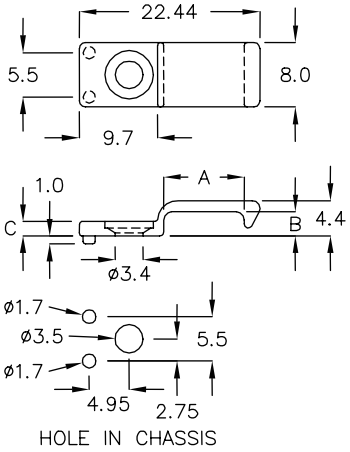

PART NO	A	B	C	PACKAGE
CKTW-10	10.0	3.0	1.8	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定板 WIRE CLAMP — 6-122-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW




	PART NO	A	B	C	D	E	F	PACKAGE
★	FSB-8C	4.95	2.1	17.4	ø2.2~ø3.0	8.0	5.0	500



電線固定座 WIRE MOUNT — 6-122-2

- MATERIAL: ABS+PC (UL)
- COLOR: BLACK
- WITH M3 SCREW

NEW

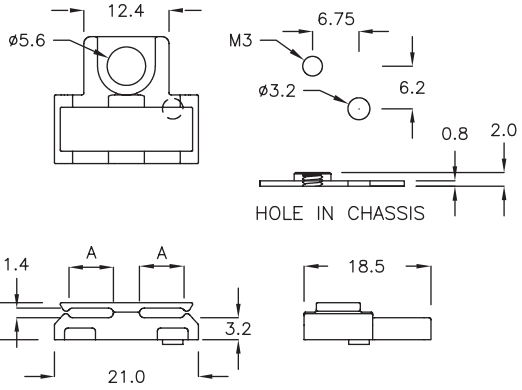


	PART NO	A	B	PACKAGE
★	FYCG-20C	6.5	5.4	200



電線固定板 WIRE CLAMP — 6-122-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
FSA-01	5.9	4.4	18.6	500



電線固定座 WIRE MOUNT — 6-122-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

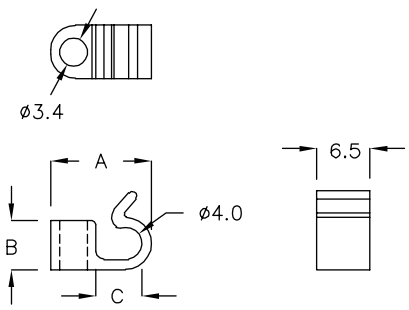


PART NO	A	B	C	PACKAGE
CHG-04	12.3	6.0	5.6	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




壓線固定板 WIRE CLAMP — 6-123-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL





FORM.2



FORM.1


此產品亦可貼背膠
OPTIONAL WITH ADHESIVE TAPE ON BASE

PART NO	A	B	C	D	E	F	G	FORM	PACKAGE
FSK-5A	3.0	1.8	12.8	2.0	5.0	5.0	10.0	1	1000
FSK-08	4.5	3.2	14.3	3.5	8.0	3.7	10.0	2	
FSK-10	5.5	4.1	15.3	4.5	10.0	3.7	10.0	2	500
FSK-10RP	6.5	5.0	16.0	5.5	10.0	3.0	9.3	2	
FSK-10KM	7.5	5.9	17.0	6.5	10.0	3.0	9.3	2	



隔離束線座 WIRE SADDLE — 6-123-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

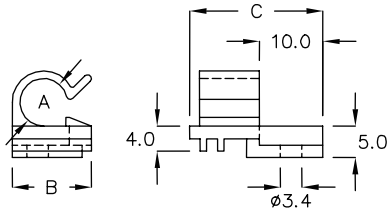



PART NO	A	B	C	PACKAGE
CHF-7	ø7.5	12.5	21.0	500




隔離束線座 WIRE SADDLE — 6-123-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

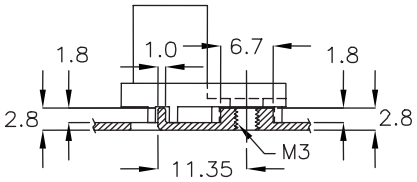

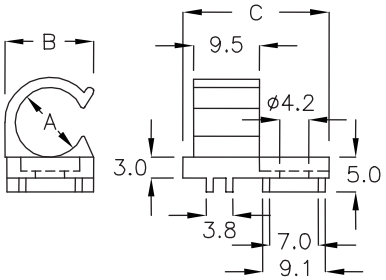



PART NO	A	B	C	PACKAGE
CHF-7A	ø10.0	12.8	21.0	500



電線固定座 WIRE MOUNT — 6-123-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 or #6-32 SCREW



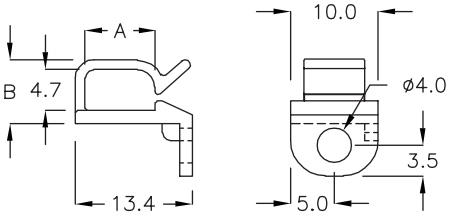


PART NO	A	B	PACKAGE
FAC-01	8.0	7.3	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-124-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 or #6-32 SCREW

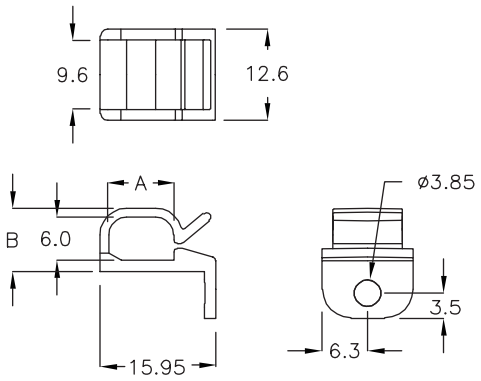


PART NO	A	B	PACKAGE
FAC-02	9.0	8.7	1000



電源線固定座 POWER CORD MOUNTING — 6-124-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

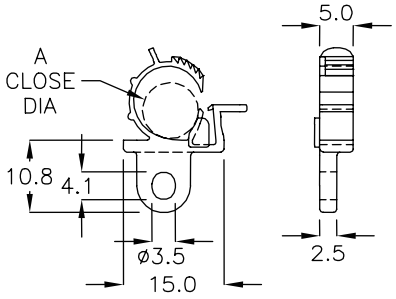


PART NO	A	PACKAGE
FWI-8CM	ø7.5~ø8.3	100




電線固定座 WIRE MOUNT — 6-124-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

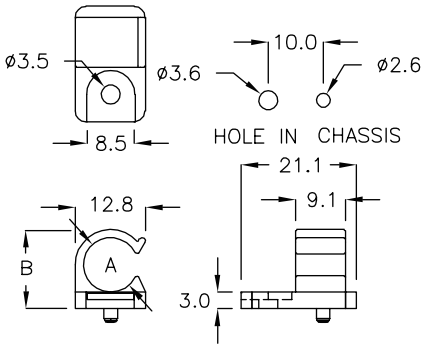


PART NO	A	B	PACKAGE
FAF-10	ø10.0	14.5	500



電線固定座 WIRE MOUNT — 6-124-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

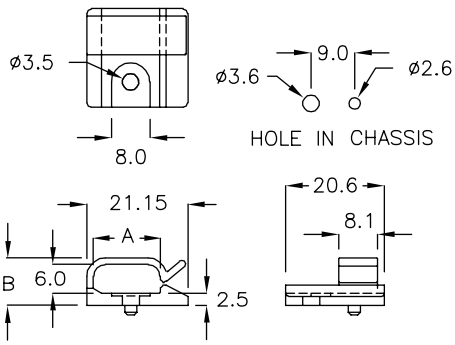

PART NO	A	B	PACKAGE
FAG-01	14.0	9.9	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-125-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

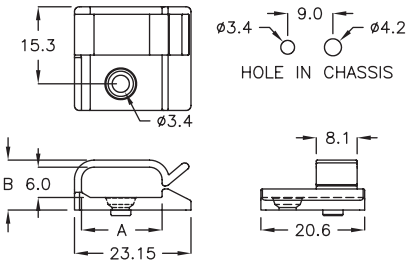


	PART NO	A	B	PACKAGE
★	FAP-23C	16.0	9.9	500




電線固定座 WIRE MOUNT 6-125-2

- MATERIAL: ABS+PC (UL)
- COLOR: BLACK
- WITH M3 SCREW

NEW

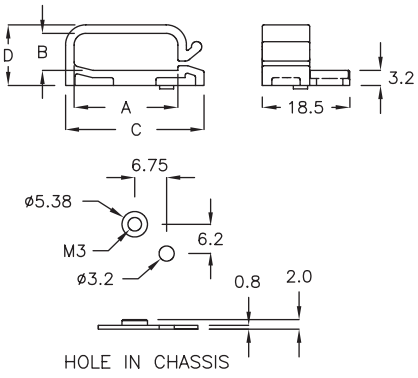


	PART NO	A	B	C	D	PACKAGE
★	FYCS-7H	22.0	7.9	29.3	12.9	200
★	FYCS-15H	22.0	15.0	25.8	20.0	



隔離束線座 WIRE SADDLE 6-125-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

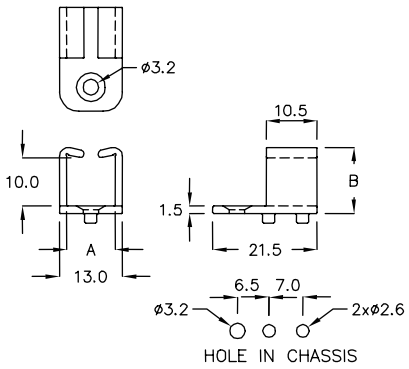


PART NO	A	B	PACKAGE
CHF-10A	10.0	13.6	200



隔離束線座 WIRE SADDLE 6-125-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

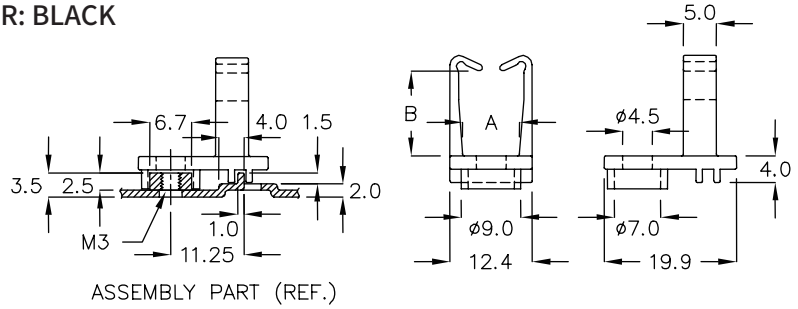


PART NO	A	B	PACKAGE
CHF-11	8.0	12.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-126-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

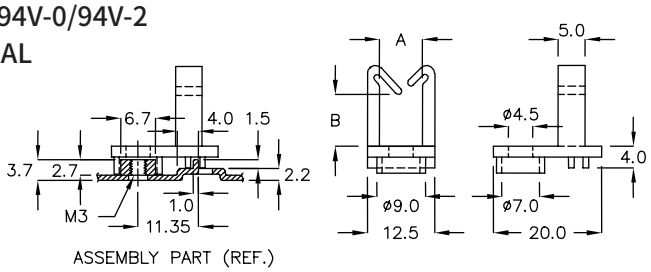


PART NO	A	B	PACKAGE
CHF−11E	8.0	11.2	500




隔離束線座 WIRE SADDLE — 6-126-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

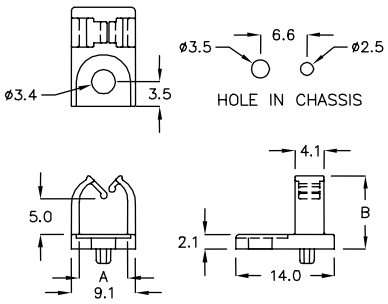


PART NO	A	B	PACKAGE
CHFB−7A	6.9	10.4	500



隔離束線座 WIRE SADDLE — 6-126-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

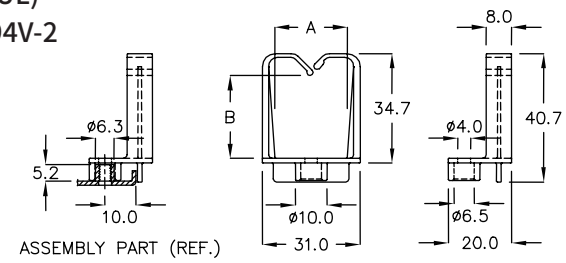


PART NO	A	B	PACKAGE
CHFM−27SJ	23.0	26.0	100




隔離束線座 WIRE SADDLE — 6-126-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW




PART NO	A	B	PACKAGE
CNFK−11T	11.1	16.6	500




隔離束線座 WIRE SADDLE — 6-126-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 or #6-32 SCREW




PART NO	A	B	PACKAGE
CNF−11	11.1	18.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE 6-127-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

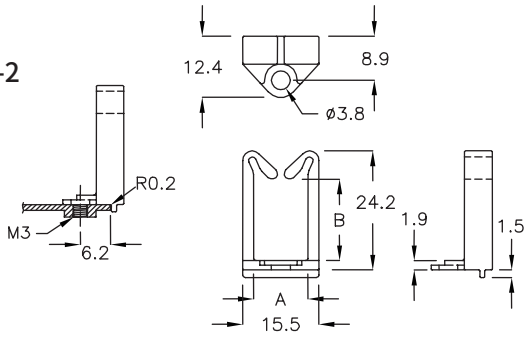


PART NO	A	B	PACKAGE
CNFA−11GS	11.1	16.6	500



隔離束線座 WIRE SADDLE 6-127-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW




PART NO	A	B	PACKAGE
CNF−12R	12.0	18.5	500



隔離束線座 WIRE SADDLE 6-127-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

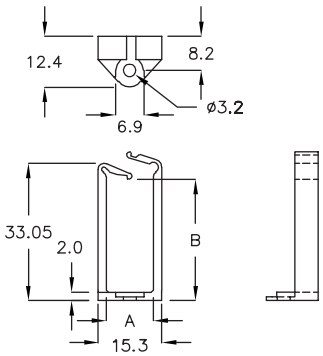


PART NO	A	B	PACKAGE
CNK−11DY	11.3	29.2	200



隔離束線座 WIRE SADDLE 6-127-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




PART NO	A	B	PACKAGE
CNK−11PH	11.3	46.1	100



隔離束線座 WIRE SADDLE 6-127-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

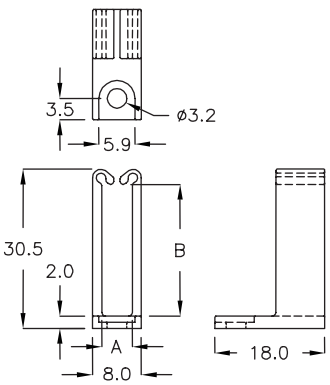


PART NO	A	B	PACKAGE
CNTF−5HY	5.0	26.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT 6-128-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

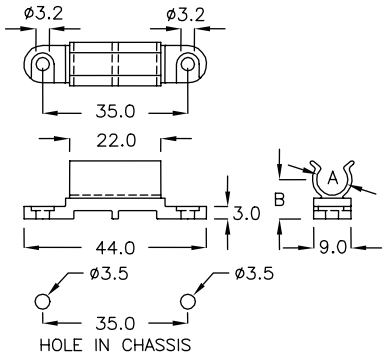


PART NO	A	B	PACKAGE
CMS-22JC	ø7.5	9.5	500



隔離束線座 WIRE SADDLE 6-128-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE
- WITH M3 SCREW

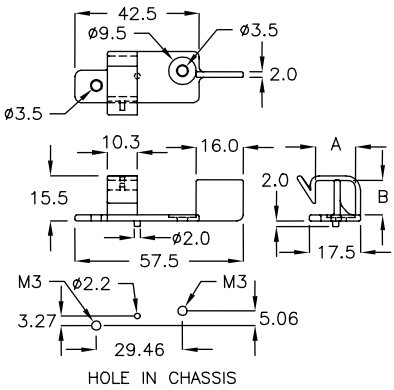


PART NO	A	B	PACKAGE
CHFK-11JS	13.8	11.9	500



電線固定座 WIRE MOUNT 6-128-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




PART NO	A	B	PACKAGE
CNR-31A	ø7.0	10.8	500



電線固定座 TIE MOUNT 6-128-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

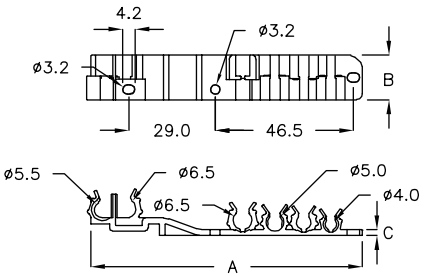


PART NO	A	B	C	PACKAGE
CTT-91	91.2	15.0	2.0	200



電線固定座 WIRE MOUNT 6-128-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




PART NO	A	B	C	D	PACKAGE
FW-12C	ø12.0	13.7	8.9	17.0	500
FW-08A	ø16.0	15.5	9.3	19.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-129-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  WITH M3 SCREW

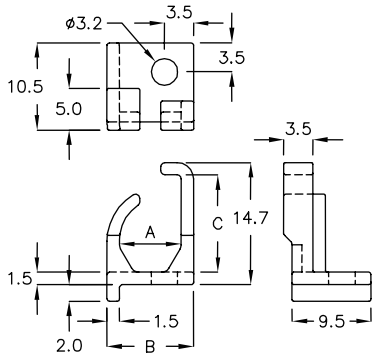


PART NO	A	B	C	PACKAGE
CHFW−7A	ø7.2	10.4	11.7	500



隔離束線座 WIRE SADDLE — 6-129-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

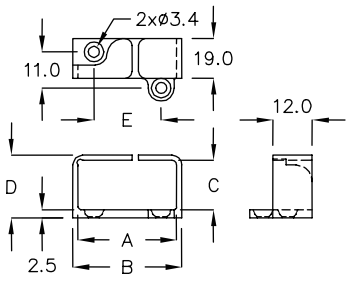


PART NO	A	B	C	D	E	PACKAGE
CNQ−30A	30.0	33.2	15.0	19.1	20.5	500
CNQ−40K	40.0	43.2	8.0	12.1	30.0	



隔離束線座 WIRE SADDLE — 6-129-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2.5 COUNTERSUNK SCREW

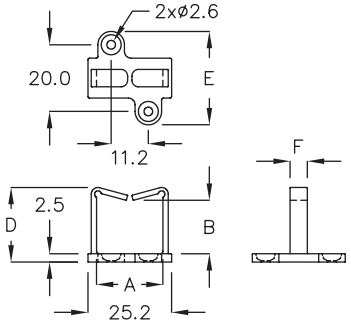


PART NO	A	B	D	E	F	PACKAGE
CNW−20AM	20.0	18.7	25.1	28.6	7.5	100
CNW−20TP	20.0	10.7	17.1	28.0	5.2	



隔離束線座 WIRE SADDLE — 6-129-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

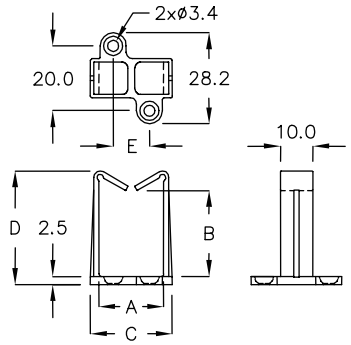

PART NO	A	B	C	D	E	PACKAGE
CNW−19AT	19.8	16.5	25.0	25.0	11.2	500
CNW−20K	20.0	26.5	25.2	35.0	14.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE — 6-130-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

	PART NO	A	B	C	E	PACKAGE
★	CNWB-20	20.0	26.5	25.0	13.8	500
★	CNWB-24C	24.8	26.5	30.0	18.8	

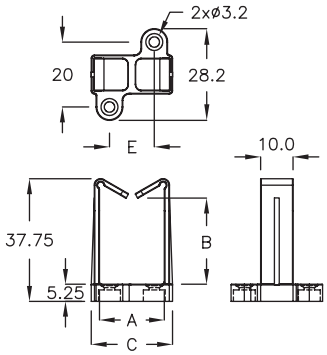




隔離束線座 WIRE SADDLE — 6-130-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

PART NO	A	B	PACKAGE
CNW-35H	35.0	26.7	100






隔離束線座 WIRE SADDLE — 6-130-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

PART NO	A	B	PACKAGE
CNWA-15B	15.5	31.7	200

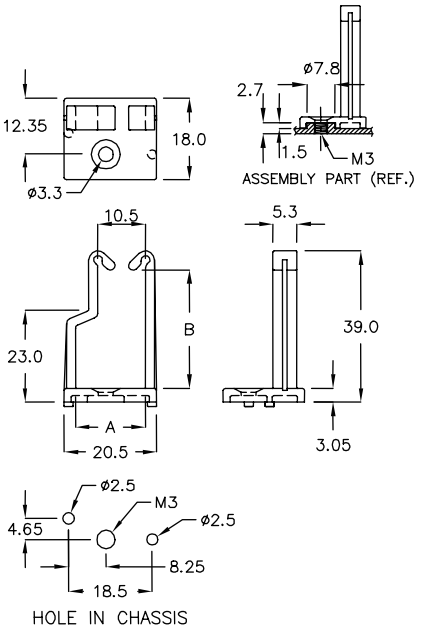




隔離束線座 WIRE SADDLE — 6-130-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

PART NO	A	B	PACKAGE
CNWF-15A	15.2	27.5	200

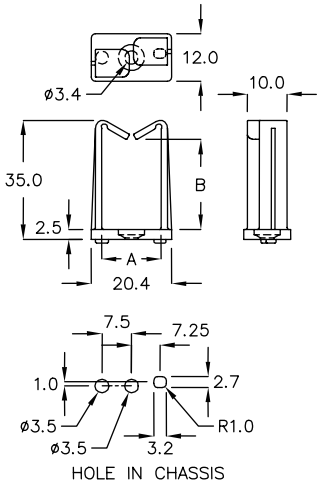


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-131-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

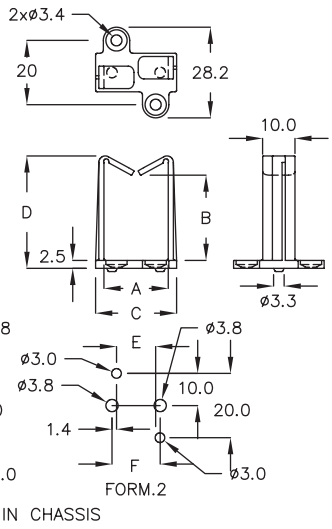


	PART NO	A	B	C	D	E	F	FORM	PACKAGE
★	CNWH-19C	19.8	16.5	25.0	25.0	11.2	11.2	1	500
	CNWZ-20D	20.0	26.5	25.2	35.0	12.2	15.0	2	



隔離束線座 WIRE SADDLE — 6-131-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

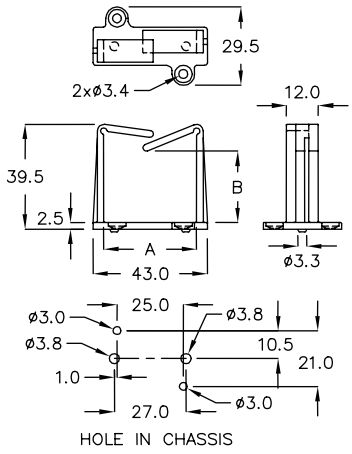


PART NO	A	B	PACKAGE
CNWZ-35M	35.0	26.9	100



隔離束線座 WIRE SADDLE — 6-131-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

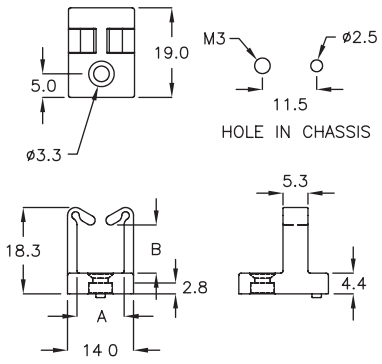


	PART NO	A	B	PACKAGE
★	CKFC-10A	10.0	10.0	100



隔離束線座 WIRE SADDLE — 6-131-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

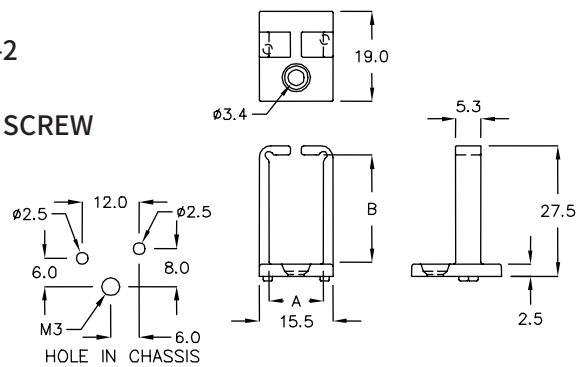

PART NO	A	B	PACKAGE
CNWG-11C	11.5	23.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE — 6-132-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

	PART NO	A	B	PACKAGE
★	CHFN-11C	11.3	27.2	200

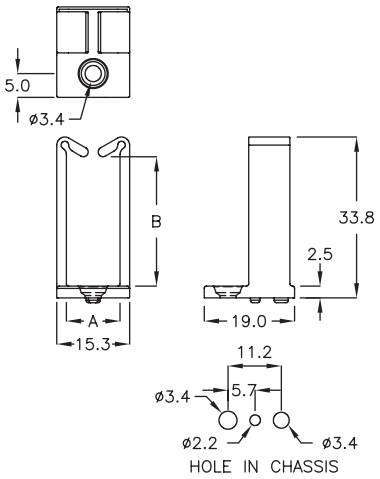




隔離束線座 WIRE SADDLE — 6-132-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	PACKAGE
★	CNWB-11F	11.5	16.3	1000

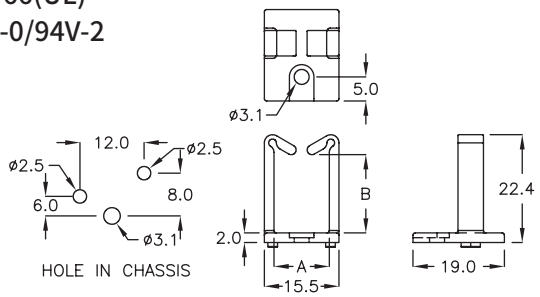




電線固定座 WIRE MOUNT — 6-132-3

- MATERIAL: ABS+PC
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	PACKAGE
★	FYCB-12C	12.3	22.0	200

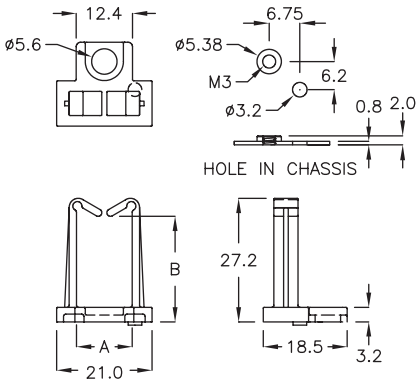





隔離束線座 WIRE SADDLE — 6-132-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

PART NO	A	B	C	D	PACKAGE
CNH-22DC	22.8	24.0	31.5	28.8	100
CNH-28MG	28.6	40.4	53.2	35.0	

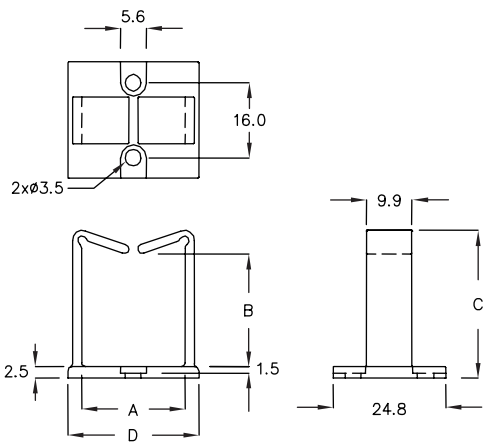

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定座 WIRE MOUNT — 6-133-1

- MATERIAL: ABS+PC(UL)
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	PACKAGE
★	FYCH-20A	20.8	31.5	200

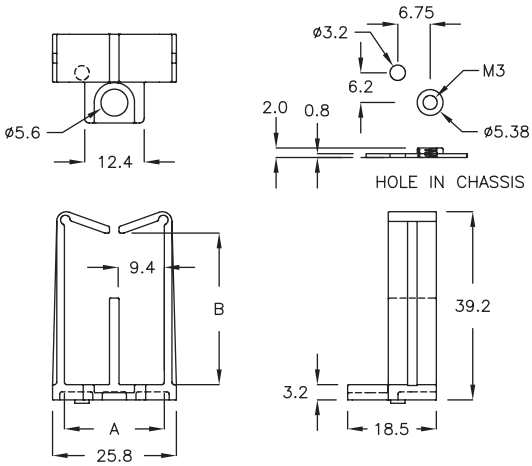




電線固定座 WIRE MOUNT — 6-133-2

- MATERIAL: ABS+PC
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	PACKAGE
★	FYCD-25C	22.7	15.4	200

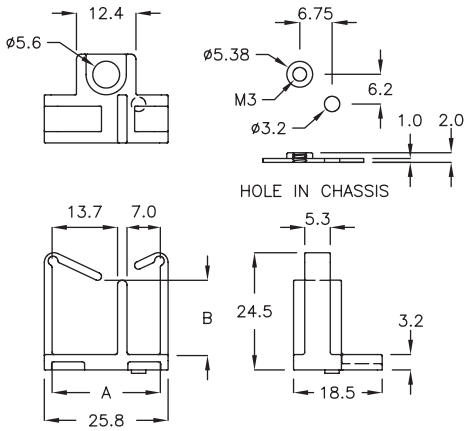




隔離束線座 WIRE SADDLE — 6-133-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	PACKAGE
★	CNHD-11S	11.5	19.9	200

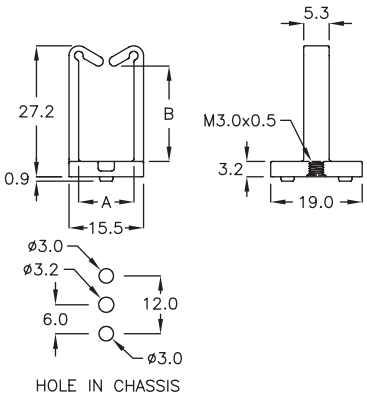




隔離束線座 WIRE SADDLE — 6-133-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	C	D	PACKAGE
★	PACD-32F	34.0	25.5	38.0	31.1	100

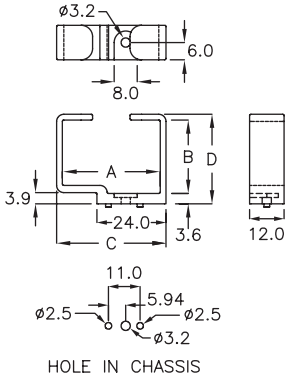


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE 6-134-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

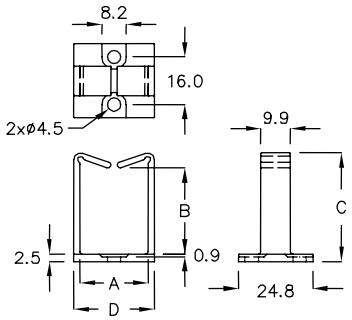


PART NO	A	B	C	D	PACKAGE
CNHB–22A	22.8	29.0	36.5	26.8	100




隔離束線座 WIRE SADDLE 6-134-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW

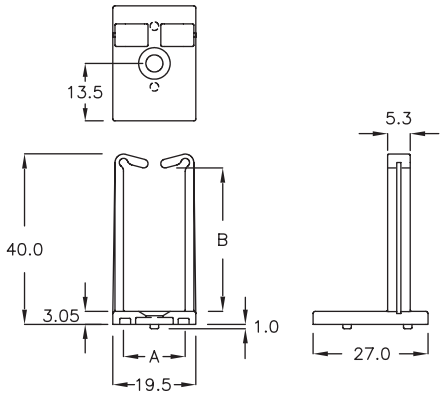




HOLE IN CHASSIS


PART NO	A	B	PACKAGE
★ CKFA–14A	14.5	33.7	100



隔離束線座 WIRE SADDLE 6-134-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2/M4 COUNTERSUNK SCREW

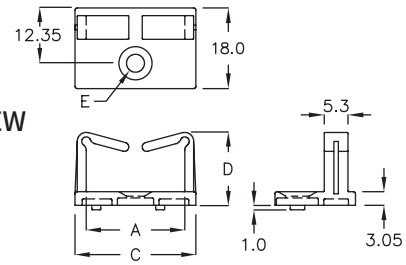



HOLE IN CHASSIS


PART NO	A	C	D	E SCREW	PACKAGE
CKFA–22A	22.0	27.0	22.0	M4	100
★ CKFA–22B	22.0	27.0	30.0	M4	
★ CKFA–22TG	22.0	27.0	30.0	M2	
★ CKFA–25C	25.5	31.5	18.5	M4	




隔離束線座 WIRE SADDLE 6-134-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW

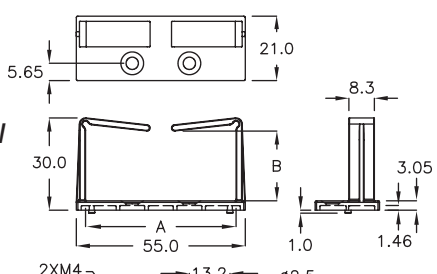



HOLE IN CHASSIS

PART NO	A	B	PACKAGE
★ CKFB–49D	49.0	22.7	100


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-135-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW




	PART NO	A	B	PACKAGE
★	CHFY−8C	8.3	4.85	500



隔離束線座 WIRE SADDLE — 6-135-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

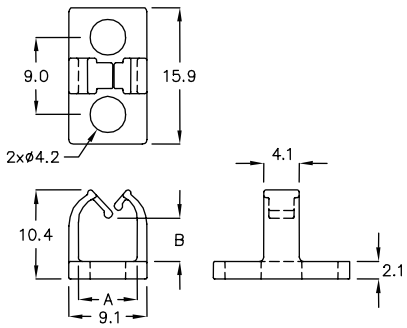


PART NO	A	B	PACKAGE
CHFG−6AB	6.9	5.0	1000



隔離束線座 WIRE SADDLE — 6-135-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

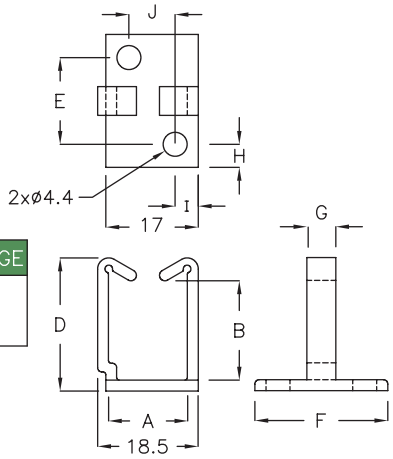


	PART NO	A	B	D	E	F	G	H	I	J	PACKAGE
★	ABP−10W	14.5	32.9	39.1	16.9	26.4	10.0	4.75	4.85	7.3	200
	ABP−13C	14.5	20.9	27.1	19.9	28.4	5.3	4.25	4.25	8.5	



隔離束線座 WIRE SADDLE — 6-135-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

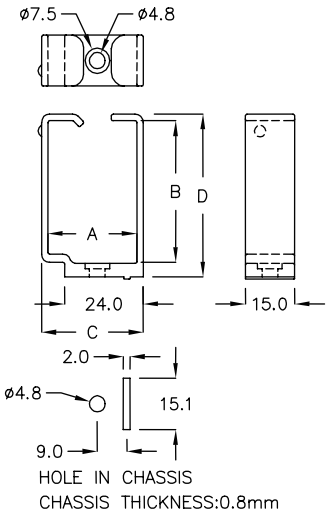

PART NO	A	B	C	D	PACKAGE
PACB−51Q	27.0	44.7	31.0	50.7	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





隔離束線座 WIRE SADDLE 6-136-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW

PART NO	A	B	C	D	PACKAGE
★ PACA-58D	33.0	52.5	37.0	57.55	100

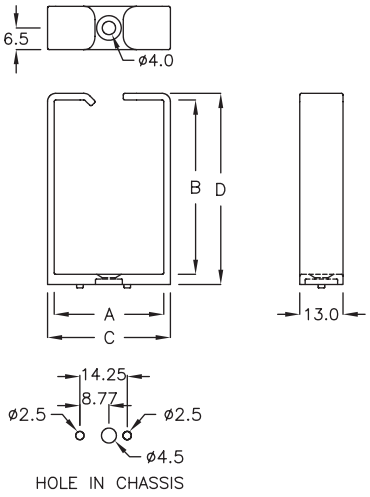




隔離束線座 WIRE SADDLE 6-136-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2 COUNTERSUNK SCREW

NEW

PART NO	A	B	C	D	PACKAGE
★ PACF-120A	36.0	115.0	40.0	120.0	50

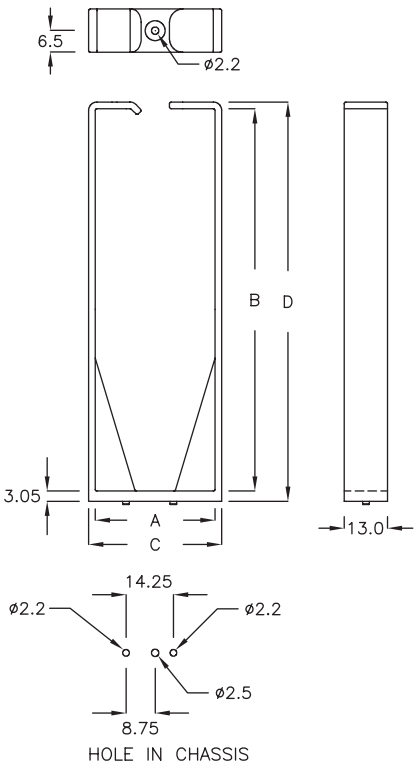




隔離束線座 WIRE SADDLE 6-136-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

PART NO	A	B	C	D	PACKAGE
★ CNWK-38A	14.0	31.0	38.5	17.8	100

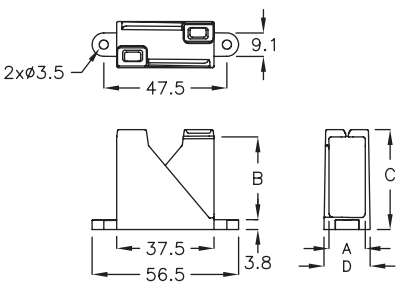


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-137-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

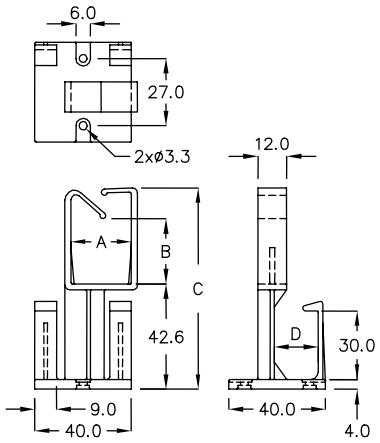


PART NO	A	B	C	D	PACKAGE
CNHA−25SK	25.0	31.0	85.7	18.25	50



排線固定座 FLAT CABLE CLIP — 6-137-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
FCM−01	29.1	4.5	6.0	500



電線固定座 WIRE MOUNT — 6-137-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

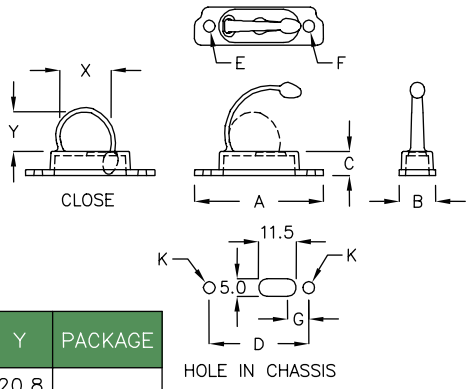

WITH LOCK FEATURE


PART NO	A	B	C	D	E	F	G	K SCREW	X	Y	PACKAGE
CMD−3H	44.0	13.0	8.5	34.0	ø4.0	ø4.0	9.3	M3	18.0	20.8	200
CMD−3KZ	44.0	13.0	8.5	34.0	ø3.0	ø3.0	9.3	M2.5	18.0	20.8	
CMD−08	44.0	12.5	8.0	34.0	ø4.0	ø4.0	9.5	M3	14.7	11.0	
CMD−8F	44.0	13.0	8.5	34.0	ø3.8	ø3.8	9.3	M3	16.0	14.2	
CMD−8TM	56.0	15.0	8.5	46.0	3.2x4.0	ø3.2	10.8	M3	23.0	16.0	



電線固定座 WIRE MOUNT — 6-137-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2 SCREW

NEW

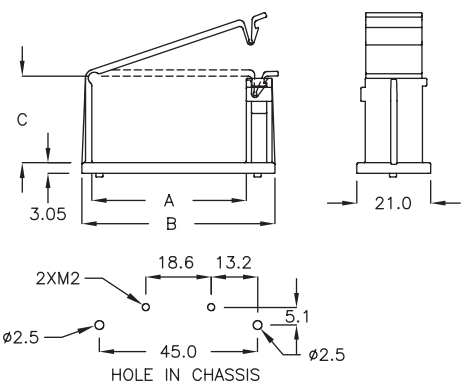

WITH LOCK FEATURE


PART NO	A	B	C	PACKAGE
★ FCE−55B	44.0	54.9	24.6	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-138-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

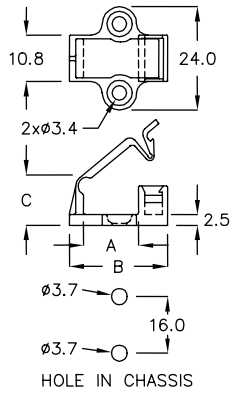


WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
FCNQ-22BS	12.8	22.8	11.7	100



電線固定座 WIRE MOUNT — 6-138-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

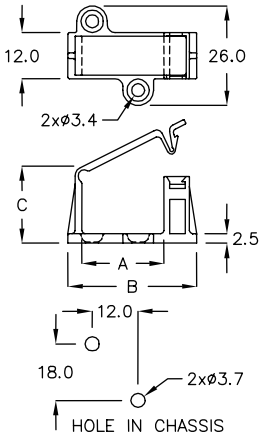


WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
FCJS-33TY	21.5	33.7	20.2	100



電線固定板 CABLE CLAMP — 6-138-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL
- WITH M3 COUNTERSUNK SCREW

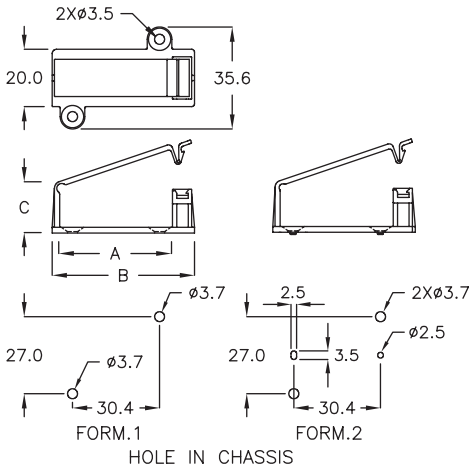


WITH LOCK FEATURE

PART NO	A	B	C	FORM	PACKAGE
FAK-39LY	39.4	49.7	18.0	1	100
★ FAKT-39C	39.4	49.7	18.0	2	



電線固定板 CABLE CLAMP — 6-138-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

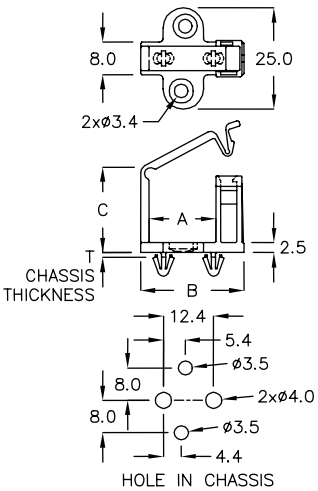

WITH LOCK FEATURE


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
FCJK-16A	16.5	25.5	27.0	1.0	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定板 CABLE CLAMP — 6-139-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW






WITH LOCK FEATURE


PART NO	A	B	C	PACKAGE
FAKT-22C	22.0	29.4	12.3	100



電線固定座 WIRE MOUNT — 6-139-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW






WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
FCWB-63TM	41.35	63.1	9.2	100
FCWB-63GS	41.35	63.1	13.8	



電線固定座 WIRE MOUNT — 6-139-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

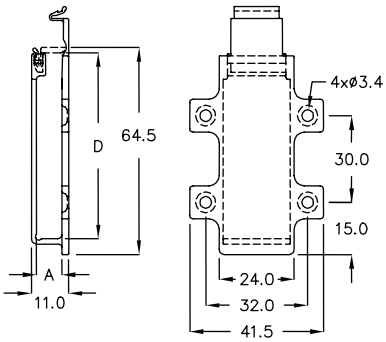


WITH LOCK FEATURE


PART NO	A	D	PACKAGE
CZG-52FA	7.5	58.0	100



電線固定座 WIRE MOUNT — 6-139-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW





WITH LOCK FEATURE


PART NO	A	B	C	PACKAGE
FCE-18A	18.5	26.15	9.7	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

電線固定板 CABLE CLAMP — 6-140-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH #6-32(FLAT) SCREW

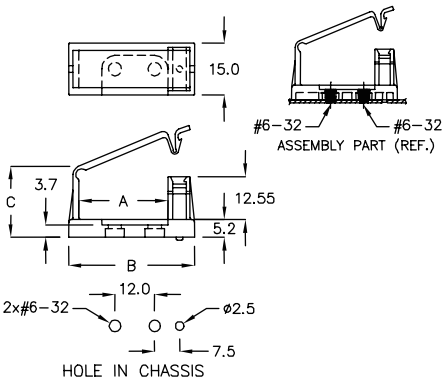


WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
FCWG–27A	26.9	38.0	20.6	100

電線固定板 CABLE CLAMP — 6-140-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

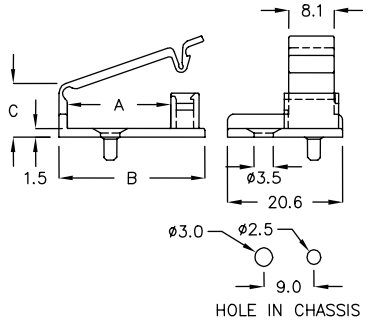


WITH LOCK FEATURE

PART NO	A	B	C	PACKAGE
FCWY–18T	18.5	26.15	8.9	100

電線固定座 WIRE MOUNT — 6-140-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

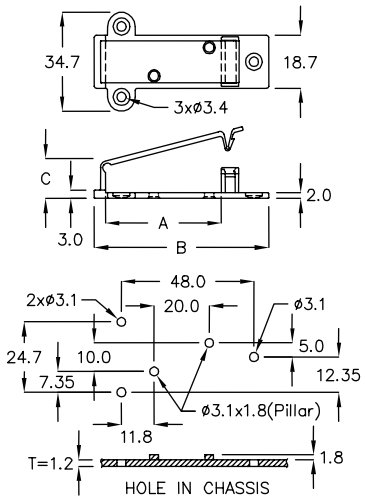

WITH LOCK FEATURE


PART NO	A	B	C	PACKAGE
FCWC–63AT	42.05	63.1	13.1	100

電線固定座 WIRE MOUNT — 6-140-4



- MATERIAL: ABS+PC
- COLOR: BLACK

NEW

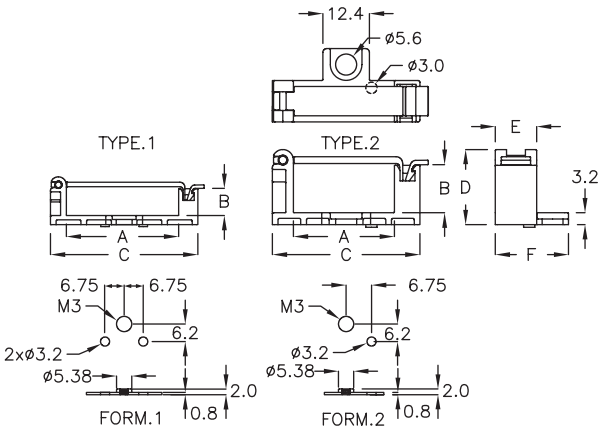

	PART NO	A	B	C	D	E	F	FORM	PACKAGE
★	FMT–26C	26.9	13.1	39.3	20.0	11.0	19.5	1	100
★	FMT–39C	39.7	10.0	52.1	16.9	14.6	23.1	2	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-141-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW



WITH LOCK FEATURE


	PART NO	A	B	C	PACKAGE
★	CKFN−18	18.0	22.0	22.7	200



隔離束線座 WIRE SADDLE — 6-141-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

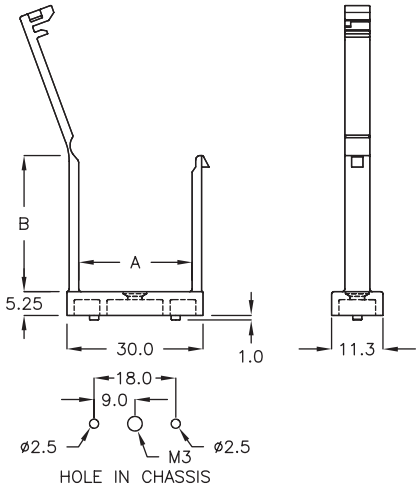


	PART NO	A	B	PACKAGE
★	CKFM−25	25.0	30.0	500




隔離束線座 WIRE SADDLE — 6-141-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

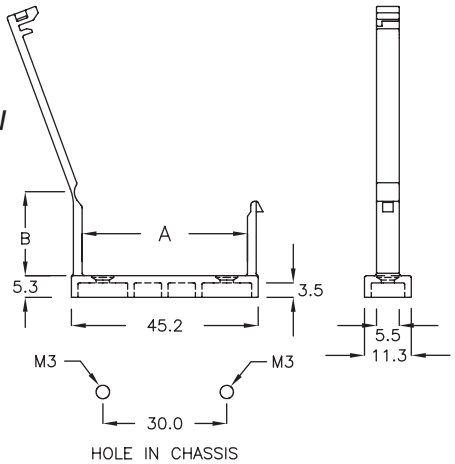


	PART NO	A	B	PACKAGE
★	CKFM−40	40.0	18.0	100



隔離束線座 WIRE SADDLE — 6-141-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M4 COUNTERSUNK SCREW

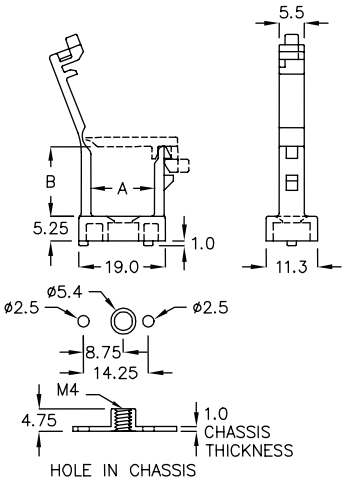

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
CKFM−14QR	14.0	17.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE — 6-142-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

	PART NO	A	B	C	PACKAGE
★	CKMZ−17A	37.4	10.2	14.8	200

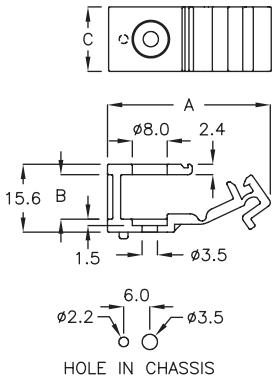





隔離束線座 WIRE SADDLE — 6-142-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW

	PART NO	A	B	PACKAGE
★	CKMY−77C	76.2	15.6	100

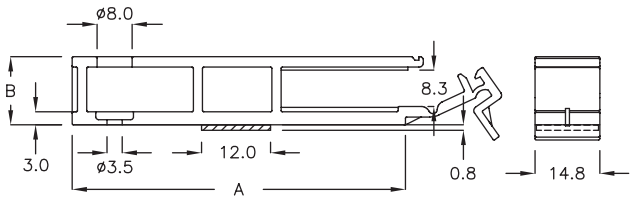




固定座 MOUNT — 6-142-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2 COUNTERSUNK SCREW

PART NO	A	PACKAGE
MMCB−13A	28.0	500

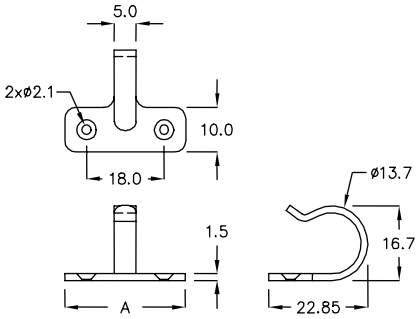




電線固定座 WIRE MOUNT — 6-142-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2 COUNTERSUNK SCREW

PART NO	A	B	PACKAGE
CNJ−19MT	5.5	8.0	500

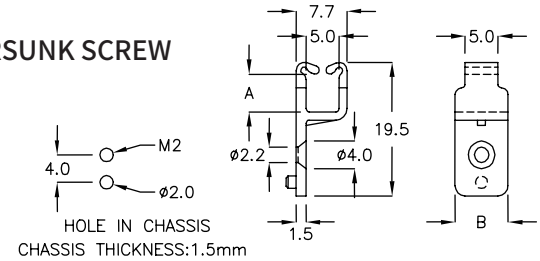


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




隔離束線座 WIRE SADDLE — 6-143-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
ABGX-13C	3.1	12.0	1000

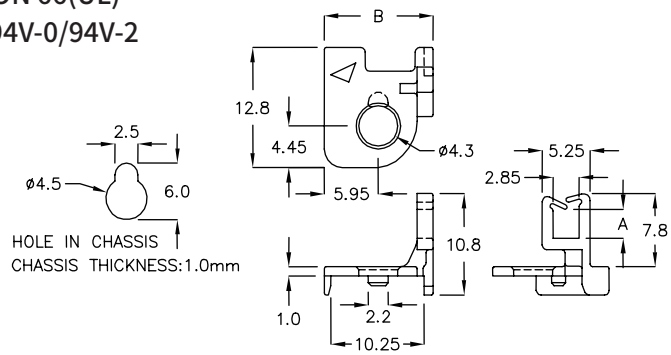




電線固定座 WIRE MOUNT — 6-143-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
KYA-17	5.7	9.5	1000

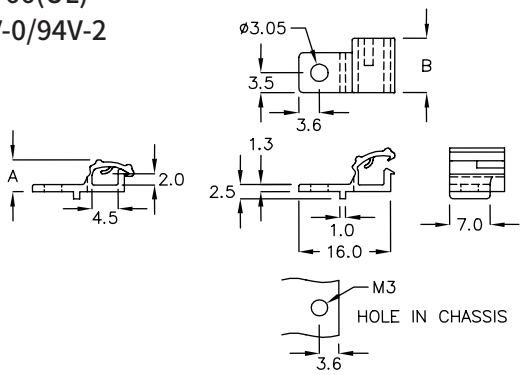




電線固定座 WIRE MOUNT — 6-143-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
CYX-121	14.7	24.2	8.4	0.6	200
CYX-121KP	19.7	29.2	13.4	0.6	

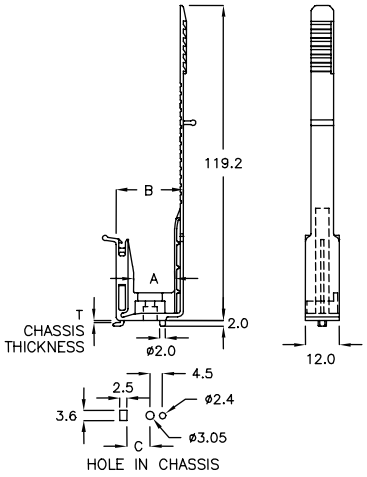




電線固定座 WIRE MOUNT — 6-143-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 TAPPING SCREW

WITH LOCK FEATURE

PART NO	A	B	PACKAGE
CAF-8A	8.7	8.0	500

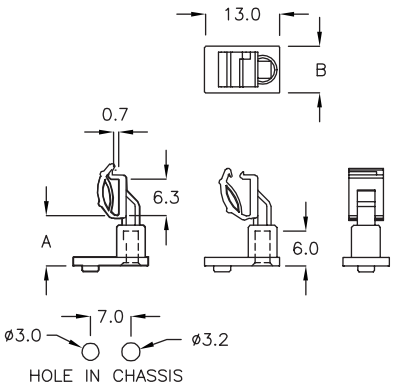


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT 6-144-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
CMP-21A	14.0	5.2	500




隔離束線座 WIRE SADDLE 6-144-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

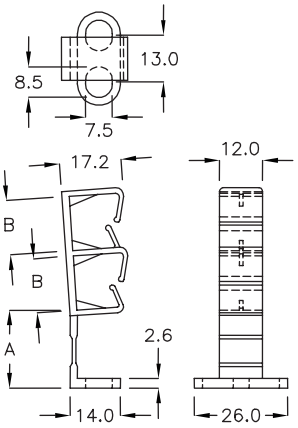


PART NO	A	B	PACKAGE
2CH-15	21.7	15.0	100




隔離束線座 WIRE SADDLE 6-144-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

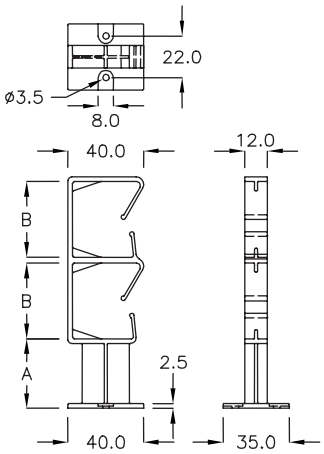


PART NO	A	B	PACKAGE
2CH-40MP	36.7	40.3	50



隔離束線座 WIRE SADDLE 6-144-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M



PART NO	A	B	PACKAGE
2CH-15A	22.6	15.0	100


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



隔離束線座 WIRE SADDLE — 6-145-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
3CH−15	27.6	15.1	100

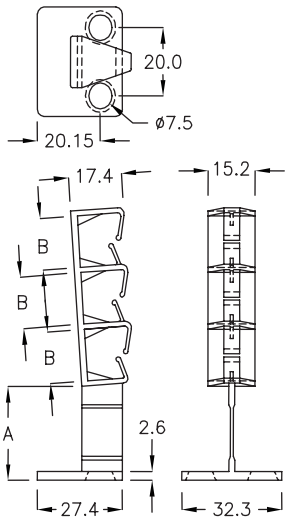




消磁線圈固定座 DEGAUSS COIL CLIP — 6-145-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CH−38	7.8	13.0	200






消磁線圈固定座 DEGAUSS COIL CLIP — 6-145-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CH−48	10.0	10.0	200

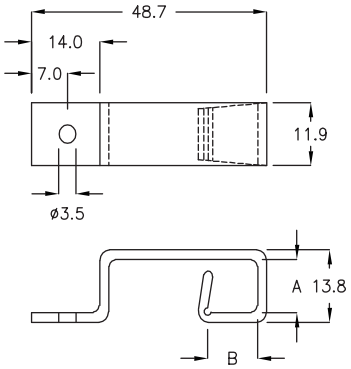




固定座 EDGE CONNECT BASE — 6-145-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
PDB−01	38.0	10.0	5.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定扣 CABLE CLAMP — 6-146-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
PC-01J	7.0	12.8	ø3.2	ø2.0	1000
PC-1RL	7.0	12.75	ø3.2	ø2.1	



電線固定扣 CABLE CLAMP — 6-146-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	B	C	D	PACKAGE
PCG-5A	10.0	19.0	ø4.6	ø5.4	500
PCG-5CK	10.0	26.0	ø5.4	ø5.4	
PCG-5NW	9.6	11.6	ø3.5	ø5.35	
PCG-7F	9.5	11.75	ø5.4	ø7.5	



電線固定扣 CABLE CLAMP — 6-146-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	CLOSE DIA	PACKAGE
PC-01D	6.6	6.7	ø3.5	0.9	ø2.7	2000
PC-1A	6.5	6.7	ø3.4	1.2	ø3.4	
PC-2A	8.5	11.4	ø4.4	1.3	ø5.0	1000
PC-02D	8.5	13.8	ø4.4	1.5	ø5.7	
PC-2Q	7.5	9.3	ø4.1	1.2	ø4.0	
★ PC-12A	10.2	15.0	ø5.08	1.8	ø12.7	500



電線固定扣 CABLE CLAMP — 6-146-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	B	C	D CLOSE DIA	PACKAGE
PC-09	9.5	12.2	ø4.4	ø7.5	500
PC-5HM	9.5	11.1	ø4.3	ø5.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定扣 CABLE CLAMP 6-147-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

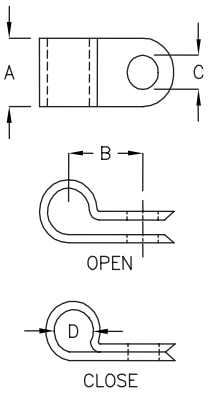


PART NO	A	B	C	D CLOSE DIA	PACKAGE
PC−1	13.5	9.0	ø5.4	ø3.6	1000
PC−1C	9.5	8.3	ø4.4	ø3.0	2000
PC−1K	6.3	9.0	ø3.1	ø3.5	
PC−1Q	6.5	9.5	ø3.1	ø3.0	
PC−1S	6.5	6.7	ø3.5	ø3.1	
PC−2	10.2	11.5	ø4.0	ø5.0	1000
PC−2H	9.7	11.7	ø4.1	ø4.5	
PC−2K	12.7	10.7	ø5.2	ø5.7	
PC−2L	9.6	12.1	ø5.0	ø7.3	
PC−2M	9.8	12.1	ø5.1	ø6.1	
PC−2S	9.8	12.0	ø5.1	ø6.9	
PC−3	10.0	11.9	ø4.3	ø5.6	500
PC−3K	9.0	11.35	ø3.5	ø5.7	
PC−3M	8.3	9.8	ø4.0	ø5.0	
PC−4	9.7	12.1	ø4.1	ø8.3	
PC−5	12.4	13.4	ø5.0	ø8.8	
PC−05C	9.5	12.0	ø3.2	ø8.3	
PC−5F	9.5	16.0	ø4.1	ø8.7	
PC−5GW	9.6	12.1	ø4.4	ø5.6	
PC−6	13.5	16.5	ø5.25	ø11.4	
PC−24MT	12.0	21.8	ø5.4	ø25.0	200



電線固定扣 CABLE CLAMP 6-147-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

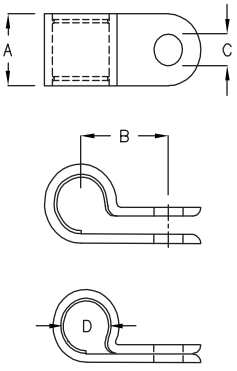


PART NO	A	B	C	D CLOSE DIA	PACKAGE
PC−3L	10.0	10.0	ø4.4	ø5.5	500
PC−03C	9.8	11.3	ø4.2	ø6.9	
PC−02C	9.8	12.0	ø4.2	ø7.7	
PC−6M	10.0	15.1	ø4.0	ø11.0	



電線固定扣 CABLE CLAMP 6-147-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

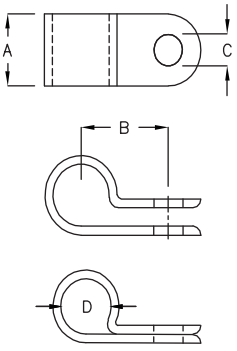

PART NO	A	B	C	D CLOSE DIA	PACKAGE
PC−3KF	9.0	11.35	ø3.5	ø5.7	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線固定扣 CABLE CLAMP 6-148-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

PART NO	A	B	C	PACKAGE
★ PLD-10AU	15.0	14.8	ø4.0	500

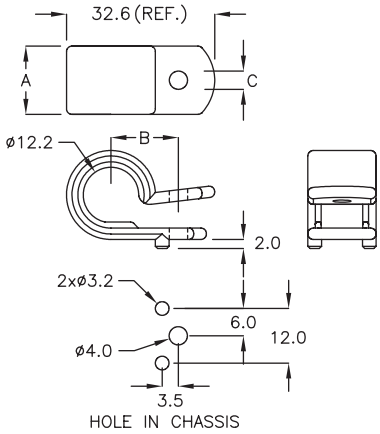





電線固定扣 CABLE CLAMP 6-148-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
PL-1	10.0	13.4	ø4.0	500

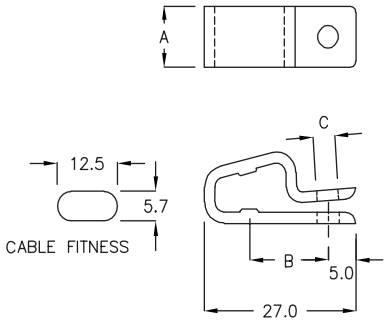




電線固定扣 CABLE CLAMP 6-148-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
PL-01A	10.1	11.0	ø5.0	500

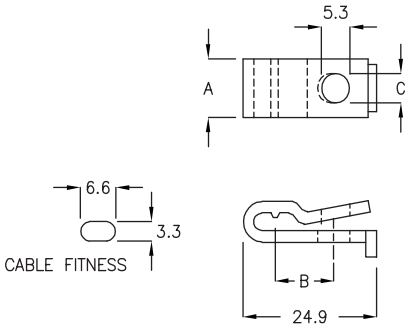




電線固定扣 CABLE CLAMP 6-148-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
PL-3	10.0	16.15	ø4.5	500

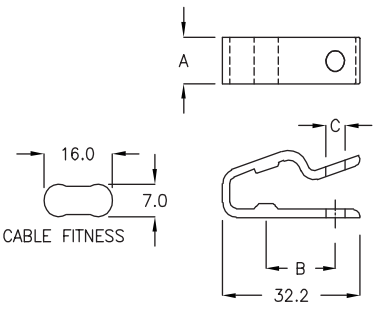




電線固定扣 CABLE CLAMP 6-148-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
PL-04	10.0	17.0	ø4.5	500

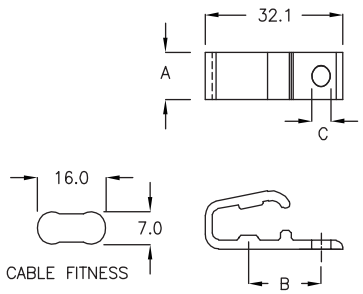


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定扣 CABLE CLAMP 6-149-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

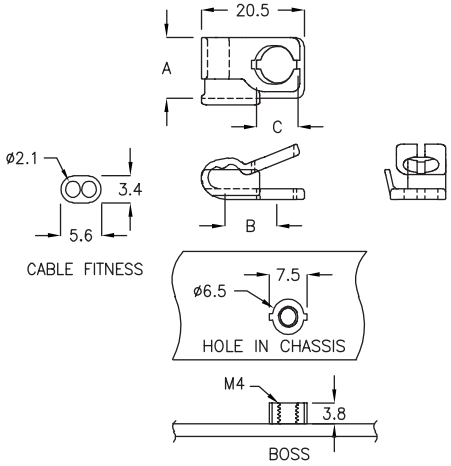


PART NO	A	B	C	PACKAGE
PLA–3F	11.0	9.8	8.0	500



電線固定扣 CABLE CLAMP 6-149-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

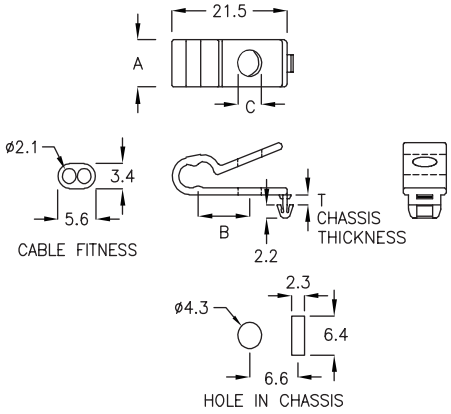


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
PLB–3Q	8.0	9.6	ø4.3	1.6	500



電線固定扣 CABLE CLAMP 6-149-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

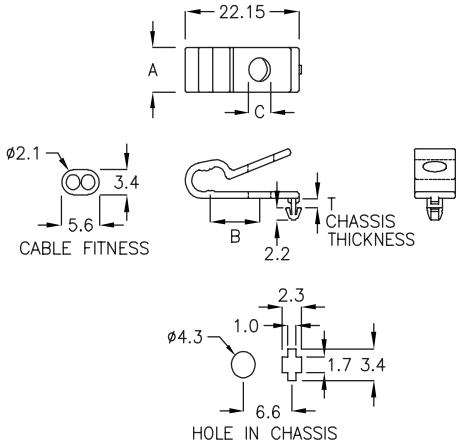


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAG
PLB–3RM	8.0	9.6	ø4.3	1.1~1.4	500



電線固定扣 CABLE CLAMP 6-149-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

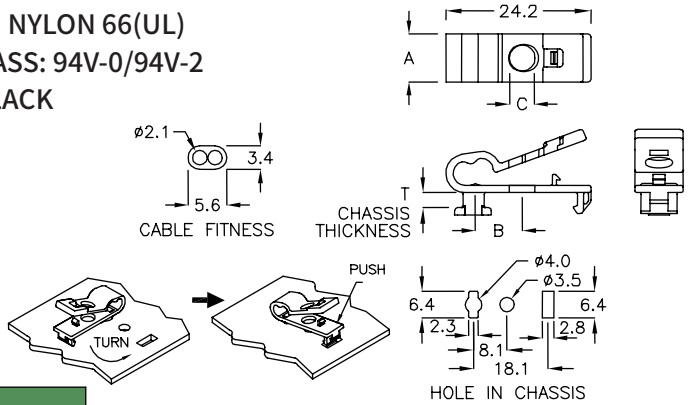


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
PLC–3KF	8.0	7.8	ø4.3	2.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-150-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
PCT–01	32.0	22.0	10.0	500



電線固定座 WIRE MOUNT — 6-150-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
PCT–06	25.0	17.0	10.0	500



電線固定座 WIRE MOUNT — 6-150-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
PCT–03	25.0	17.0	10.0	500



電線固定座 WIRE MOUNT — 6-150-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

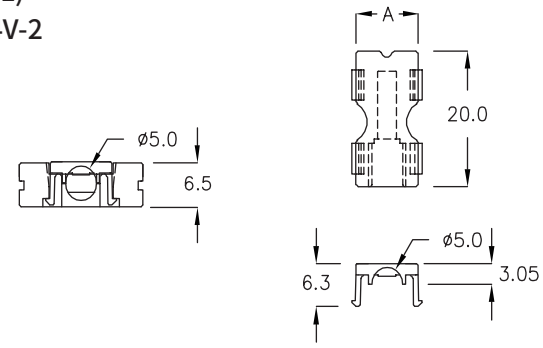

PART NO	A	PACKAGE
PCU–1A	10.0	500


ASSEMBLE WITH P.G PART PCW-01 (Page 6-151-1)

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定座 WIRE MOUNT — 6-151-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

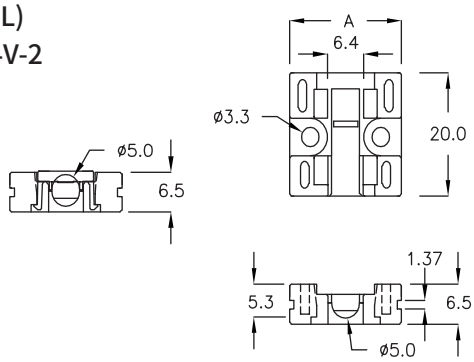


PART NO	A	PACKAGE
PCW-01	20.0	500


ASSEMBLE WITH P.G PART PCU-1A (Page 6-150-4)




排線固定座 FLAT CABLE MOUNT — 6-151-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M



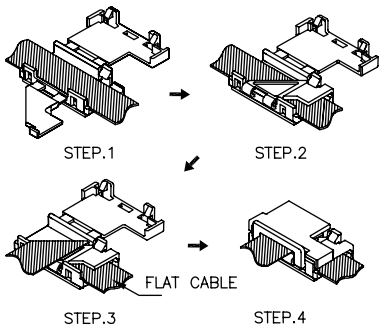


PART NO	A	PACKAGE
DFB-11	11.0	100




排線固定座 FLAT CABLE MOUNT — 6-151-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

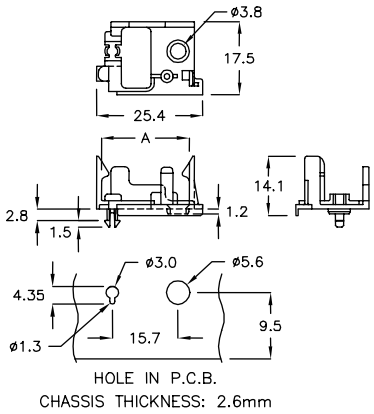


PART NO	A	PACKAGE
DFQ-21CA	21.0	500



排線固定座 FLAT CABLE MOUNT — 6-151-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

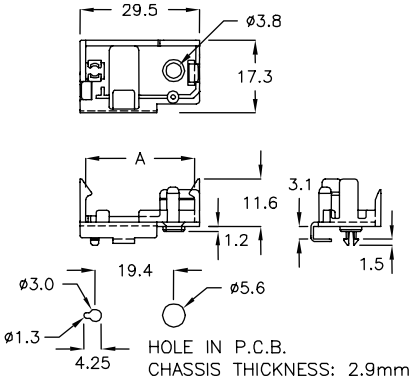

PART NO	A	PACKAGE
DFQ-27MJ	26.9	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

07




EMI扣
SLEEVE FERRITE CLAMP



EMI 扣 SLEEVE FERRITE CLAMP 7-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

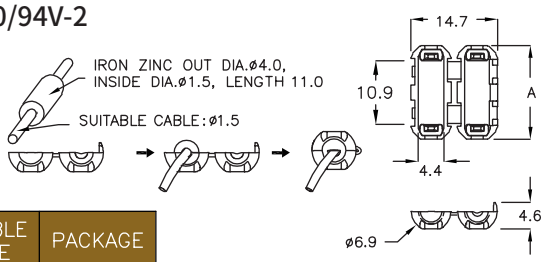


PART NO	A	SUITABLE CABLE	PACKAGE
EMR-1C	16.0	ø1.15	500




EMI 扣 SLEEVE FERRITE CLAMP 7-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	SUITABLE CABLE	PACKAGE
EMR-3A	ø3.5	500



EMI 扣 SLEEVE FERRITE CLAMP 7-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	SUITABLE CABLE	PACKAGE
EMR-05	ø5.0	200




EMI 扣 SLEEVE FERRITE CLAMP 7-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	SUITABLE CABLE	PACKAGE
EMR-7A	ø7.5	200



EMI 扣 SLEEVE FERRITE CLAMP 7-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	D	SUITABLE CABLE	PACKAGE
EMQ-06	32.8	9.7	18.0	ø6.0	200
EMQ-13	32.7	15.0	30.0	ø13.0	100
EMQ-9A	32.8	11.6	22.7	ø8.5	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

08

電子零附件

PCB,ELECTRONIC ASSEMBLY COMPONENTS:
WASHER
TRANSISTOR WASHER
SILICONE RUBBER







振盪晶體墊片 OSCILLATOR WASHER 8-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TQ-05	10.8	4.5	1.0	2000







振盪晶體墊片 OSCILLATOR WASHER 8-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
TQ-03	7.9	3.2	0.7	3.75	0.8	2000
TQ-03A	7.9	3.2	0.7	4.9	0.8	
TQ-06	11.2	5.0	1.0	4.9	1.2	
TQ-06A	11.2	5.0	1.5	4.9	1.2	
TQ-06H	11.2	6.5	1.5	4.75	2.2	






振盪晶體墊片 OSCILLATOR WASHER 8-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TQ-06F	11.0	4.5	0.7	2000






電容器座 E-CAP HOUSING 8-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CWX-10BK	ø11.0	ø10.0	10.0	1000






電容器座 E-CAP HOUSING 8-2-5

- MATERIAL: PP
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CW-2	ø12.5	ø10.2	9.2	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電容器墊片 CAPACITOR WASHER 8-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CW-10	20.0	ø23.0	2.6	1000






電容器墊片 CAPACITOR WASHER 8-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	PACKAGE
CW-1CQ	ø10.0	1.0	1000






電容器墊片 CAPACITOR WASHER 8-3-3

- MATERIAL: NYLON 66+GF30%(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	PACKAGE
CW-2KM	ø8.0	1000






電容器座 E-CAP HOUSING 8-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	PACKAGE
CW-003	ø16.0	16.0	1000






電容器座 E-CAP HOUSING 8-3-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
CWZ-7Q	ø7.9	5.5	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電容器座 E-CAP HOUSING 8-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
CWM-07	ø10.0	5.0	7.0	1000






華司 WASHER 8-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	PACKAGE
WWD-3K	ø17.2	3.0	2000







電容器墊片 E-CAP WASHER 8-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	PACKAGE
CWQ-13M	ø13.5	3.1	1000

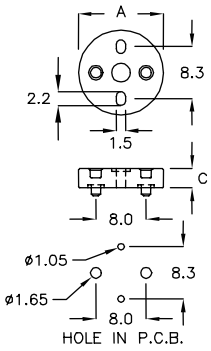





電容器墊片 E-CAP WASHER 8-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CWF-7H	9.9	7.5	1.1	2000







電容器墊片 E-CAP WASHER 8-4-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CWF-7K	10.0	7.6	1.2	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電容器墊片 E-CAP WASHER 8-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
CWF−8H	12.8	8.75	1.5	2.5	0.9	2000
CWF−14A	14.2	10.0	1.5	3.0	1.5	



蜂鳴器固定座 BUZZER MOUNT 8-5-2

- MATERIAL: NYLON 66+30%FRP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MTZ−4A	13.4	6.6	4.8	1000



固定座 MOUNT 8-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
QDC−01	33.6	18.9	15.9	100




電容器座 E-CAP HOUSING 8-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MMH−08	8.0	6.0	1000



電容器座 E-CAP HOUSING 8-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
CWB−01	17.8	22.0	8.0	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電容器座 E-CAP HOUSING 8-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CWC-08	8.0	19.7	1000






電容器座 E-CAP HOUSING 8-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	PACKAGE
CWG-4A	4.3	1000






電容器座 E-CAP HOUSING 8-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	B	C	D	PACKAGE
CWG-03	3.0	6.0	10.5	15.1	1000
CWG-3MF	3.0	5.0	10.0	15.1	
CWG-3TG	3.0	6.0	10.5	12.0	






電容器座 E-CAP HOUSING 8-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
CWFK-27A	6.22	9.85	25.5	1.2	500

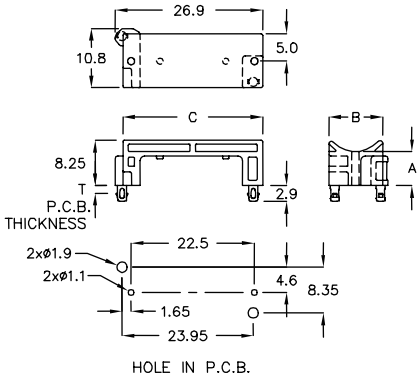




電容器座 E-CAP HOUSING 8-6-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2x5 TAPPING SCREW

PART NO	A	B	PACKAGE
CWS-01	5.0	24.4	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電容器座 E-CAP HOUSING 8-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	PACKAGE
CWH-02	2.0	1000







電容器座 E-CAP HOUSING 8-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW

PART NO	A	B	PACKAGE
★ CWHA-12C	3.8	18.1	1000

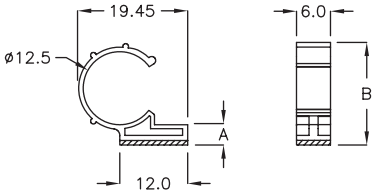





電容器座 E-CAP HOUSING 8-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MLA-40	10.8	16.0	100






電容器座 E-CAP HOUSING 8-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CWD-01	12.6	10.8	1000

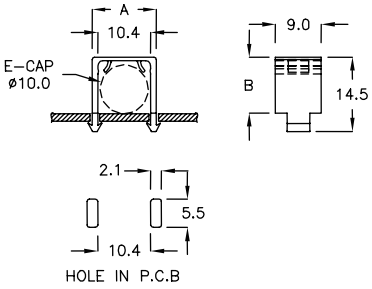





電容器座 E-CAP HOUSING 8-7-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CWD-02	25.2	10.9	500

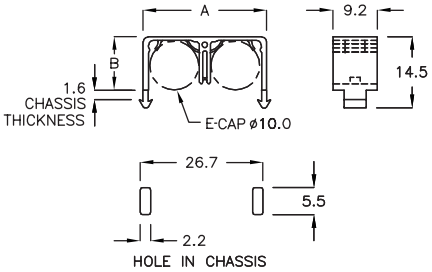


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電容器座 E-CAP HOUSING 8-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CWD-16	38.0	15.3	200

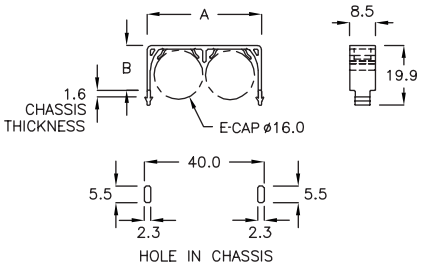




電容器座 E-CAP HOUSING 8-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CWL-19	18.0	18.4	500






電容器座 E-CAP HOUSING 8-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CWJ-01	17.0	22.0	7.0	500






電容器帽套 E-CAP TUBE 8-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CWT-16K	ø16.5	30.5	ø17.5	500
CWT-18A	ø18.6	10.0	ø18.6	100






電容器座 E-CAP HOUSING 8-8-5


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

PART NO	A	B	PACKAGE
★ CWTD-10C	21.0	5.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電容器帽套 E-CAP TUBE 8-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
DXM-27H	27.45	9.3	500






電容器帽套 E-CAP TUBE 8-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXJ-20NC	ø12.8	20.0	ø13.7	ø11.8~ø12.3	500






電容器帽套 E-CAP TUBE 8-9-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-31JK	ø10.5	27.5	ø11.5	ø9.5~ø10.2	500
DXA-50F	ø13.0	50.8	ø14.5	ø12.0~ø12.5	






電容器帽套 E-CAP TUBE 8-9-4

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXK-30C	ø13.0	30.5	ø14.0	ø12.0~ø12.5	500






電容器帽套 E-CAP TUBE 8-9-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
CWY-50	ø20.5	40.9	100




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電容器帽套 E-CAP TUBE 8-10-1

- COLOR: BLACK




PART NO	MATERIAL	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-16RC	PP V0	ø12.5	16.0	ø13.6	ø11.0~ø12.0	500
DXA-20KS	N66 V2	ø24.0	20.0	ø25.0	ø23.5~ø24.5	



電容器帽套 E-CAP TUBE 8-10-2

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXP-28CA	ø31.0	28.0	ø32.0	ø29.5~ø30.5	500



電容器帽套 E-CAP TUBE 8-10-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK,NATURAL




PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXP-20TC	ø25.6	20.0	ø26.6	ø24.0~ø25.0	100
DXP-20KF	ø26.6	20.0	ø27.6	ø25.0~ø26.0	
DXP-46FM	ø31.5	46.5	ø32.9	ø30.0~ø31.0	486



電容器帽套 E-CAP TUBE 8-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-41	ø30.0	41.0	ø31.0	ø29.2~ø31.2	486



電容器帽套 E-CAP TUBE 8-10-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-51C	ø30.0	51.0	ø31.0	ø29.7~ø31.7	405


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電容器帽套 E-CAP TUBE 8-11-1

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-51FL	ø30.0	51.0	ø31.6	ø29.7~ø31.7	405






電容器帽套 E-CAP TUBE 8-11-2

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-55KT	ø30.0	55.5	ø31.6	ø29.7~ø31.7	405







電容器帽套 E-CAP TUBE 8-11-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E-CAP	PACKAGE
DXA-65BH	ø30.0	65.0	ø31.6	ø29.5~ø31.0	324






電容器帽套 E-CAP TUBE 8-11-4

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E -CAP	PACKAGE
DXS-49K	ø31.0	49.0	ø32.0	ø29.5~ø30.5	500






電容器帽套 E-CAP TUBE 8-11-5

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	SUITABLE E CAP	PACKAGE
DXF-76	ø31.0	75.8	ø32.0	ø29.5~ø30.5	243




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電容器帽套 E-CAP TUBE 8-12-1

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	SUITABLE E CAP	PACKAGE
DXC-58AS	ø31.0	58.0	ø32.0	ø29.0~ø31.0	324






電容器帽套 E-CAP TUBE 8-12-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

NEW

PART NO	A	B	SUITABLE E-CAP	PACKAGE
★ DXD-21A	ø8.5	21.3	ø8.4	500






電容器帽套 E-CAP TUBE 8-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	SUITABLE E-CAP	PACKAGE
DXH-31M	18.4	31.0	ø17.2~ø18.0	200






電容器座 E-CAP HOUSING 8-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
CWQ-01	15.25	21.1	500

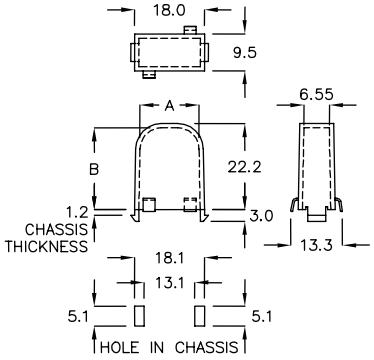




電感固定座 C. T. MOUNT 8-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
CWP-01	18.4	10.65	12.0	500

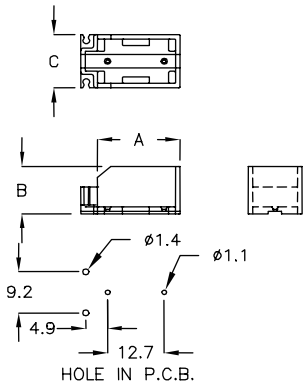


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電感固定座 INDUCTOR HOUSING 8-13-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CW-1A	23.3	12.0	20.0	1000






電感固定座 INDUCTOR HOUSING 8-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CW-005	10.4	9.5	7.6	2000

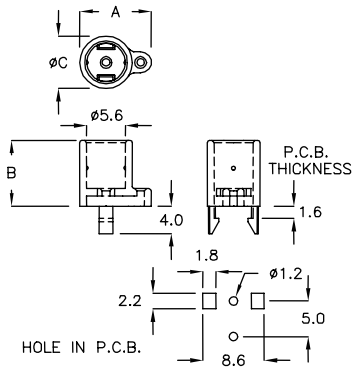





電容器帽套 E-CAP TUBE 8-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
DXZB-23C	21.0	1000

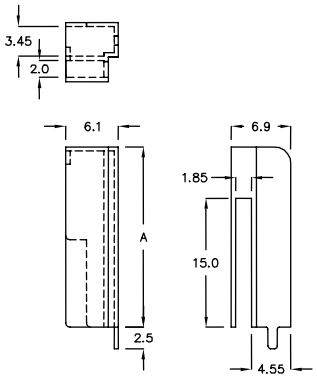





電容器帽套 E-CAP TUBE 8-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
DXZC-24C	24.5	100






熱敏電阻座 PTC MOUNT 8-13-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
PTC-2K	12.3	11.0	1000
PTC-05	12.3	14.0	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




熱敏電阻座 NTC HOLDER 8-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUG-6A	2.5	6.5	2000






熱敏電阻座 NTC HOLDER 8-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-1	16.2	5.3	9.9	1000






熱敏電阻座 NTC HOLDER 8-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-1PS	15.0	5.3	9.9	1000






熱敏電阻座 NTC HOLDER 8-14-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HU-1C	16.0	6.8	9.9	1000







熱敏電阻座 NTC HOLDER 8-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-1A	16.2	8.3	13.9	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




熱敏電阻座 NTC HOLDER 8-15-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-3	17.2	7.7	13.1	500







熱敏電阻座 NTC HOLDER 8-15-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HU-4	12.6	6.8	14.1	500







熱敏電阻座 NTC HOLDER 8-15-3

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HU-4A	12.7	6.8	8.5	500







熱敏電阻座 NTC HOLDER 8-15-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HU-4C	12.7	6.8	12.0	500







熱敏電阻座 NTC HOLDER 8-15-5

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HU-4TX	12.7	6.8	8.5	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱敏電阻座 NTC HOLDER 8-16-1

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HUX-4K	12.7	6.8	8.4	500






電容器座 CAPACITOR HOUSING 8-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
CWA-4A	16.7	7.9	10.0	6.5	200
CWA-4C	16.7	7.2	10.0	5.2	
CWA-4KH	16.7	7.9	10.0	5.9	







電容器座 CAPACITOR HOUSING 8-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	D	PACKAGE
CWA-10	20.0	13.0	10.0	100







電容器座 CAPACITOR HOUSING 8-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
CWR-2C	17.5	9.2	12.5	7.6	10.0	200
CWR-26SK	26.3	11.7	10.0	10.2	21.7	







熱敏電阻座 NTC HOLDER 8-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CWA-4F	12.0	6.5	12.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電容器座 E-CAP HOUSING 8-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK


PART NO	A	B	PACKAGE
CWW-19H	18.5	7.5	500

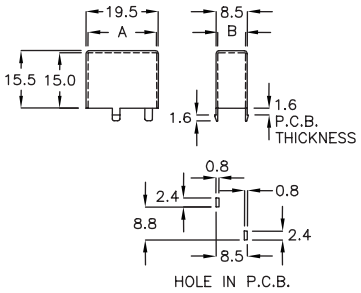




電容器座 E-CAP HOUSING 8-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	F	G	H	I	PACKAGE
CWW-19PJ	18.0	7.7	8.7	13.3	13.8	0.8	2.4	8.7	2.2	500
CWW-19AN	18.0	16.0	17.0	16.0	16.5	1.15	1.9	17.0	9.0	



固定座 MOUNT 8-17-3

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

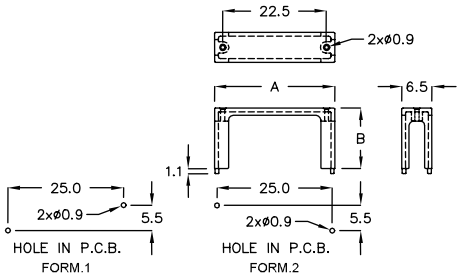


PART NO	A	B	FORM	PACKAGE
MNS-26DT	26.0	13.1	1	500
MNS-26KH	26.0	10.0	2	



電容絕緣片 E-CAP INSULATING STRIP 8-17-4

- MATERIAL: PP
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	C	D	PACKAGE
CWU-36	30.0	36.0	27.5	675







熱敏電阻座 NTC HOLDER 8-17-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
HU-5	20.0	7.4	20.0	4.6	7.5	500
HU-008	19.9	9.4	15.9	6.5	7.9	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




熱敏電阻座 NTC HOLDER 8-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
HU-05A	13.4	6.6	9.0	5.0	500






Y 電容座 Y CAPACITOR HOLDER 8-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-05D	15.6	6.6	15.0	500






熱敏電阻座 NTC HOLDER 8-18-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HU-15	14.5	9.0	500






熱敏電阻座 NTC HOLDER 8-18-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
HU-7	16.6	7.5	3.0	4.6	1000
HU-7FG	16.6	7.5	3.0	6.1	
HU-07H	16.6	7.5	2.6	6.1	
HU-07L	16.6	7.5	3.5	5.9	






熱敏電阻座 NTC HOLDER 8-18-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	D	PACKAGE
HU-07A	16.7	7.5	3.5	1000
HU-07K	19.5	7.5	3.3	
HU-07P	19.5	7.5	3.5	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱敏電阻座 NTC HOLDER 8-19-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-07C	19.8	7.5	5.9	1000
HU-07J	20.8	7.5	6.9	
HU-07Q	19.8	7.5	7.4	






熱敏電阻座 NTC HOLDER 8-19-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	D	PACKAGE
HU-7AC	16.7	7.5	3.5	1000






熱敏電阻座 NTC HOLDER 8-19-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	F	PACKAGE
HU-07F	16.0	7.5	2.2	4.1	2.0	1000
HU-7PK	16.0	7.5	2.2	4.15	2.15	






熱敏電阻座 NTC HOLDER 8-19-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-07M	15.5	7.5	2.8	1000






熱敏電阻座 NTC HOLDER 8-19-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	E	F	G	PACKAGE
HU-7WF	16.55	8.0	3.5	4.3	3.6	3.2	6.9	1000
HU-8DM	16.7	7.5	3.0	4.0	3.5	3.0	5.7	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱敏電阻座 NTC HOLDER 8-20-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
HU-7LA	14.2	7.5	2.5	1000



熱敏電阻座 NTC HOLDER 8-20-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	K	H	PACKAGE
HU-07W	14.5	7.5	3.1	3.9	4.85	2.7	1000
HU-7AW	14.5	7.5	2.7	3.5	4.85	2.7	
HU-7WC	16.5	8.0	3.5	4.3	6.9	2.7	
HU-7WD	15.5	7.5	3.1	3.9	4.85	2.7	
HU-7QN	16.5	8.0	3.5	4.3	6.9	3.5	




熱敏電阻座 NTC HOLDER 8-20-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	E	F	G	PACKAGE
HU-7MA	14.5	7.5	2.0	3.5	2.5	ø3.2	1000
HU-7MK	14.5	7.5	2.8	3.5	2.5	ø3.1	
HU-7RH	14.5	7.5	1.8	3.3	2.3	ø3.2	




熱敏電阻座 NTC HOLDER 8-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

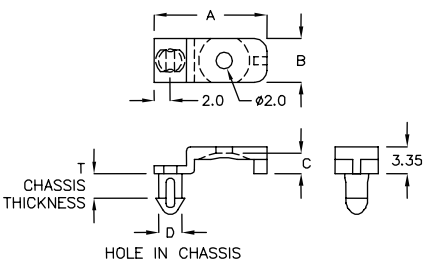

PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
HU-07U	14.0	5.4	2.55	ø3.0	2.8	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱敏電阻座 NTC HOLDER 8-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HUDK-7AH	14.5	7.5	1.6	1000

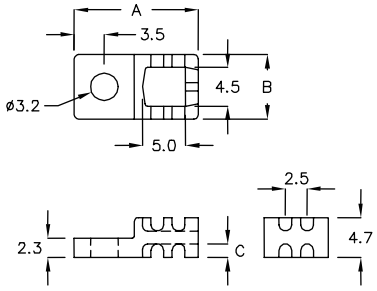




熱敏電阻座 NTC HOLDER 8-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HUH-19	19.0	7.0	2.5	500

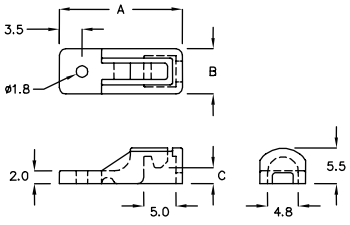




熱敏電阻座 NTC HOLDER 8-21-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-09	15.5	9.0	3.4	1000







熱敏電阻座 NTC HOLDER 8-21-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-09A	15.5	9.0	3.4	1000






熱敏電阻座 NTC HOLDER 8-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-09D	18.0	18.6	3.6	1000

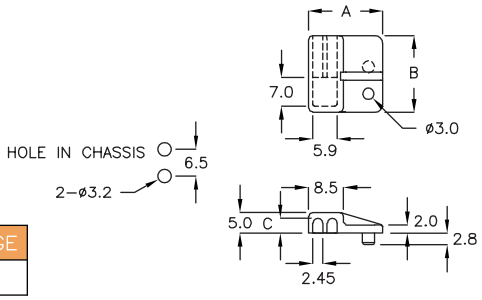


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱敏電阻座 NTC HOLDER 8-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HUD-01	16.55	8.0	2.3	1000







熱敏電阻座 NTC HOLDER 8-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HUA-04	14.0	7.2	6.2	1000

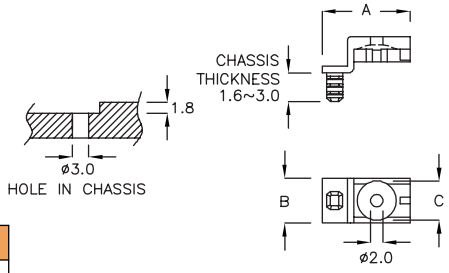





熱敏電阻座 NTC HOLDER 8-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
HU-7FT	14.0	5.4	6.35	7.0	1000






熱敏電阻座 NTC HOLDER 8-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
HUL-12CP	12.0	1000






熱敏電阻座 NTC HOLDER 8-22-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HUC-01	7.5	4.5	6.4	2000

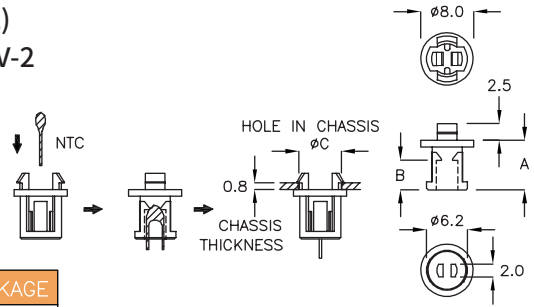


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱敏電阻座 NTC HOLDER 8-23-1

- MATERIAL: TPR(UL)
- COLOR: BLACK

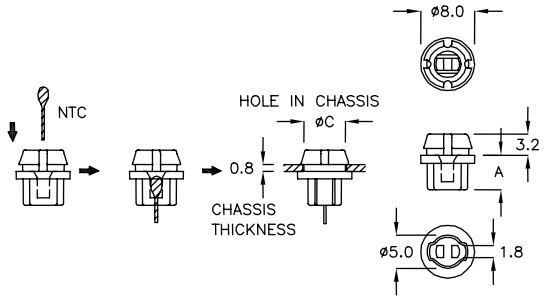


PART NO	A	C	PACKAGE
HUC-02	5.2	6.4	2000



熱敏電阻座 NTC HOLDER 8-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

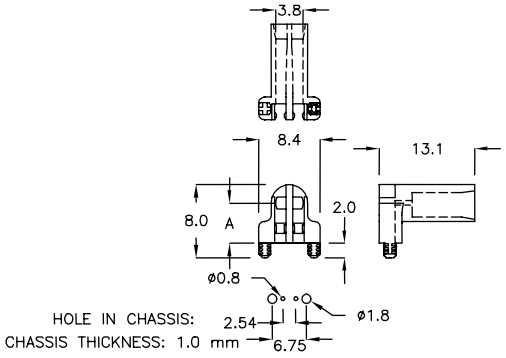


PART NO	A	PACKAGE
HUP-05	5.5	500



熱敏電阻座 NTC HOLDER 8-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
DXW-8A	10.5	8.4	7.5	1000



熱敏電阻座 NTC HOLDER 8-23-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
HUM-20K	10.6	500



光感應器座 LIGHT SENSOR HOLDER 8-23-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	PACKAGE
MTU-09	9.0	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



光感應器座 LIGHT SENSOR HOLDER — 8-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
MTU−16D	16.0	500






華司 WASHER — 8-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
U−6A	6.5	ø9.0	ø2.6	ø6.4	2000






華司 WASHER — 8-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
U−10A	10.0	ø9.0	ø3.4	ø6.0	1000






華司 WASHER — 8-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
UWA−01	9.9	ø9.2	ø3.3	ø5.6	3.1	1000






圓體間隔柱 SPACER SUPPORT — 8-24-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
UWB−07	7.0	ø9.4	ø6.5	ø5.9	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	øB	øC	øD	E	PACKAGE
U-2DK	2.5	7.0	3.8	5.0	1.0	2000
U-3	3.2	6.0	3.1	4.4	0.7	
U-3A	3.2	6.0	3.0	5.0	1.2	
U-3C	3.0	5.0	2.2	4.0	0.5	
U-3S	3.3	5.0	2.2	4.1	1.3	
U-4	4.2	6.0	2.2	4.3	1.3	
U-04D	4.8	10.5	6.2	9.4	0.5	
U-4FR	4.5	8.5	4.5	7.0	1.0	
U-4HK	4.5	9.1	5.5	6.8	2.7	
U-4S	4.3	5.0	2.2	4.2	1.2	
U-4WP	4.25	8.0	5.2	7.1	2.25	
U-5	4.6	8.0	4.0	6.5	1.6	
U-5C	5.6	8.0	4.0	6.5	1.6	
U-5H	5.0	9.0	5.3	8.0	0.5	

PART NO	A	øB	øC	øD	E	PACKAGE
U-5T	5.0	9.5	6.0	8.5	0.5	2000
U-05D	5.7	8.0	3.5	6.1	0.5	
U-6	6.5	8.0	3.5	6.1	0.85	
U-06C	6.0	10.5	6.5	9.5	0.5	
U-06D	6.5	10.4	6.9	9.4	0.5	1000
U-7	7.7	11.0	3.2	6.7	2.1	
U-7A	3.5	8.0	3.5	5.7	1.2	2000
U-07C	7.0	10.0	3.5	7.5	2.0	1000
U-8	7.7	11.0	4.0	7.1	1.6	
U-8A	7.5	12.4	8.2	11.4	0.5	
U-8S	7.7	11.0	4.0	7.1	2.0	
U-10	3.6	12.0	4.0	10.1	1.5	
U-12	12.0	10.0	3.2	6.3	1.5	
U-12A	12.0	8.5	4.5	7.0	6.0	



華司 WASHER 8-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
UWC-01	6.1	4.2	5.2	3.0	1000



華司 WASHER 8-25-3

- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	MATERIAL	A	B	C	D	E	F	G	PACKAGE
UWT-5AC	N66	6.6	ø8.1	ø7.2	ø3.1	5.0	4.2	ø4.0	1000
UWT-6QR	PBT	8.2	ø11.5	ø9.5	ø4.1	6.0	4.0	ø8.2	2000




華司 WASHER 8-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	PACKAGE
WRA-02	1.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




華司 WASHER 8-26-1

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

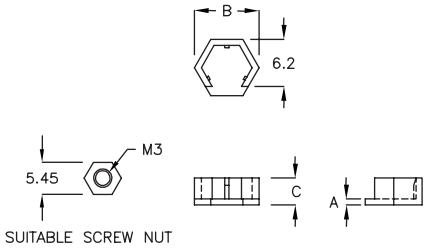


PART NO	A	B	C	PACKAGE
U-05M	0.8	8.6	3.6	2000



華司 WASHER 8-26-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

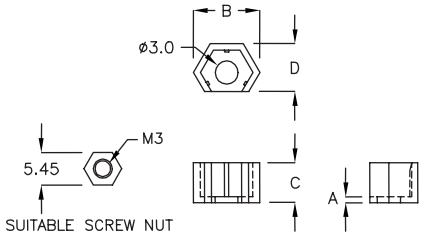


PART NO	A	B	C	D	PACKAGE
U-05J	0.8	8.6	5.2	6.25	2000
U-05Y	0.8	7.8	4.0	5.8	
U-5QF	0.8	8.6	4.0	6.25	




華司 WASHER 8-26-3

- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK




PART NO	MATERIAL	A	B	C	D	PACKAGE
U-03D	N46	0.8	3.5	1.6	ø3.5	2000
U-03F	N46	0.8	3.8	2.2	ø3.5	
U-03L	N46	0.8	5.0	1.6	ø3.5	
U-03R	N46	0.8	2.5	2.2	ø3.5	
U-4RY	N66	0.8	4.0	3.5	ø3.8	
U-4XQ	PPS	0.8	3.9	2.0	ø3.5	
U-5AB	N46	1.9	4.9	2.4	ø3.5	
U-5AF	N46	1.9	3.9	2.4	ø3.5	
U-5KW	N46	1.9	4.9	3.6	ø5.0	



華司 WASHER 8-26-4

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK
- SUITABLE NUT: M3 NUT

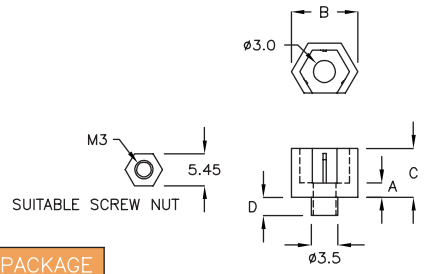


PART NO	MATERIAL	A	B	C	D	PACKAGE
U-5CG	N46	1.9	8.6	6.4	2.4	2000
★ U-5PG	PPS	1.9	8.6	7.5	2.4	




華司 WASHER 8-26-5

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

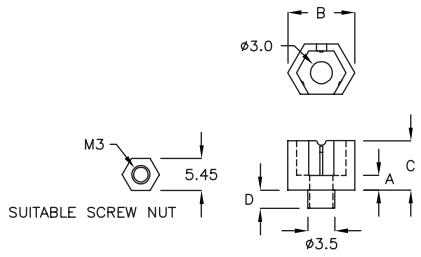


PART NO	A	B	C	D	PACKAGE
U-5NR	1.9	8.6	6.0	2.2	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




華司 WASHER 8-27-1

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT






PART NO	A	B	C	D	PACKAGE
U-05L	0.8	8.6	5.0	1.6	2000
U-05K	0.8	8.6	5.2	2.2	
U-05W	0.8	8.6	4.0	1.6	
U-5CF	1.9	8.6	6.3	2.4	
U-5CH	0.8	8.6	5.2	1.6	



華司 WASHER 8-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

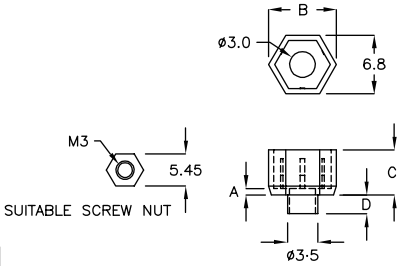


PART NO	A	B	C	D	PACKAGE
U-05P	0.8	7.85	5.2	2.2	2000



華司 WASHER 8-27-3

- MATERIAL: ABS+PS
- COLOR: BLACK

NEW




PART NO	A	B	C	PACKAGE
★ WS-1GN	0.5	ø5.5	ø2.8	2000



華司 WASHER 8-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW




PART NO	A	B	C	PACKAGE
WS-3KP	2.0	ø6.0	ø3.0	2000
WS-3MD	2.0	ø6.0	ø3.7	
WS-3QR	1.8	ø5.8	ø3.5	



華司 WASHER 8-27-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
SHC-06	6.0	ø6.5	ø4.6	ø3.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



O 型環 ORING — 8-28-1

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
OPW-7A	1.5	ø13.5	ø7.2	1000
OPW-9CD	1.5	ø15.5	ø9.3	
OPW-15D	1.8	ø21.4	ø15.65	
OPW-19M	1.8	ø26.7	ø19.5	
OPW-20	1.8	ø28.2	ø20.0	
OPW-24A	2.0	ø31.5	ø24.3	



O 型環 ORING — 8-28-2

- MATERIAL: SILICONE
- COLOR: BLACK,ORANGE




PART NO	A	B	C	PACKAGE
OIL-02C	1.0	ø4.5	ø2.5	5000
OIL-10	1.5	ø13.0	ø10.0	2000




華司 WASHER — 8-28-3

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
UWX-11	1.5	ø11.0	ø5.8	1000
WSR-11RM	1.5	ø18.0	ø11.9	2500



華司 WASHER — 8-28-4

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
WSU-10	1.0	ø10.0	ø5.0	2000



華司 WASHER — 8-28-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
MYC-18Y	0.5	ø18.7	ø14.5	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



螺絲蓋 SCREW COVER 8-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

美觀保護螺絲
Better appearance and with
Protection .
如有其他顏色需求,歡迎來電詢問
If you have other color request,
kindly feel free to contact with us.

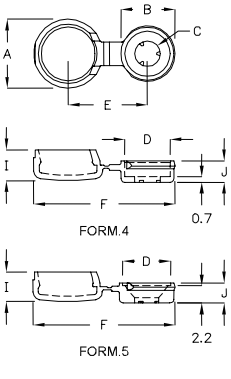


PART NO	A	B	C	D	E	F	I	J	SUITABLE SCREW				配合件 FORM	PACKAGE
									SCREW	FORM	G	H		
M3P−8A	ø8.7	ø6.7	ø3.2	ø5.7	10.0	17.9	3.9	2.7	M3	1	5.5	2.0	4	1000
M3T−10K	ø10.1	ø8.1	ø3.2	ø7.1	11.4	20.7	3.9	2.7	M3	2	6.9	1.9	4	
M3F−9W	ø9.2	ø7.2	ø3.2	ø6.2	10.5	18.9	4.1	3.0	M3	3	6.0	1.8	5	
M3Q−14K	ø13.1	ø11.5	ø6.3	ø10.2	14.5	28.1	4.1	6.0	M3	6	10.0	5.0	4	
M4P−10A	ø10.2	ø8.2	ø4.2	ø7.2	11.5	20.9	4.4	3.3	M4	1	7.0	2.6	4	
M4T−12K	ø12.6	ø10.6	ø4.2	ø9.6	13.9	25.7	4.4	3.3	M4	2	9.4	2.5	4	
M4F−11W	ø11.2	ø9.2	ø4.2	ø8.2	12.5	22.9	4.1	3.0	M4	3	8.0	2.3	5	
UN6K−10K	ø10.1	ø8.1	ø3.7	ø7.1	11.4	20.6	3.9	2.8	#6−32	1	6.9	2.1	4	
UN6K−9D	ø9.8	ø7.8	ø3.7	ø6.8	11.1	20.1	4.4	3.3	#6−32	2	6.6	2.6	4	
UN6K−10FQ	ø10.3	ø8.3	ø3.7	ø7.3	11.6	21.1	4.1	3.0	#6−32	3	7.1	2.1	5	



螺絲蓋 SCREW COVER 8-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

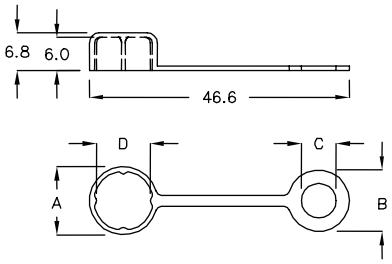


PART NO	A	B	C	D	PACKAGE
M3G−46A	ø12.2	ø11.0	ø6.2	9.6	500



C型環 C RING 8-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	B	C	D	PACKAGE
WCC−05	2.3	ø6.55	ø5.55	2.9	2000
WCC−5A	2.46	ø6.2	ø5.05	1.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
WS-1BD	1.0	ø3.2	ø1.6	2000
WS-01N	0.45	ø3.9	ø1.85	
WS-2RK	1.0	ø4.0	ø2.0	
WS-2HR	1.0	ø4.1	ø2.2	
WS-0	0.4	ø4.2	ø2.5	
WS-04C	0.5	ø4.5	ø2.5	
WS-4KT	1.5	ø4.9	ø3.7	
WS-1D	1.0	ø5.0	ø2.7	
WS-1F	1.5	ø5.0	ø2.5	
WS-2DC	1.8	ø5.0	ø3.1	
WS-1B	0.5	ø5.5	ø2.5	
WS-1C	0.5	ø5.5	ø3.0	
WS-2FA	1.8	ø5.5	ø3.1	
WS-3GK	1.0	ø5.6	ø3.0	
WS-3A	1.4	ø5.6	ø2.9	
WS-6NZ	0.5	ø6.0	ø4.3	
WS-01L	0.8	ø6.0	ø3.1	
WS-2K	1.0	ø6.0	ø2.7	
WS-5HY	1.0	ø6.2	ø3.2	
WS-06K	1.5	ø6.35	ø3.3	
WS-06A	1.0	ø6.5	ø3.8	
WS-06C	1.35	ø6.8	ø4.9	
WS-07H	0.5	ø7.0	ø2.2	
WS-1R	0.6	ø7.0	ø4.6	
WS-1M	0.8	ø7.0	ø3.1	
WS-02M	1.0	ø7.0	ø3.2	
WS-3SB	1.0	ø7.0	ø3.5	
WS-07F	0.65	ø7.5	ø4.3	
WS-07C	1.55	ø7.5	ø5.1	
WS-08F	0.9	ø7.8	ø4.1	
WS-4	0.8	ø7.9	ø4.0	
WS-9	0.5	ø8.0	ø5.1	
WS-23	0.6	ø8.0	ø1.6	
WS-1S	0.7	ø8.0	ø3.0	
WS-8RM	0.8	ø8.0	ø3.2	
WS-6FP	0.8	ø8.0	ø5.8	
WS-1	1.0	ø8.0	ø3.2	
WS-57	1.6	ø8.0	ø3.0	
WS-9A	2.0	ø8.0	ø5.1	
WS-2	1.7	ø8.1	ø3.2	
WS-8MK	1.0	ø8.2	ø5.65	
WS-24	0.8	ø9.0	ø4.0	


PART NO	A	B	C	PACKAGE
WS-9RC	0.75	ø9.0	ø5.85	2000
WS-9DK	0.75	ø9.0	ø6.25	
WS-9KR	0.8	ø9.0	ø4.4	
WS-4PS	1.0	ø9.0	ø4.5	
WS-06M	1.5	ø9.0	ø5.5	
WS-22	1.8	ø9.0	ø4.2	
WS-5KL	1.0	ø9.5	ø5.0	
WS-7DM	3.7	ø9.6	ø4.2	
WS-5	3.0	ø9.9	ø4.0	
WS-06D	0.8	ø10.0	ø6.7	
WS-10C	1.0	ø10.0	ø3.1	
WS-6	1.1	ø10.0	ø5.5	
WS-3	1.2	ø10.0	ø4.2	
WS-10F	2.65	ø10.0	ø6.6	
WS-10AC	3.0	ø10.0	ø6.6	
WS-7	3.5	ø10.0	ø6.0	
WS-10	4.0	ø10.0	ø3.6	1000
WS-10AH	0.4	ø10.2	ø6.5	2000
WS-11F	1.0	ø11.0	ø4.1	
WS-11MC	1.5	ø11.1	ø5.2	
WS-11KY	2.0	ø11.5	ø4.5	
WS-8	0.5	ø12.0	ø8.2	
WS-12S	1.0	ø12.0	ø3.1	
WS-12FG	1.0	ø12.0	ø7.4	
WS-12A	1.5	ø12.0	ø4.5	
WS-12	1.2	ø12.1	ø6.4	
WS-13	3.8	ø12.6	ø6.4	1000
WS-13A	4.2	ø13.0	ø3.6	
WS-13C	1.0	ø13.0	ø10.0	2000
WS-14	1.0	ø14.0	ø6.5	
WS-14F	1.0	ø14.0	ø10.4	
WS-56	1.6	ø14.1	ø8.2	
WS-15	4.8	ø14.7	ø12.6	1000
WS-16D	0.8	ø16.0	ø9.7	2000
WS-16A	1.6	ø16.0	ø9.7	
WS-16F	1.6	ø16.0	ø8.4	
WS-17	1.5	ø17.0	ø13.5	
WS-18	0.8	ø18.0	ø4.2	
WS-18QT	1.4	ø18.0	ø8.1	
WS-20	1.0	ø20.0	ø14.5	1000
WS-20A	2.0	ø20.0	ø10.5	
WS-21	1.0	ø21.0	ø14.1	
WS-22PM	1.5	ø22.0	ø16.5	
WS-26	1.5	ø26.0	ø20.5	
WS-60	2.0	ø60.0	ø9.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-31-1

- MATERIAL: NYLON 6
- COLOR: NATURAL
- OTHER MATERIAL&THICKNESS
- AVAILABLE FOR OPTIONAL REQUEST
  (我司備有其他尺寸 , 歡迎來電洽詢)




PART NO	A	B	C	PACKAGE
NWT−01	0.5	ø4.5	ø2.1	5000
NWT−02	0.5	ø4.5	ø2.6	
NWT−03	0.5	ø4.6	ø2.5	
NWT−04	0.5	ø4.7	ø2.6	
NWT−05	0.5	ø5.0	ø2.2	
NWT−06	0.5	ø5.0	ø2.5	
NWT−07	0.5	ø5.0	ø2.6	
NWT−08	0.5	ø5.0	ø3.0	
NWT−09	0.5	ø5.0	ø3.1	
NWT−10	0.5	ø5.0	ø3.2	
NWT−11	0.5	ø5.0	ø3.5	
NWT−13	0.5	ø5.6	ø4.8	
NWT−14	0.5	ø6.0	ø2.1	
NWT−15	0.5	ø6.0	ø3.1	
NWT−16	0.5	ø6.0	ø3.2	
NWT−17	0.5	ø6.0	ø3.6	5000
NWT−18	0.5	ø6.0	ø4.1	
NWT−19	0.5	ø6.0	ø4.3	
NWT−21	0.5	ø6.5	ø2.98	
NWT−22	0.5	ø6.5	ø3.5	
NWT−23	0.5	ø6.5	ø4.1	
NWT−24	0.5	ø7.0	ø2.5	
NWT−25	0.5	ø7.0	ø4.2	
NWT−26	0.5	ø7.0	ø5.1	
NWT−27	0.5	ø7.0	ø3.1	
NWT−28	0.5	ø7.5	ø4.8	
NWT−29	0.5	ø7.8	ø3.2	
NWT−30	0.5	ø8.0	ø3.1	


PART NO	A	B	C	PACKAGE
NWT−31	0.5	ø8.0	ø4.1	5000
NWT−32	0.5	ø8.0	ø5.0	
NWT−33	0.5	ø8.0	ø5.1	
NWT−34	0.5	ø8.0	ø6.0	
NWT−36	0.5	ø8.8	ø4.0	
NWT−37	0.5	ø8.8	ø5.2	
NWT−38	0.5	ø9.0	ø4.5	
NWT−39	0.5	ø9.0	ø6.1	
NWT−40	0.5	ø10.0	ø3.1	
NWT−41	0.5	ø10.0	ø4.1	
NWT−42	0.5	ø10.0	ø5.1	
NWT−43	0.5	ø10.0	ø5.2	
NWT−44	0.5	ø10.0	ø5.5	
NWT−45	0.5	ø10.0	ø6.1	
NWT−46	0.5	ø10.0	ø6.4	
NWT−47	0.5	ø10.4	ø7.2	5000
NWT−48	0.5	ø10.5	ø6.6	
NWT−49	0.5	ø10.8	ø7.2	
NWT−50	0.5	ø11.0	ø5.0	
NWT−51	0.5	ø11.6	ø7.6	
NWT−52	0.5	ø12.0	ø3.6	
NWT−53	0.5	ø12.0	ø5.2	
NWT−54	0.5	ø12.0	ø6.0	
NWT−55	0.5	ø12.0	ø7.3	
NWT−56	0.5	ø12.0	ø8.0	
NWT−58	0.5	ø13.0	ø6.5	
NWT−59	0.5	ø13.0	ø7.95	
NWT−60	0.5	ø13.0	ø8.0	
NWT−99	0.5	ø9.1	ø4.0	



華司 WASHER 8-31-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







PART NO	A	B	C	PACKAGE
U−02A	0.3	ø7.0	2.3	2000



華司 WASHER 8-31-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL





PART NO	A	B	C	PACKAGE
U−02F	0.3	ø7.0	1.9	2000
U−03K	0.8	ø7.0	3.8	


提醒 : 本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
UWD-6K	1.1	ø14.3	3.65	1000






華司 WASHER 8-32-2

- MATERIAL: PPO(UL)
- FLAME CLASS: 94V-1
- COLOR: GRAY

PART NO	A	B	C	PACKAGE
UWJ-14Q	2.0	ø14.6	4.0	1000






華司 WASHER 8-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

PART NO	A	B	C	PACKAGE
UWD-3F	0.6	ø6.7	2.3	1000






華司 WASHER 8-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

PART NO	A	B	C	PACKAGE
UWK-9	2.0	ø10.0	9.0	1000






華司 WASHER 8-32-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	SCREW	PACKAGE
WSF-02	0.6	ø4.5	ø1.6	M2x0.4	2000
WSF-3	0.8	ø8.3	ø3.2	#6-32	
WSF-3A	0.75	ø6.7	ø2.5	M3x0.5	
WSF-3D	0.6	ø5.0	ø2.5	M3x0.5	
WSF-3GK	0.6	ø5.0	ø2.4		
WSF-3M	1.0	ø8.0	ø2.5	M3x0.5	
WSF-3S	0.6	ø8.3	ø3.2	#6-32	
WSF-04	1.0	ø12.5	ø3.6	M4x0.7	
WSF-06	2.0	ø12.0	ø5.25		
WSF-6KT	1.0	ø6.3	ø2.3		
WSF-10	0.7	ø10.0	ø5.2		




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	SCREW	PACKAGE
WSF−09	0.6	ø9.0	ø4.2	M5x0.8	2000



華司 WASHER 8-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	USE SCREW	PACKAGE
WS−5RM	1.0	ø5.5	ø3.2	M3	2000
WS−5WK	1.2	ø5.5	ø3.2		
WS−5YT	1.8	ø5.5	ø3.2		
WS−6AT	1.5	ø6.35	ø3.2		
WS−2T	0.9	ø6.5	ø3.25		
WS−7RT	0.8	ø7.0	ø3.2		
WS−7YM	1.2	ø7.0	ø4.2	M4	
WS−7TH	1.0	ø7.0	ø4.2		
WS−7AY	1.5	ø7.5	ø4.2		
WS−7FT	0.65	ø7.5	ø4.2		
WS−8WT	0.8	ø7.9	ø4.2		

PART NO	A	B	C	USE SCREW	PACKAGE
WS−8HT	0.5	ø8.0	ø5.3	M5	2000
WS−8ST	1.0	ø8.0	ø3.2	M3	
WS−8TQ	2.0	ø8.0	ø3.2		
WS−3T	1.2	ø10.0	ø4.2	M4	
WS−11KT	1.0	ø11.0	ø4.2		
WS−11DF	2.0	ø11.0	ø4.2		
WS−11QT	2.0	ø11.5	ø4.2		
WS−12T	1.0	ø12.0	ø3.2	M3	
WS−12CK	2.0	ø12.0	ø3.2		
WS−4T	3.0	ø14.0	ø4.2	M4	
WS−15T	1.0	ø15.0	ø3.2	M3	
WS−15KR	2.0	ø15.0	ø3.2		



華司 WASHER 8-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	USE SCREW	PACKAGE
WRK−3C	0.7	ø4.6	ø3.3	M3	2000



華司 WASHER 8-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	USE SCREW	PACKAGE
WRC−5Q	0.8	ø11.0	ø6.6	ø4.4	—	2000
WRC−3BA	1.0	ø8.0	ø3.5	ø2.7	M3	
WRC−4GC	0.8	ø10.0	ø4.5	ø3.7	M4	
WRC−5DH	1.0	ø11.0	ø5.35	ø4.5	M5	
WRC−5MK	1.0	ø11.0	ø5.5	ø4.7	M5	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-34-1

- MATERIAL: PE
- COLOR: NATURAL




PART NO	A	B	C	D	USE SCREW	PACKAGE
WRD-3K	0.8	ø10.0	ø4.4	ø3.2	M4	2000
WRD-5C	1.2	ø12.0	ø6.4	ø5.2	M6	



華司 WASHER 8-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	USE SCREW	PACKAGE
WS-20T	2.4	ø8.0	ø3.0	M3	2000



華司 WASHER 8-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	USE SCREW	PACKAGE
WSX-1A	3.0	ø5.0	ø3.2	ø1.8	M1.6	2000



華司 WASHER 8-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	USE SCREW	PACKAGE
WS-4FT	1.0	ø7.0	ø4.2	M4	2000
WS-4XT	1.5	ø7.0	ø4.2		
WS-4BT	2.0	ø7.0	ø4.2		
WS-5T	0.8	ø8.0	ø5.2	M5	
WS-5WT	1.0	ø8.0	ø5.2		
WS-5LT	1.5	ø8.0	ø5.2		
WS-5BT	2.0	ø8.0	ø5.2		
WS-6GT	1.0	ø9.0	ø6.2	M6	
WS-6HT	1.5	ø9.0	ø6.2		
WS-6PT	2.0	ø9.0	ø6.2		



華司 WASHER 8-34-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
WRP-5LA	5.5	ø8.7	ø5.8	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	USE SCREW	PACKAGE
WSH-08	0.5	ø8.0	3.4	#6-32	2000



華司 WASHER 8-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
UWD-3D	2.0	ø12.0	ø3.2	1000



華司 WASHER 8-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
WWK-11A	2.25	ø11.0	ø2.2	2000



華司 WASHER 8-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
UWQ-2M	2.5	ø5.5	ø4.1	1000



華司 WASHER 8-35-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW




PART NO	A	B	C	PACKAGE
WSA-02	2.1	ø20.0	ø3.7	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW




PART NO	A	B	C	PACKAGE
WRB-3A	1.9	ø9.6	ø4.2	2000
WRB-3C	1.9	ø11.5	ø4.2	



華司 WASHER 8-36-2

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
WRF-02	2.0	ø7.0	ø4.2	1000



華司 WASHER 8-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW




PART NO	A	B	C	D	USE SCREW	PACKAGE
UWM-03	2.5	ø9.6	ø6.3	ø3.1	M3	2000
UWM-04	2.7	ø11.6	ø8.4	ø4.1	M4	
UWM-05	3.2	ø13.6	ø10.4	ø5.1	M5	
UWS-11	2.55	ø11.0	ø8.0	ø3.9	NO. 6-32UNC	
UWS-13	2.9	ø13.0	ø9.4	ø4.4	NO. 8-32UNC	
UWS-14	3.85	ø14.7	ø11.6	ø5.0	NO. 10-24UNC	1000
UWS-15	4.0	ø15.4	ø12.7	ø5.8	NO. 12-24UNC	
UWS-17	4.65	ø17.3	ø14.5	ø6.5	1/4-20UNC	



華司 WASHER 8-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
WSA-01	2.4	ø11.5	ø3.0	2000



固定座 MOUNT 8-36-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
UWF-3PQ	3.6	ø7.0	ø5.4	2000
UWF-05	5.0	ø7.0	ø5.3	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
UWXC−12A	2.2	ø13.5	ø12.7	1000






華司 WASHER 8-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
WSC−01	4.5	ø15.0	ø6.0	1000
WSC−1A	5.7	ø15.0	ø6.0	






華司 WASHER 8-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
WSC−30KP	10.0	ø30.0	ø10.0	200






華司 WASHER 8-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
WSC−06	6.0	ø14.0	ø4.6	1000






華司 WASHER 8-37-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
WWF−4K	3.1	ø12.0	ø4.35	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	B	C	D	E	PACKAGE
WSL-01	2.5	ø10.0	ø4.1	ø8.1	ø8.7	2000
WSL-02	1.5	ø7.0	ø3.1	ø5.1	ø5.7	






華司 WASHER 8-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
WSB-01	5.0	ø10.0	ø5.4	1000






華司 WASHER 8-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
WSJ-01	3.4	ø13.0	ø6.3	2000






華司 WASHER 8-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	D	PACKAGE
MIA-03	9.0	ø17.9	ø8.1	3.0	500
MIA-04	10.0	ø17.9	ø8.0	4.0	

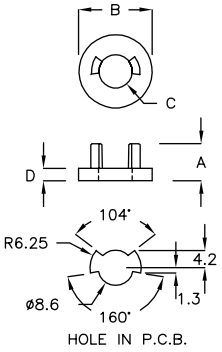




華司 WASHER 8-38-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
WST-14	3.0	ø14.0	ø4.5	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	PACKAGE
WSQ-01	10.0	ø14.0	ø3.2	ø5.0	ø12.0	2.8	1000
WSQ-03	7.3	ø7.0	ø3.0	ø3.5	ø6.1	3.8	



華司 WASHER 8-39-2

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
WU-1	0.8	12.6	ø5.9	11.5	2000
WU-002	0.6	9.5	ø4.1	8.9	



華司 WASHER 8-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
WUS-1A	5.5	5.84	ø1.7	2000



華司 WASHER 8-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
WSM-01	10.8	8.0	3.3	2.9	2000



華司 WASHER 8-39-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
WSU-01	8.0	3.6	ø3.3	1.6	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防震華司 SHOCK-ABSORB WASHER — 8-40-1

- MATERIAL: TPE
- COLOR: GRAY
- WITH M2.6 SCREW




PART NO	A	B	C	PACKAGE
GSG-01	ø9.6	1.75	ø2.5	2000



防震華司 SHOCK-ABSORB WASHER — 8-40-2

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
GSG-03	ø8.6	3.0	ø3.74	2000



華司 WASHER — 8-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
WSN-2A	ø6.3	2.6	ø2.3	ø4.3	2000



防震華司 SHOCK-ABSORB WASHER — 8-40-4

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	C	D HOLE IN CHASSIS	E	PACKAGE
GLH-2A	ø10.3	4.7	ø5.5	ø8.0	1.4	2000
GLH-12MP	ø12.0	4.9	ø6.2	ø8.2	1.8	



防震華司 SHOCK-ABSORB WASHER — 8-40-5

- MATERIAL: TPE
- COLOR: BLACK

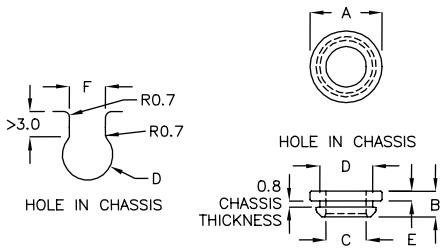


PART NO	A	B	C	D HOLE IN CHASSIS	E	F	PACKAGE
GLH-10CT	ø10.0	4.1	ø4.55	ø7.0	1.6	5.0	2000
GLH-3WD	ø11.0	3.9	ø6.4	ø8.1	1.5	6.0	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防震華司 SHOCK-ABSORB WASHER — 8-41-1

- MATERIAL: TPE
- COLOR: BLACK






PART NO	A	B	C	D HOLE IN CHASSIS	PACKAGE
GQH−9AT	ø9.0	2.8	ø3.9	ø5.5	2000



防震華司 SHOCK-ABSORB WASHER — 8-41-2

- MATERIAL: TPE
- COLOR: BLACK





PART NO	A	B	C	D HOLE IN CHASSIS	PACKAGE
GSQ−8AC	ø8.0	3.4	ø3.9	ø5.5	2000



防震華司 SHOCK-ABSORB WASHER — 8-41-3

- MATERIAL: TPE
- COLOR: BLACK







PART NO	A	B	C	PACKAGE
GSK−13A	ø13.0	9.35	ø5.6	1000



防震華司 SHOCK-ABSORB WASHER — 8-41-4

- MATERIAL: TPR,TPE,SILICONE
- COLOR: BLACK



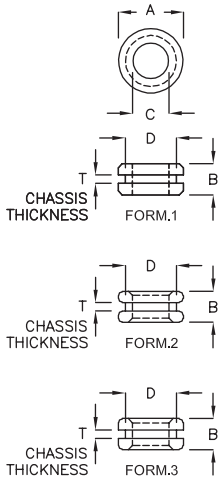


PART NO	MATERIAL	A	B	C	D	E	H	T CHASSIS THICKNESS	FORM	PACKAGE
WSS−02C	TPR	ø7.0	2.8	ø3.9	ø5.5	4.0	1.6	0.8	1	
WSS−03A	SILICONE	ø7.0	3.4	ø3.9	ø5.5	4.0	1.6	0.8	2	
WSS−3RK	SILICONE	ø8.2	3.8	ø4.0	ø6.0	4.0	2.0	0.8	3	
WSS−07	TPE	ø7.0	5.0	ø3.9	ø5.5	4.0	1.6	0.8	1	2000
WSS−5GD	TPE	ø5.0	4.0	ø2.5	ø4.0	3.0	1.5	1.0	2	
★ WSS−7BH	TPE	ø7.0	5.3	ø3.5	ø5.2	3.5	1.5	0.8	1	
WSS−10CQ	SILICONE	ø10.0	5.35	ø4.0	ø6.0	4.0	3.0	1.2	3	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防震華司 SHOCK-ABSORB WASHER — 8-42-1

- MATERIAL: TPE
- COLOR: BLACK

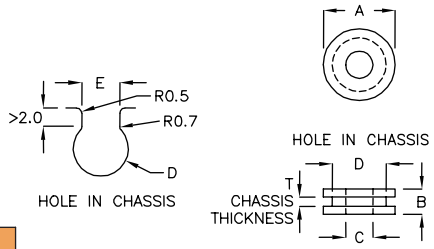


PART NO	A	B	C	D HOLE IN CHASSIS	E	T CHASSIS THICKNESS	PACKAGE
★ GSH−9C	ø9.6	2.8	ø5.6	ø7.6	6.6	0.8	1000
GSH−12RT	ø12.0	6.0	ø3.9	ø7.5	6.5	1.0	
GSH−12AP	ø12.0	9.0	ø6.0	ø9.0	8.0	1.0	
GSH−12	ø12.7	4.4	ø4.8	ø9.5	8.5	1.6	



防震華司 SHOCK-ABSORB WASHER — 8-42-2

- MATERIAL: TPE
- COLOR: BLACK

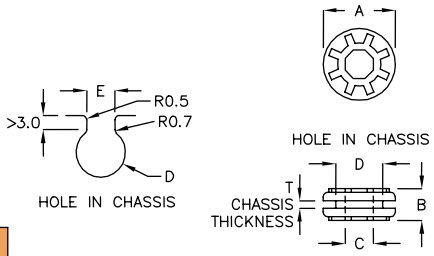


PART NO	A	B	C	D HOLE IN CHASSIS	E	T CHASSIS THICKNESS	PACKAGE
GSA−2C	ø16.0	7.0	6.3	ø10.5	9.0	1.6	500
GSA−2D	ø20.0	14.0	6.3	ø14.7	13.2	1.6	200



防震華司 SHOCK-ABSORB WASHER — 8-42-3

- MATERIAL: TPE
- COLOR: BLACK

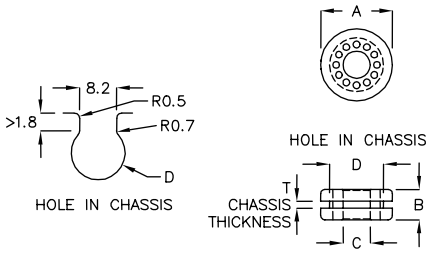


PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
GSA−2H	ø12.7	5.4	ø4.8	ø9.2	1.0	1000



防震華司 SHOCK-ABSORB WASHER — 8-42-4

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
GSD−01	ø18.8	9.7	ø6.3	ø14.4	1.4	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




防震華司 SHOCK-ABSORB WASHER — 8-43-1

- MATERIAL: TPE
- COLOR: BLACK

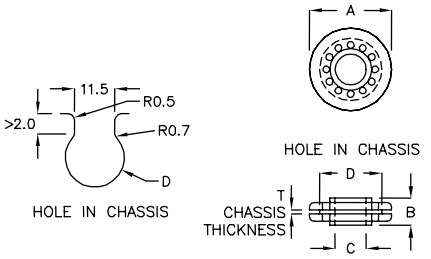


PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
GSA−1A	ø16.5	5.45	ø6.2	ø12.5	0.85	500
GSA−2A	ø16.5	6.5	ø6.6	ø12.5	1.6	



防震華司 SHOCK-ABSORB WASHER — 8-43-2

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
GSE−16A	ø16.5	6.5	ø5.8	ø12.5	1.6	500



防震華司 SHOCK-ABSORB WASHER — 8-43-3

- MATERIAL: TPE
- COLOR: BLACK

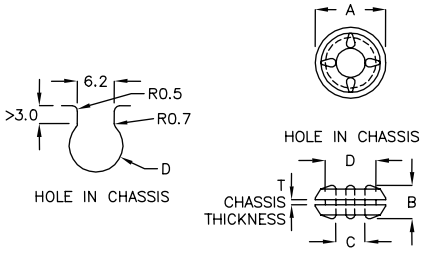


PART NO	A	B	C	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
GSA−03	ø11.2	5.3	ø4.6	ø8.0	0.8	2000



防震華司 SHOCK-ABSORB WASHER — 8-43-4

- MATERIAL: SILICONE
- COLOR: BLACK

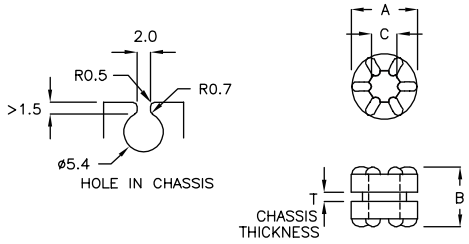


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
GSA−08	ø8.6	7.8	ø3.3	0.6~1.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防震華司 SHOCK-ABSORB WASHER — 8-44-1

- MATERIAL: TPE,SILICONE
- COLOR: BLACK

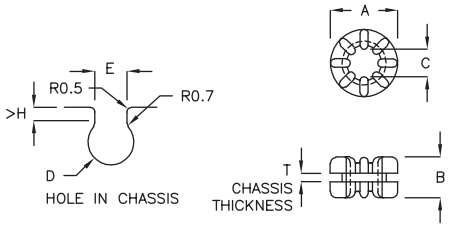


PART NO	MATERIAL	A	B	C	D	E	H	T CHASSIS THICKNESS	PACKAGE
GSA-7A	TPE	ø7.2	5.1	ø4.2	ø6.0	5.0	1.5	0.8	1000
GSA-8LM	TPE	ø7.8	4.5	ø4.0	ø5.8	4.2	1.5	1.0	2000
GSA-8QT	TPE	ø8.6	7.8	ø3.3	ø5.4	3.5	1.5	0.6~1.0	
GSA-010	TPE	ø9.6	5.8	ø3.9	ø6.3	5.0	1.8	1.2	1000
GSA-09	TPE	ø9.6	7.6	ø4.0	ø6.4	5.0	1.8	3.2	
GSA-9KP	TPE	ø9.6	4.6	ø4.3	ø6.5	5.0	1.9	1.0	
GSA-9SQ	TPE	ø9.6	5.8	ø3.9	ø6.3	5.0	4.5	0.8	
GSA-10A	TPE	ø9.6	5.8	ø3.9	ø6.3	5.0	4.5	1.0	
GSA-04	SILICONE	ø14.3	7.95	ø5.0	ø9.5	7.5	3.0	1.0	
GSA-14	TPE	ø14.3	8.2	ø4.7	ø9.5	7.5	3.0	1.6	
GSA-14A	TPE	ø14.3	9.5	ø5.6	ø9.5	7.5	3.0	3.2	



防震華司 SHOCK-ABSORB WASHER — 8-44-2

- MATERIAL: TPE
- COLOR: BLACK

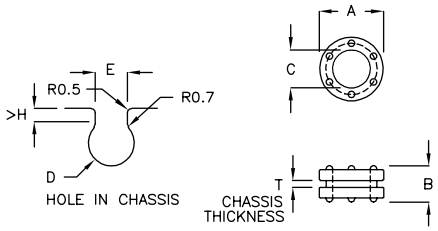


PART NO	A	B	C	D	E	H	T CHASSIS THICKNESS	PACKAGE
GSM-9F	ø9.5	5.4	ø5.6	ø7.5	6.1	1.8	1.0	1000



防震華司 SHOCK-ABSORB WASHER — 8-44-3

- MATERIAL: TPE
- COLOR: BLACK

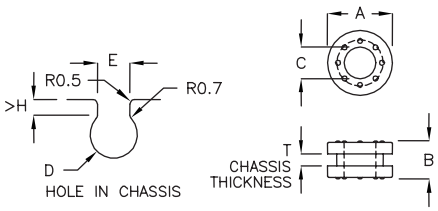


PART NO	A	B	C	D	E	H	T CHASSIS THICKNESS	PACKAGE
GSM-11K	ø11.5	6.8	ø5.6	ø8.4	7.0	2.8	2.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防震華司 SHOCK-ABSORB WASHER — 8-45-1

- MATERIAL: TPE
- COLOR: BLACK

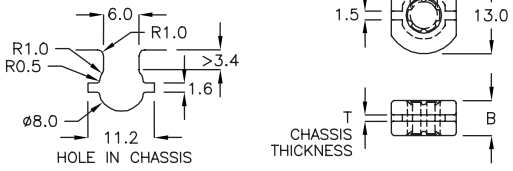


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
GSB-13K	11.0	5.9	ø4.6	1.0	1000



防震華司用螺絲 SCREW — 8-45-2

- MATERIAL: STEEL PLATING NI
- COLOR: SILVER
- D: SCREW




PART NO	A	B	C	D	PACKAGE
SWA-05	9.8	5.0	ø4.4	M3	2000
SWA-5DA	9.8	5.0	ø4.4	#6-32	
SWA-5F	11.0	5.0	ø4.4	M3	

A SSEMBLE WITH P.G PART GSA-010



防震華司用螺絲 SCREW — 8-45-3

- MATERIAL: STEEL PLATING NI
- COLOR: SILVER
- D: SCREW




PART NO	A	B	C	D	PACKAGE
SWA-7A	11.3	7.5	ø5.4	M3	1000

A SSEMBLE WITH P.G PART GSA-04




電晶體墊片 TRANSISTOR WASHER — 8-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	PACKAGE
TRC-201	ø6.5	0.75	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體墊片 TRANSISTOR WASHER — 8-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
TRC-202	ø5.0	0.75	2000






電晶體墊片 TRANSISTOR WASHER — 8-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TRC-301	ø6.5	3.0	1.5	2000
TRC-301M	ø6.5	1.6	1.0	






電晶體墊片 TRANSISTOR WASHER — 8-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
TRC-301S	ø6.5	1.7	2000






電晶體墊片 TRANSISTOR WASHER — 8-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
TRC-302	ø6.0	5.0	2000






電晶體墊片 TRANSISTOR WASHER — 8-46-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
TRC-501	ø8.9	3.0	2000
TRC-501A	ø8.9	4.5	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體墊片 TRANSISTOR WASHER 8-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
TRC-601	ø12.0	1.2	2000






電晶體墊片 TRANSISTOR WASHER 8-47-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	PACKAGE
TRA-3A	ø6.4	3.4	2000






熱釋電紅外線感測器座 PIR HOLDER 8-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
TQJ-04	ø11.0	500

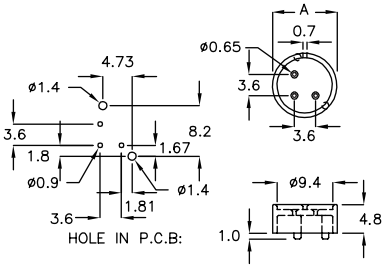




熱釋電紅外線感測器座 PIR HOLDER 8-47-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	PACKAGE
TQP-10C	10.7	6.15	2000






華司 WASHER 8-47-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
WSG-6C	ø12.0	1.2	3.1	ø5.3	ø4.3	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: POM(UL),TPE
- COLOR: NATURAL,BLACK




PART NO	MATERIAL	COLOR	A	B	C	D	E	PACKAGE
WSG-04	N66	NATURAL	ø5.6	0.6	0.8	ø3.85	ø2.9	
WSG-9Q	N66	NATURAL	ø7.2	0.7	1.0	ø5.2	ø3.2	
WSG-9C	POM	NATURAL	ø9.0	1.5	1.0	ø6.3	ø4.5	2000
WSG-01	N66	NATURAL	ø10.0	1.8	1.0	ø5.0	ø3.1	
WSG-02	TPE	BLACK	ø10.0	1.8	1.0	ø5.5	ø4.0	
WSG-10BD	N66	BLACK	ø10.0	2.0	1.2	ø7.0	ø4.3	1000
WSG-11B	N66	NATURAL	ø10.9	2.3	1.3	ø6.8	ø2.95	
WSG-06	N66	NATURAL	ø12.0	3.0	3.2	ø6.2	ø3.0	
WSG-6A	N66	NATURAL	ø12.0	3.0	1.4	ø8.0	ø3.0	
WSG-12CR	N66	NATURAL	ø12.7	0.8	0.8	ø6.2	ø4.4	2000
WSG-05	N66	NATURAL	ø12.85	0.8	1.6	ø9.5	ø6.4	
WSG-07	N66	NATURAL	ø13.0	5.0	1.5	ø8.2	ø3.0	
WSG-10M	N66	NATURAL	ø13.0	2.4	1.7	ø7.9	ø6.6	



華司 WASHER 8-48-2

- MATERIAL: PPO(UL)
- FLAME CLASS: 94V-1
- COLOR: GRAY
- ADHESIVE TAPE: 3M




PART NO	A	B	C	D	E	PACKAGE
WSI-20P	ø20.0	3.35	2.65	ø8.4	ø6.4	1000



華司 WASHER 8-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
WSGT-10F	ø10.0	1.3	0.8	4.05	ø3.45	1000




華司 WASHER 8-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	C	D	E	PACKAGE
WSGB-20A	ø20.0	3.5	4.5	ø15.8	ø10.2	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



華司 WASHER 8-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
WSG-03	ø16.0	1.0	0.85	ø11.0	ø9.7	2000






華司 WASHER 8-49-2

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

PART NO	A	D	E1	E2	PACKAGE
WSG-6F	ø12.55	ø11.5	ø9.3	ø8.1	2000
WSG-8A	ø12.35	ø11.4	ø9.35	ø8.15	






華司 WASHER 8-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
821	ø21.0	4.6	1.6	500






華司 WASHER 8-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
WWA-01	ø10.0	7.1	0.9	ø6.6	ø5.2	1000






華司 WASHER 8-49-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	B	C	D	E	PACKAGE
WSE-01	ø10.0	4.0	1.0	ø5.0	ø4.0	2000
WSE-02	ø15.8	3.8	1.5	ø8.6	ø6.5	
WSE-03	ø15.9	4.3	1.0	ø8.6	ø6.5	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




華司 WASHER — 8-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




PART NO	A	B	C	D	E	PACKAGE
★ WSEA-04L	ø8.4	2.5	1.25	ø4.85	ø3.25	2000



華司 WASHER — 8-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

PART NO	A	B	C	PACKAGE
WSNA-25K	ø25.3	3.95	2.5	500

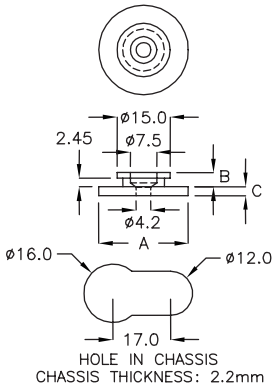




電感保護罩 INSULATED CAP — 8-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
CAP-01	13.0	ø13.0	500

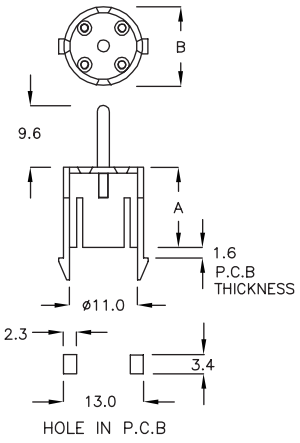




電晶體墊片 TRANSISTOR WASHER — 8-50-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	D	E	PACKAGE
40M-2H	ø4.2	0.5	1.7	ø2.9	ø2.05	2000
40M-2FC	ø4.2	1.0	1.6	ø2.9	ø2.05	






電晶體墊片 TRANSISTOR WASHER — 8-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW

PART NO	A	B	C	D	E	PACKAGE
60M-16	ø8.5	4.35	1.6	ø3.5	ø3.0	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體墊片 TRANSISTOR WASHER — 8-51-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
807	ø8.0	3.7	2.0	1.8	2000
807S	ø8.0	2.9	2.0	1.8	






電晶體墊片 TRANSISTOR WASHER — 8-51-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	D	E	F	PACKAGE
60T−12	ø6.4	2.0	1.2	3.7	3.0	3.76	2000
60T−20	ø6.4	2.0	1.2	3.6	3.0	3.86	






電晶體墊片 TRANSISTOR WASHER — 8-51-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	D	E	PACKAGE
60K−29	ø6.0	1.1	2.9	ø3.8	ø3.2	2000
60K−28C	ø6.0	1.0	2.8	ø3.8	ø3.2	
602−46−1	ø6.1	1.6	1.4	ø3.5	ø3.0	






電晶體墊片 TRANSISTOR WASHER — 8-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	E	PACKAGE
603FK	ø6.0	0.8	2.8	ø3.6	ø3.1	2000







電晶體墊片 TRANSISTOR WASHER — 8-51-5

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	D	E	PACKAGE
603QT	ø4.4	1.5	0.5	ø3.55	ø2.95	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體墊片 TRANSISTOR WASHER — 8-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- OPTIONAL MATERIAL:
- NYLON 46(UL), PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL, BLACK



PART NO	A	B	C	D	E	PACKAGE
601A	ø3.6	2.8	1.0	ø3.0	ø1.8	2000
601C	ø3.6	2.8	1.0	ø3.0	ø2.0	
601	ø4.6	2.4	1.2	ø3.0	ø2.3	
603GK	ø4.7	3.25	0.7	ø3.55	ø3.0	
601W	ø5.0	1.0	0.8	ø3.0	ø2.0	
601M	ø5.0	1.7	1.0	ø3.0	ø2.2	
604PH	ø5.0	2.4	1.9	ø3.1	ø2.5	
602YH	ø5.0	1.6	1.3	ø3.5	ø3.0	
603NJ	ø5.0	2.0	1.9	ø3.5	ø3.0	
603QH	ø5.0	2.4	1.9	ø3.5	ø3.0	
601S	ø5.4	0.8	1.0	ø3.4	ø2.9	
601Q	ø5.5	2.16	1.04	ø3.64	ø2.56	
601R	ø5.7	1.75	0.95	ø3.55	ø2.95	
603	ø5.9	2.2	1.9	ø3.55	ø2.95	
601J	ø6.0	0.9	2.5	ø3.0	ø2.2	
601H	ø6.0	4.0	1.5	ø3.0	ø2.5	
601D	ø6.0	4.5	1.0	ø3.0	ø2.5	
602HC	ø6.0	1.6	1.3	ø3.5	ø2.95	
603D	ø6.0	2.5	1.2	ø3.5	ø2.7	
604P	ø6.0	2.54	2.0	ø3.5	ø2.88	
605A	ø6.0	5.7	1.2	ø3.5	ø2.95	
602S	ø6.0	1.2	1.3	ø3.55	ø2.95	
602	ø6.0	1.6	1.3	ø3.55	ø2.95	
602Y	ø6.0	1.6	1.3	ø3.55	ø3.0	
603L	ø6.0	2.0	2.0	ø3.55	ø2.95	
603M	ø6.0	2.3	1.8	ø3.55	ø2.95	
603P	ø6.0	2.3	1.8	ø3.55	ø3.0	
604S	ø6.0	3.1	1.5	ø3.55	ø2.95	
604	ø6.0	3.2	2.0	ø3.55	ø2.95	
608L	ø6.0	7.7	1.0	ø3.55	ø2.95	
605U	ø6.0	1.5	0.5	ø3.6	ø3.0	
602L	ø6.0	1.5	1.5	ø3.6	ø3.0	


PART NO	A	B	C	D	E	PACKAGE
603AG	ø6.1	0.8	2.0	ø3.55	ø2.95	2000
602K	ø6.1	1.4	1.5	ø3.55	ø2.95	
602M	ø6.1	1.5	1.2	ø3.55	ø2.95	
603S	ø6.1	1.5	2.0	ø3.55	ø2.95	
603W	ø6.1	1.5	2.0	ø3.55	ø2.95	
603K	ø6.1	2.0	1.4	ø3.55	ø2.95	
603Y	ø6.1	2.25	2.0	ø3.55	ø2.95	
602MS	ø6.15	1.4	1.2	ø3.55	ø2.95	
602TK	ø6.2	1.2	1.0	ø3.5	ø2.9	
603MK	ø6.2	2.4	1.9	ø3.5	ø3.0	
602W	ø6.2	2.4	1.9	ø3.5	ø3.0	
604HQ	ø6.2	3.1	1.5	ø3.5	ø2.95	
602KD	ø6.2	0.6	1.2	ø3.55	ø2.95	
603U	ø6.2	3.0	1.9	ø3.55	ø3.0	
604V	ø6.2	3.1	1.5	ø3.55	ø2.95	
604C	ø6.2	3.6	1.2	ø3.55	ø2.95	
603A	ø6.2	2.9	1.9	ø3.6	ø2.95	
604K	ø6.22	3.1	1.02	ø3.56	ø2.95	
604M	ø6.3	2.6	2.0	ø3.55	ø2.95	
605AF	ø6.3	1.5	2.5	ø3.9	ø3.2	
605W	ø6.35	2.05	1.0	ø4.1	ø3.15	
605MF	ø6.35	2.05	1.02	ø4.35	ø3.08	
605N	ø6.4	2.0	1.2	ø3.53	ø3.0	
605T	ø6.4	3.0	1.5	ø3.53	ø3.0	
604L	ø6.4	2.0	1.3	ø3.55	ø2.95	
606S	ø6.5	1.7	2.5	ø4.15	ø3.2	
606	ø6.5	1.7	3.0	ø4.25	ø3.2	
603T	ø7.0	2.4	1.3	ø3.55	ø3.0	
605S	ø7.9	1.5	1.0	ø3.6	ø3.0	
605	ø8.0	5.7	1.2	ø3.5	ø2.95	
606A	ø8.0	6.3	1.2	ø3.55	ø2.9	
601F	ø8.0	3.9	0.5	ø6.0	ø3.5	
605K	ø10.0	5.7	2.2	ø3.95	ø2.95	
605F	ø12.0	5.7	2.7	ø3.95	ø2.95	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體墊片 TRANSISTOR WASHER 8-53-1


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- OPTIONAL MATERIAL:
  NYLON 46(UL), PPS(UL), PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL, BLACK



PART NO	A	B	C	D	E	PACKAGE
706A	ø7.0	2.5	1.0	ø3.5	ø3.1	2000
701	ø7.0	4.4	2.0	ø3.55	ø2.95	
706C	ø7.0	1.67	1.06	ø4.5	ø2.35	
706D	ø7.0	1.67	0.81	ø4.5	ø2.35	
703	ø7.0	2.5	2.0	ø5.0	ø2.95	
704A	ø7.0	3.0	1.0	ø5.0	ø4.0	
705	ø7.0	4.0	1.0	ø5.0	ø4.0	
704	ø7.0	5.8	2.0	ø5.0	ø3.0	
702A	ø7.11	0.8	1.2	ø3.68	ø3.0	
805	ø7.8	3.65	1.2	ø5.9	ø3.1	
805A	ø7.9	2.5	1.2	ø5.9	ø3.2	
806H	ø8.0	2.7	1.3	ø3.05	ø2.5	
805C	ø8.0	1.2	4.0	ø3.5	ø3.0	
803A	ø8.0	2.4	1.3	ø3.5	ø2.95	
806F	ø8.0	2.7	1.3	ø3.5	ø2.5	
802	ø8.0	2.5	2.0	ø3.7	ø2.95	
806	ø8.0	1.9	1.45	ø3.9	ø3.2	
801A	ø8.0	0.9	2.0	ø4.4	ø3.2	
801C	ø8.0	0.9	2.0	ø4.65	ø4.0	
804A	ø8.0	5.1	1.0	ø4.55	ø3.65	
804C	ø8.0	0.9	3.2	ø4.65	ø3.1	
804	ø8.0	3.0	3.2	ø4.65	ø3.1	
803	ø8.1	2.7	1.2	ø3.9	ø3.0	
801	ø8.1	0.8	1.0	ø4.9	ø3.1	

★


PART NO	A	B	C	D	E	PACKAGE
805B	ø8.1	6.65	1.25	ø6.0	ø3.1	2000
808F	ø8.8	2.0	0.8	ø5.0	ø4.1	
807B	ø9.0	3.75	2.0	ø6.0	ø3.0	
808D	ø9.5	1.55	0.8	ø4.95	ø4.35	
808A	ø9.5	1.2	2.0	ø6.2	ø3.8	
808	ø9.6	0.65	1.55	ø6.0	ø3.65	
809	ø10.0	4.0	1.0	ø5.0	ø4.0	
809A	ø10.0	3.0	1.0	ø5.0	ø4.0	
811	ø10.8	3.8	2.0	ø7.9	ø5.3	
811A	ø10.9	7.25	1.1	ø5.0	ø4.0	
813K	ø11.0	3.5	1.5	ø6.9	ø4.3	
812	ø11.8	2.0	2.0	ø5.9	ø3.0	
803K	ø11.8	1.9	0.5	ø6.0	ø4.0	
812C	ø11.8	2.0	1.2	ø5.9	ø3.0	
812L	ø11.9	3.0	2.6	ø7.9	ø4.0	1000
812A	ø12.3	9.0	1.1	ø5.3	ø4.5	
812D	ø12.7	1.6	1.6	ø7.96	ø3.58	
713AN	ø13.0	2.9	3.0	ø7.8	ø4.1	2000
713BK	ø13.0	3.9	3.0	ø7.8	ø4.1	
713	ø13.0	5.9	3.0	ø7.8	ø4.1	
814AT	ø14.0	14.7	1.3	ø6.6	ø5.1	500
814	ø14.0	18.9	1.3	ø6.6	ø5.1	
817A	ø15.0	13.0	2.0	ø9.95	ø8.1	
815	ø15.9	1.65	2.0	ø5.9	ø3.1	
901	ø19.2	1.6	3.25	ø12.7	ø9.5	




電晶體墊片 TRANSISTOR WASHER 8-53-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
603RA	ø5.0	2.4	1.9	2000







電晶體蓋 TRANSISTOR COVER 8-53-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-19	29.5	7.5	3.3	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體蓋 TRANSISTOR COVER 8-54-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HU-19A	29.5	7.5	3.3	1000







電晶體蓋 TRANSISTOR COVER 8-54-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	F	G	K	PACKAGE
HUK-01	19.0	7.0	3.4	2.0	ø2.4	5.0	1000
HUK-2A	15.0	7.0	3.6	2.0	ø3.2	5.5	






電晶體蓋 TRANSISTOR COVER 8-54-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HUK-7Y	15.0	10.0	3.3	1000






電晶體蓋 TRANSISTOR COVER 8-54-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HU-07T	12.9	12.0	1000






光電耦合器保護蓋 OPTICAL COUPLER COVER 8-54-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HUJ-01	2.5	8.6	5.0	2000
HUJ-1FD	3.0	8.6	5.0	
HUJ-2MK	2.5	11.6	8.0	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




光電耦合器保護蓋
OPTICAL COUPLER COVER 8-55-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUJ-3RS	2.5	10.6	1000






光電耦合器保護蓋
OPTICAL COUPLER COVER 8-55-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUJ-2A	2.4	9.4	2000
HUJ-2XY	2.9	9.4	







IC 保護蓋 IC COVER 8-55-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
MPT-7PN	2.5	7.4	5.5	2000







光電耦合器保護蓋
OPTICAL COUPLER COVER 8-55-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HJA-2D	2.5	8.6	2000







IC 保護蓋 IC COVER 8-55-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUJ-4HN	2.2	13.9	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



IC 保護蓋 IC COVER 8-56-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUJ-4QM	2.2	8.0	1000






IC 保護蓋 IC COVER 8-56-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUJ-4CR	2.2	9.5	1000

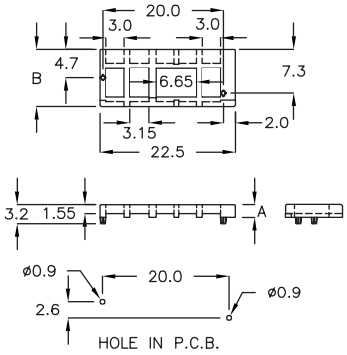





IC 保護蓋 IC COVER 8-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUT-2CD	2.2	8.2	1000







IC 保護蓋 IC COVER 8-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
ICC-16	16.0	12.2	1000







IC 保護蓋 IC COVER 8-56-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
ICA-20A	20.4	9.3	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




IC 保護蓋 IC COVER 8-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HUQ-16	16.0	8.0	500






保護蓋 HOLE PROTECTOR 8-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MPR-05	15.1	8.0	6.8	1000







電晶體座 TRANSISTOR HOUSING 8-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TRR-4A	4.1	19.2	10.3	1000







電晶體座 TRANSISTOR HOUSING 8-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
TR-01A	3.0	5.0	7.0	2000







電晶體座 TRANSISTOR HOUSING 8-57-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TR-01	7.6	10.5	10.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體座 TRANSISTOR HOUSING 8-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TR-01C	7.5	10.5	10.0	1000







電晶體座 TRANSISTOR HOUSING 8-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
TR-01D	6.1	9.0	10.5	1000







電晶體座 TRANSISTOR HOUSING 8-58-3

- MATERIAL: PBT,NYLON 66(UL)
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR
  ＊ FOR TO-247 TRANSISTOR

PART NO	MATERIAL	A	B	C	D	E	F	PACKAGE
TR-01H	PBT V0	4.5	9.5	3.4	3.0	1.0	1.6	2000
*TR-1MK	N66 V2	8.0	14.7	7.0	4.0	1.2	3.6	







電晶體座 TRANSISTOR HOUSING 8-58-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TR-01F	5.5	10.0	3.4	3.0	2000







電晶體座 TRANSISTOR HOUSING 8-58-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TR-1YQ	4.5	9.45	3.4	3.0	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體座 TRANSISTOR HOUSING 8-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR
  ＊ FOR TO-3P TRANSISTOR




PART NO	A	B	C	D	PACKAGE
TR−02	5.0	10.0	2.6	4.0	2000
*TR−02A	5.0	15.0	5.75	4.0	
TR−02C	3.7	10.0	2.7	3.7	




電晶體座 TRANSISTOR HOUSING 8-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	D	PACKAGE
TR−02D	5.0	10.0	4.0	2000




電晶體座 TRANSISTOR HOUSING 8-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	D	PACKAGE
TR−02F	8.5	10.0	2.6	4.0	1000
TR−02H	9.5	10.0	2.6	4.0	




電晶體座 TRANSISTOR HOUSING 8-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	D	PACKAGE
TR−2QM	5.0	10.0	2.6	4.0	2000




電晶體座 TRANSISTOR HOUSING 8-59-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR



PART NO	A	B	C	D	PACKAGE
TRZ−07	7.0	9.8	2.6	4.0	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體座 TRANSISTOR HOUSING 8-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	D	PACKAGE
TR−2DC	3.5	8.6	2.5	2.3	2000






電晶體座 TRANSISTOR HOUSING 8-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- FOR TO-247 TRANSISTOR

PART NO	A	B	C	D	PACKAGE
TR−2HK	4.3	15.0	4.8	2.8	2000
TR−2WS	4.3	16.5	4.8	4.0	
TR−11AM	11.0	16.5	4.77	4.77	1000







電晶體座 TRANSISTOR HOUSING 8-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	D	PACKAGE
TRK−2A	2.8	6.5	1.5	3.0	2000






電晶體座 TRANSISTOR HOUSING 8-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TRT−5CS	5.5	5.7	ø1.1	3.5	2000







電晶體座 TRANSISTOR HOUSING 8-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220FP TRANSISTOR

PART NO	A	B	C	D	PACKAGE
TRW−4YL	4.0	10.0	2.5	4.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體座 TRANSISTOR HOUSING 8-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-251 TRANSISTOR

PART NO	A	B	C	PACKAGE
TRY−1A	0.8	14.0	7.4	1000






電晶體座 TRANSISTOR HOUSING 8-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TR−20D	4.0	20.0	5.2	6.5	1000







電晶體座 TRANSISTOR HOUSING 8-61-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	D	PACKAGE
TR−22D	3.0	22.0	5.35	5.0	1000






電晶體座 TRANSISTOR HOUSING 8-61-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TRL−10	10.0	23.0	5.4	5.1	1000






電晶體座 TRANSISTOR HOUSING 8-61-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TRN−9H	8.5	21.3	5.44	5.08	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體座 TRANSISTOR HOUSING 8-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-247-4L-M TRANSISTOR




PART NO	A	B	C	D	E	PACKAGE
TRNC−4A	4.5	15.5	8.25	3.8	8.3	1000



電晶體座 TRANSISTOR HOUSING 8-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR




PART NO	A	B	C	D	PACKAGE
QLL−16	7.0	8.0	16.0	13.5	2000




電晶體蓋 TRANSISTOR COVER 8-62-3

- MATERIAL: NYLON 66+GF30%
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
HUF−14	14.0	12.2	2.0	1000




電晶體蓋 TRANSISTOR COVER 8-62-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	PACKAGE
TR−03	16.0	12.8	12.5	500



電晶體蓋 TRANSISTOR COVER 8-62-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL



PART NO	A	B	C	D	E	F	PACKAGE
TR−03A	16.6	7.1	10.4	5.4	8.5	7.4	500
TR−03E	14.0	7.1	10.4	4.2	8.4	7.8	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體蓋 TRANSISTOR COVER 8-63-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-03P	14.0	7.35	13.0	1000






電晶體蓋 TRANSISTOR COVER 8-63-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	E	F	G	PACKAGE
TR-03C	14.0	7.1	10.4	8.4	7.8	ø2.8	500
TR-03D	14.0	7.1	12.0	10.2	7.7	ø3.4	
TR-03L	14.8	8.15	12.15	10.35	7.8	ø3.1	






電晶體蓋 TRANSISTOR COVER 8-63-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TR-03N	14.2	8.15	12.15	500







電晶體蓋 TRANSISTOR COVER 8-63-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-03F	16.0	12.8	10.3	500






電晶體蓋 TRANSISTOR COVER 8-63-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-03K	21.55	14.1	10.8	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體蓋 TRANSISTOR COVER 8-64-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	G	PACKAGE
TR-04A	15.3	8.35	10.1	ø3.7	1000
TR-04H	13.0	6.0	10.1	ø3.2	



電晶體蓋 TRANSISTOR COVER 8-64-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	G	PACKAGE
TR-4ND	11.45	5.65	10.1	ø3.2	1000



電晶體蓋 TRANSISTOR COVER 8-64-3

- METAL MATERIAL: PHOSPHOR BRONZE
- PLASTIC MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	PACKAGE
TR-04	14.6	8.2	10.2	1000



電晶體蓋 TRANSISTOR COVER 8-64-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

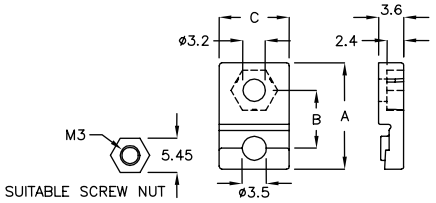


PART NO	A	B	C	PACKAGE
TR-4GS	15.3	8.35	10.1	1000
TR-4YK	14.3	7.4	10.1	




電晶體蓋 TRANSISTOR COVER 8-64-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

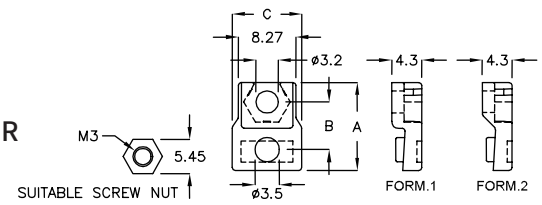


PART NO	A	B	C	FORM	PACKAGE
TR-4LF	12.65	6.85	10.0	1	1000
TR-4JW	12.65	6.85	10.0	2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體蓋 TRANSISTOR COVER 8-65-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

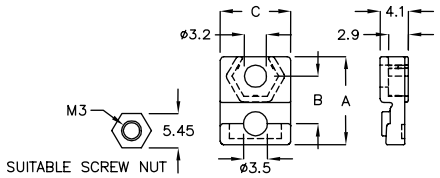


PART NO	A	B	C	PACKAGE
TR−4RL	12.65	6.85	10.1	1000




電晶體蓋 TRANSISTOR COVER 8-65-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	PACKAGE
TRE−4BJ	12.65	6.85	10.1	200




電晶體蓋 TRANSISTOR COVER 8-65-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	PACKAGE
TR−05	16.2	7.4	13.0	200



電晶體蓋 TRANSISTOR COVER 8-65-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	E	F	G	PACKAGE
TR−06	16.2	7.65	13.1	10.3	ø3.1	ø3.4	200
TR−06A	16.1	7.75	13.2	10.6	ø3.3	ø3.5	
TR−08	17.6	9.15	13.0	10.5	ø3.1	ø3.4	
TR−08D	19.2	10.75	13.0	10.5	ø3.0	ø3.4	



電晶體蓋 TRANSISTOR COVER 8-65-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR



PART NO	A	B	C	E	F	PACKAGE
TR−06H	14.3	8.3	12.6	10.3	ø3.0	200
TR−06J	14.3	8.3	13.2	10.5	ø3.2	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體蓋 TRANSISTOR COVER 8-66-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TR-06K	13.0	6.8	13.2	200






電晶體蓋 TRANSISTOR COVER 8-66-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TR-06D	13.0	6.8	13.2	200







電晶體蓋 TRANSISTOR COVER 8-66-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR


PART NO	A	B	C	PACKAGE
TR-08C	16.0	8.0	13.0	200






電晶體蓋 TRANSISTOR COVER 8-66-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




PART NO	A	B	C	PACKAGE
TR-6AF	13.0	6.8	13.2	200






電晶體蓋 TRANSISTOR COVER 8-66-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR



PART NO	A	B	C	PACKAGE
TR-8CF	16.0	8.0	13.0	200




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體蓋 TRANSISTOR COVER 8-67-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR
  ＊ FOR TO-3P TRANSISTOR




PART NO	A	B	C	D	E	F	G	I	PACKAGE
TR−09	22.9	9.3	12.9	9.4	10.4	ø2.9	ø3.5	7.8	200
＊TR−26	26.3	10.6	18.6	10.2	15.3	ø3.6	ø4.1	7.2	



電晶體蓋 TRANSISTOR COVER 8-67-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR

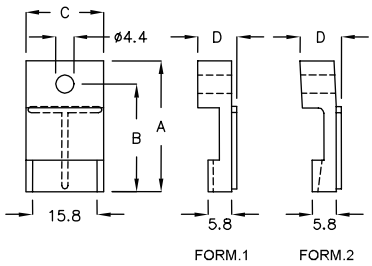


PART NO	A	B	C	D	FORM	PACKAGE
TR−10	32.0	26.3	19.1	9.75	1	200
TR−10KD	32.0	26.3	19.1	10.0	2	




電晶體蓋 TRANSISTOR COVER 8-67-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR




PART NO	A	B	C	PACKAGE
TR−11	32.0	26.3	19.0	200



電晶體蓋 TRANSISTOR COVER 8-67-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247 TRANSISTOR



PART NO	A	B	C	PACKAGE
TR−20MK	20.25	14.0	13.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體蓋 TRANSISTOR COVER 8-68-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

PART NO	A	B	C	PACKAGE
TR-21KP	21.5	9.3	12.9	200






電晶體蓋 TRANSISTOR COVER 8-68-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR

PART NO	A	B	C	D	E	PACKAGE
TR-25	27.0	12.3	18.5	8.4	15.5	200
TR-30	32.3	9.7	21.3	9.5	18.3	
TR-30A	33.2	12.3	21.3	9.5	18.3	







電晶體蓋 TRANSISTOR COVER 8-68-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-31	25.0	14.65	25.1	200






電晶體蓋 TRANSISTOR COVER 8-68-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-31A	20.0	13.55	25.4	200






電晶體蓋 TRANSISTOR COVER 8-68-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-33MQ	22.0	14.1	33.3	200

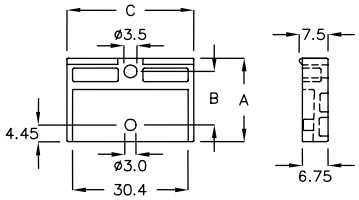


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體蓋 TRANSISTOR COVER 8-69-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	G	PACKAGE
TR-35	37.7	11.4	18.8	ø3.6	200
TR-35A	37.7	11.4	18.8	ø4.1	







電晶體蓋 TRANSISTOR COVER 8-69-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TR-35C	37.7	11.4	18.8	200






電晶體蓋 TRANSISTOR COVER 8-69-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
TRX-28K	28.5	12.4	19.1	100







電晶體蓋 TRANSISTOR COVER 8-69-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	E	F	G	PACKAGE
TRM-01	32.0	25.5	16.0	4.7	6.2	3.2	3.2	500
TRM-2A	35.0	27.65	17.5	5.3	7.0	3.2	4.0	







電晶體座 TRANSISTOR HOUSING 8-69-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

PART NO	A	B	PACKAGE
TRJ-25F	25.4	15.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電晶體座 TRANSISTOR HOUSING 8-70-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247 TRANSISTOR

PART NO	A	B	PACKAGE
TRJP-25BC	25.4	12.5	500
TRJP-36AK	36.3	15.15	







電晶體座 TRANSISTOR HOUSING 8-70-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247-3 TRANSISTOR

PART NO	A	B	PACKAGE
TRJQ-25A	25.4	9.5	500







電晶體座 TRANSISTOR HOUSING 8-70-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247 TRANSISTOR

PART NO	A	B	PACKAGE
TRJW-65C	65.3	15.15	200

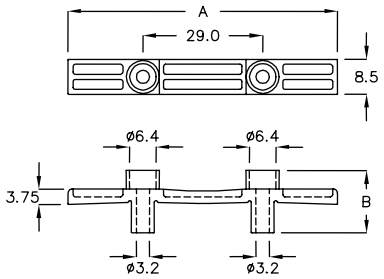





電晶體座 TRANSISTOR HOUSING 8-70-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
TR-20	5.6	3.8	2.1	5.0	200
TR-20A	8.2	5.9	2.0	6.0	







電晶體座 TRANSISTOR HOUSING 8-70-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
TR-20B	2.0	1.1	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電晶體固定扣 TRANSISTOR CLAMP — 8-71-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
TRQ-4H	13.75	6.0	6.3	4.5	11.5	1000
TRQ-5CN	12.6	8.0	7.5	5.7	10.0	
TRQ-5ZL	17.25	8.0	6.8	5.0	14.7	
TRQ-10	12.5	8.0	7.0	5.2	10.0	
TRQ-10A	12.5	8.0	8.0	6.2	10.0	
TRQ-10F	12.5	8.0	7.3	5.5	10.0	
TRQ-10W	12.5	8.0	6.1	4.3	10.0	




電晶體固定扣 TRANSISTOR CLAMP — 8-71-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
TRQ-5K	13.6	7.8	7.3	5.5	10.0	1000
TRQ-5P	12.6	7.8	7.3	5.5	9.0	
TRQ-7A	13.6	8.0	8.8	7.0	10.0	




電晶體固定扣 TRANSISTOR CLAMP — 8-71-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
TRQ-7DM	20.4	10.0	9.0	7.0	18.1	1000




電晶體固定扣 TRANSISTOR CLAMP — 8-71-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
TRQ-7F	21.9	10.0	9.0	7.0	18.2	1000



電晶體固定扣 TRANSISTOR CLAMP — 8-71-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
TRQ-5JX	6.8	4.5	6.6	5.0	1000
TRQ-6MQ	6.8	4.5	7.9	6.3	
TRQ-7HL	6.8	4.5	8.6	7.0	
TRQ-7SK	8.2	4.5	8.6	7.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



熱收縮套管 HEAT SHRINKING TUBE — 8-72-1


- SIZE: Φ1.2~Φ50.8
- COLOR: BLACK
- LENGTH IS ACCORDING TO CUSTOMER'S DEMAND





矽膠片 SILICONE RUBBER — 8-72-2

- MATERIAL: SILICONE (UL)
- COLOR: GRAY
- FLAME CLASS: 94V-0
- THICKNESS: 0.3~0.8mm
- LENGTH IS ACCORDING TO CUSTOMER'S DEMAND




PART NO	A	B	C	PACKAGE
TO-3P3A	25.0	20.0	16.5	1000
TO-2203A	18.0	13.0	13.5	




矽膠套管 SILICONE RUBBER TUBE — 8-72-3

- MATERIAL: SILICONE(UL)
- FLAME CLASS: 94V-0
- COLOR: GRAY




PART NO	A	B	C	PACKAGE
CST-1315	15.0	ø13.2	0.45	1000
CST-1925	25.0	ø18.7	0.45	500



矽膠套管 SILICONE RUBBER TUBE — 8-72-4

- MATERIAL: SILICONE(UL)
- COLOR: GRAY
- FLAME CLASS: 94V-0
- ACCORDING TO CUSTOMER'S DEMAND




PART NO	A	B	C	D	E	PACKAGE
TO-220ST	11.4	21.5	5.8	0.45	0.45	1000
TO-220ST-B	11.4	16.0	5.8	0.45	0.45	
TO-3PST	17.5	28.5	5.9	0.45	0.45	
TO-4PST	23.5	22.0	5.0	0.4	0.4	



陶瓷片 CERAMICS — 8-72-5

- MATERIAL: CERAMICS
- COLOR: NATURAL



PART NO	A	B	C	D	T	PACKAGE
TQA-01	19.2	13.8	14.6	ø3.7	2.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

09




腳墊,燙金腳墊,墊座
PLASTIC RUBBER FOOT



腳墊 PLASTIC FOOT 9-2-1

- MALE MATERIA L: PP
- FEMALE MATERIAL: EVA
- COLOR: BLACK
- INCLUDE PIN
  * 附 PIN




PART NO	A	B HOLE IN CHASSIS	C	D	CHASSIS THICKNESS	PACKAGE
GL-13	ø13.1	ø5.0	4.6	9.0	1.0~2.0	500
GL-16	ø15.8	ø5.0	4.5	8.8	1.0~2.0	
GL-18	ø19.9	ø8.0	18.0	23.5	0.8~1.0	
GL-18S	ø20.0	ø8.0	18.0	21.9	0.8~1.0	
GL-19S	ø19.4	ø8.0	4.0	7.0	1.0~2.0	
GL-19	ø19.5	ø8.0	5.0	10.4	1.0~2.5	
GL-19M	ø19.8	ø8.0	7.0	11.0	1.0~2.0	
GL-19H	ø20.3	ø8.0	10.2	15.7	1.0~2.5	
GL-20H	ø20.0	ø8.0	20.3	25.9	1.0~3.5	200
GL-24	ø24.0	ø8.0	5.0	10.4	1.0~2.5	500
GL-24L	ø24.0	ø8.0	5.0	10.8	1.0~2.7	
GL-24H	ø24.0	ø8.0	10.5	15.8	1.0~2.5	
GL-27C	ø27.0	ø10.0	7.0	12.0	0.8~1.2	200
GL-29	ø28.6	ø10.0	8.0	13.8	1.0~3.5	500
GL-30	ø29.5	ø10.0	15.0	23.3	0.8~2.5	200
GL-30PR	ø30.0	ø8.0	3.5	7.5	0.8~1.0	500
GL-32	ø31.5	ø10.0	7.8	13.6	1.0~3.5	
GL-32S	ø32.0	ø10.0	7.8	11.3	0.8~1.2	200



腳墊 PLASTIC FOOT 9-2-2

- MALE MATERIAL: PP
- FEMALE MATERIAL: EVA
- COLOR: BLACK
- INCLUDE PIN
  * 附 PIN




PART NO	A	B HOLE IN CHASSIS	C	D	CHASSIS THICKNESS	PACKAGE
GL-20K	ø26.7	ø7.8	16.0	21.0	0.8~1.4	200
GL-20L	ø20.0	ø8.0	12.0	18.0	0.8~1.8	
GL-20P	ø19.5	ø8.0	8.0	12.5	0.8~1.2	500
GL-27	ø27.0	ø8.0	13.0	18.0	0.8~1.8	200
GL-27F	ø26.7	ø7.8	5.0	10.0	0.8~1.2	
GL-27K	ø26.7	ø7.8	10.0	15.0	0.8~1.2	
GL-32D	ø33.0	ø8.4	16.0	21.7	0.8~1.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



腳墊 PLASTIC FOOT 9-3-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: TPR(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- INCLUDE PIN
  * 附 PIN




PART NO	CHASSIS THICKNESS	A	B HOLE IN CHASSIS	C	D	PACKAGE
GL-20M	0.8	ø20.0	ø5.3	5.2	8.4	500



腳墊 PLASTIC FOOT 9-3-2

- MALE MATERIAL: PP
- FEMALE MATERIAL: EVA
- COLOR: BLACK,GRAY
- INCLUDE PIN
  * 附 PIN




PART NO	CHASSIS THICKNESS	A	B HOLE IN CHASSIS	C	D	PACKAGE
GL-23D	0.8~1.6	ø23.0	ø8.2	15.0	20.5	200
GL-23F	0.8~1.6	ø23.0	ø8.0	23.0	28.5	



腳墊 PLASTIC FOOT 9-3-3

- MATERIAL: TPE(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- GL-12AK CAN BE USED WITH SR-3XL TO SANP IN

NEW




PART NO	A	B	C	D	PACKAGE
★ GL-12AK	ø12.7	ø3.05	5.3	3.2	1000



腳墊 PLASTIC FOOT 9-3-4

- MATERIAL: TPR(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- MUST BE FASTENED BY M3 SCREW




PART NO	A	B	C	D	PACKAGE
GL-03	ø15.0	ø4.2	6.0	3.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



腳墊 PLASTIC FOOT 9-4-1

- MATERIAL: TPE
- COLOR: BLACK
- MUST BE FASTENED BY M3 SCREW
- GL-7 CAN BE USED WITH SR-5 TO SNAP IN




PART NO	A	B	C	D	E	PACKAGE
GL-2	ø13.8	ø3.2	ø5.9	10.0	6.0	1000
GL-2C	ø12.0	ø3.5	ø6.35	8.0	3.3	
GL-4	ø20.0	ø3.4	ø8.7	10.4	4.5	500
GL-4D	ø20.0	ø4.5	ø8.8	10.4	4.6	
GL-5	ø28.0	ø3.8	ø8.2	19.8	13.8	100
GL-6K	ø19.0	ø3.8	ø9.0	6.3	3.2	500
GL-6S	ø18.2	ø4.2	ø9.0	7.8	3.8	1000
GL-7	ø14.7	ø5.0	ø9.0	6.0	2.2	
GL-7S	ø14.7	ø5.0	ø9.0	5.0	2.2	
★ GL-22	ø22.0	ø4.5	ø9.2	15.0	10.6	200




腳墊 PLASTIC FOOT 9-4-2

- MATERIAL: EVA
- COLOR: BLACK
- MUST BE FASTENED BY M3 SCREW




PART NO	A	B	C	D	E	PACKAGE
GL-4A	ø20.0	ø4.2	ø9.0	10.4	6.5	500
GL-4L	ø19.7	ø3.4	ø8.7	12.6	6.8	
GL-6	ø18.6	ø3.95	ø8.8	6.4	3.3	
GL-9	ø25.0	ø3.3	ø9.0	6.4	3.4	
GL-20	ø20.0	ø4.2	ø9.2	20.0	14.0	200



燙金腳墊 HOT STAMPING FOOT 9-4-3

- MATERIAL: ABS+SPONGE
- COLOR: BLACK(ABS), BLACK+GOLD,BLACK+SILVER
- MUST BE FASTENED BY M3 SCREW




PART NO	A	B	C	D	E HOT STAMPING	COLOR	PACKAGE
GLA-30C	ø30.2	ø3.6	ø8.1	9.3	6.4	STAMPING GOLD	100
GLA-30F	ø30.0	ø4.3	ø11.5	6.0	4.0		
GLA-40F	ø40.0	ø4.3	ø11.5	8.0	4.5	STAMPING SILIVER	
GLA-45F	ø44.8	ø4.0	ø10.3	10.9	5.8		
GLA-50F	ø50.0	ø4.3	ø11.5	13.5	8.0	ABS BLACK	50

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




燙金腳墊 HOT STAMPING FOOT 9-5-1

- MATERIAL: ABS+SPONGE
- COLOR: BLACK(ABS)
  BLACK+GOLD,BLACK+SILVER
- MUST BE FASTENED BY M3 SCREW




PART NO	A	B	C	D	E HOT STAMPING	PACKAGE
GLA-40H	ø40.0	ø4.3	ø11.5	10.0	4.5	100



燙金腳墊 HOT STAMPING FOOT 9-5-2

- MATERIAL: ABS+SPONGE
- COLOR: BLACK(ABS)
  BLACK+GOLD,BLACK+SILVER
- MUST BE FASTENED BY M3 SCREW




PART NO	A	B	C	D	E HOT STAMPING	COLOR	PACKAGE
GLA-45C	ø44.5	ø4.0	ø12.0	10.9	5.7	STAMPING GOLD STAMPING SILIVER ABS BLACK	50



腳墊 RUBBER FOOT 9-5-3

- PLASTIC MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- SOFT MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
WHT-6C	ø9.6	ø5.3	6.8	ø8.0	2000



腳墊 RUBBER FOOT 9-5-4

- PLASTIC MATERIAL: NYLON 66, NYLON 46(UL)
- FLAME CLASS: 94V-0
- SOFT MATERIAL: SILICONE
- COLOR: BLACK, GRAY




PART NO	PLASTIC MATERIAL	A	B	C	PACKAGE
WHT-6F	N66/BLACK	ø11.0	ø8.0	4.15	2000
	N66/GRAY	ø9.6	ø7.9	4.55	
	N46/BLACK	ø9.6	ø8.0	4.55	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



腳墊 RUBBER FOOT 9-6-1

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	C	D HOLE IN CHASSIS	PACKAGE
GLE-01	ø20.0	8.5	ø15.7	500
GLE-02	ø22.8	9.1	ø20.0	
GLE-03	ø20.0	7.3	ø15.7	



墊座 SILICONE RUBBER FOOT 9-6-2

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
GMC-3CD	ø12.0	ø8.0	0.6	2000



墊座 SILICONE RUBBER FOOT 9-6-3

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
GMC-3RF	ø12.0	ø8.0	1.2	2000



墊座 RUBBER FOOT 9-6-4

- MATERIAL: PU
- COLOR: BLACK




PART NO	A	B	C	E	PACKAGE
LGA-01	ø15.0	ø9.7	8.0	5.9	500
LGA-02	ø15.0	ø9.7	8.5	6.2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



墊座 SILICONE RUBBER FOOT 9-7-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	C	PACKAGE
S0603	ø6.3	3.0	3200
S0702	ø7.0	2.0	3000
S0803D	ø8.0	3.5	
S0904	ø8.8	3.6	1000
S0904MF	ø8.8	4.3	
S1105	ø10.7	5.2	
S1106	ø11.0	6.0	
S1608	ø15.7	8.0	



墊座 SILICONE RUBBER FOOT 9-7-2

- MATERIAL: SILICONE
- COLOR: BLACK,GRAY
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	C	PACKAGE
S1303K	ø13.0	3.35	500
S1303NH	ø13.0	3.55	



墊座 SILICONE RUBBER FOOT 9-7-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	C	PACKAGE
U0802F	ø8.0	2.6	2000
U0802KM	ø8.0	2.4	1000
U1815	ø18.0	14.5	500



墊座 SILICONE RUBBER FOOT 9-7-4

- MATERIAL: SILICONE
- COLOR: BLACK, WHITE
- ADHESIVE TAPE: 3M or EQUIVALENT



PART NO	A	B	C	PACKAGE
WRX−3C	ø5.0	ø3.0	1.0	2000
WRX−6MT	ø12.0	ø6.0	2.5	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



墊座 SILICONE RUBBER FOOT 9-8-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特別尺寸訂購



PART NO	A	C	PACKAGE
R0301A	ø3.8	0.5	
R0401	ø4.0	1.0	
R0402	ø4.0	1.8	
R0501	ø4.8	1.0	
R0501A	ø5.0	1.5	
R0502	ø5.0	1.8	
R0502J	ø5.0	2.4	
R0503A	ø5.0	3.5	
R0601	ø5.7	1.0	
R0602	ø6.0	1.5	
R0602A	ø6.0	2.0	
R0602C	ø6.0	2.5	
R0603	ø6.0	3.0	2000
R0603S	ø6.4	2.6	
R0702F	ø6.5	2.0	
R0703A	ø6.5	3.2	
R0701J	ø7.0	1.0	
R0702C	ø7.0	2.0	
R0702A	ø7.0	2.2	
R0703	ø7.0	3.0	
R0701K	ø7.5	0.65	
R0801C	ø8.0	0.7	
R0801	ø8.0	1.0	
R0802H	ø8.0	1.5	
R0802	ø8.0	1.8	


PART NO	A	C	PACKAGE
R0802C	ø8.0	2.0	
R0802P	ø8.0	2.2	
R0803S	ø8.0	2.6	
R0803C	ø8.0	3.0	
R0803	ø8.0	3.2	
R0803F	ø8.0	3.4	
R0803D	ø8.0	3.5	
R0802L	ø8.2	2.0	
R0802K	ø8.5	2.0	
R0902C	ø9.0	2.0	
R0901	ø9.5	1.5	
R0902A	ø9.5	2.0	2000
R1001K	ø10.0	0.65	
R1001	ø10.0	1.0	
R1002	ø10.0	2.0	
R1002C	ø10.0	2.5	
R1003C	ø10.0	3.0	
R1003A	ø10.0	3.3	
R1202A	ø12.0	2.0	
R1202D	ø12.0	2.5	
R1202	ø12.7	2.0	
R1202C	ø12.7	2.5	
R1501	ø15.0	1.0	
R1502C	ø15.0	2.0	500
R2103	ø21.0	3.0	
R2802M	ø28.0	2.5	



墊座 SILICONE RUBBER FOOT 9-8-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特別尺寸訂購



PART NO	A	B	C	PACKAGE
R0805	ø8.2	ø6.6	5.0	
R0806A	ø8.0	ø7.3	6.0	
R0808	ø8.0	ø7.04	8.0	2000
R0903	ø9.5	ø8.5	3.7	
R0906C	ø9.5	ø7.75	6.1	
R1003	ø10.9	ø10.0	3.0	
R1008	ø10.0	ø8.8	8.0	1000
R1105	ø10.9	ø9.7	5.0	
R1204A	ø11.7	ø7.0	4.0	2000
R1205	ø12.0	ø11.0	5.0	


PART NO	A	B	C	PACKAGE
R1302A	ø12.7	ø11.7	2.0	
R1303	ø12.6	ø10.0	3.5	2000
R1304	ø12.7	ø11.5	4.0	
R1305	ø12.7	ø10.6	4.7	
R1306	ø12.7	ø10.3	6.2	1000
R1307A	ø12.7	ø10.1	7.35	
R1511	ø15.0	ø13.5	11.0	
R1904	ø19.0	ø15.5	4.2	500
R1907	ø19.0	ø17.0	7.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



墊座 SILICONE RUBBER FOOT 9-9-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST
  ◎ 我司可接受特別尺寸訂購




PART NO	A	B	C	PACKAGE
R0401D	ø4.5	ø4.0	1.7	2000
R0402ADK	ø4.5	ø4.0	2.5	
R0404	ø4.0	ø3.7	4.5	
R0502KM	ø5.0	ø4.7	2.0	
R0502LK	ø5.5	ø5.2	2.2	
R0504	ø5.8	ø5.4	4.0	
R0603H	ø6.0	ø5.5	3.0	
R0603C	ø6.8	ø6.6	3.1	
R0605	ø6.0	ø5.7	5.2	1280
R0703C	ø7.0	ø6.8	3.2	2000
★ R0704H	ø7.0	ø6.5	4.2	
R0704K	ø7.0	ø6.5	4.0	
R0705A	ø7.0	ø6.7	4.6	
R0801LM	ø8.0	ø7.4	1.8	
R0802PQ	ø8.0	ø7.5	2.0	
R0803HD	ø8.0	ø7.5	2.6	

PART NO	A	B	C	PACKAGE
R0803GQ	ø8.0	ø7.5	3.0	2000
R0803MK	ø8.0	ø7.7	3.5	
R0804	ø8.0	ø7.8	3.7	
R0804A	ø8.0	ø7.8	4.5	1000
R0804F	ø8.5	ø8.0	4.0	2000
R0903S	ø9.4	ø9.0	3.2	
R1004	ø9.7	ø9.4	4.2	
R0910A	ø9.0	ø8.8	10.2	500
R1004C	ø10.5	ø10.5	4.5	
R1005D	ø10.0	ø9.7	5.5	1000
R1009A	ø10.0	ø9.8	9.4	500
R1011	ø10.0	ø9.0	11.5	
R1505	ø15.4	ø14.9	5.1	
R1507	ø15.0	ø14.4	7.0	
R2210	ø22.0	ø21.7	10.4	



墊座 SILICONE RUBBER FOOT 9-9-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	C	PACKAGE
RX0902	ø9.0	2.0	2000
RX1003	ø10.0	3.0	
RX1203	ø12.0	3.0	
RX1202	ø12.5	2.0	1000
RX1502	ø15.0	2.0	
RX2503	ø25.0	3.0	




墊座 SILICONE RUBBER FOOT 9-9-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
C060301	ø6.0	ø3.0	1.0	2000
C060302	ø6.0	ø3.0	2.0	
C070301	ø7.0	ø3.0	1.0	
C080401C	ø8.0	ø4.7	0.9	
C090202A	ø9.0	ø2.5	2.5	
C100501	ø10.0	ø5.0	1.0	
C120206	ø12.0	ø6.0	2.5	
C190603	ø18.9	ø5.6	2.54	1000
C311303	ø31.5	ø13.0	3.0	50

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



墊座 SILICONE RUBBER FOOT — 9-10-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
L1193901M	119.0	39.0	0.5	500



墊座 SILICONE RUBBER FOOT — 9-10-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特別尺寸訂購



PART NO	A	B	C	PACKAGE
L040401	4.0	4.0	1.0	2000
L040402	4.0	4.0	2.0	
L040402A	4.0	4.0	2.5	
L040403	4.0	4.0	3.0	
L040404	4.0	4.0	4.0	
L050302	5.0	3.0	2.5	
L050501KM	5.0	5.0	1.0	
L050502	5.0	5.0	2.0	
L050502C	5.0	5.0	2.5	
L050503	5.0	5.0	3.0	
L050504	5.0	5.0	4.0	
L050506	5.0	5.0	6.5	
L060201C	6.0	2.0	1.5	
L060602D	6.0	6.0	2.0	
L060602A	6.0	6.0	2.5	
L060603	6.0	6.0	3.0	
L060604	6.0	6.0	4.0	
L070707	6.5	6.5	6.5	
L080202C	8.0	2.5	2.2	
L080203	8.0	2.5	3.0	
L080403	8.0	4.0	3.5	
L080405	8.0	4.0	5.0	
L080602A	8.0	6.0	2.3	
L080802	8.0	8.0	2.5	
L080803	8.0	8.0	3.5	
L080804	8.0	8.0	4.0	
L080805	8.0	8.0	5.0	
L080806	8.0	8.0	6.0	
L080809	8.0	8.0	9.0	
L080811	8.0	8.0	11.5	
L100502A	10.0	5.0	2.5	
L100503A	10.0	5.0	3.5	
L100505	10.0	5.0	5.0	
L100705	10.0	7.0	5.0	
L100801A	10.0	8.0	1.8	
L100802	10.0	8.0	2.5	
L100805	10.0	8.0	5.0	
L101001	10.0	10.0	1.0	
L101002	10.0	10.0	2.5	
L101003A	10.0	10.0	3.0	


PART NO	A	B	C	PACKAGE
L101003	10.0	10.0	3.5	2000
L101004	10.0	10.0	4.0	
L101004A	10.0	10.0	4.6	
L101005	10.0	10.0	5.0	
L120802	12.0	8.0	2.5	
L120803	12.0	8.0	3.5	
L121003	12.0	10.0	3.5	
L121202	12.0	12.0	2.5	
L121203	12.0	12.0	3.5	
L121204	12.0	12.0	4.0	
L121205	12.0	12.0	5.0	
L150508	15.0	5.0	0.8	
L150603	15.0	6.0	3.0	
L150803	15.0	8.0	3.0	
L151005	15.0	10.0	5.0	
L160805	16.0	8.0	5.0	
L180802	18.0	8.0	2.5	
L180803	18.0	8.0	3.5	
L180804	18.0	8.0	4.0	
L180805	18.0	8.0	5.0	
L181003	18.0	10.0	3.5	
L181004	18.0	10.0	4.0	
L181005	18.0	10.0	5.0	
L181202	18.0	12.0	2.5	
L181204	18.0	12.0	4.0	
L181205	18.0	12.0	5.0	
L181802	18.0	18.0	2.5	
L181803	18.0	18.0	3.5	
L181804	18.0	18.0	4.0	
L181805	18.0	18.0	5.0	1000
L201002S	20.0	10.0	2.5	500
L201008	20.0	10.0	8.0	
L251501	25.0	15.0	1.5	
L281901M	28.5	19.0	0.5	
L303008	30.0	30.0	8.0	
L351002	35.0	10.0	2.3	
L400602A	40.0	6.4	2.0	
L454504	45.0	45.0	4.0	
L602005	60.0	20.0	5.0	
L18004003	180.0	40.0	3.0	
L3300702A	330.8	7.2	2.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




墊座 SILICONE RUBBER FOOT 9-11-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
Q202008	20.4	20.4	8.0	500
Q381015C	38.0	10.5	14.5	200
Q381410C	38.0	14.5	10.5	500



墊座 SILICONE RUBBER FOOT 9-11-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	D	PACKAGE
T110803	10.5	10.5	3.0	8.0	2000
T130706	12.7	12.7	6.0	6.8	
T130903	12.7	12.7	3.0	9.0	
T131003	12.7	12.7	3.1	10.0	
T202023	20.0	20.0	23.0	17.8	500
T211308	20.5	20.5	7.6	12.3	



墊座 SILICONE RUBBER FOOT 9-11-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
GLQ−2K	18.4	6.4	2.0	2000
GLQ−12	12.0	4.5	1.2	
GLQ−16	16.0	8.0	2.0	
GLQ−16A	16.0	8.0	2.5	



墊座 SILICONE RUBBER FOOT 9-11-4

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
GLQ−19	19.4	7.4	1.2	2000
GLQ−3H	26.8	12.8	3.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



墊座 SILICONE RUBBER FOOT 9-12-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
GLQ−13	13.0	6.0	2.0	2000
GLQ−3K	13.1	6.1	3.5	1000



墊座 SILICONE RUBBER FOOT 9-12-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
GLQ−2J	41.5	22.1	2.5	500



墊座 SILICONE RUBBER FOOT 9-12-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
GLC−2A	37.05	20.5	2.5	1000



墊座 SILICONE RUBBER FOOT 9-12-4

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	D	PACKAGE
GTT−45	45.0	15.0	2.5	5.0	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




墊座 SILICONE RUBBER FOOT 9-13-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	D	PACKAGE
GXA-01	20.0	10.0	1.5	ø3.5	2000



墊座 SILICONE RUBBER FOOT 9-13-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
GSP-24	24.0	24.0	0.6	500




墊座 SILICONE RUBBER FOOT 9-13-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




PART NO	A	B	C	PACKAGE
LDA-3901XB	39.6	39.6	1.9	400



墊座 SILICONE RUBBER FOOT 9-13-4

- MATERIAL: SILICONE
- COLOR: BLUE
- ADHESIVE TAPE: 3M or EQUIVALENT



PART NO	A	B	C	PACKAGE
GLD-21	21.0	21.0	0.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

10




拉柄
CIRCUIT BOARD EJECTOR



把手蓋 EJECTOR COVER 10-2-1

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: ORANGE

PART NO	A	B	PACKAGE
MKL-01	5.6	2.6	500






把手蓋 EJECTOR COVER 10-2-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	PACKAGE
MKL-2A	5.6	2.6	500







拉柄 CIRCUIT BOARD EJECTOR 10-2-3

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-10	200

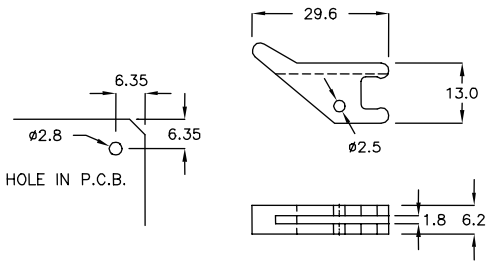





拉柄 CIRCUIT BOARD EJECTOR 10-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-15	200

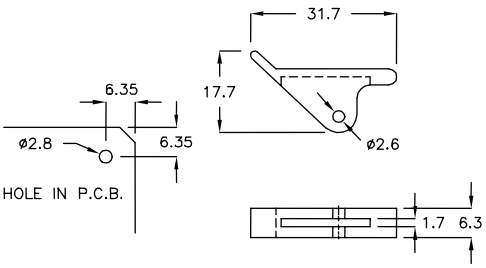




拉柄 CIRCUIT BOARD EJECTOR 10-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-20	200

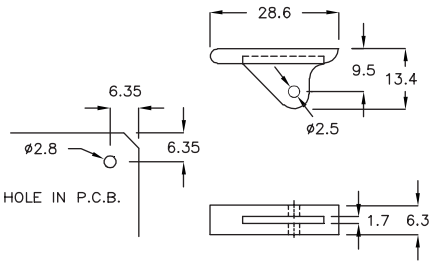


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



拉柄 CIRCUIT BOARD EJECTOR 10-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-25	200

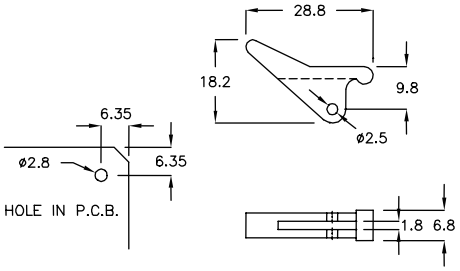





拉柄 CIRCUIT BOARD EJECTOR 10-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-30	200

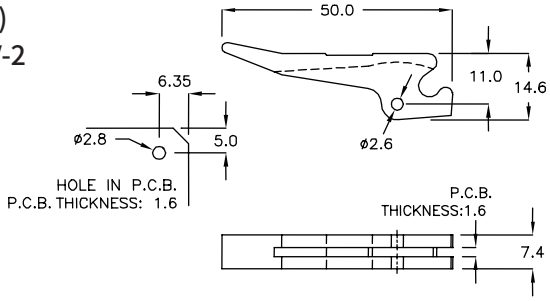





拉柄 CIRCUIT BOARD EJECTOR 10-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-31	200

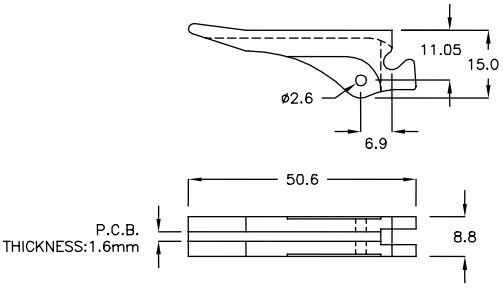





拉柄 CIRCUIT BOARD EJECTOR 10-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-31C	200

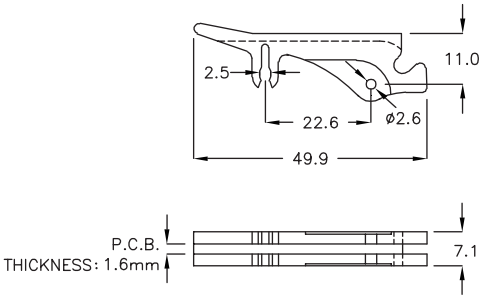




拉柄 CIRCUIT BOARD EJECTOR 10-3-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-32	200

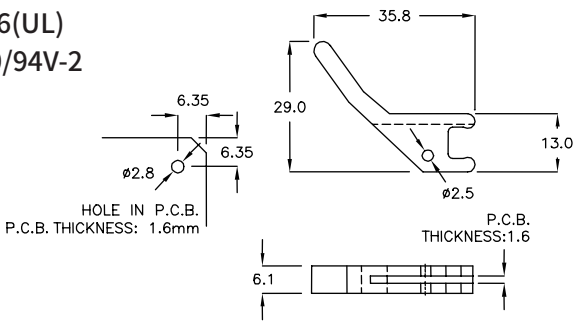


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



拉柄 CIRCUIT BOARD EJECTOR 10-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	PACKAGE
CP-33	500

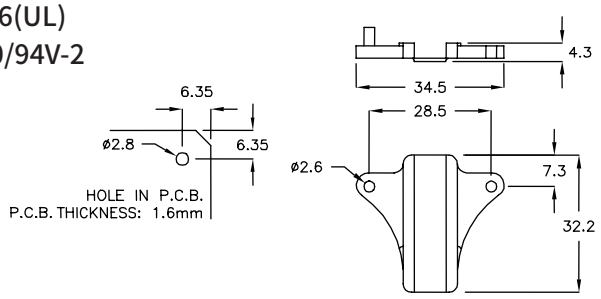




拉柄 CIRCUIT BOARD EJECTOR 10-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-034	200







拉柄 CIRCUIT BOARD EJECTOR 10-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-35	200









拉柄 CIRCUIT BOARD EJECTOR 10-4-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-36	200

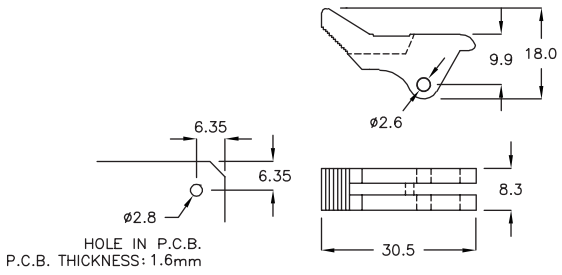




拉柄 CIRCUIT BOARD EJECTOR 10-4-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-37	200

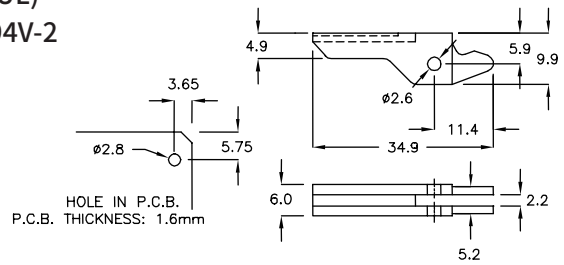


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




拉柄 CIRCUIT BOARD EJECTOR 10-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

PART NO	PACKAGE
CP-39	200

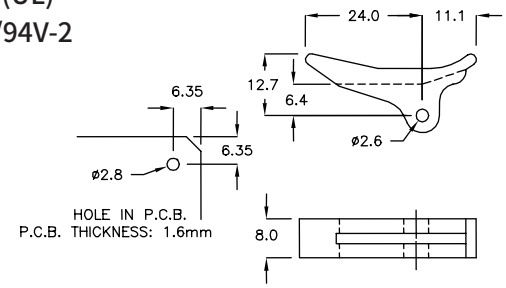





拉柄 CIRCUIT BOARD EJECTOR 10-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	PACKAGE
CP-50D	200

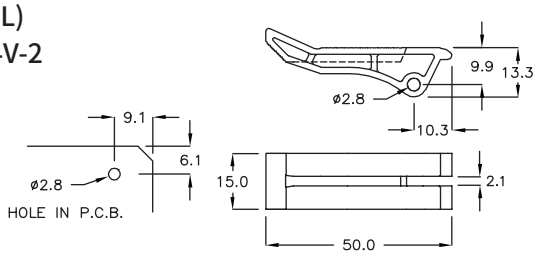




把手蓋 EJECTOR COVER 10-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M2 TAPPING SCREW

PART NO	A	PACKAGE
MHLG-11A	9.0	500






拉柄 CIRCUIT BOARD EJECTOR 10-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	PACKAGE
CP-50	100

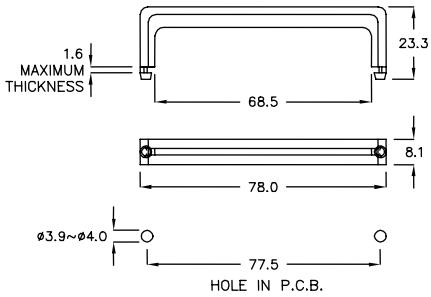




拉柄 CIRCUIT BOARD EJECTOR 10-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	PACKAGE
CP-60	100

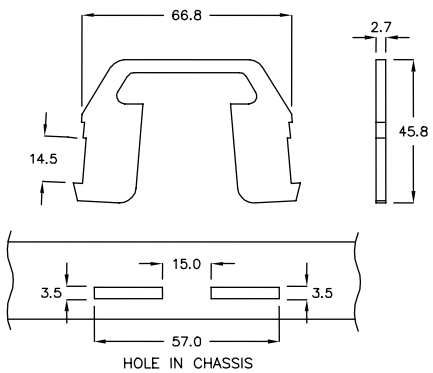

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

11




導槽

P.C.B GUIDE RAIL




印刷電路板導槽 PCB GUIDE RAIL 11-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

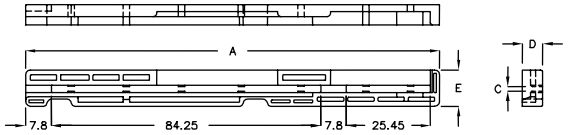


PART NO	A	C	D	E	PACKAGE
CG-128YD	128.0	1.6	6.1	11.0	100



印刷電路板導槽 PCB GUIDE RAIL 11-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x6 FLAT HEAD SCREW

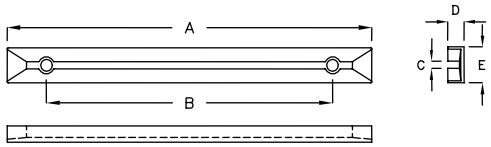


PART NO	A	B	C	D	E	PACKAGE
CG-9	89.0	64.5	1.9	4.5	9.8	100
CG-9AS	100.0	77.4	2.2	7.1	10.0	
CG-9L	91.0	67.0	1.9	8.8	9.2	
CG-12	119.0	94.5	1.6	4.5	9.8	
CG-12F	119.0	94.5	1.9	4.5	9.8	
CG-14	139.8	114.5	1.9	4.3	9.7	
CG-16	158.7	135.0	1.9	4.3	9.7	
CG-18	180.0	150.0	3.5	9.0	12.0	



印刷電路板導槽 PCB GUIDE RAIL 11-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

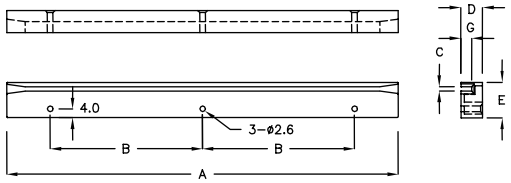


PART NO	A	B	C	D	E	G	PACKAGE
CF-180	180.5	70.0	2.0	10.0	16.0	5.0	50




印刷電路板導槽 PCB GUIDE RAIL 11-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

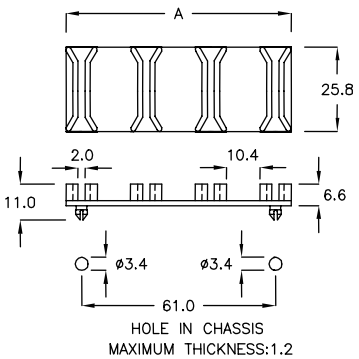


PART NO	A	PACKAGE
CG-2Ax4	70.5	50

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

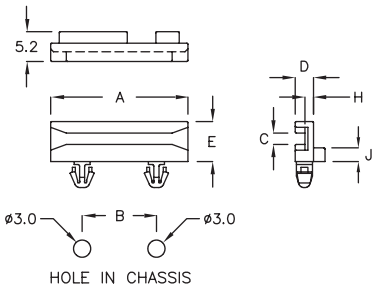


	PART NO	A	B	C	D	E	H	J	CHASSIS THICKNESS	PACKAGE
	CG-24AF	24.0	13.0	2.0	3.2	7.0	1.5	2.4	1.6	500
★	CG-24HD	24.0	13.0	2.0	3.2	7.0	1.5	2.0	1.6	



印刷電路板導槽 PCB GUIDE RAIL — 11-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

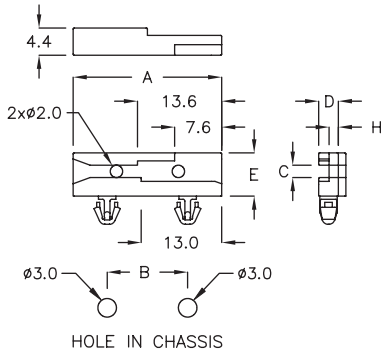


	PART NO	A	B	C	D	E	H	CHASSIS THICKNESS	PACKAGE
★	CG-24TC	24.0	13.0	2.0	3.2	7.0	1.5	1.6	500



印刷電路板導槽 PCB GUIDE RAIL — 11-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

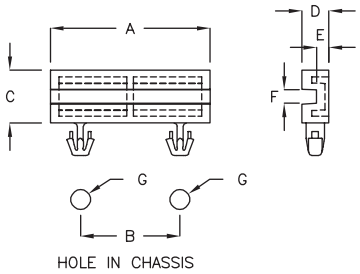


PART NO	A	B	C	D	E	F	G	CHASSIS THICKNESS	PACKAGE
CG-24RM	24.0	15.0	7.8	4.0	1.8	2.0	ø3.0	2.0	500




印刷電路板導槽 PCB GUIDE RAIL — 11-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

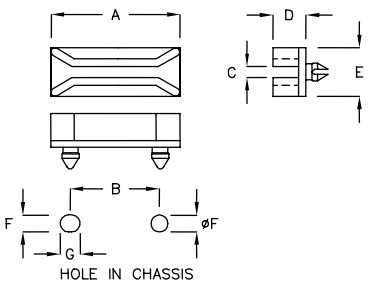


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-2A	26.0	18.0	1.9	6.8	9.7	3.4	4.0	1.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL 11-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

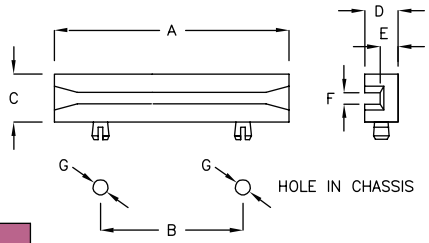


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-4A	38.3	20.2	9.3	6.5	3.5	2.3	ø3.0	1.2	500




印刷電路板導槽 PCB GUIDE RAIL 11-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

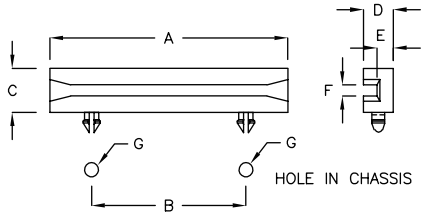


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-04E	38.3	20.0	9.3	6.5	3.5	1.8	ø3.5	1.6	500
CG-04C	38.3	20.2	9.3	6.5	3.5	2.3	ø3.2	1.6	
CG-04H	50.0	40.0	7.0	6.0	3.0	2.0	ø3.2	1.6	200
CG-08C	80.5	60.0	9.4	6.4	3.4	2.3	ø3.2	1.6	100
CG-08D	80.5	60.0	8.0	6.0	3.0	2.0	ø3.2	1.6	
CG-08H	80.5	60.0	8.0	6.0	3.0	2.0	ø3.2	2.6	




印刷電路板導槽 PCB GUIDE RAIL 11-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

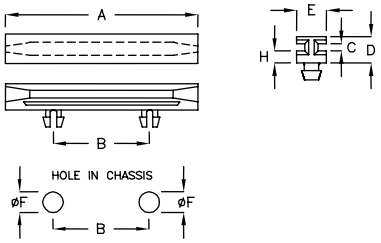


PART NO	A	B	C	D	E	F	H	MAXIMUM THICKNESS	PACKAGE
CG-5D	50.8	25.4	2.0	7.0	7.9	4.4	3.2	1.6	200




印刷電路板導槽 PCB GUIDE RAIL 11-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

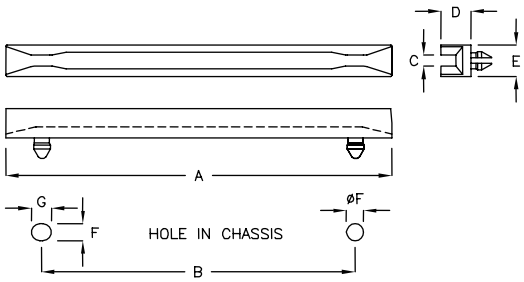


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-06A	76.8	62.5	2.2	5.9	6.3	3.4	4.0	1.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

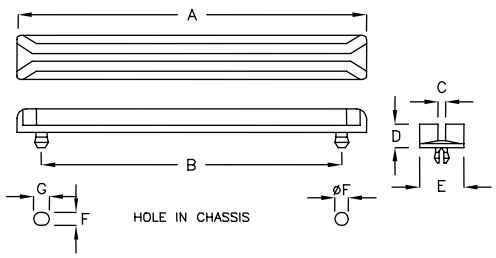


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-9B	89.2	76.85	1.9	6.0	11.3	3.4	4.0	1.2	100




印刷電路板導槽 PCB GUIDE RAIL — 11-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

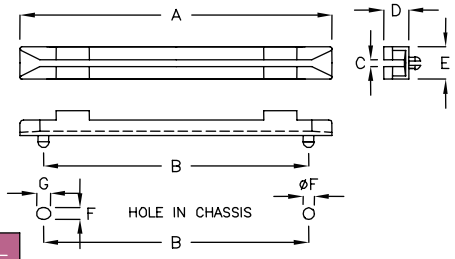


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-9AW	89.7	76.7	1.9	11.6	9.7	3.4	4.0	1.2	100
CG-9D	89.7	76.8	1.9	7.1	9.5	3.4	4.0	1.2	




印刷電路板導槽 PCB GUIDE RAIL — 11-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

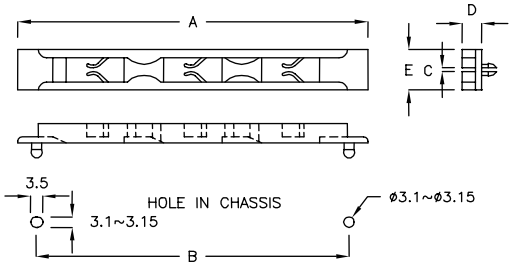


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
CG-10B	102.8	91.9	1.1	5.6	11.9	2.3	100




印刷電路板導槽 PCB GUIDE RAIL — 11-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

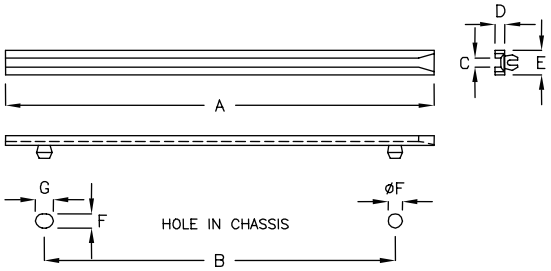


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-14C	140.2	114.8	2.0	3.2	8.0	4.7	5.9	1.2	100
CG-14D	140.2	114.8	3.0	3.2	8.0	4.7	5.9	1.7	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

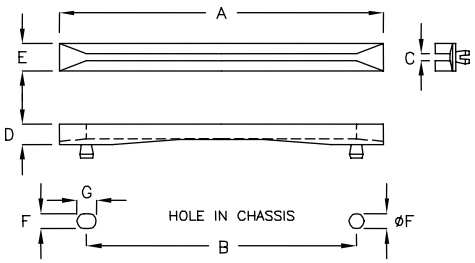


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-7B	76.2	63.5	1.9	4.8	6.4	3.2	4.1	1.3	100



印刷電路板導槽 PCB GUIDE RAIL — 11-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

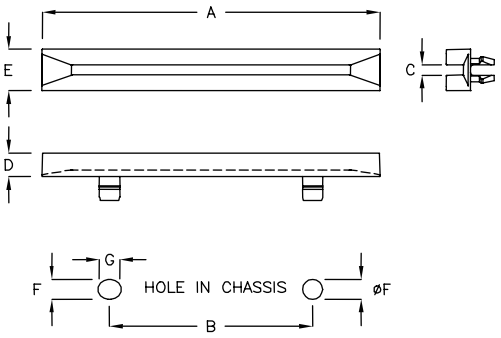


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-06H	63.5	38.1	1.9	4.5	7.9	4.6	5.0	1.6	200
CG-6J	63.5	38.1	2.3	2.8	4.6	3.4	4.0	1.0	
CG-5QT	63.5	38.1	2.3	6.4	6.4	4.5	5.1	1.0	



印刷電路板導槽 PCB GUIDE RAIL — 11-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

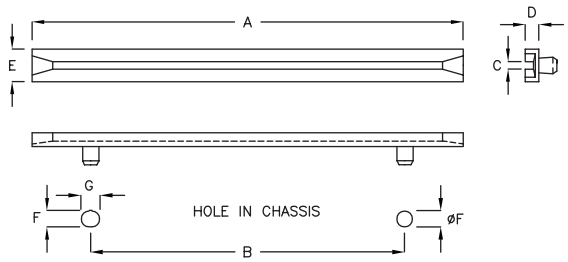


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-10N	101.6	88.9	1.9	4.4	6.4	3.2	4.0	1.1	100
CG-16N	164.1	152.4	2.0	4.4	6.5	3.2	3.9	1.1	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-7-1

- MATERIAL: NYLON 66(UL), ABS+PC
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

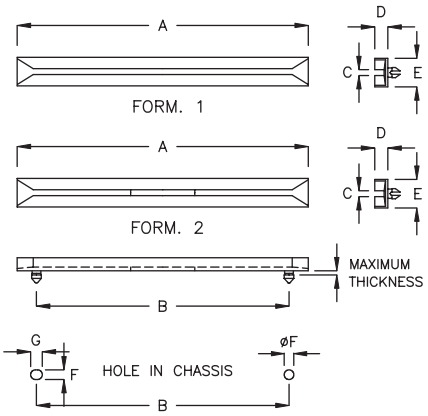


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	FORM	MATERIAL	PACKAGE
CG-3A	38.0	25.4	1.9	4.6	9.6	3.4	4.0	1.2	1	N66	500
CG-5A	50.8	38.0	2.3	4.6	9.6	3.4	4.0	1.1	1	N66	200
CG-7A	76.6	63.5	2.2	4.6	10.0	3.4	4.0	1.2	1	N66	100
CG-7C	76.6	63.5	2.1	4.1	10.0	3.4	4.0	1.2	1		
CG-9A	89.7	76.7	1.9	4.5	9.7	3.4	4.0	1.2	2		
CG-9F	89.2	76.7	2.3	4.4	6.4	3.4	4.0	1.2	1		
CG-10A	102.1	89.5	2.2	4.6	6.3	3.4	4.0	1.2	1		
CG-10M	100.0	70.0	2.0	4.3	7.5	4.8	6.0	1.1	1	N66	100
CG-10P	100.0	70.0	2.0	4.3	7.5	4.8	6.4	1.2	1		
CG-12D	114.3	88.9	1.9	6.4	6.4	4.8	5.5	1.2	1		
CG-13A	127.0	101.6	2.3	4.6	6.4	3.4	4.0	1.5	1		
CG-13C	110.0	101.6	2.3	4.6	6.4	3.4	4.0	1.2	1		
CG-14A	136.0	114.5	2.2	4.6	6.3	3.4	4.0	1.5	1		
CG-15C	153.8	141.6	2.1	4.8	6.5	3.4	4.0	1.2	1		
CG-18A	181.1	161.3	2.0	4.6	6.5	3.4	4.6	1.2	1		
CG-19A	191.1	177.0	2.0	5.5	6.4	3.4	4.0	1.2	1		
CG-21A	217.8	205.0	2.0	4.6	6.6	3.4	4.0	1.0	1		
CG-21B	218.7	205.0	2.2	7.7	6.6	3.4	4.0	1.2	1		
★ CG-30PC	30.0	20.0	2.8	6.3	8.0	3.5	3.5	0.8	1	ABS+PC	500




印刷電路板導槽 PCB GUIDE RAIL — 11-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

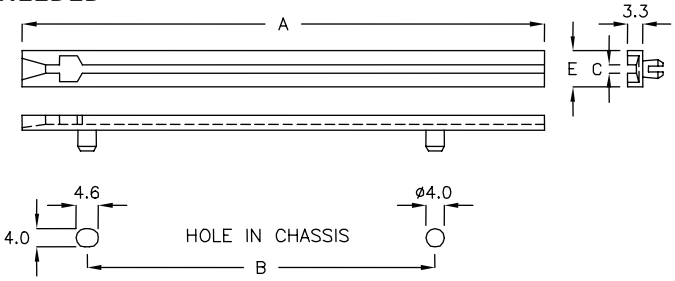


PART NO	A	B	C	E	MAXIMUM THICKNESS	PACKAGE
CG-11A	115.5	77.1	2.0	7.9	1.2	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL 11-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

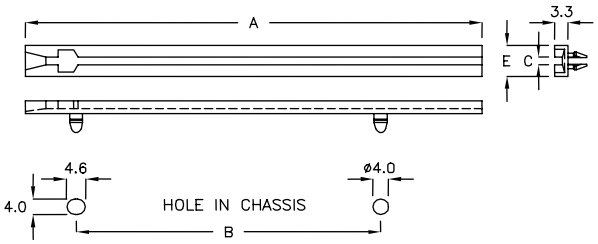


PART NO	A	B	C	E	MAXIMUM THICKNESS	PACKAGE
CG-11F	115.5	77.1	1.9	7.9	1.4	100
CG-92TK	92.0	67.4	1.9	7.9	1.4	




印刷電路板導槽 PCB GUIDE RAIL 11-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

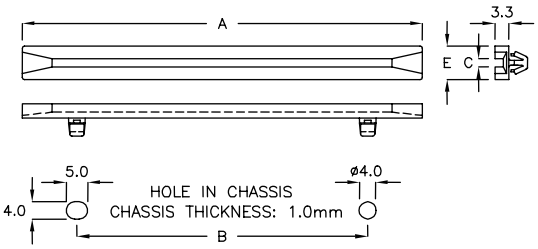


PART NO	A	B	C	E	PACKAGE
CG-92FM	92.8	67.4	1.9	7.9	100




印刷電路板導槽 PCB GUIDE RAIL 11-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

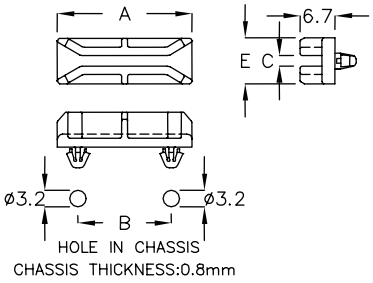


PART NO	A	B	C	E	PACKAGE
CG-2RQ	25.8	17.9	2.0	8.7	500




印刷電路板導槽 PCB GUIDE RAIL 11-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

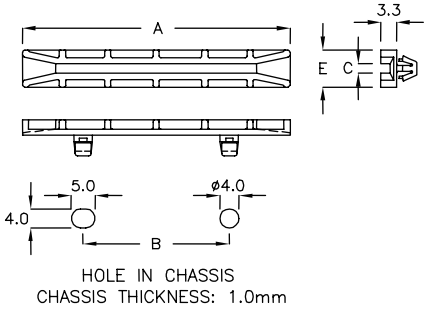


PART NO	A	B	C	E	PACKAGE
CG-56FY	56.0	30.6	2.0	7.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

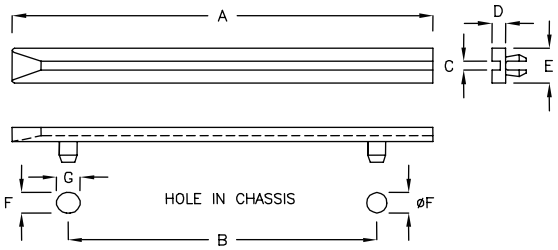


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-20A	203.2	177.8	2.0	3.2	7.9	4.6	5.4	1.7	100



印刷電路板導槽 PCB GUIDE RAIL — 11-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

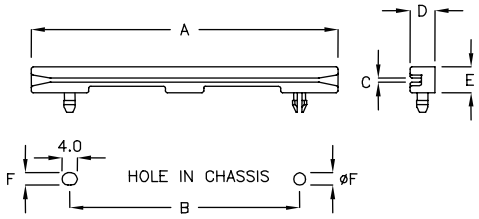


PART NO	A	B	C	D	E	F	MAXIMUM THICKNESS	PACKAGE
CG-08K	80.0	60.0	1.1	6.5	6.7	3.2	2.0	100




印刷電路板導槽 PCB GUIDE RAIL — 11-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

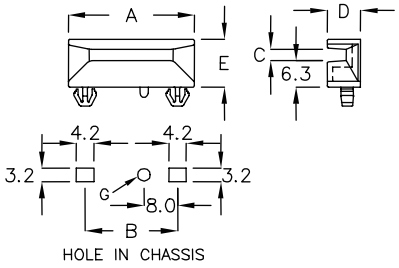


PART NO	A	B	C	D	E	G	CHASSIS THICKNESS	PACKAGE
CG-3WX	30.0	22.0	2.7	8.0	11.3	ø3.0	0.8	500




印刷電路板導槽 PCB GUIDE RAIL — 11-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED




PART NO	A	B	C	D	CHASSIS THICKNESS	PACKAGE
CGD-1KF	10.0	5.0	1.7	5.0	1.6	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

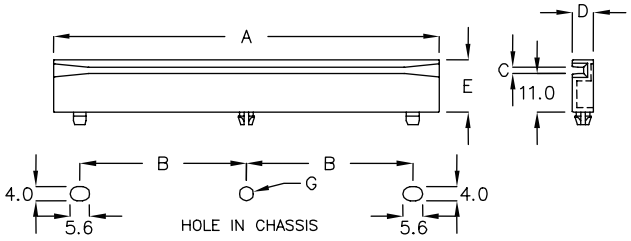


PART NO	A	B	C	D	E	G	CHASSIS THICKNESS	PACKAGE
CG−11K	110.0	47.5	1.8	6.0	14.9	ø4.0	1.2	100




印刷電路板導槽 PCB GUIDE RAIL — 11-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

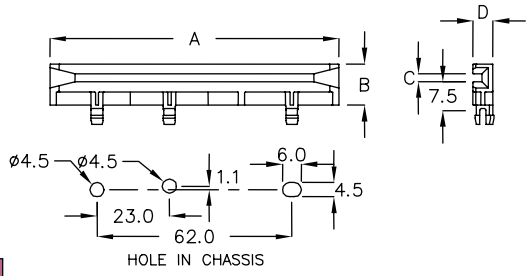


PART NO	A	B	C	D	MAXIMUM THICKNESS	PACKAGE
CGU−92F	92.0	13.2	2.5	6.4	3.0	100




印刷電路板導槽 PCB GUIDE RAIL — 11-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

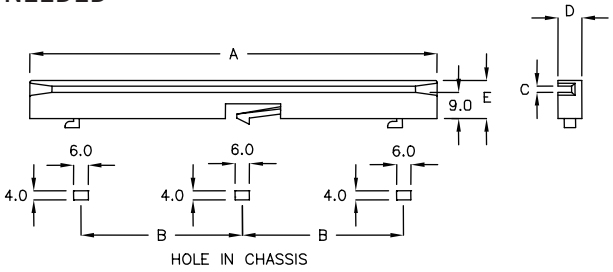


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
CG−16C	190.0	80.0	2.0	6.4	13.1	1.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

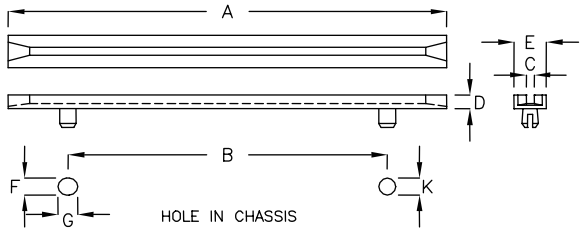


PART NO	A	B	C	D	E	F	G	K	CHASSIS THICKNESS	PACKAGE
CG-45RK	45.0	23.0	1.9	3.3	7.9	ø4.5	5.1	ø4.6	1.4~1.6	200
CG-5C	63.5	38.1	2.3	6.4	6.4	ø4.5	5.1	ø4.5	1.2~1.6	
CG-6F	63.5	38.1	1.9	4.5	7.9	ø4.6	5.0	ø4.6	1.2~1.6	
CG-08L	88.9	63.5	1.9	4.5	7.9	ø4.6	5.0	ø4.6	1.4~1.6	100
CG-88D	88.9	63.5	1.9	3.3	7.9	ø4.5	5.1	ø4.6	1.4~1.6	
CG-9AL	89.1	77.4	2.2	7.1	10.0	ø3.4	4.0	ø3.4	1.6	



印刷電路板導槽 PCB GUIDE RAIL — 11-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

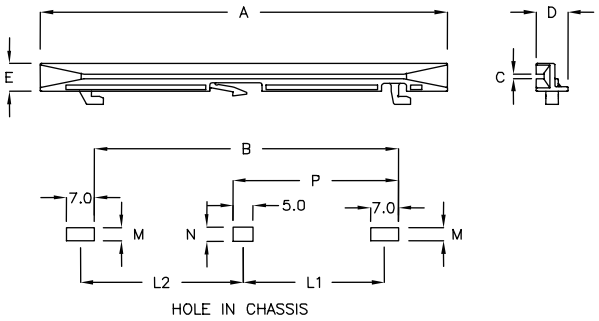


PART NO	A	B	C	D	E	M	N	P	L1	L2	MAXIMUM THICKNESS	PACKAGE
CG-8M	81.0	65.4	2.0	8.0	10.65	5.65	5.65	33.0	27.0	38.4	1.0	100
CG-10Q	101.6	75.9	1.2	7.9	7.0	3.3	3.6	41.3	35.3	40.6	1.0	100




印刷電路板導槽 PCB GUIDE RAIL — 11-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

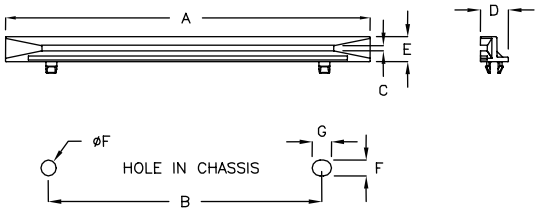


PART NO	A	B	C	D	E	F	G	MAXIMUM THICKNESS	PACKAGE
CG-10K	101.6	76.2	1.2	7.9	7.0	4.4	5.4	1.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL 11-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

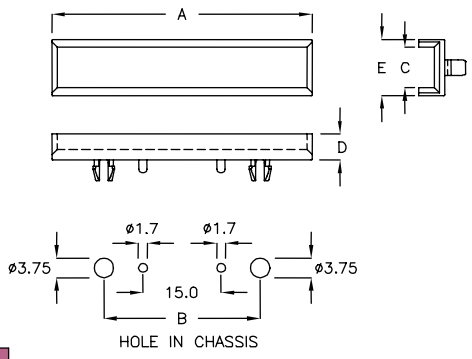


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
CG-5K	50.0	30.0	7.75	5.0	10.75	1.0	200



印刷電路板導槽 PCB GUIDE RAIL 11-12-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

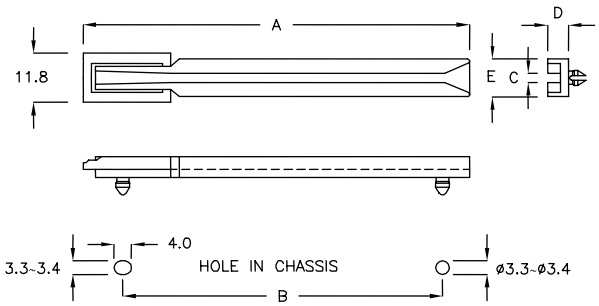


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
CG-09H	92.7	76.7	2.2	5.0	9.0	1.2	100
CG-09J	99.5	76.7	2.2	5.0	9.0	1.2	
CG-09C	72.6	50.0	1.9	5.0	9.0	1.0	




印刷電路板導槽 PCB GUIDE RAIL 11-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

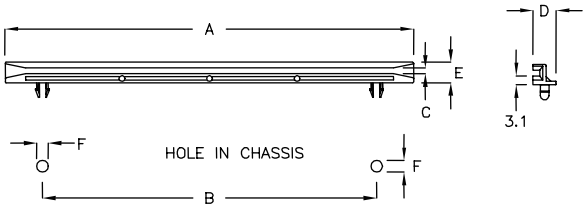


PART NO	A	B	C	D	E	F	MAXIMUM THICKNESS	PACKAGE
CG-14H	140.0	114.5	1.9	8.0	7.0	ø4.4	1.5	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

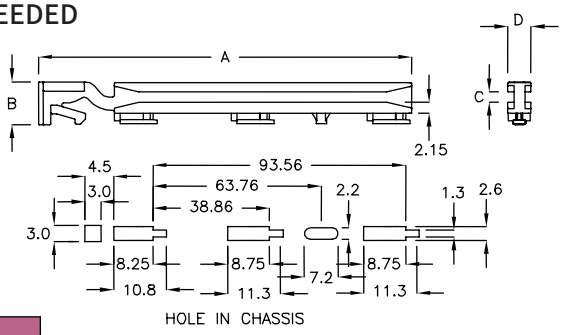


PART NO	A	B	C	D	MAXIMUM THICKNESS	PACKAGE
CGL-116JS	116.9	8.0	2.0	4.5	0.8	100




印刷電路板導槽 PCB GUIDE RAIL — 11-13-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

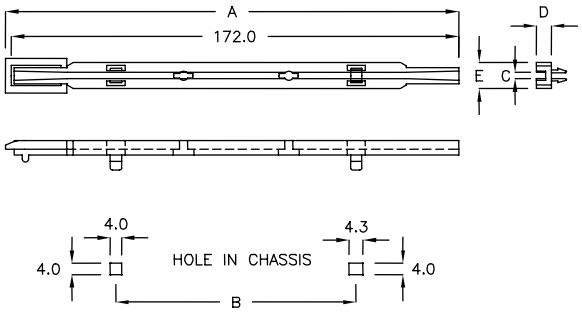


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
CG-17A	175.0	102.0	2.2	5.0	9.0	1.6	100




印刷電路板導槽 PCB GUIDE RAIL — 11-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

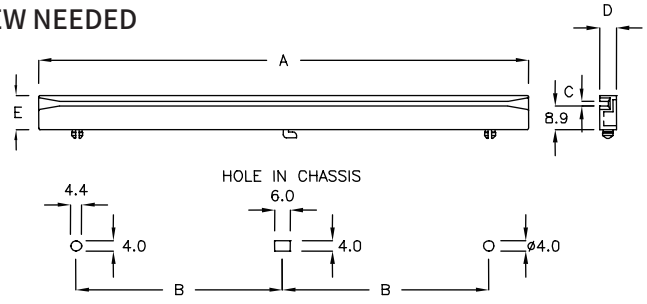


PART NO	A	B	C	D	E	MAXIMUM THICKNESS	PACKAGE
CG-19C	190.0	80.0	2.0	6.4	13.1	1.1	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

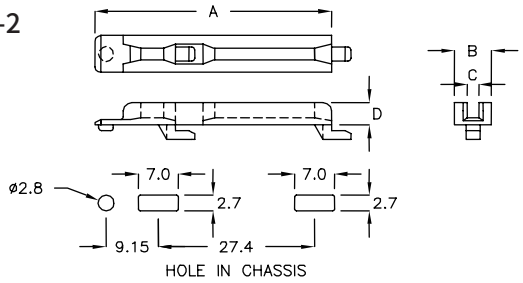


PART NO	A	B	C	D	CHASSIS THICKNESS	PACKAGE
CG-04FN	41.5	6.5	2.0	4.0	0.8	200



印刷電路板導槽 PCB GUIDE RAIL — 11-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

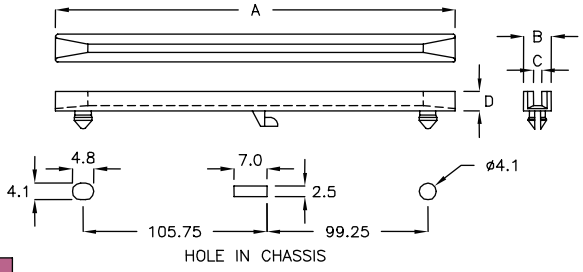


PART NO	A	B	C	D	MAXIMUM THICKNESS	PACKAGE
CG-21C	218.0	6.6	1.85	4.7	1.5	100



印刷電路板導槽 PCB GUIDE RAIL — 11-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

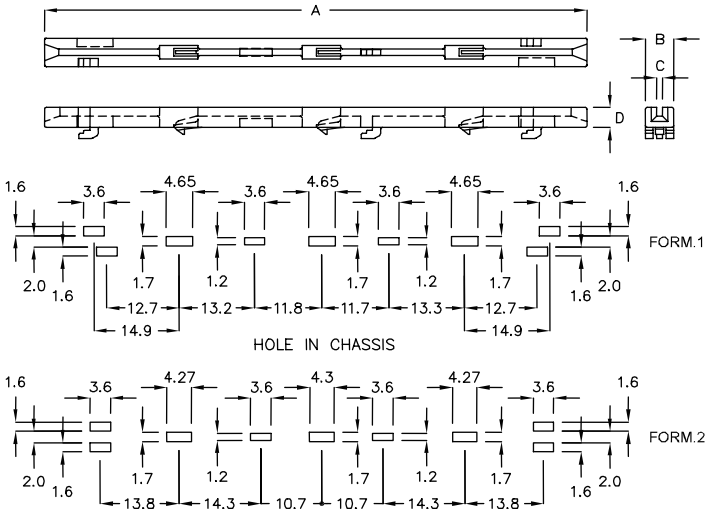


PART NO	A	B	C	D	CHASSIS THICKNESS	FORM	PACKAGE
CGJ-95RY	95.0	5.0	1.1	3.5	0.5	1	100
					0.8~1.0	2	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

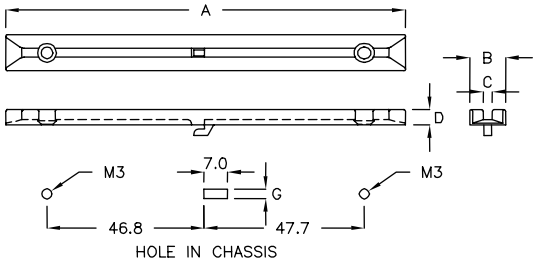


PART NO	A	B	C	D	G	MAXIMUM THICKNESS	PACKAGE
CG−12AT	119.0	10.8	2.6	4.5	2.1	1.0	100
CG−12BG	119.0	10.8	3.2	4.5	2.7	1.0	




印刷電路板導槽 PCB GUIDE RAIL — 11-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

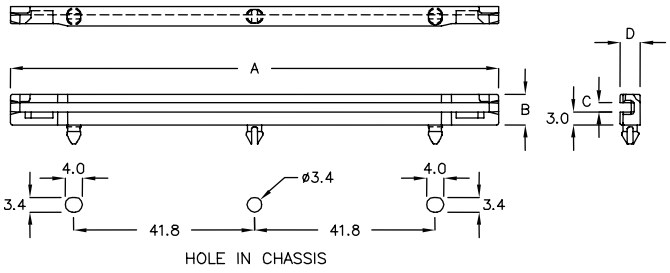


PART NO	A	B	C	D	MAXIMUM THICKNESS	PACKAGE
CGT−113F	113.0	7.1	2.1	4.6	1.6	100



印刷電路板導槽 PCB GUIDE RAIL — 11-15-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

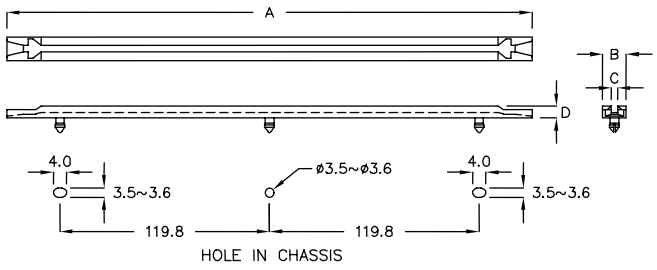


PART NO	A	B	C	D	MAXIMUM THICKNESS	PACKAGE
CG−28A	280.0	9.0	2.35	4.5	1.7	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

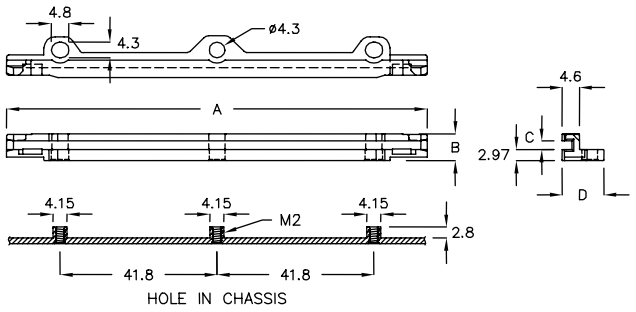


PART NO	A	B	C	D	PACKAGE
CGW-112A	112.0	7.16	2.25	11.1	100



印刷電路板導槽 PCB GUIDE RAIL — 11-16-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

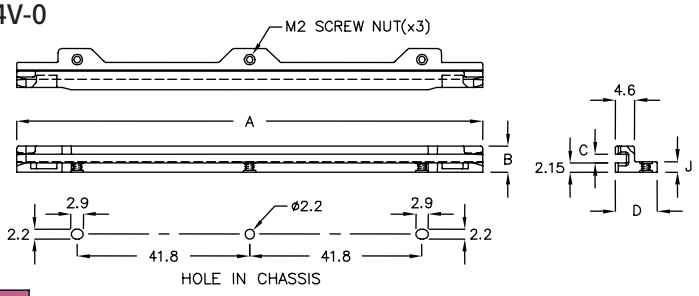


PART NO	A	B	C	D	J	PACKAGE
CGZ-113AT	113.0	6.25	2.1	10.1	2.0	100
CGZ-113K	113.0	6.25	2.1	10.1	2.5	



印刷電路板導槽 PCB GUIDE RAIL — 11-16-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

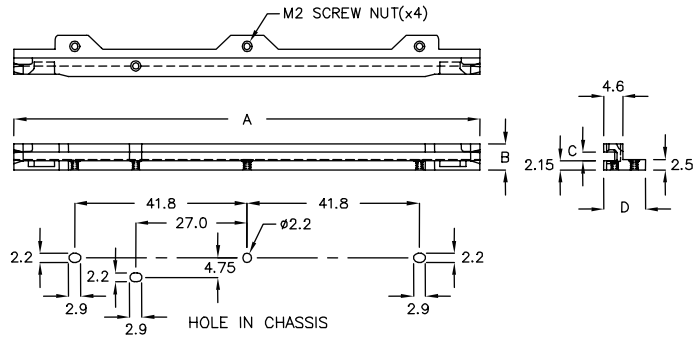


PART NO	A	B	C	D	PACKAGE
CGZ-113NR	113.0	6.25	2.1	10.1	100



印刷電路板導槽 PCB GUIDE RAIL — 11-16-4

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

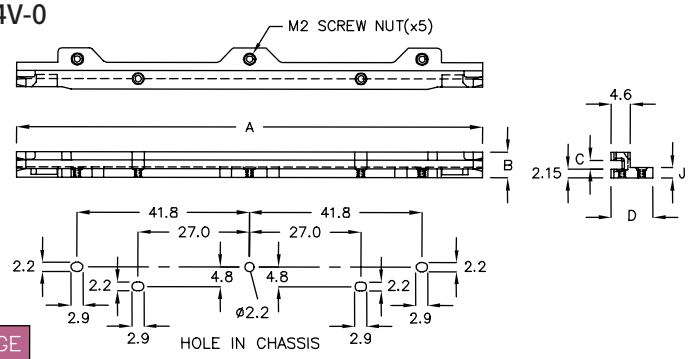

PART NO	A	B	C	D	J	PACKAGE
CGZ-113TY	113.0	6.25	2.1	10.1	2.0	100
CGZ-113FL	113.0	6.25	2.1	10.1	2.5	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-17-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

NEW

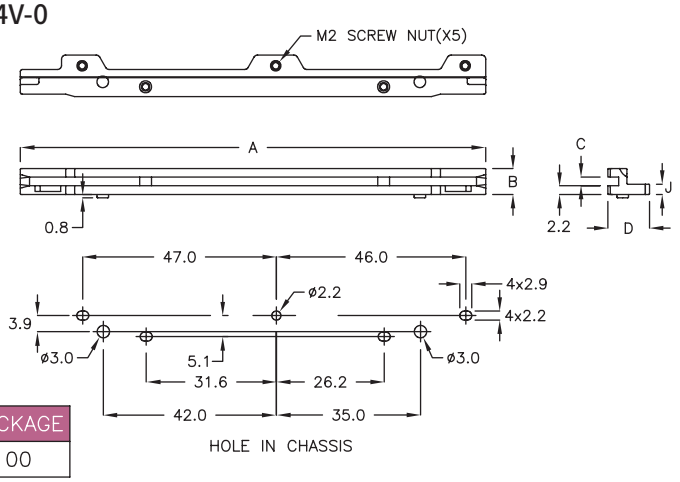


	PART NO	A	B	C	D	J	PACKAGE
★	CGZ−113DK	113.0	6.3	2.1	10.1	2.5	100



印刷電路板導槽 PCB GUIDE RAIL — 11-17-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

NEW

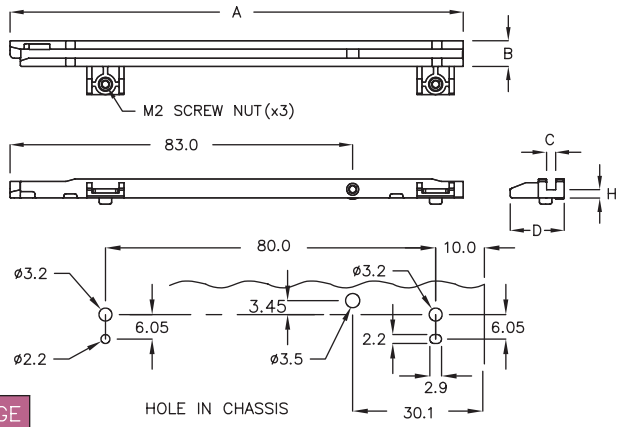


	PART NO	A	B	C	D	H	PACKAGE
★	CGZA−109R	109.8	6.25	2.2	13.05	2.0	100



印刷電路板導槽 PCB GUIDE RAIL — 11-17-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

NEW

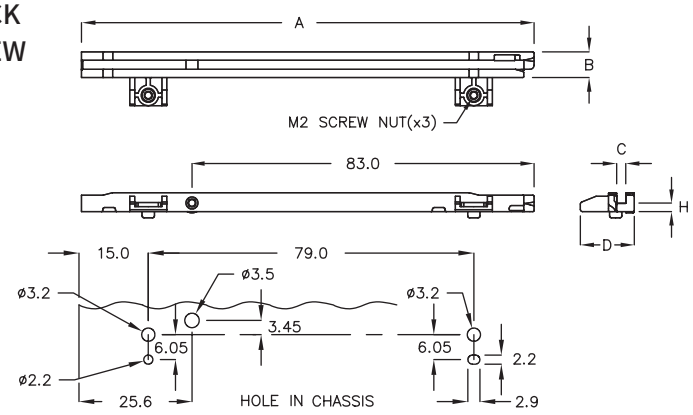


	PART NO	A	B	C	D	H	PACKAGE
★	CGZA−109L	109.8	6.25	2.2	13.05	2.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL — 11-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

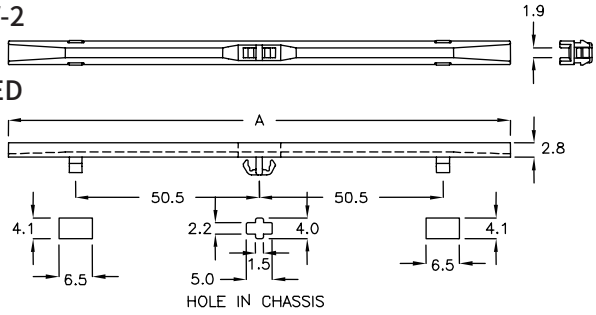


PART NO	A	MAXIMUM THICKNESS	PACKAGE
CGB−127	127.0	1.0	100



印刷電路板導槽 PCB GUIDE RAIL — 11-18-2

- MATERIAL: NYLON 66(UL), ABS+PC(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK, BLUE
- USE M3 SCREW

NEW

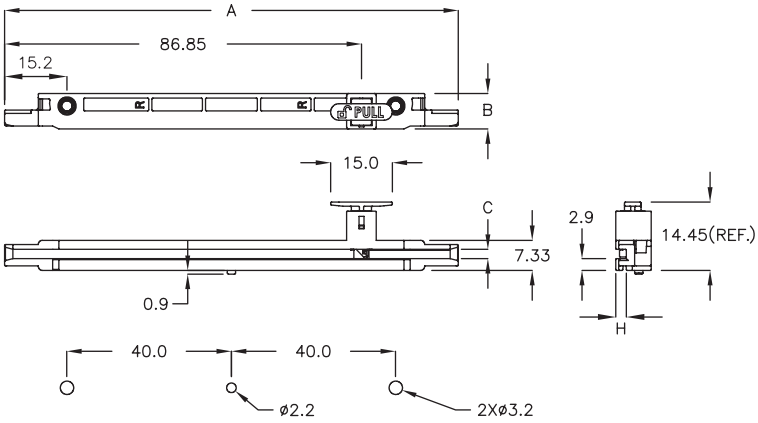


	PART NO	A	B	C	H	PACKAGE
★	CGZF−110R	110.4	8.65	2.25	2.6	100



印刷電路板導槽 PCB GUIDE RAIL — 11-18-3


- MATERIAL: NYLON 66(UL), ABS+PC(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK, BLUE
- USE M3 SCREW

NEW

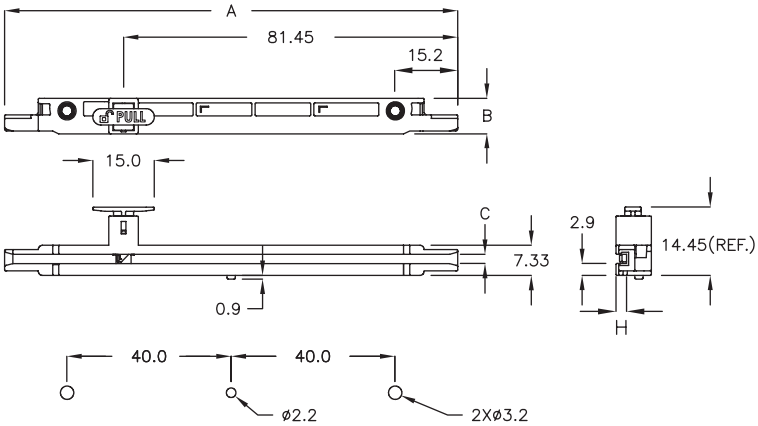

	PART NO	A	B	C	H	PACKAGE
★	CGZH−110L	110.4	8.65	2.25	2.6	100


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



印刷電路板導槽 PCB GUIDE RAIL 11-19-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK, BLUE
- USE M3 SCREW

NEW

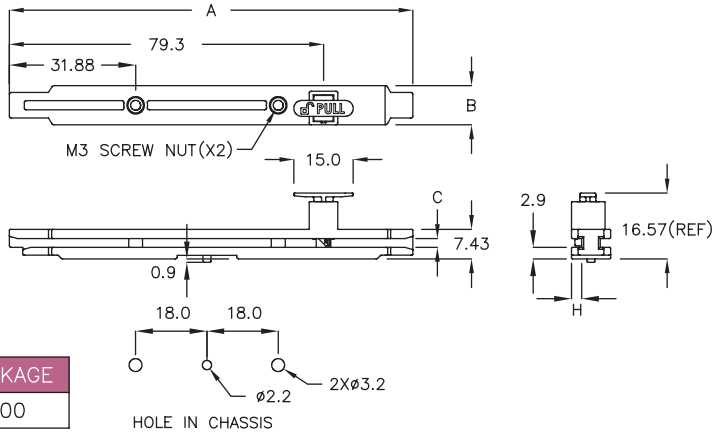


	PART NO	A	B	C	H	PACKAGE
★	CGZD−102	101.9	9.9	2.25	2.59	100



印刷電路板導槽 PCB GUIDE RAIL 11-19-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

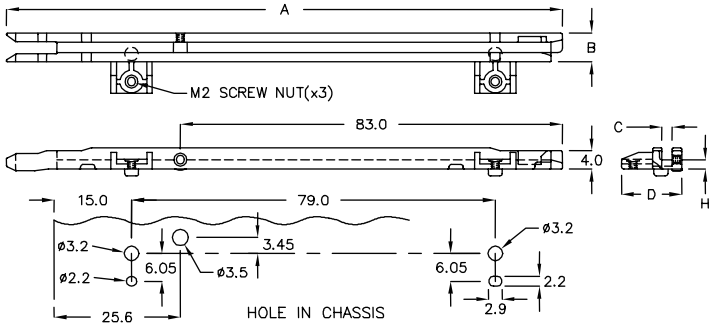


PART NO	A	B	C	D	H	PACKAGE
CGZA−120L	120.7	6.25	2.2	13.05	2.0	100
CGZA−126L	126.3	6.25	2.2	13.05	2.0	




印刷電路板導槽 PCB GUIDE RAIL 11-19-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

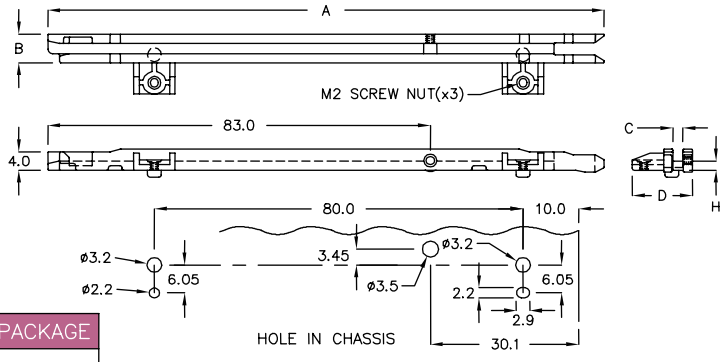

PART NO	A	B	C	D	H	PACKAGE
CGZA−120R	120.7	6.25	2.2	13.05	2.0	100
CGZA−126R	126.3	6.25	2.2	13.05	2.0	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
CGM-47	47.0	200

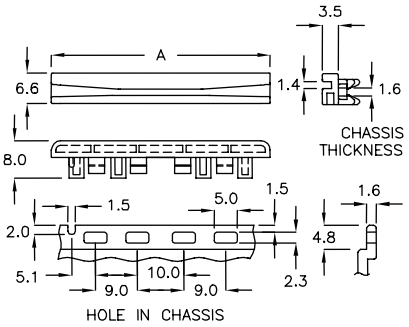





印刷電路板導槽 PCB GUIDE RAIL — 11-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
CGM-47SJ	47.0	200

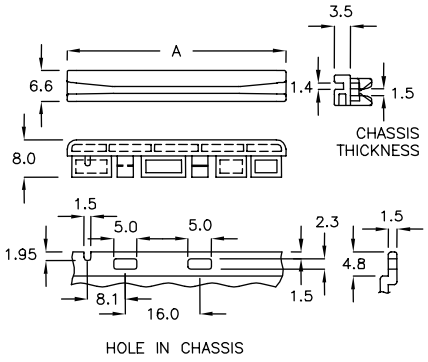





印刷電路板導槽 PCB GUIDE RAIL — 11-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
CGM-47YK	47.0	200

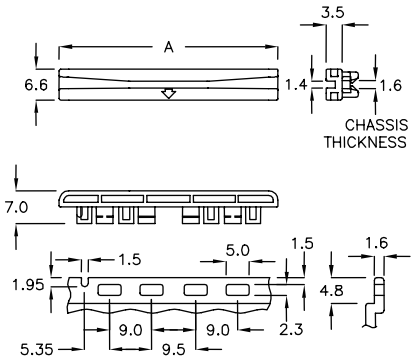





印刷電路板導槽 PCB GUIDE RAIL — 11-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
CGM-47DK	47.0	200

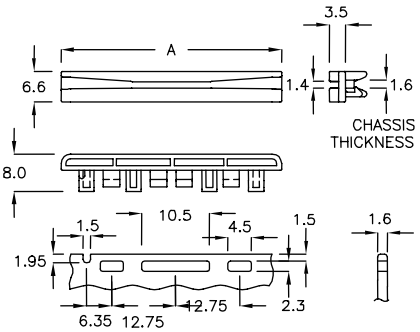


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




印刷電路板導槽 PCB GUIDE RAIL — 11-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

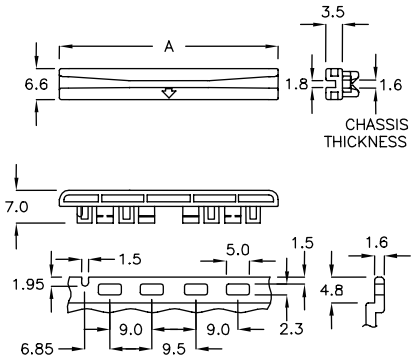


PART NO	A	PACKAGE
CGM−50RT	50.0	200




印刷電路板導槽 PCB GUIDE RAIL — 11-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

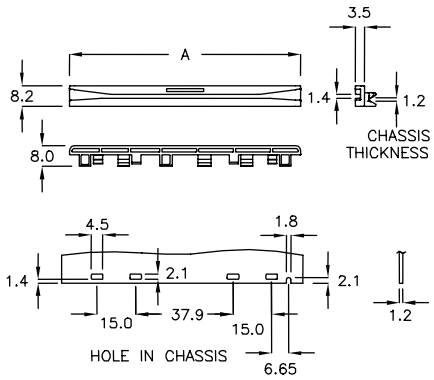


PART NO	A	PACKAGE
CGM−90	90.0	200



印刷電路板導槽 PCB GUIDE RAIL — 11-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

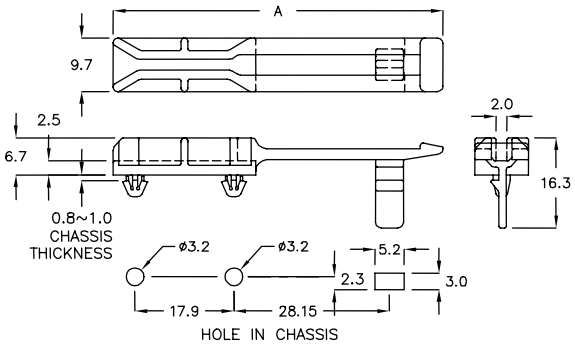


PART NO	A	PACKAGE
CGH−60PL	59.7	200




直立式導槽 PCB GUIDE RAIL — 11-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

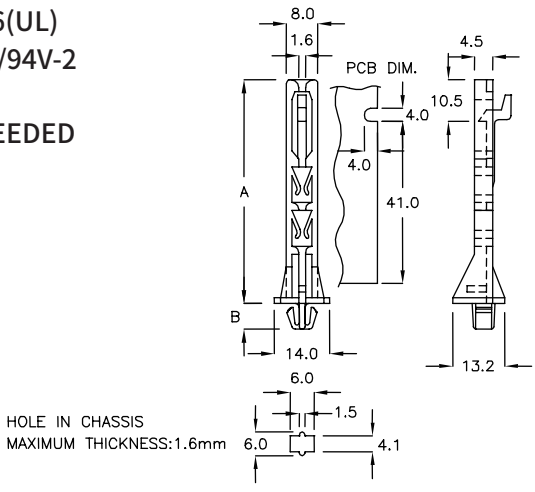

PART NO	A	B	PACKAGE
HCG−5	56.5	6.5	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




直立式導槽 PCB GUIDE RAIL 11-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: WHITE

PART NO	A	B	PACKAGE
HCG-9	89.2	77.2	50
HCG-13	130.0	118.5	

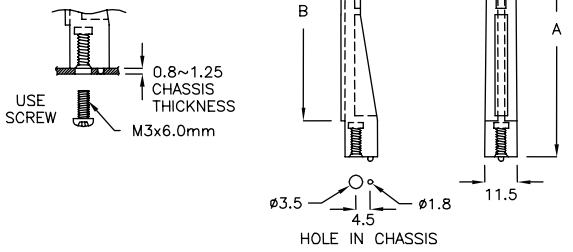




直立式導槽 PCB GUIDE RAIL 11-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
  USE M3x8 TAPPING SCREW

PART NO	A	B	PACKAGE
HCG-74A	74.2	62.2	200

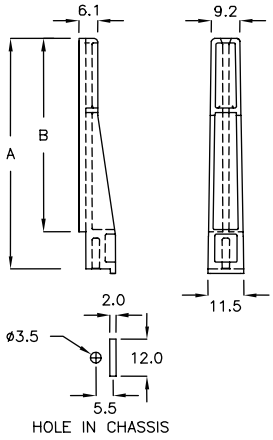




直立式導槽 PCB GUIDE RAIL 11-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
  USE M3x10 TAPPING SCREW

PART NO	A	B	PACKAGE
HCG-10	105.0	92.0	200

ASSEMBLE WITH P.G PART CG-10B

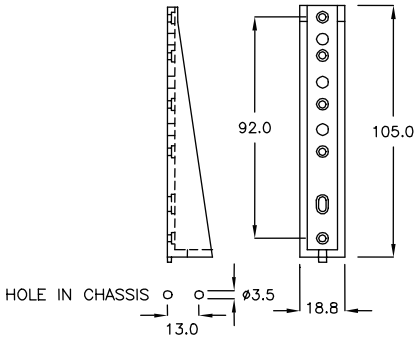




直立式導槽 PCB GUIDE RAIL 11-22-4


- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK


	PART NO	A	T P.C.B. THICKNESS	PACKAGE
★	HCGT-20K	20.4	2.7	200
★	HCGT-25C	20.4	3.6	

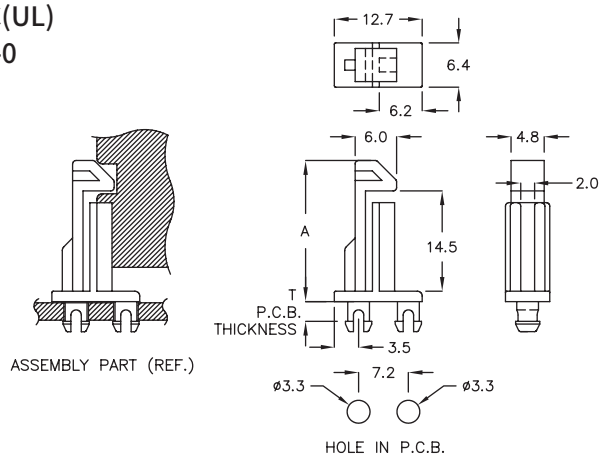

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

12

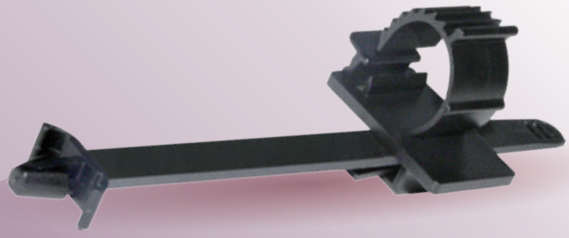












束線帶
CABLE TIES

電線束線帶 CABLE TIE 12-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

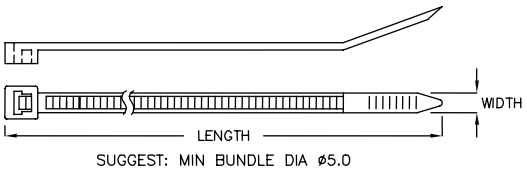


SUGGEST: MIN BUNDLE DIA ø5.0

E101675

PART NO	APPROX LENGTH mm(in)	APPROX WIDTH mm(in)	MAX BUNDLE DIA mm(in)	MIN. LOOP TENSILE STRENGTH kgs(Lbs)	PACKAGE
YJ-80	80(3.15")	2.2(0.08")	17(0.67")	8(18)	1000
YJ-90	90(3.54")	2.5(0.10")	21(0.83")		
YJ-98	98(3.86")		22(0.87")		
YJ-100	100(4.00")		23(0.91")		
YJ-115	115(4.53")	4.8(0.19")	29(1.15")	23(50)	500
YJ-120	120(4.72")	2.5(0.10")	30(1.18")	8(18)	1000
YJ-140	140(5.50")	4.8(0.19")	34(1.34")	23(50)	500
YJ-142	142(5.59")	3.6(0.14")		18(40)	
YJ-142S	142(5.59")	2.5(0.10")	36(1.42")	8(18)	1000
YJ-160	160(6.30")		42(1.66")		
YJ-203	203(8.00")	3.6(0.14")	55(2.17")	18(40)	500
YJ-203S	203(8.00")	2.5(0.10")	56(2.21")	8(18)	1000

電線束線帶 SCREW-ON CABLE TIE 12-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




SUGGEST: MIN BUNDLE DIA ø10.0

PART NO	APPROX LENGTH mm(in)	APPROX WIDTH mm(in)	MAX BUNDLE DIA mm(in)	A	PACKAGE
YJ-156	156(6.14")	3.6(0.14")	34(1.33")	ø4.3	500
YJ-205	205(8.00")	4.8(0.19")	51(2.01")	ø5.5	




把手座 HANDLE MOUNTING PLATE 12-2-3

- MATERIAL: PE
- COLOR: BLACK

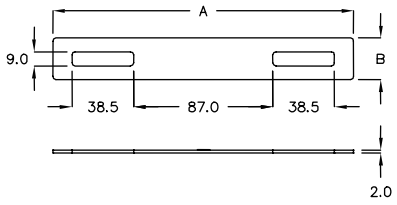


PART NO	A	B	PACKAGE
BSTH-188F	188.0	26.0	100

CAN BE USED AN OPTION P.G PART BST-07



紙箱把手 PULLER 12-2-4

- MATERIAL: PE
- COLOR: WHITE

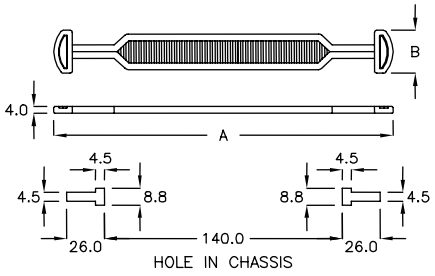

PART NO	A	B	PACKAGE
BST-07	198.0	25.4	200


CAN BE USED AN OPTION P.G PART BSTH-188F

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手 PULLER 12-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

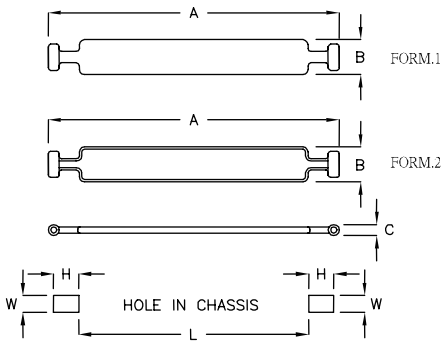


PART NO	A	B	C	H	W	L	FORM	PACKAGE
BST-60A	60.6	9.4	ø2.3	8.0	3.7	30.0	1	1000
BST-70	70.0	8.0	ø2.0	7.0	4.0	46.0	1	500
BST-8D	79.8	9.4	ø2.3	15.0	3.7	46.0	1	
BST-9A	90.5	9.4	ø2.3	7.0	3.8	60.5	2	
BST-120	120.0	11.9	ø2.3	9.2	6.0	80.0	2	




把手 PULLER 12-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

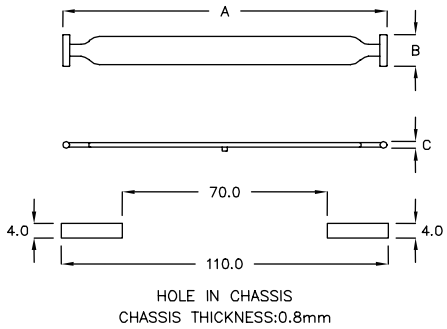


PART NO	A	B	C	PACKAGE
BSX-110K	110.6	9.0	ø2.0	500



把手 PULLER 12-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

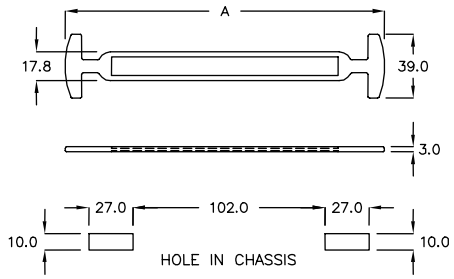


PART NO	A	PACKAGE
BST-180Q	180.0	200



固定座 MOUNTING 12-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M4 SCREW

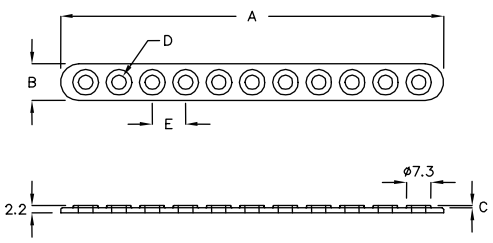


PART NO	A	B	C	D	E	PACKAGE
BSW-115	115.0	11.0	0.7	ø4.3×11	10.0×10	500
BSW-155	155.0	11.0	0.7	ø4.3×15	10.0×14	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNTING 12-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M4 SCREW

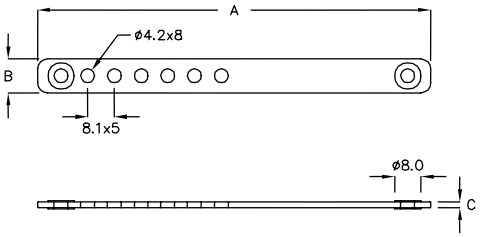


PART NO	A	B	C	PACKAGE
BSW-119	118.8	10.2	1.7	500



固定座 MOUNTING 12-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M4 SCREW

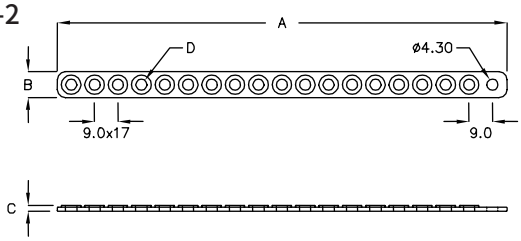


PART NO	A	B	C	D	PACKAGE
BSW-172	172.7	10.0	2.2	ø4.3x18	500



束線固定座 MOUNTING 12-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	ASSEMBLE WITH P.G. PART	PACKAGE
YAD-01	17.2	5.0	4.0	YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142S YJ-160, YJ-203S	2000

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 2.6mm



電源線固定帶 CABLE TIE 12-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	C	D	PACKAGE
PSA-01	45.0	20.0	11.9	1.2	500


ASSEMBLE WITH P.G PART PSA-02

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定帶 CABLE TIE 12-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

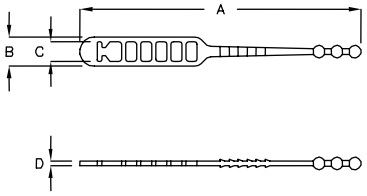


PART NO	A	B	C	D	PACKAGE
PSA-02	78.25	8.0	5.6	1.2	500

ASSEMBLE WITH P.G PART PSA-01



電源線固定帶 CABLE TIE 12-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

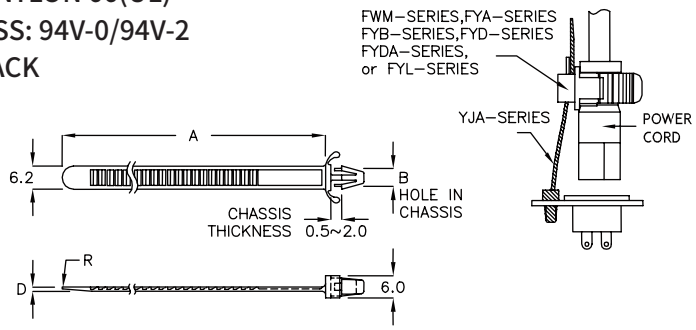


PART NO	A	B HOLE IN CHASSIS	D	R	ASSEMBLE WITH P.G. PART	PACKAGE
YJA-85	85.0	ø5.0	1.2	R0.1	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	100
YJA-85KT	85.0	ø5.0	1.2	R0.4		
YJA-85PD	85.0	ø5.0	1.5	R0.1	FWM-11PH, FWM-15PD	

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES,
FYD-SERIES, FYDA-SERIES or FYL-SERIES



電源線固定帶 CABLE TIE 12-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

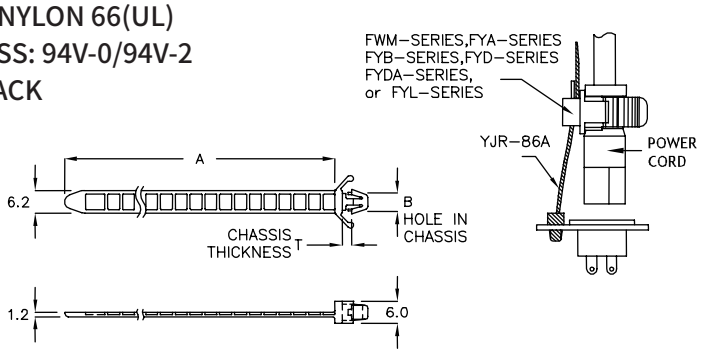

PART NO	A	B HOLE IN CHASSIS	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJR-86A	86.75	ø5.0	0.8~2.0	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	100


ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES,
FYD-SERIES, FYDA-SERIES or FYL-SERIES

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定帶 CABLE TIE 12-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

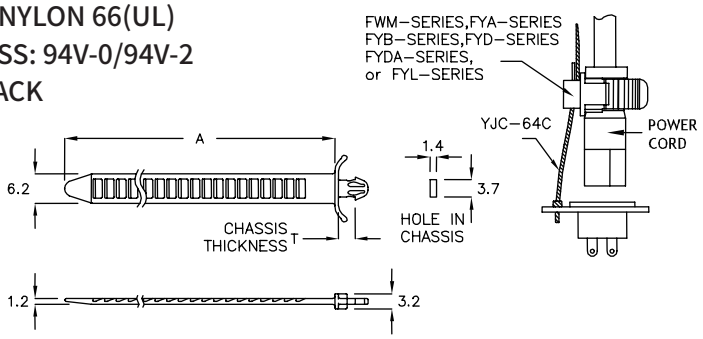


PART NO	A	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJC-64C	64.2	1.8~2.8	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	500

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES



電源線固定帶 CABLE TIE 12-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

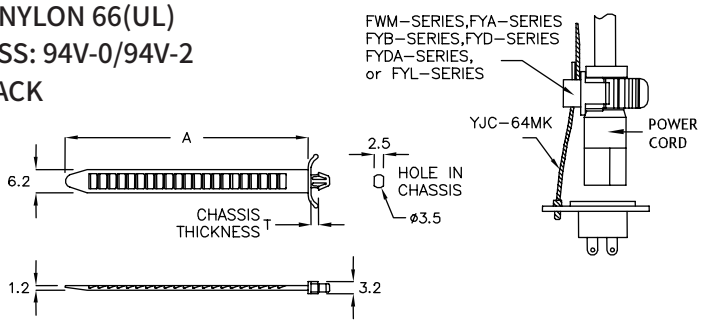


PART NO	A	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJC-64MK	64.2	1.0~1.4	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	500

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES



電源線固定帶 CABLE TIE 12-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

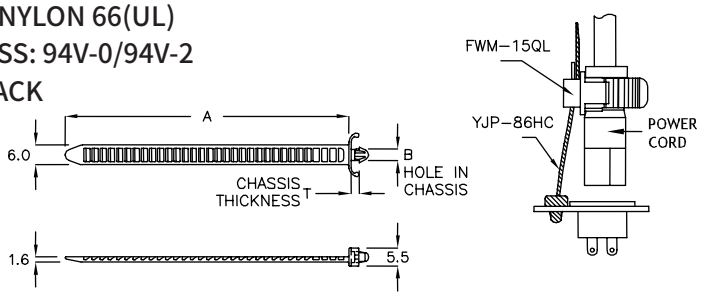

PART NO	A	B HOLE IN CHASSIS	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJP-86HC	86.74	ø3.5	0.8~2.0	FWM-15QL	100


ASSEMBLE WITH P.G PART FWM-15QL

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定帶 CABLE TIE 12-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

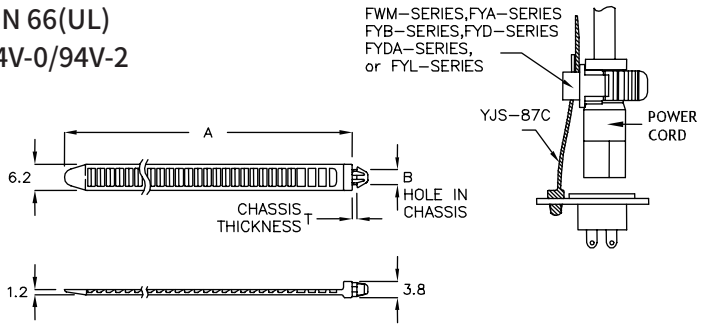


PART NO	A	B HOLE IN CHASSIS	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJS–87C	89.0	ø3.5	0.8	FWM–7GQ, FWM–8K FWM–11A, FWM–11KN FWM–15A, FWM–19M FYA–15KC, FYA–15TR FYB–15NK, FYD–13K FYDA–13C, FYL–17C	100

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES



電源線固定帶 CABLE TIE 12-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

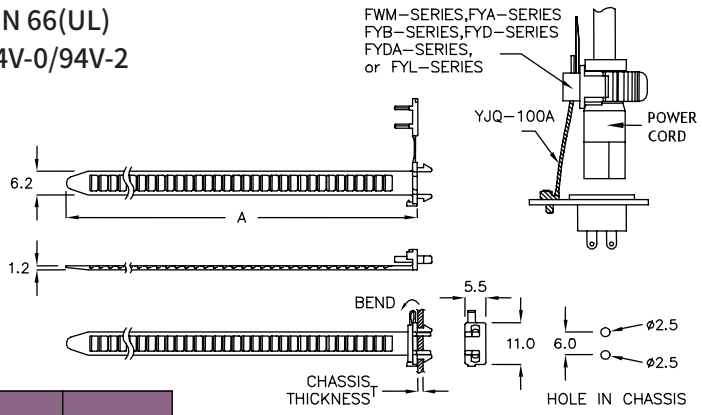


PART NO	A	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJQ–100A	100.0	1.6	FWM–7GQ, FWM–8K FWM–11A, FWM–11KN FWM–15A, FWM–19M FYA–15KC, FYA–15TR FYB–15NK, FYD–13K FYDA–13C, FYL–17C	100

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES



電源線固定帶 CABLE TIE 12-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

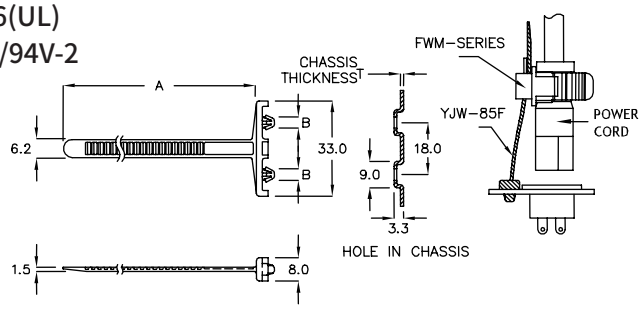

PART NO	A	B HOLE IN CHASSIS	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
YJW–85F	85.0	ø4.0	1.0	FWM–11PH, FWM–15PD	100


ASSEMBLE WITH P.G PART FWM–SERIES

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電源線固定帶 CABLE TIE 12-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

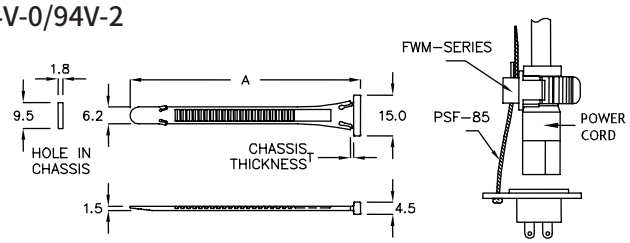


PART NO	A	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
PSF–85	85.0	0.8	FWM–11PH, FWM–15PD	500

ASSEMBLE WITH P.G PART FWM–SERIES



電源線固定帶 CABLE TIE 12-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

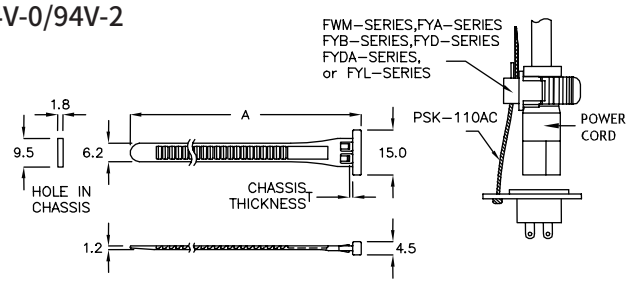


PART NO	A	T CHASSIS THICKNESS	ASSEMBLE WITH P.G. PART	PACKAGE
PSK–110AC	110.0	0.8	FWM–7GQ, FWM–8K FWM–11A, FWM–11KN FWM–15A, FWM–19M FYA–15KC, FYA–15TR FYB–15NK, FYD–13K FYDA–13C, FYL–17C	500

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES



電源線固定帶 CABLE TIE 12-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

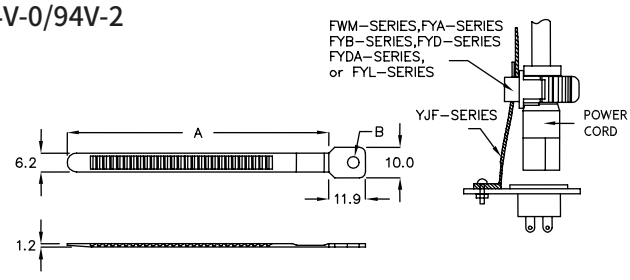

PART NO	A	B	ASSEMBLE WITH P.G. PART	PACKAGE
YJF–94	85.0	ø3.8	FWM–7GQ, FWM–8K FWM–11A, FWM–11KN FWM–15A, FWM–19M FYA–15KC, FYA–15TR FYB–15NK, FYD–13K FYDA–13C, FYL–17C	100
YJF–116KH	105.0	ø6.0		


ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定帶 CABLE TIE 12-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

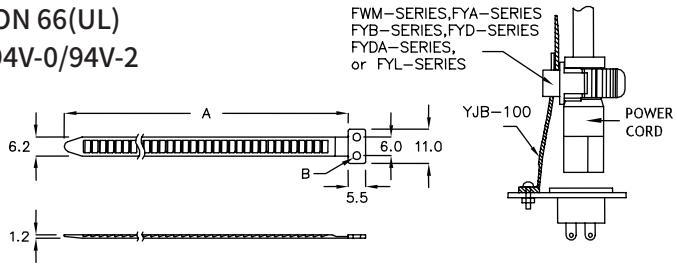


PART NO	A	B	ASSEMBLE WITH P.G. PART	PACKAGE
YJB-100	100.0	ø2.5	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	100

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES



電源線固定帶 CABLE TIE 12-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

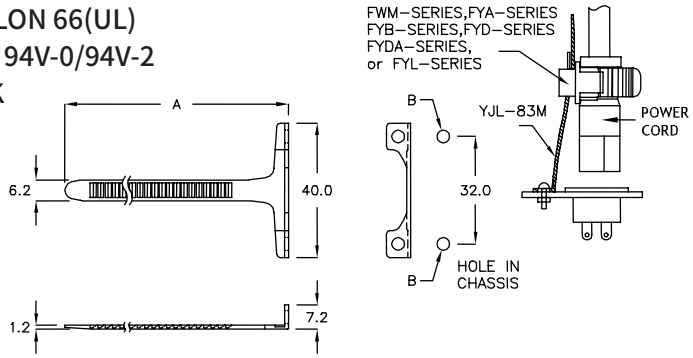


PART NO	A	B HOLE IN CHASSIS	ASSEMBLE WITH P.G. PART	PACKAGE
YJL-83M	83.5	ø3.5	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	100


ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES



電源線固定帶 CABLE TIE 12-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

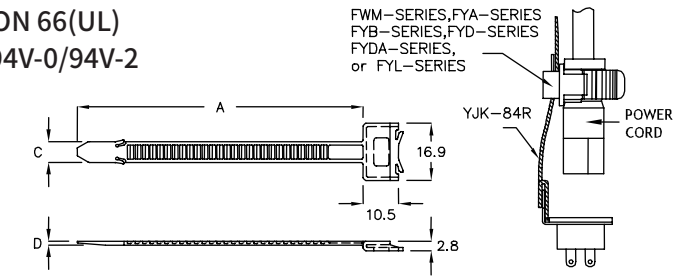




PART NO	A	C	D	ASSEMBLE WITH P.G. PART	PACKAGE
YJK-84R	84.6	6.2	1.2	FWM-7GQ, FWM-8K FWM-11A, FWM-11KN FWM-15A, FWM-19M FYA-15KC, FYA-15TR FYB-15NK, FYD-13K FYDA-13C, FYL-17C	100


ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定帶 CABLE TIE — 12-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

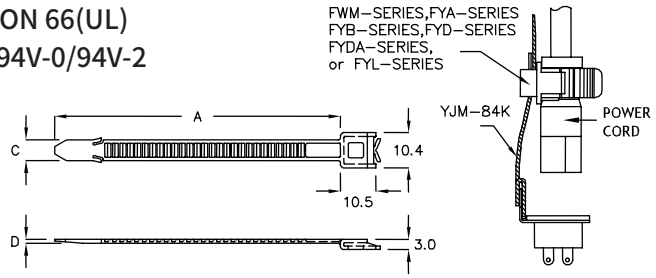




PART NO	A	C	D	ASSEMBLE WITH P.G. PART	PACKAGE
YJM–84K	84.6	6.2	1.2	FWM–7GQ, FWM–8K FWM–11A, FWM–11KN FWM–15A, FWM–19M FYA–15KC, FYA–15TR FYB–15NK, FYD–13K FYDA–13C, FYL–17C	100


ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES



電源線固定帶 CABLE TIE — 12-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

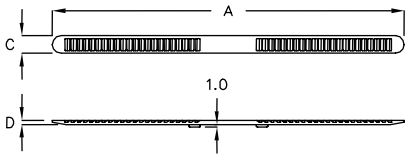

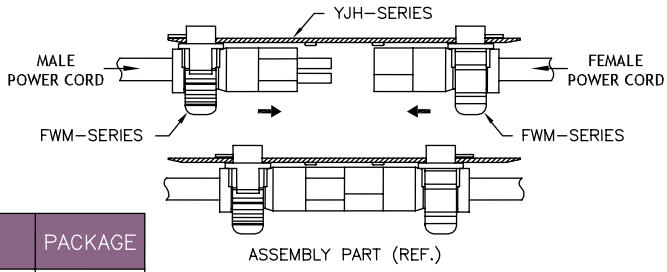


PART NO	A	C	D	ASSEMBLE WITH P.G. PART	PACKAGE
YJH–125	125.0	6.2	1.5	FWM–11PH, FWM–15PD FWM–26SA	100
YJH–180HG	180.0	6.2	1.5		

ASSEMBLE WITH P.G PART FWM–SERIES



電源線固定座 POWER CORD MOUNTING — 12-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

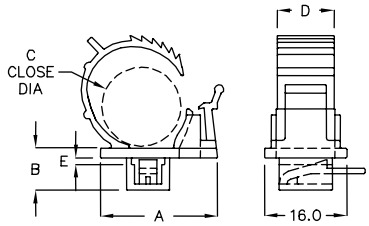

PART NO	A	B	C CLOSE DIA	D	E	ASSEMBLE WITH P.G. PART	PACKAGE
FYB–15NK	22.7	8.1	ø11.5~ø15.3	11.0	1.3	YJA–85, YJA–85KT, YJB–100 YJC–64C, YJC–64MK, YJF–94 YJF–116KH, YJK–84R, YJL–83M YJM–84K, YJQ–100A, YJR–86A YJS–87C, PSK–110AC	100


ASSEMBLE WITH P.G PART YJA–SERIES, YJB–SERIES, YJC–SERIES, YJF–SERIES, YJK–SERIES, YJL–SERIES, YJM–SERIES, YJQ–SERIES, YJR–SERIES, YJS–SERIES or PSK–SERIES

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定座 POWER CORD MOUNTING — 12-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C CLOSE DIA	D	E	R	ASSEMBLE WITH P.G. PART	PACKAGE
FWM−7GQ	18.0	8.1	ø5.0~ø6.5	11.0	1.3	R0.1	YJA−85, YJA−85KT YJB−100, YJC−64C YJC−64MK, YJF−94 YJF−116KH, YJK−84R YJL−83M, YJM−84K YJQ−100A, YJR−86A YJS−87C, PSK−110AC	100
FWM−8K	18.0	8.1	ø7.2~ø8.3					
FWM−11A	25.0	8.3	ø8.0~ø11.0					
FWM−11KN	25.0	8.3	ø8.0~ø11.0	11.0	1.3	R0.2		
FWM−15A	24.7	8.1	ø11.5~ø15.3	11.0	1.3	R0.1		
FWM−19M	28.3	8.3	ø15.3~ø19.0					
FWM−11PH	25.0	8.3	ø8.0~ø11.0	11.0	1.6	R0.1	YJA−85PD, YJH−125 YJH−180HG, YJW−85F PSF−85	
FWM−15PD	24.8	8.1	ø11.5~ø15.3					

ASSEMBLE WITH P.G PART YJA−SERIES, YJB−SERIES, YJC−SERIES, YJF−SERIES, YJH−SERIES, YJK−SERIES, YJL−SERIES, YJM−SERIES, YJQ−SERIES, YJR−SERIES, YJS−SERIES, YJW−SERIES or PSK−SERIES



電源線固定座 POWER CORD MOUNTING — 12-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

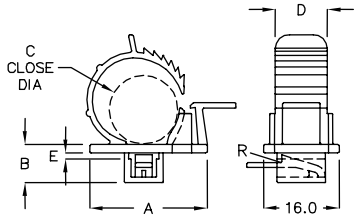


PART NO	A	B	C CLOSE DIA	D	E	R	ASSEMBLE WITH P.G. PART	PACKAGE
FWM−15QL	20.5	8.3	ø11.5~ø15.3	11.0	1.3	R0.1	YJP−86HC	100
FYA−15KC	24.8	8.1	ø11.5~ø15.3	11.0	1.35	R0.2	YJA−85, YJA−85KT, YJB−100 YJC−64C, YJC−64MK, YJF−94 YJF−116KH, YJK−84R, YJL−83M YJM−84K, YJQ−100A, YJR−86A YJS−87C, PSK−110AC	
FYA−15TR	24.8	8.1	ø11.5~ø15.3	11.0	1.3	R0.1		

ASSEMBLE WITH P.G PART YJA−SERIES, YJB−SERIES, YJC−SERIES, YJF−SERIES, YJK−SERIES, YJL−SERIES, YJM−SERIES, YJP−SERIES, YJQ−SERIES, YJR−SERIES, YJS−SERIES or PSK−SERIES



電源線固定座 POWER CORD MOUNTING — 12-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

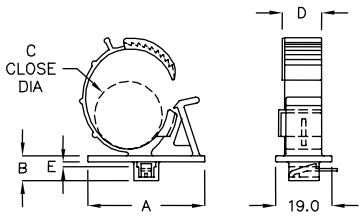

PART NO	A	B	C CLOSE DIA	D	E	ASSEMBLE WITH P.G. PART	PACKAGE
FWM−26SA	39.9	8.5	ø21.0~ø26.5	13.3	1.65	YJA−85PD, YJH−125 YJH−180HG, YJW−85F PSF−85	100


ASSEMBLE WITH P.G PART YJA−SERIES, YJH−SERIES, YJW−SERIES, PSF−SERIES

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源線固定座 POWER CORD MOUNTING — 12-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

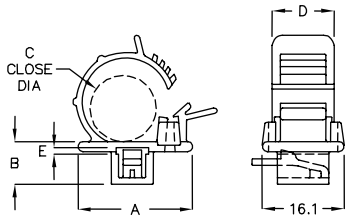


PART NO	A	B	C CLOSE DIA	D	E	ASSEMBLE WITH P.G. PART	PACKAGE
FYD-13K	22.5	8.4	ø11.0~ø13.0	12.1	1.3	YJA-85, YJA-85KT, YJB-100 YJC-64C, YJC-64MK, YJF-94 YJF-116KH, YJK-84R, YJL-83M YJM-84K, YJQ-100A, YJR-86A YJS-87C, PSK-110AC	100
FYDA-13C	22.5	8.45	ø11.0~ø13.0	12.0	1.35		

ASSEMBLE WITH P.G PART YJA-SERIES, YJB-SERIES, YJC-SERIES, YJF-SERIES, YJK-SERIES, YJL-SERIES, YJM-SERIES, YJQ-SERIES, YJR-SERIES, YJS-SERIES or PSK-SERIES



電源線固定座 POWER CORD MOUNTING — 12-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	C CLOSE DIA	D	E	ASSEMBLE WITH P.G. PART	PACKAGE
FYL-17C	31.1	ø15.0~ø17.0	11.0	1.35	YJA-85, YJA-85KT, YJB-100 YJC-64C, YJC-64MK, YJF-94 YJF-116KH, YJK-84R, YJL-83M YJM-84K, YJQ-100A, YJR-86A YJS-87C, PSK-110AC	100

ASSEMBLE WITH P.G PART YJA-SERIES, YJB-SERIES, YJC-SERIES, YJF-SERIES, YJK-SERIES, YJL-SERIES, YJM-SERIES, YJQ-SERIES, YJR-SERIES, YJS-SERIES or PSK-SERIES



電源線固定座 POWER CORD MOUNTING — 12-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 SCREW

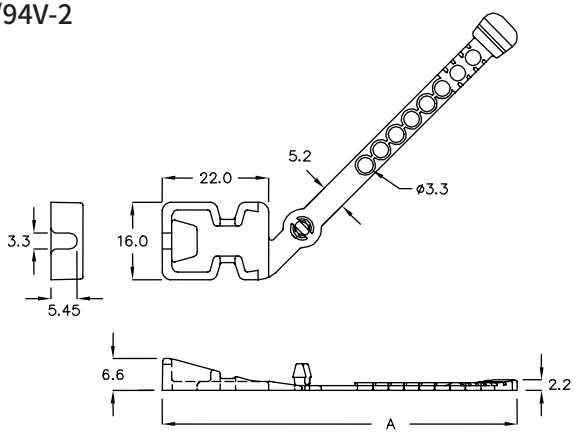


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
YAT-83A	83.06	ø8.0~ø16.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線束線帶 MOUNTING CABLE TIE — 12-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

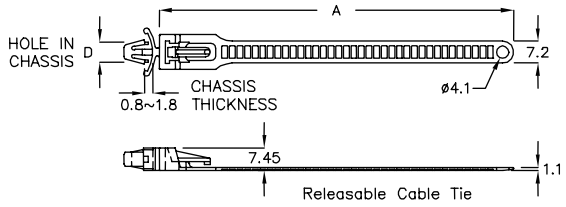


PART NO	A	D HOLE IN CHASSIS	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE DIA	PACKAGE
YAA-118	117.4	ø6.5	129(5.08")	7.2(0.284")	28.5(1.125")	100
YAA-150	150.0	ø3.8	160(6.30")	7.2(0.284")	40.0(1.575")	




電線束線帶 MOUNTING CABLE TIE — 12-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

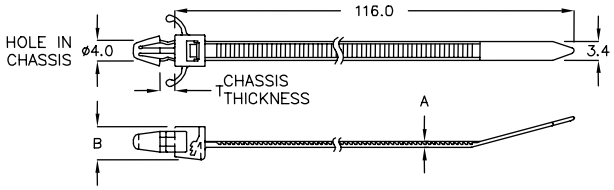


PART NO	A	B	T CHASSIS THICKNESS	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE DIA	PACKAGE
YJ-123	1.1	6.8	0.8~2.0	123(4.84")	3.4(0.13")	25.4(1.00")	500
YJ-123TK	1.3	6.0	2.0~2.5	123(4.84")	3.4(0.13")	25.4(1.00")	




電源線固定帶 CABLE TIE — 12-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

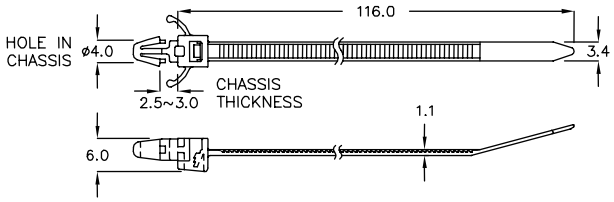


PART NO	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE DIA	PACKAGE
YJ-123HR	123.6(4.86")	3.4(0.13")	25.4(1.00")	500




電線束線帶 MOUNTING CABLE TIE — 12-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

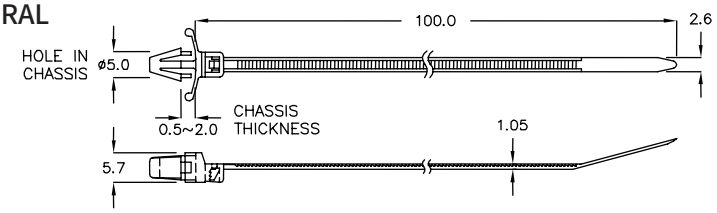


PART NO	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE DIA	PACKAGE
YJ-99T	108(4.25")	2.6(0.10")	22.0(0.86")	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電線束線帶 MOUNTING CABLE TIE — 12-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

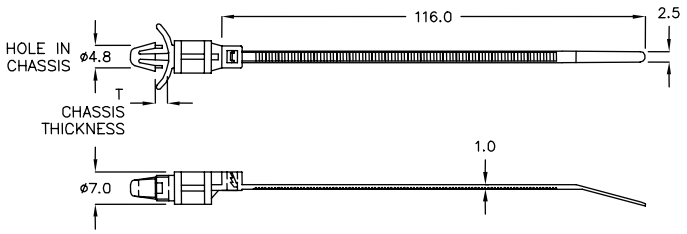


PART NO	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE DIA	T CHASSIS THICKNESS	PACKAGE
YJ-138T	114.8(4.52")	2.5(0.10")	25.4(1.00")	0.6~2.0	500



電線束線帶 MARKER TIE — 12-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

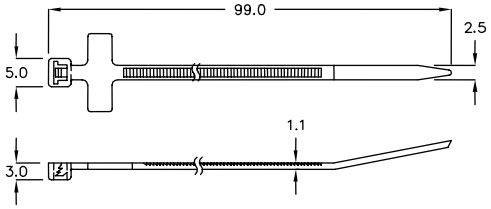


PART NO	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE DIA	PACKAGE
MCT-98	99(3.86")	2.5(0.10")	21.0(0.81")	500



電線束線帶 MOUNTING CABLE TIE — 12-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

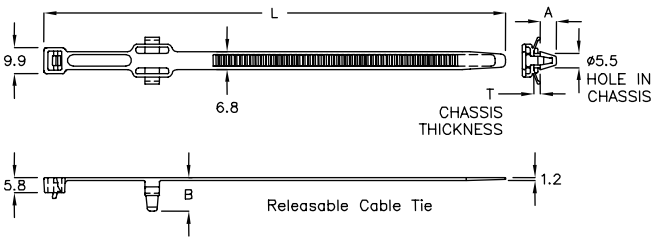


PART NO	A	B	L	APPROX WIDTH	MAX BUNDLE DIA	T CHASSIS THICKNESS	PACKAGE
YAM-180MQ	6.0	12.8	180(7.09")	6.8(0.268")	45.0(1.772")	0.5~2.0	200
YAM-180RC	5.1	12.4	180(7.09")	6.8(0.268")	45.0(1.772")	2.3~2.5	



電源收線固定帶 STRAP TIE — 12-14-4

- MATERIAL: PE
- COLOR: NATURAL,BLACK

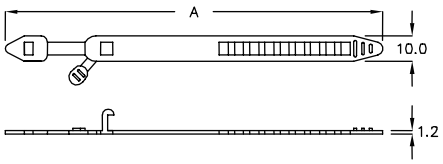

PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST-1	138.8	ø10.0~ø27.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源收線固定帶 STRAP TIE 12-15-1

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	PACKAGE
BST-2	103.6	200

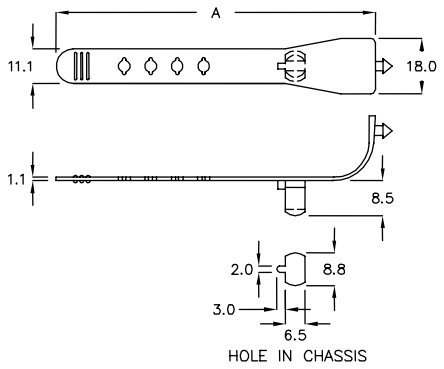




電源收線固定帶 STRAP TIE 12-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL, BLACK

PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST-3	129.0	ø15.0~ø35.0	500

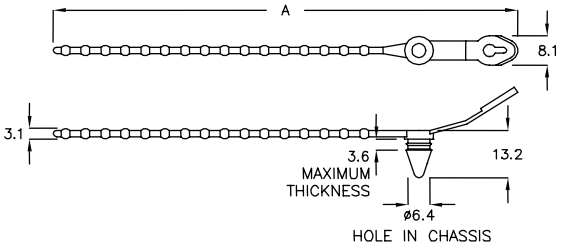




電源收線固定帶 STRAP TIE 12-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN

PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST-128	128.3	ø15.0~ø33.0	500

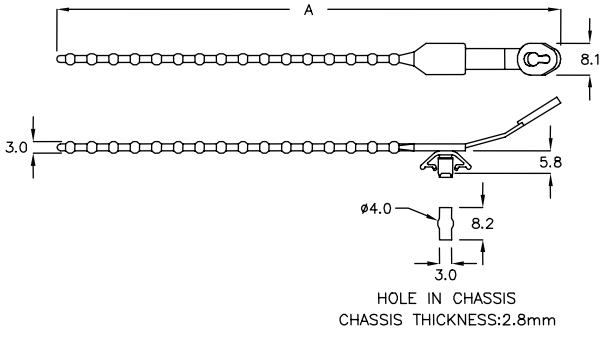




電源收線固定帶 STRAP TIE 12-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK

PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST-129	129.0	ø15.0~ø35.0	500

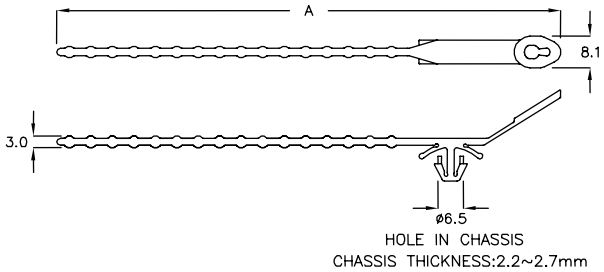


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源收線固定帶 STRAP TIE — 12-16-1

- MATERIAL: PE
- COLOR: BLACK

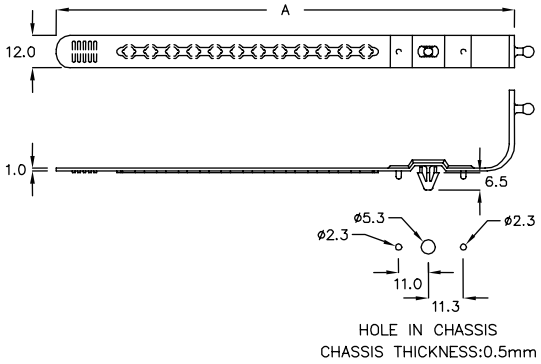


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST−170C	170.0	ø30.0~ø44.0	100



電源收線固定帶 STRAP TIE — 12-16-2

- MATERIAL: PE
- COLOR: BLACK

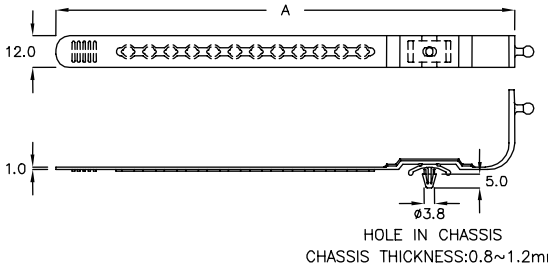


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST−172CF	172.0	ø30.0~ø44.0	200



電源收線固定帶 STRAP TIE — 12-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

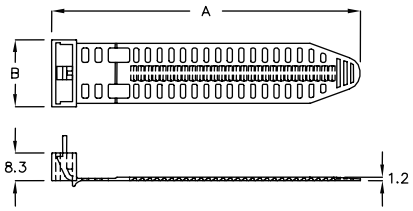


PART NO	A	B	SUITABLE BUNDLE DIA	PACKAGE
YJD−85H	92.5	20.1	ø9.0~ø19.0	100



電源收線固定帶 STRAP TIE — 12-16-4

- MATERIAL: PE
- COLOR: BLACK

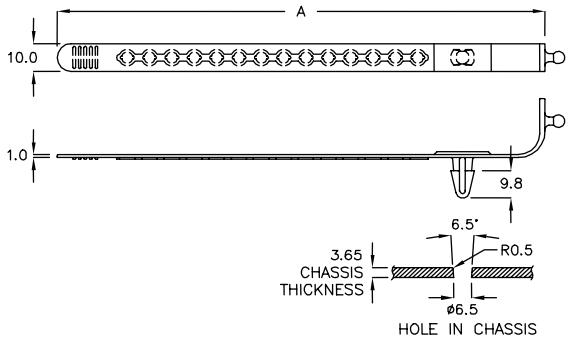


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST−174A	174.5	ø25.0~ø44.0	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源收線固定帶 STRAP TIE 12-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
  COLOR: NATURAL

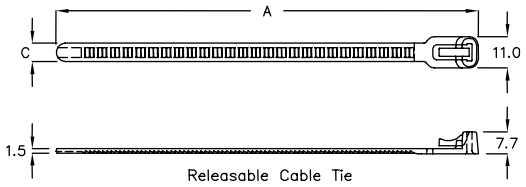


PART NO	A	C	SUITABLE BUNDLE DIA	PACKAGE
YAK−148	148.0	7.5	ø8.0~ø36.0	500
YAK−196A	196.4	5.5	ø8.0~ø50.0	



電源收線固定帶 STRAP TIE 12-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

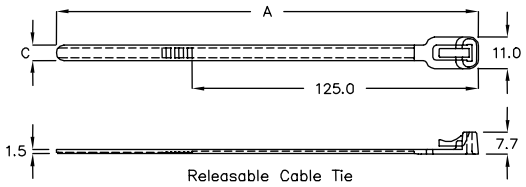


PART NO	A	C	SUITABLE BUNDLE DIA	PACKAGE
YAKS−196	196.4	5.5	ø33.0~ø35.0	500



電源收線固定帶 STRAP TIE 12-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- 按下槓桿即可解開 , 可重複使用

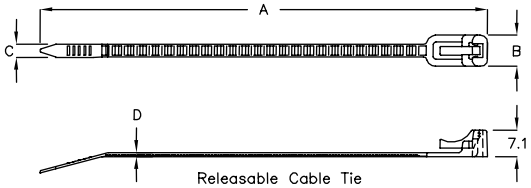


PART NO	A	B	C	D	SUITABLE BUNDLE DIA	PACKAGE
YJG−120	120.0	8.4	3.5	1.1	ø5.0~ø25.0	500
YJG−260	260.0	9.0	4.0	1.3	ø8.0~ø70.0	



電源收線固定帶 STRAP TIE 12-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK

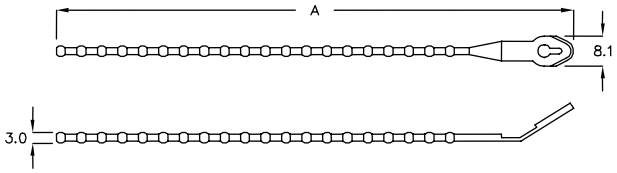


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST−3A	142.0	ø5.5~ø39.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電源收線固定帶 STRAP TIE — 12-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: BLACK

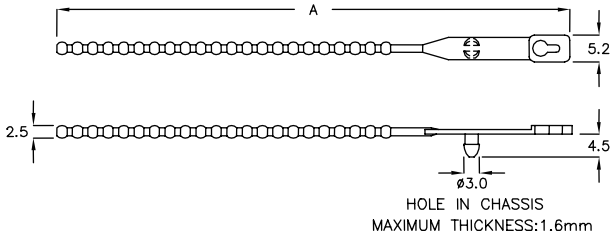


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST−5	103.0	ø9.5~ø27.0	500



活動束線帶 MOVABLE TIE — 12-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK

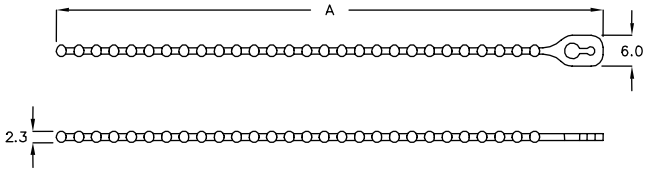


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BST−6C	70.0	ø6.0~ø17.0	500
BST−6HJ	88.0	ø6.0~ø20.0	
BST−6A	106.0	ø6.0~ø27.0	



活動束線帶 STRAP TIE — 12-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

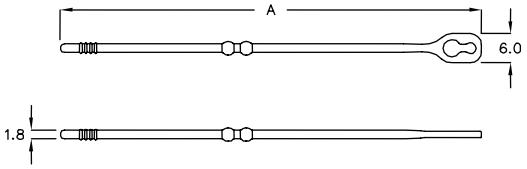


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BXR−86	86.0	ø13.0	500



活動束線帶 STRAP TIE — 12-18-4

- ATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

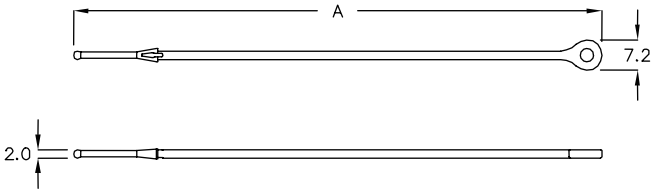


PART NO	A	SUITABLE BUNDLE DIA	PACKAGE
BFN−102	125.6	ø30.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



活動束線帶 STRAP TIE 12-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

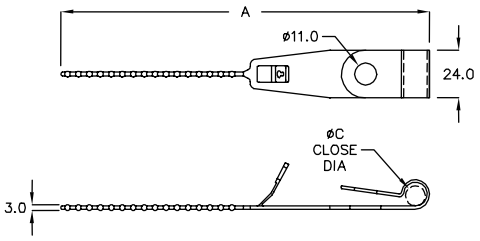


PART NO	A	C CLOSE DIA	SUITABLE BUNDLE DIA	PACKAGE
BST-185P	185.0	ø10.0	ø15.4~ø32.4	10



電源收線固定帶 STRAP TIE 12-19-2

- MATERIAL: PE
- COLOR: NATURAL,BLACK

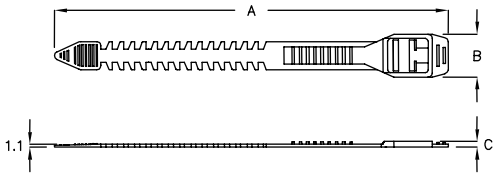


PART NO	A	B	C	SUITABLE BUNDLE DIA	PACKAGE
LST-6	141.5	15.5	2.05	ø16.0~ø34.0	500
LST-8	158.5	15.8	2.5	ø26.0~ø38.0	100



電源收線固定帶 STRAP TIE 12-19-3

- MATERIAL: PE
- COLOR: NATURAL,BLACK

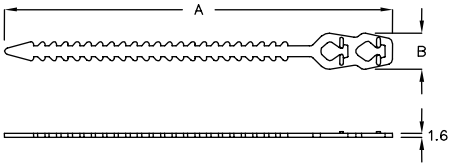


PART NO	A	B	SUITABLE BUNDLE DIA	PACKAGE
LST-10	208.0	14.6	ø5.0~ø47.0	500




電源收線固定帶 STRAP TIE 12-19-4

- COLOR: NATURAL,BLACK

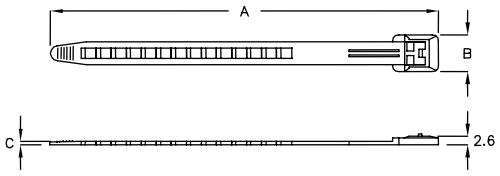


PART NO	MATERIAL	A	B	C	SUITABLE BUNDLE DIA	PACKAGE
PST-1	N66	125.0	13.0	1.6	ø15.0~ø33.0	500
PST-2A	N66/PE	151.5	14.5	1.4	ø15.0~ø39.0	
PST-5	PE	180.4	14.5	1.5	ø15.5~ø47.5	
PST-6	PE	209.0	14.5	1.5	ø20.0~ø55.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



活動束線帶　STRAP TIE — 12-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

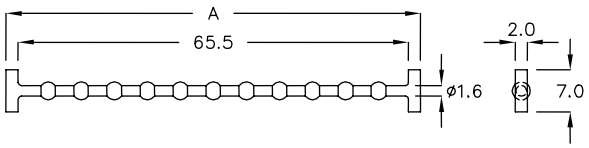


PART NO	A	PACKAGE
BST−4	69.5	1000




把手　PULLER — 12-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
BSQ−75A	79.5	2000



打包扣　PACKING FASTENER — 12-20-3

- MATERIAL: PP
- COLOR: NATURAL




PART NO	A	PACKAGE
PF−1	60.8	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

13

其他塑膠製品

HANDLE
HOUSING
COVER

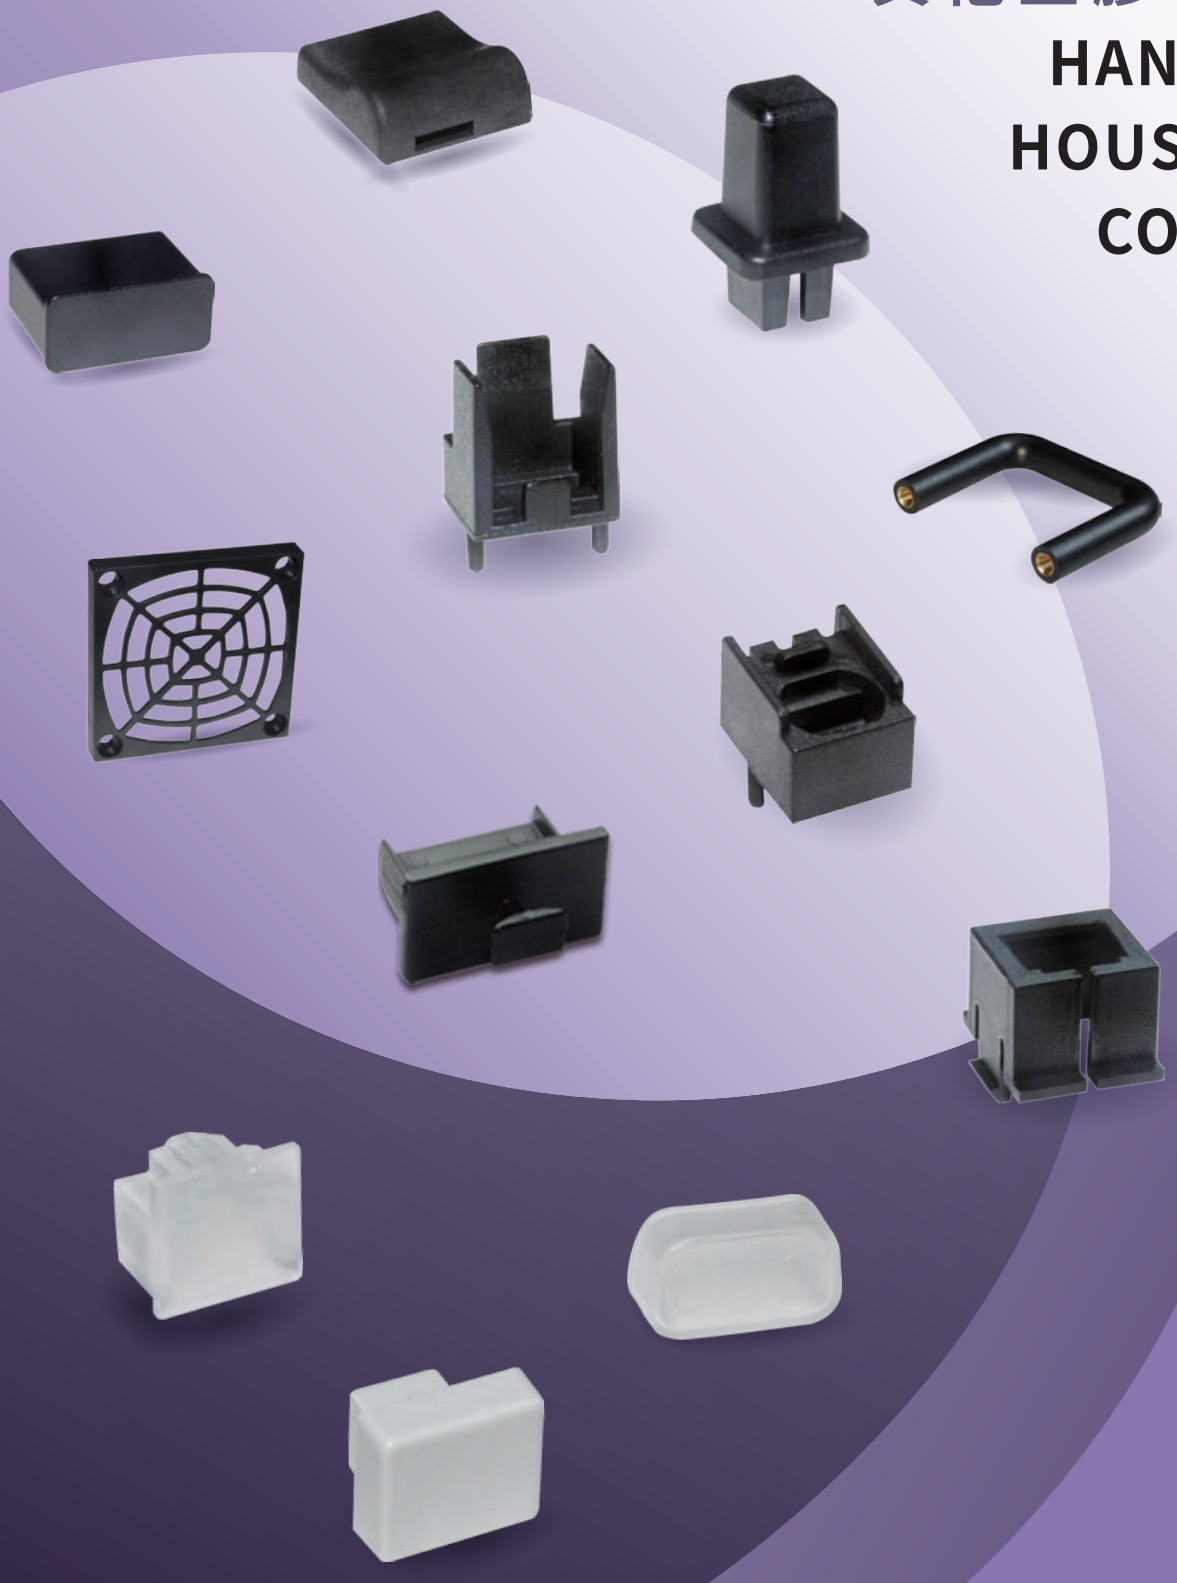




把手 HANDLE 13-2-1

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK

PART NO	A	B	PACKAGE
BSA-38	44.55	36.7	200






把手 HANDLE 13-2-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3.5 TAPPING SCREW

PART NO	A	B	PACKAGE
BSA-64	70.4	31.6	200

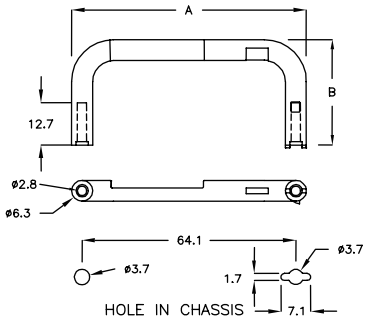




把手 HANDLE 13-2-3

- MATERIAL: ABS+PC, PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- MATERIAL: BRASS

PART NO	MATERIAL	A	B	C	D	PACKAGE
BWK-32PM	ABS+PC	38.3	29.3	32.0	ø6.3	200
BWK-45DK	PC	52.3	22.5	45.3	ø7.0	
BWK-51CT	ABS+PC	57.3	32.0	51.0	ø6.3	






把手 HANDLE 13-2-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- MATERIAL: BRASS

PART NO	A	B	PACKAGE
BSG-30MF	37.2	27.0	200






把手 HANDLE 13-2-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	PACKAGE
BSC-33	52.0	22.0	200

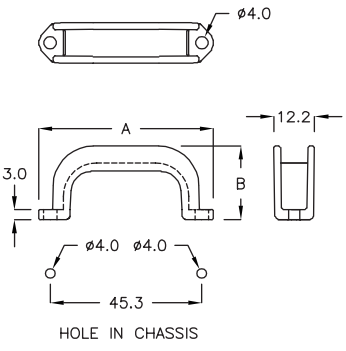

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




把手 HANDLE 13-3-1

- MATERIAL: PC(UL)
- COLOR: GREEN
- USE M3 SCREW

NEW

PART NO	A	B	PACKAGE
★ BSHC−32	40.0	22.7	200






把手 HANDLE 13-3-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3.5x8 TAPPING SCREW

PART NO	A	B	PACKAGE
BWN−26	33.0	35.0	200






把手 HANDLE 13-3-3

- MATERIAL: PC(UL)
- COLOR: NATURAL
- USE M3 SCREW

PART NO	A	B	PACKAGE
BSA−32A	38.0	34.7	200






把手 HANDLE 13-3-4

- MATERIAL: PC(UL)
- COLOR: NATURAL
- USE M3 TAPPING SCREW

PART NO	A	B	PACKAGE
BSA−32HC	38.0	35.0	200






把手 HANDLE 13-3-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- USE M3.5x8 TAPPING SCREW

PART NO	A	B	PACKAGE
BSA−46K	55.4	32.7	200

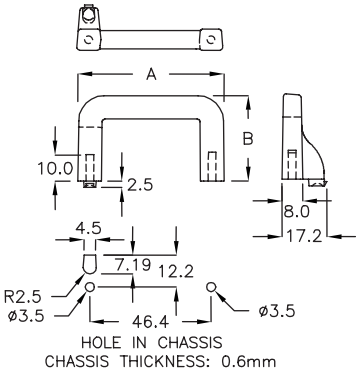


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手 HANDLE 13-4-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE: M3.5 TAPPING SCREW

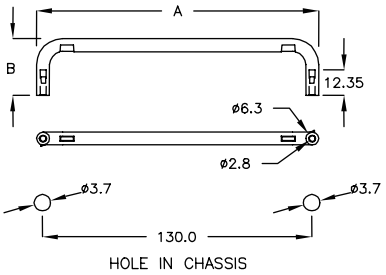


PART NO	A	B	PACKAGE
BSA−130	136.3	27.65	100



把手 HANDLE 13-4-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3 TAPPING SCREW

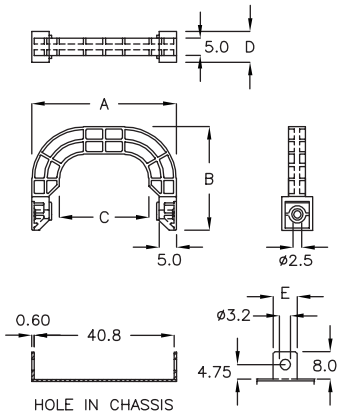


PART NO	A	B	C	D	E	PACKAGE
BWA−36	42.0	30.25	26.0	9.3	7.1	200
BWA−40H	42.0	20.0	30.0	10.0	6.8	



把手 HANDLE 13-4-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3x4 TAPPING SCREW

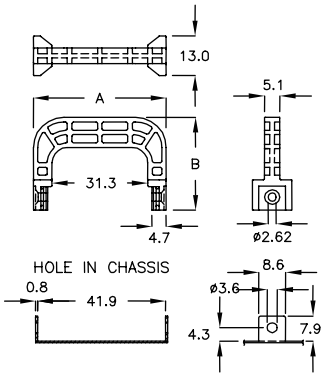


PART NO	A	B	PACKAGE
BWH−43A	43.5	30.65	200



把手 HANDLE 13-4-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3x4 TAPPING SCREW




PART NO	A	B	C	PACKAGE
BWF−40GP	41.6	30.0	7.25	200
BWF−40TS	41.6	30.0	6.85	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




把手 HANDLE 13-5-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M4 SELF TAPPING SCREW or M3 SCREW

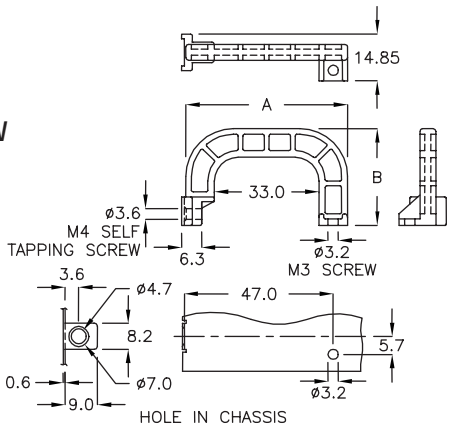


PART NO	A	B	PACKAGE
BWD-47	51.0	30.5	200



把手 HANDLE 13-5-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLUE
- SCREW: M3 TAPPING SCREW

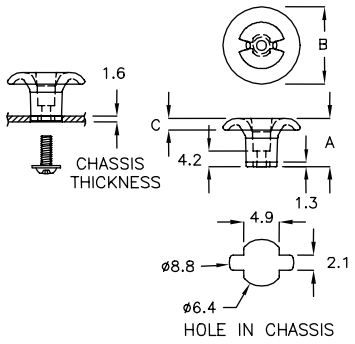


PART NO	A	B	C	PACKAGE
BJA-13K	13.3	21.0	3.2	100



把手 HANDLE 13-5-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLUE
- USE M3 TAPPING SCREW




PART NO	A	B	C	PACKAGE
BJA-30C	30.2	12.9	30.9	100




IR 座 IR RECEIVER HOUSING 13-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	F	PACKAGE
CDS-1A	7.5	9.6	14.4	10.4	12.0	ø0.8	500
CDS-1C	6.6	8.6	14.4	9.3	10.4	ø1.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




IR 座 IR RECEIVER HOUSING 13-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	D	E	F	H	PACKAGE
CDS-2A	1.5	3.5	3.8	4.0	5.5	6.0	500
CDS-2M	1.5	3.5	3.8	4.0	5.5	6.0	
CDS-4G	4.5	6.5	3.8	4.0	8.5	6.0	
CDS-4WP	4.15	6.5	5.0	4.35	8.5	6.0	
CDS-5F	4.5	6.5	3.8	3.5	8.0	6.0	
CDS-07	7.0	9.0	3.8	4.0	11.0	6.0	
CDS-10A	10.0	12.0	3.8	4.0	14.0	6.0	
CDS-13A	13.7	15.7	3.8	4.0	17.7	5.3	
CDS-13DF	13.35	15.7	5.0	4.35	17.7	5.3	




IR 座 IR RECEIVER HOUSING 13-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

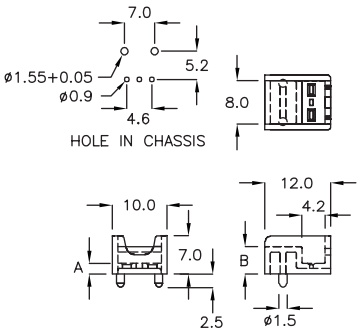


PART NO	A	B	PACKAGE
CDS-2D	2.0	5.0	500




IR 座 IR RECEIVER HOUSING 13-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	F	PACKAGE
CDS-7A	7.0	9.0	11.0	500




IR 座 IR RECEIVER HOUSING 13-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	F	PACKAGE
CDS-7B	7.0	9.0	11.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




IR 座　IR RECEIVER HOUSING　13-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

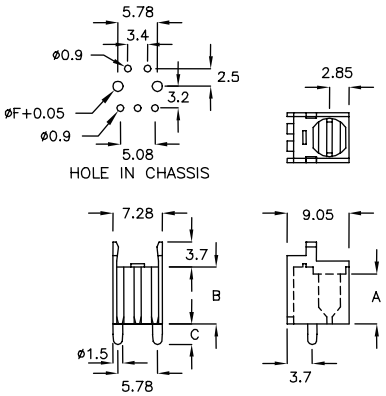


PART NO	A	B	C	F	PACKAGE
CDS-04	3.0	4.0	3.0	1.55	1000
CDS-4H	3.0	4.0	1.4	1.55	500
CDS-8A	6.6	7.6	3.0	1.60	
CDS-12	10.9	11.9	3.0	1.55	




IR 座　IR RECEIVER HOUSING　13-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

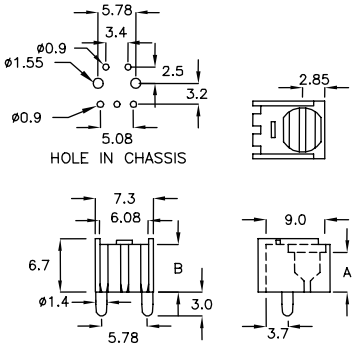


PART NO	A	B	PACKAGE
CDS-6A	5.0	6.0	500




IR 座　IR RECEIVER HOUSING　13-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

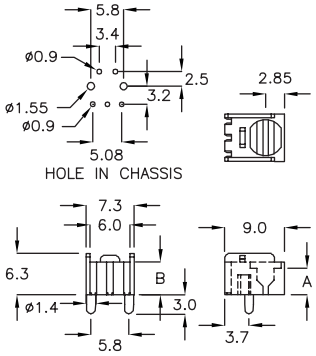


PART NO	A	B	PACKAGE
CDS-4D	4.0	5.0	1000




IR 座　IR RECEIVER HOUSING　13-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

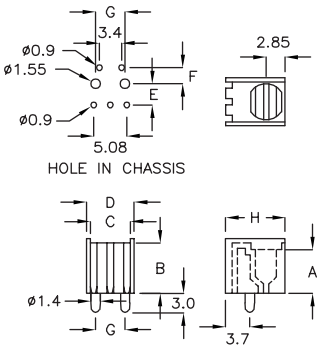

PART NO	A	B	C	D	E	F	G	H	PACKAGE
CDS-03	2.0	3.0	7.7	8.9	3.2	4.5	5.78	11.5	500
CDS-6C	5.0	6.0	6.1	7.3	3.2	2.5	4.5	9.05	
CDS-6D	5.0	6.0	6.1	7.3	3.2	2.5	4.5	9.05	
CDS-8C	5.0	8.0	6.1	7.3	3.2	2.5	4.5	9.05	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



IR 座 IR RECEIVER HOUSING 13-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
CDS-6J	5.0	6.0	9.05	500

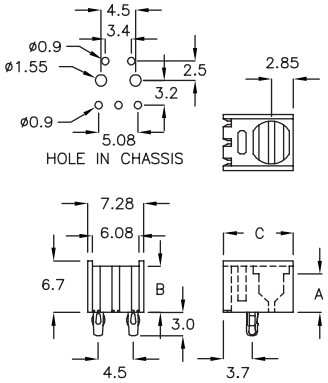




IR 座 IR RECEIVER HOUSING 13-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	C	PACKAGE
CDS-13	13.0	9.05	500

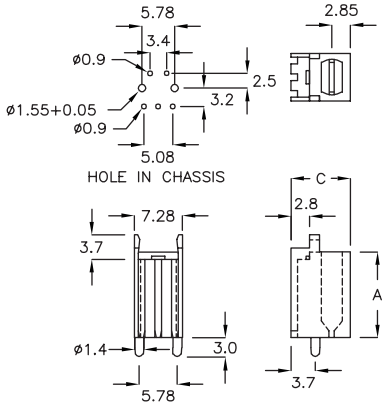




IR 座 IR RECEIVER HOUSING 13-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
CDS-10C	9.6	10.6	9.05	500

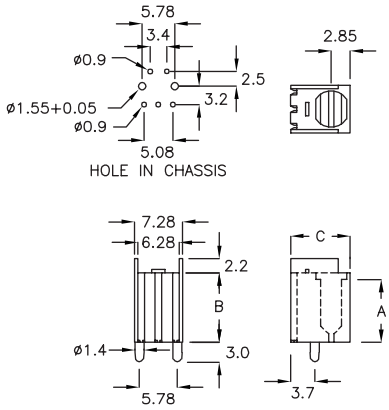





IR 座 IR RECEIVER HOUSING 13-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	C	PACKAGE
CDS-11A	12.4	10.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



IR 座 IR RECEIVER HOUSING 13-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CDS-2C	2.0	7.0	1000
CDS-2F	5.0	10.0	






IR 座 IR RECEIVER HOUSING 13-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	C	PACKAGE
CDS-10D	10.1	9.04	500

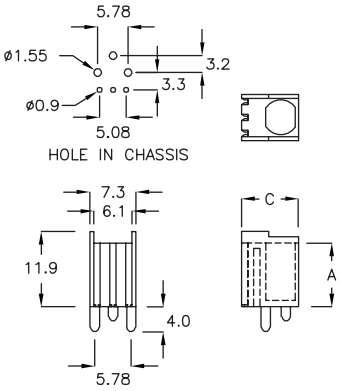




IR 座 IR RECEIVER HOUSING 13-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
CDS-6K	6.1	10.3	500
CDS-10F	10.1	14.3	
CDS-11K	11.6	15.8	

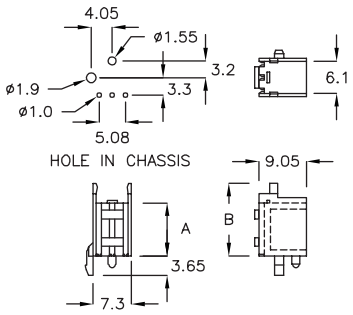




IR 座 IR RECEIVER HOUSING 13-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
CDS-2H	2.6	8.0	1000






IR 座 IR RECEIVER HOUSING 13-9-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	L	PACKAGE
CDS-4C	2.85	4.15	11.1	1000
CDS-5DM	4.45	5.75	12.6	

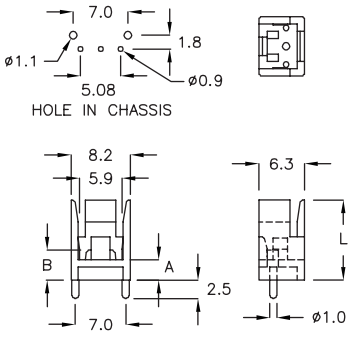


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



IR 座 IR RECEIVER HOUSING 13-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	L	PACKAGE
CDS-1J	1.3	8.9	1000
CDS-8DQ	8.3	15.9	500

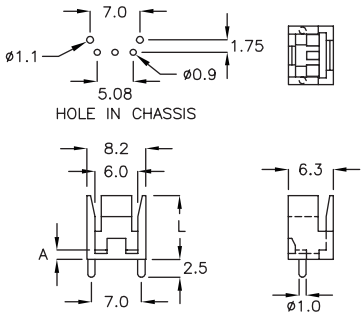




IR 座 IR RECEIVER HOUSING 13-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CDS-1F	1.0	2000







IR 座 IR RECEIVER HOUSING 13-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
CDS-2J	1.5	3.5	500

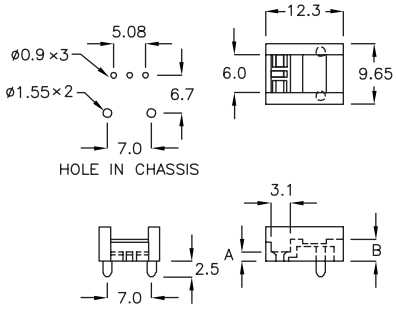





IR 座 IR RECEIVER HOUSING 13-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CDS-2PS	2.3	1000

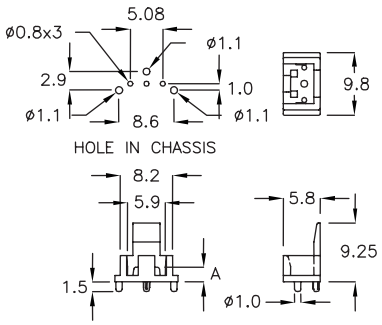





IR 座 IR RECEIVER HOUSING 13-10-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CDS-2K	2.3	1000

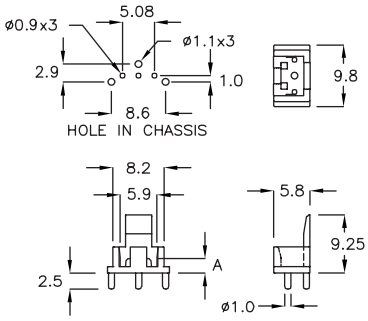


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



IR 座 IR RECEIVER HOUSING 13-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CDS-2L	1.7	500






IR 座 IR RECEIVER HOUSING 13-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
CDS-4F	5.08	ø1.5	3.5	1000






IR 座 IR RECEIVER HOUSING 13-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CDS-1TR	9.8	1000








IR 座 IR RECEIVER HOUSING 13-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CDY-7M	7.0	1.6	200



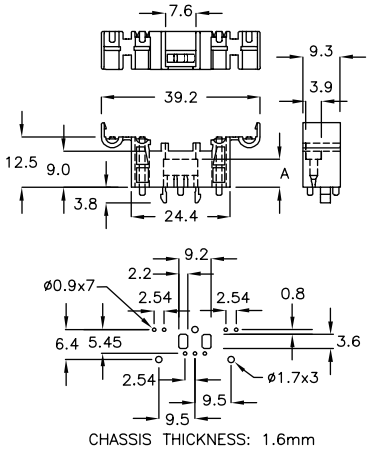




IR 座 IR RECEIVER HOUSING 13-11-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CDA-08	8.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 HOLDER 13-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T CHASSIS THICKNESS	PACKAGE
CDT-4A	5.65	1.6	1000






IR 座 IR RECEIVER HOUSING 13-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
EED-3A	1.2	3.3	2000






風扇罩 FAN COVER 13-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
NBB-03	60.0	100

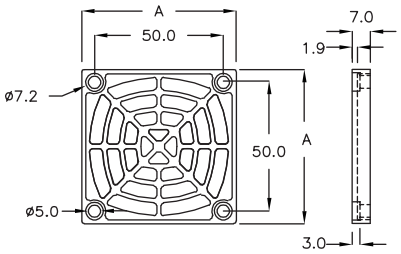




風扇罩 FAN COVER 13-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
NBB-04	79.5	ø4.3	50






風扇罩 FAN COVER 13-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
NBR-40A	40.0	ø3.5	5.0	200

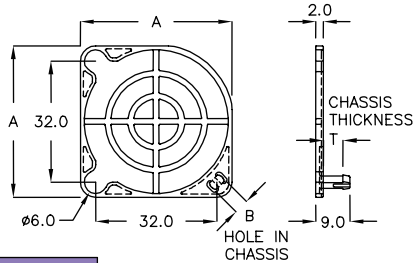


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



風扇罩 FAN COVER 13-13-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

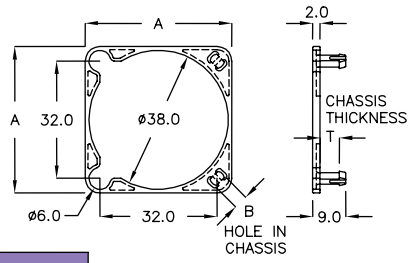


PART NO	A	B HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
NBT-40	40.0	ø3.5	5.0	100



風扇罩 FAN COVER 13-13-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

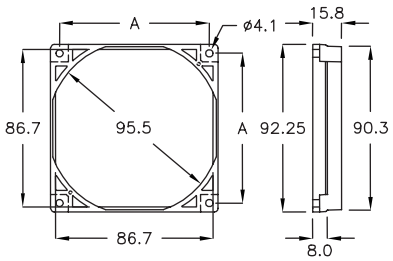


PART NO	A	PACKAGE
NBC-01	82.5	20



風扇罩 FAN COVER 13-13-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
NBC-80	80.0	20



電線固定座 WIRE MOUNT 13-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
FBA-7A	9.1	7.25	1000



風扇電源座 MOUNT 13-13-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	PACKAGE
HFC-01	11.1	7.7	8.8	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 HOUSING 13-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
PH-5	20.2	3.2	500







固定座 HOUSING 13-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
PH-6	36.0	3.4	500







防震座 ANTI-SHOCK HOUSING 13-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CQ-010	ø3.0	1.6	10.5	1000
CQ-008	ø3.0	1.6	8.0	
CQ-10NR	ø2.0	1.6	10.5	







防震座 ANTI-SHOCK HOUSING 13-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CQ-015	ø3.5	1.2	15.0	1000
CQ-15A	ø4.0	1.6	15.0	
CQ-15C	ø3.5	1.4	15.0	
CQ-15D	ø4.0	1.7	15.0	
CQ-017	ø3.5	1.2	17.0	






防震座 ANTI-SHOCK HOUSING 13-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
CQ-08A	ø3.0	1.1~1.6	8.05	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定夾 CLIP 13-15-1

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HP-6	8.0	22.0	7.0	1000






CCD 座 CCD HOUSING 13-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MDV-01	4.15	17.7	9.6	2000






固定座 MOUNT 13-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
MJB-27A	27.35	9.85	12.1	500






電池端子保護座 CONNECTOR PROTECT HOUSING 13-15-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MD-16S	11.2	9.0	8.8	500
MD-017	13.5	10.8	10.5	






電池端子保護座 CONNECTOR PROTECT HOUSING 13-15-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MD-16A	11.4	9.0	9.1	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電池端子保護座
CONNECTOR PROTECT HOUSING — 13-16-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

PART NO	A	B	C	PACKAGE
MD-020	9.3	7.0	6.9	500






保護蓋 HOLE PROTECTOR — 13-16-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

PART NO	A	B	C	PACKAGE
MVA-01	10.2	7.4	6.65	500






固定座 MOUNT — 13-16-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
MDJ-01	17.0	15.5	14.0	17.5	200
MDJ-02	12.6	11.1	9.6	17.2	500






固定座 MOUNT — 13-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MDA-01	10.0	3.0	ø8.0	1000
MDA-02	10.0	1.6	ø8.0	






固定座 MOUNT — 13-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MDA-7BC	7.2	1.2	ø7.0	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
MDB-01	20.0	10.0	1000






固定座 MOUNT 13-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
MDB-02	20.0	4.0	500
MDB-04	16.0	4.0	
MDB-05	15.0	3.2	1000






固定座 MOUNT 13-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	D	E	F	PACKAGE
UW-1	7.0	ø11.5	ø8.8	ø10.5	ø7.2	ø6.8	1000
UW-1K	6.6	ø11.0	ø7.5	ø10.0	ø5.45	ø5.05	
UW-1Y	6.6	ø8.8	ø7.55	ø7.8	ø5.45	ø5.05	2000






固定座 MOUNT 13-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
UW-6F	4.0	ø8.4	ø7.4	1000






固定座 MOUNT 13-17-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
UW-1S	4.2	ø9.1	ø6.85	1000
UW-01C	6.35	ø5.8	ø4.8	
UW-01M	4.3	ø9.2	ø6.7	
UW-01J	6.7	ø11.2	ø7.2	
UW-4TM	4.35	ø6.2	ø5.0	2000
UW-8MK	8.0	ø7.0	ø5.4	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
UW-01A	4.8	ø9.1	1000






固定座 MOUNT 13-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	øB	øC	PACKAGE
UW-01D	3.0	6.1	4.5	1000
UW-02A	4.2	9.2	7.1	
UW-04A	5.0	9.2	6.4	
UW-08A	8.2	9.0	7.0	
UW-8CD	8.2	9.0	6.8	






固定座 MOUNT 13-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
UW-01G	3.0	ø7.0	1000






固定座 MOUNT 13-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MTH-05	3.9	10.3	1000






固定座 MOUNT 13-18-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MTN-3H	4.15	4.45	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MTJ-02	2.0	2.0	ø0.8	2000
MTJ-3A	1.55	2.54	ø0.8	
MTJ-3HD	3.5	2.0	ø0.7	






固定座 MOUNT 13-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
MDK-01	12.8	1.15	9.5	17.6	500
MDK-03	12.8	1.3	11.0	17.6	
MDK-04	13.0	1.9	10.5	17.6	
MDK-05	10.8	1.5	10.5	15.6	






固定座 MOUNT 13-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C	PACKAGE
MDK-02	12.8	6.9	1000






散熱片固定座 HEAT SINK MOUNT 13-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	C CHASSIS THICKNESS	PACKAGE
DAP-1A	5.4	3.0	2000







固定座 MOUNT 13-19-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
DAB-01	19.5	6.0	10.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNT 13-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
DAB−02	17.0	6.6	10.0	500






固定座 MOUNT 13-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
DAB−3A	12.0	6.6	10.0	500







固定座 MOUNT 13-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
MAH−6A	8.2	2.9	2000

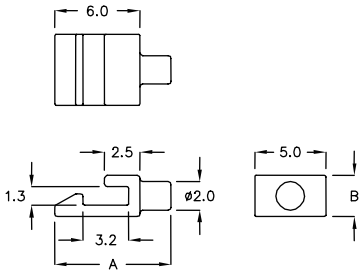




散熱片固定座 HEAT SINK MOUNT 13-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A CHASSIS THICKNESS	T P.C.B THICKNESS	PACKAGE
UBA−3A	0.8	1.6	2000

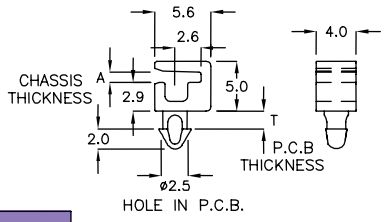




固定座 MOUNT 13-20-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A CHASSIS THICKNESS	T P.C.B THICKNESS	PACKAGE
MTQ−2A	0.8	1.6	2000

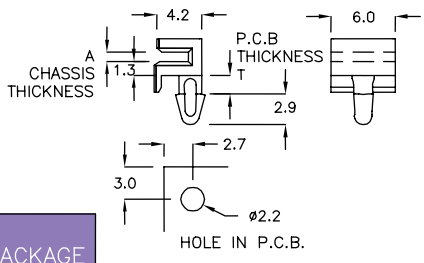


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	T P.C.B THICKNESS	PACKAGE
MRA−6C	5.2	1.6	2000

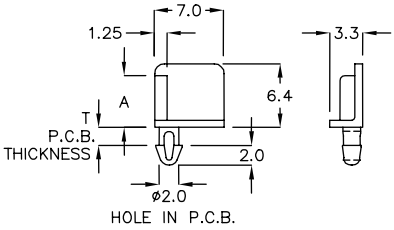




固定座 MOUNT 13-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

PART NO	A	T P.C.B THICKNESS	PACKAGE
★ MRA−8D	8.2	1.2	2000

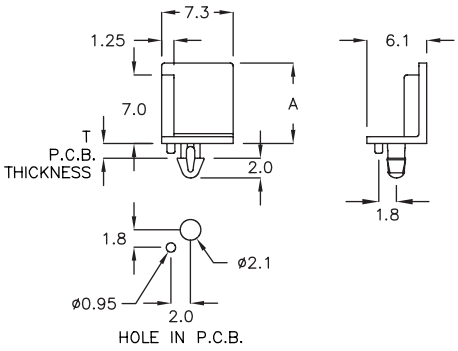




固定座 MOUNT 13-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T P.C.B THICKNESS	PACKAGE
MFG−21HC	7.4	2.0	200

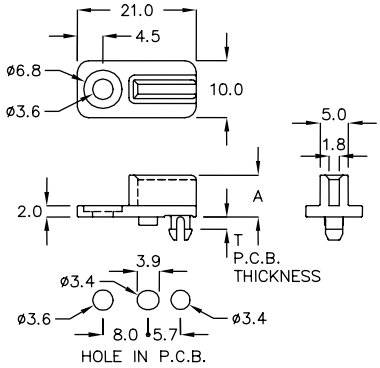





固定座 MOUNT 13-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T P.C.B. THICKNESS	PACKAGE
MFG−22TK	7.5	1.6	500

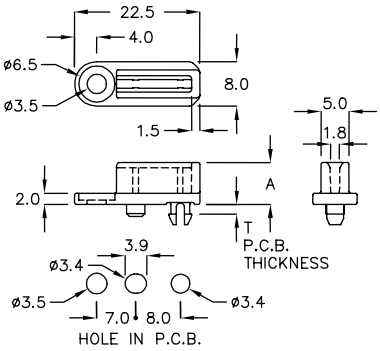




固定座 MOUNT 13-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
MDL−01	2.75	0.8	1.6	2000

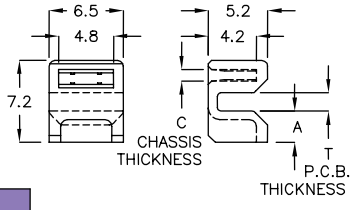



提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNT 13-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



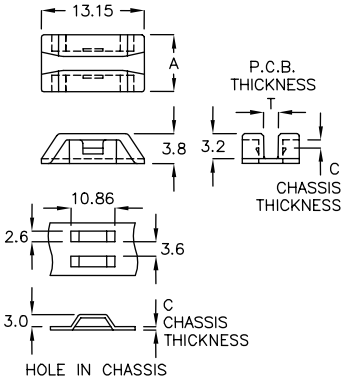


PART NO	A	C CHASSIS THICKNESS	T P.C.B. THICKNESS	PACKAGE
MTB−13A	7.3	0.8	1.6	2000



固定座 MOUNT 13-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
MGM−11	11.0	8.3	1.6	500
MGM−11SK	11.0	8.8	1.6	



固定座 MOUNT 13-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

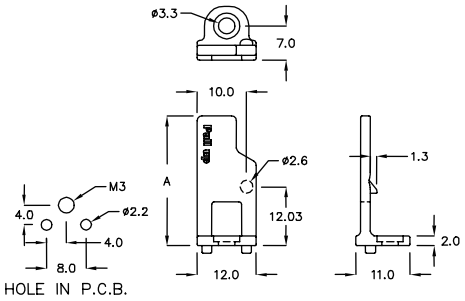


PART NO	A	PACKAGE
MGMB−28	26.5	500



固定座 MOUNT 13-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

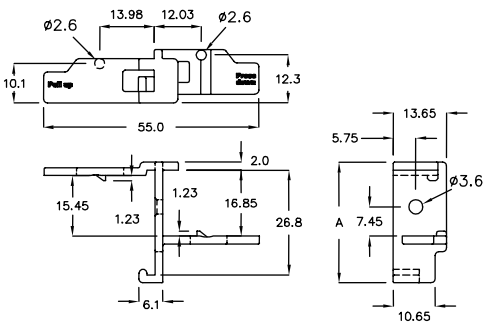


PART NO	A	PACKAGE
MGMA−30	30.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-23-1

- FLAME CLASS: 94V-0
- COLOR: BLACK
- MATERIAL: BRASS




PART NO	MATERIAL	A	B	C	D	E	PACKAGE
LCM3−20	ABS	20.0	21.0	10.1	M3	ø7.1	500
LCM5−20	PBT	20.0	26.0	12.5	M5	ø10.0	



固定座 MOUNT 13-23-2

- MATERIAL: NYLON 66+30%FRP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
MGZ−18	16.0	18.0	11.0	ø4.2	500



固定座 MOUNT 13-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
MWZ−12A	8.15	12.1	6.8	ø4.7	500



固定座 MOUNT 13-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MMW−7	6.9	2.0	500



固定座 MOUNT 13-23-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	PACKAGE
MGL−04	4.0	3.8	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MGF−01	8.75	1.5	0.7	500






固定座 MOUNT 13-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
MGF−14	7.25	1.5	0.6	500







固定座 MOUNT 13-24-3

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
PED−01	7.5	3.0	2.2	1000







固定座 MOUNT 13-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	PACKAGE
MML−11A	12.4	500






固定座 MOUNT 13-24-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

PART NO	A	PACKAGE
MMR−11A	12.4	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
MWC−05	9.0	5.0	1.6	1000







固定座 MOUNT 13-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HPA−16K	16.6	3.1	500







支撐柱 CHIP SUPPORT 13-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: DEXERIALS or EQUIVALENT

PART NO	A	FORM	PACKAGE
DPM−02T	2.5	1	5000
DPM−3AT	2.5	2	







支撐柱 CHIP SUPPORT 13-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: DEXERIALS or EQUIVALENT


PART NO	A	FORM	PACKAGE
DPS−2CK	2.2	1	5000
DPS−3FQ	2.2	2	






固定座 MOUNT 13-25-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW





PART NO	A	T CHASSIS THICKNESS	PACKAGE
MGK−18F	18.7	2.0	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MGKH-18	9.4	18.4	500






喇叭座 SPEAKER HOUSING 13-26-2

- MATERIAL: POM
- COLOR: WHITE

PART NO	A	B	PACKAGE
SP-2866	28.5	66.0	200






電線固定扣 CABLE CLAMP 13-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
LQC-02	4.2	4.4	500







P.C. 板固定扣 P.C.B. HINGE 13-26-4

- MATERIAL: PP
- COLOR: NATURAL

PART NO	A	PACKAGE
BH-5	24.2	1000

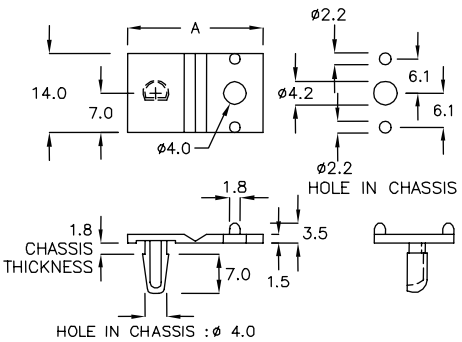





P.C. 板固定扣 P.C.B. HINGE 13-26-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
BH-6	25.3	500

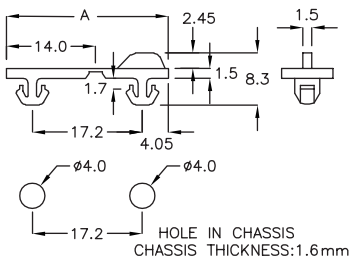


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



P.C. 板固定扣　P.C.B. HINGE　13-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

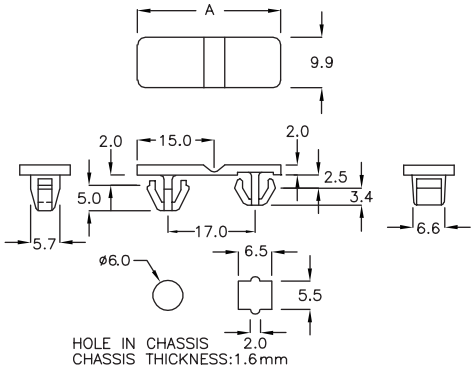


PART NO	A	PACKAGE
BH−7	28.0	500




固定扣　CANOE CLIP　13-27-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
DCQ−01	21.9	12.8	7.8	500




固定座　MOUNT　13-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

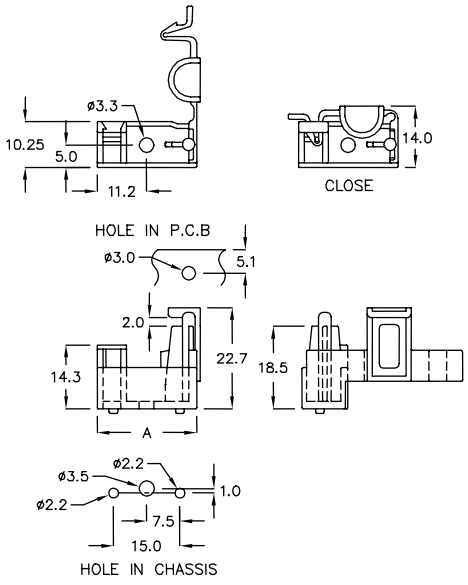


PART NO	A	PACKAGE
FTHM−22AW	22.5	100



固定座　MOUNT　13-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: BLUE

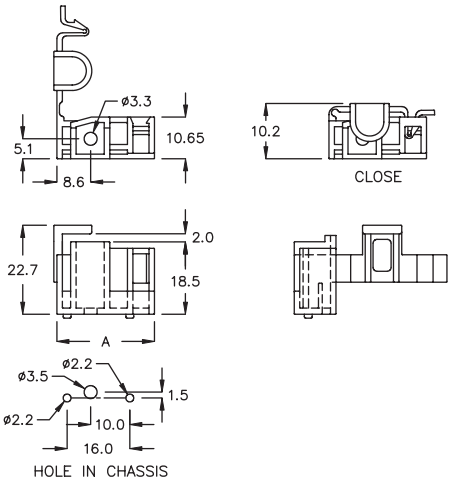


PART NO	A	PACKAGE
FTHM−24RK	24.9	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



螺絲固定座 WALL INSERT 13-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

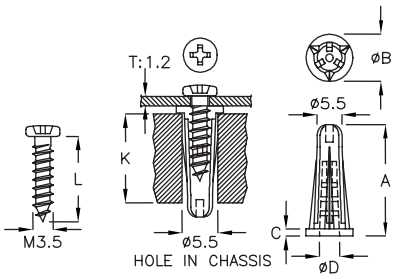


PART NO	A	B	C	D	K CHASSIS THICKNESS	L SCREW LENGTH	PACKAGE
MHW-01	18.7	7.9	1.2	3.4	>22.0	12.0	1000
MHW-02	22.0	8.2	1.0	4.6	>25.0	14.0	
MHW-03	22.3	8.0	1.0	3.8	>25.0	14.0	
MHW-04	33.0	8.0	1.0	3.5	>35.0	20.0	



螺絲固定座 WALL INSERT 13-28-2

- MATERIAL: PE
- COLOR: NATURAL




PART NO	A	B	C	D	HOLE IN CHASSIS	CHASSIS THICKNESS	TAPPING SCREW	SCREW LENGTH	PACKAGE
MHM-30	30.0	9.0	2.2	2.9	ø6.7	33.0	M4	12.0	500




螺絲固定座 WALL INSERT 13-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: GRAY

NEW




PART NO	A	B	C	D	HOLE IN CHASSIS	CHASSIS THICKNESS	TAPPING SCREW	SCREW LENGTH	PACKAGE
★ MHMK-31C	31.8	ø10.9	0.9	ø6.4	ø8.5	33.0	M6	25.4	500




固定座 EDGE CONNECT BASE 13-28-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	PACKAGE
MH-4	8.7	6.0	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 EDGE CONNECT BASE 13-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW

PART NO	A	B	PACKAGE
MH−5	10.0	10.0	1000







固定座 EDGE CONNECT BASE 13-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW

PART NO	A	B	PACKAGE
MH−05C	7.2	10.0	1000






固定座 EDGE CONNECT BASE 13-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MH−6	13.4	10.0	11.5	500






固定座 EDGE CONNECT BASE 13-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
MH−6A	14.0	8.75	7.5	6.5	500






固定座 MOUNT 13-29-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MH−13AK	13.8	9.9	500

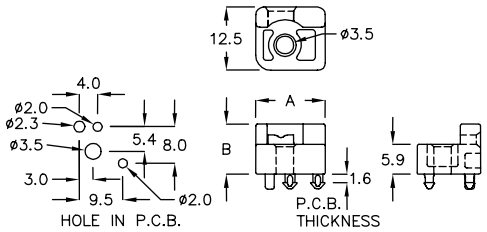


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-30-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- ADHESIVE TAPE: EQUIALENT

PART NO	A	B	PACKAGE
MRN-21KG	21.0	13.9	500

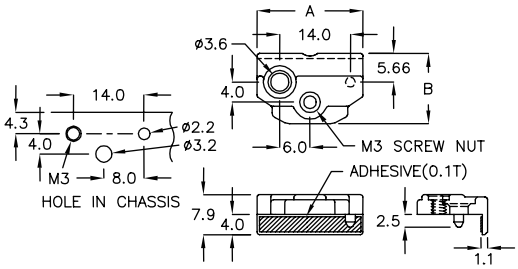




固定座 MOUNT 13-30-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK
- ADHESIVE TAPE: EQUIALENT

PART NO	A	B	PACKAGE
MRN-21YL	21.0	13.9	500

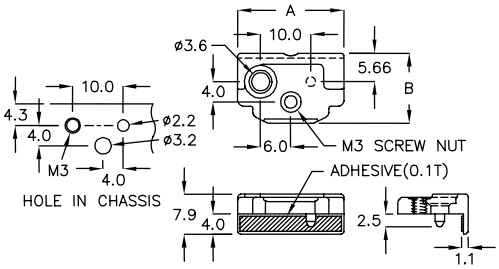




固定座 EDGE CONNECT BASE 13-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
MMX-15F	13.0	15.0	9.0	200






散熱片護套 HEAT SINK COVER 13-30-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HDA-01	38.5	13.3	18.0	200






保護蓋 INSULATION CAP 13-30-5

- MATERIAL: PP(UL)
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HD-12S	ø12.0	ø5.2	4.63	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保護罩 INSULATION CAP 13-31-1

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
HD-27MQ	27.0	17.5	20.4	10.9	3.43	1200
HD-34	33.4	19.1	27.3	13.0	2.3	840
HD-35FC	35.3	21.5	28.4	14.9	5.13	840
HD-52	51.7	28.0	44.0	20.0	3.0	450



保護罩 INSULATION CAP 13-31-2

- MATERIAL: PP(UL)
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
HD-24C	ø24.0	ø18.0	2.3	990
HD-26	ø26.0	ø19.7	2.3	
HD-31A	ø31.6	ø21.3	2.8	690
HD-31CD	ø31.6	ø21.3	3.2	




固定座 MOUNT 13-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
D-0710	10.8	6.5	7.0	1000



固定座 MOUNT 13-31-4

- MATERIAL: PBT
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
MJC-13	13.9	10.0	7.5	1.45	500
MJC-15	15.5	10.0	7.5	3.0	



固定座 MOUNT 13-31-5


- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

NEW




	PART NO	A	B	C	PACKAGE
★	MJKT-30	21.55	30.0	17.5	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保險絲盒 FUSE BOX — 13-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MFH-50	48.2	51.0	500



保險絲蓋 FUSE COVER — 13-32-2

- MATERIAL: PVC
- COLOR: NATURAL

E122477(S)




PART NO	A	B	C	D	E	UL	PACKAGE
FH-1	19.8	22.6	5.6	8.4	11.0	UL	1000
FH-1L	22.0	24.0	6.0	8.0	11.0	UL	
FH-1S	18.0	20.5	5.3	7.8	10.0	UL	
FH-3	31.6	33.6	9.5	12.0	13.0	UL	500
FH-3A	31.0	33.6	8.1	10.5	11.5	UL	
FH-13	12.2	14.2	4.7	6.7	9.0	UL	1000



開關延長蓋 SWITCH EXTENDING COVER — 13-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	D	PACKAGE
HSA-01	3.8	3.0	ø3.4	1000



開關延長蓋 SWITCH EXTENDING COVER — 13-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	D	PACKAGE
HS-5A	5.6	1.0	ø9.5	1000



開關延長蓋 SWITCH EXTENDING COVER — 13-32-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	D	PACKAGE
HS-5K	5.6	1.0	ø9.5	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開關延長蓋 SWITCH EXTENDING COVER — 13-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	D	PACKAGE
HS−1	5.5	3.5	4.0	3.2	2000
HS−01A	4.7	3.45	5.25	3.2	
HS−1S	4.7	3.45	5.25	3.3	
HS−2	6.5	4.5	5.0	2.8	
HS−2H	4.4	3.0	5.0	2.7	

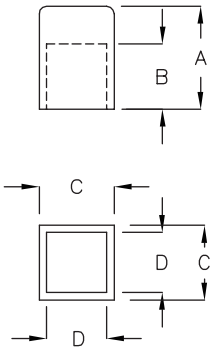




開關延長蓋 SWITCH EXTENDING COVER — 13-33-2

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: BLACK

PART NO	A	C	D	PACKAGE
HS−009	8.8	2.0	3.0	2000






開關延長蓋 SWITCH EXTENDING COVER — 13-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL

PART NO	A	C	D	PACKAGE
HS−1C	9.6	2.0	3.0	2000







開關延長蓋 SWITCH EXTENDING COVER — 13-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL

PART NO	A	C	D	PACKAGE
HS−06C	5.5	1.9	3.0	2000






開關延長蓋 SWITCH EXTENDING COVER — 13-33-5

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: NATURAL

PART NO	A	C	D	PACKAGE
HSQ−7C	7.3	2.8	2.8	2000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開關延長蓋 SWITCH EXTENDING COVER — 13-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




	PART NO	A	B	C	D	PACKAGE
★	HS-7KC	7.5	2.8	2.45	2.4	2000




開關延長蓋 SWITCH EXTENDING COVER — 13-34-2

- COLOR: NATURAL,BLACK




PART NO	MATERIAL	A	B	C	D	E	PACKAGE
HS-09C	ABS V0	9.0	4.0	2.8	2.6	ø5.0	2000
HS-09D	N66 V2	9.0	3.0	2.5	2.15	ø4.6	




開關延長蓋 SWITCH EXTENDING COVER — 13-34-3

- COLOR: NATURAL,BLACK




PART NO	MATERIAL	A	B	C	E	FORM	PACKAGE
HS-10C	ABS HB	9.9	4.2	ø3.2	ø8.0	1	1000
HS-12A	ABS HB	12.0	4.2	ø3.3	ø8.0	1	
HS-14A	ABS HB	14.0	4.2	ø3.4	ø8.0	1	
HS-16FA	N66 V2	16.5	7.0	ø3.45	ø6.3	2	
HS-18	N66 V2	18.0	7.0	ø3.45	ø6.3	2	



開關延長蓋 SWITCH EXTENDING COVER — 13-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK



PART NO	A	B	D	PACKAGE
HS-6F	6.0	2.8	2.3	2000
HS-6M	6.5	2.8	2.4	
HS-7K	7.5	2.8	2.4	
HS-8HY	8.0	2.8	2.4	
HS-8MA	8.5	2.8	2.4	


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開關延長蓋 SWITCH EXTENDING COVER — 13-35-1

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: BLACK

PART NO	A	B	D	PACKAGE
HS-15	9.9	4.55	ø3.7	1000







開關延長蓋 SWITCH EXTENDING COVER — 13-35-2

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: WHITE,NATURAL

PART NO	A	B	D	PACKAGE
HS-16	5.5	3.0	2.28	2000






開關延長蓋 SWITCH EXTENDING COVER — 13-35-3

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: NATURAL

PART NO	A	B	D	PACKAGE
HSM-5K	5.7	2.8	2.3	2000







開關延長蓋 SWITCH EXTENDING COVER — 13-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HS-05S	11.8	14.2	1000
HS-5	15.8	14.2	







開關延長蓋 SWITCH EXTENDING COVER — 13-35-5

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: GRAY

PART NO	A	B	C	PACKAGE
HS-6	10.2	10.8	12.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




開關延長蓋 SWITCH EXTENDING COVER — 13-36-1

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: GRAY

PART NO	A	B	C	PACKAGE
HS-06A	10.3	10.8	12.2	500






開關延長蓋 SWITCH EXTENDING COVER — 13-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HS-007	6.3	1.2	1000






開關延長蓋 SWITCH EXTENDING COVER — 13-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HS-07A	9.5	2.5	1000






開關延長蓋 SWITCH EXTENDING COVER — 13-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
HS-04	15.5	10.5	1000






開關延長蓋 SWITCH EXTENDING COVER — 13-36-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	B	PACKAGE
HS-008	4.0	ø5.5	2000
HS-012	6.3	ø5.5	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開關延長蓋 SWITCH EXTENDING COVER — 13-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
HS-4CF	4.0	2000






開關延長蓋 SWITCH EXTENDING COVER — 13-37-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	D	PACKAGE
HSD-01	7.8	5.3	2.0	2.0	2000






開關延長蓋 SWITCH EXTENDING COVER — 13-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

PART NO	A	PACKAGE
DAH-9H	9.5	1000






開關延長蓋 SWITCH EXTENDING COVER — 13-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HSL-11A	11.8	ø8.5	ø4.1	1000
HSL-11SP	11.8	ø7.5	ø3.3	






開關延長蓋 SWITCH EXTENDING COVER — 13-37-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	D	PACKAGE
HSW-13FH	7.7	ø4.0	3.0	1000

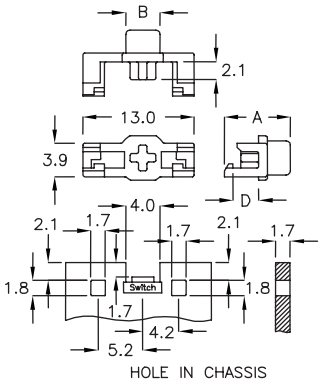


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開關座 PUSH SWITCH HOLDER — 13-38-1

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: BLACK

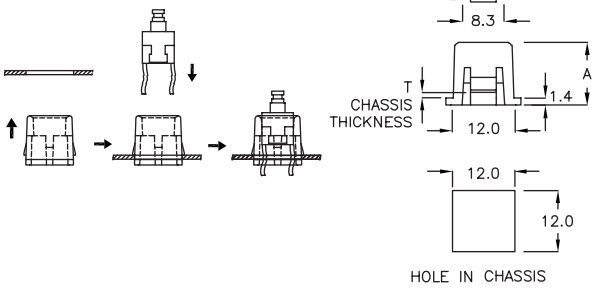


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
HS-08A	12.4	14.8	0.8	1000



開關座 PUSH SWITCH HOLDER — 13-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

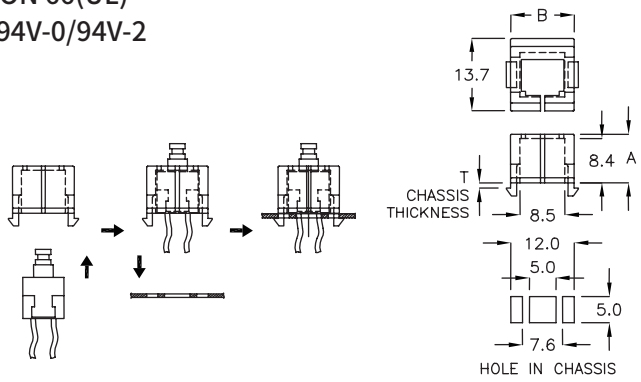


PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
HS-11	9.2	11.95	0.8	500



開關座 SWITCH HOLDER — 13-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

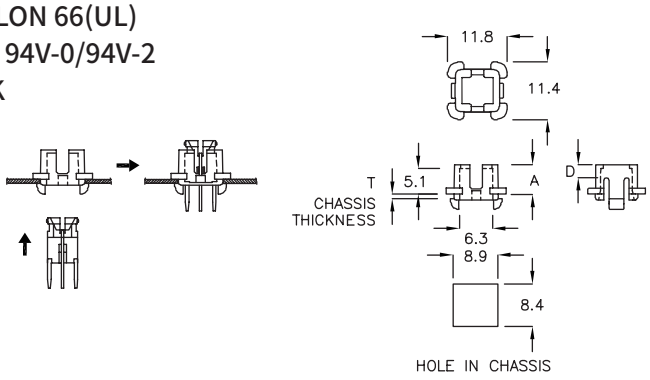


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
HSF-01	5.8	2.5	0.8	1000



開關座 SWITCH HOLDER — 13-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

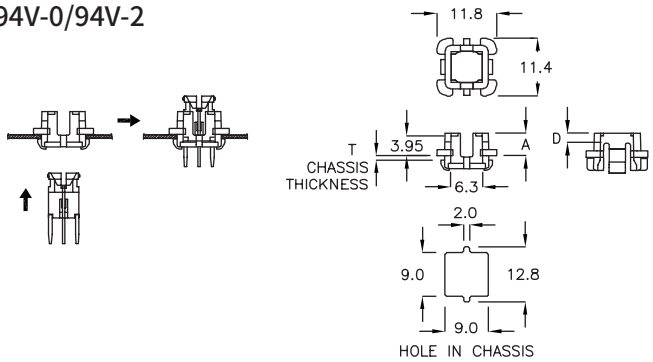


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
HSF-02	4.5	1.8	0.8	1000
HSF-2KD	4.5	1.8	0.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



開關座 SWITCH HOLDER 13-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

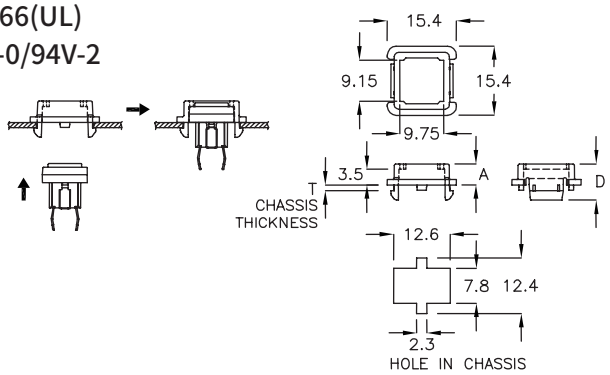


PART NO	A	D	T CHASSIS THICKNESS	PACKAGE
HSF−4WR	4.7	8.05	1.2	1000



電源開關座 SWITCH COVER 13-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

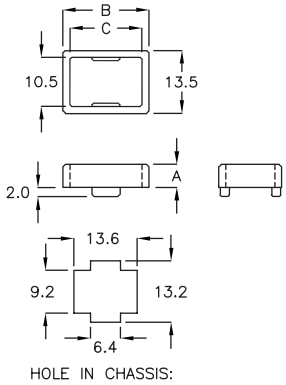


PART NO	A	B	C	PACKAGE
HCA−15D	5.0	18.5	15.5	500



電源開關座 SWITCH COVER 13-39-3

- MATERIAL: ABS
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HCA−18	9.0	26.1	18.8	16.4	500




電源開關座 SWITCH COVER 13-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CALSS: 94V-0/94V-2
- COLOR: BLACK

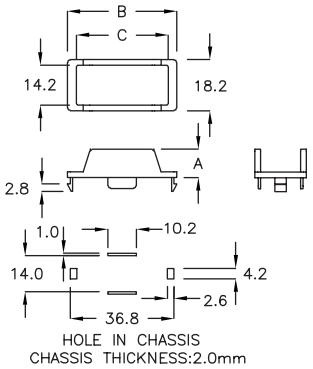


PART NO	A	B	C	PACKAGE
HCA−32	10.0	38.6	32.4	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




電源開關座 SWITCH COVER 13-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
HCA-21K	6.5	25.5	21.5	500



把手蓋 EJECTOR COVER 13-40-2

- MATERIAL: ABS+PC
- COLOR: GREEN
- USE M2x6 COUNTERSUNK SCREW

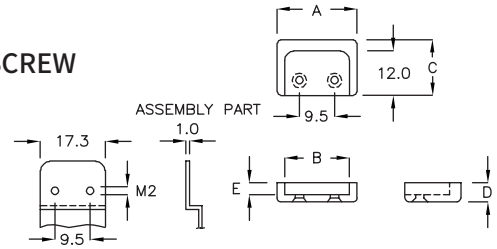


PART NO	A	B	C	D	E	PACKAGE
MHL-21	21.5	17.5	15.0	4.6	2.6	500



把手蓋 EJECTOR COVER 13-40-3

- MATERIAL: ABS+PC
- COLOR: GREEN
- USE M2x6 COUNTERSUNK SCREW

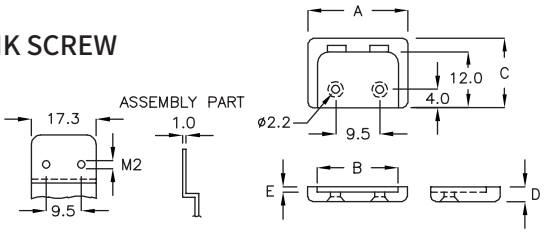


PART NO	A	B	C	D	E	PACKAGE
MHL-03	21.5	17.5	15.0	7.8	5.8	500
MHL-14	21.5	17.5	15.0	3.2	1.2	



把手蓋 EJECTOR COVER 13-40-4

- MATERIAL: ABS+PC
- COLOR: GREEN
- USE M2x6 COUNTERSUNK SCREW

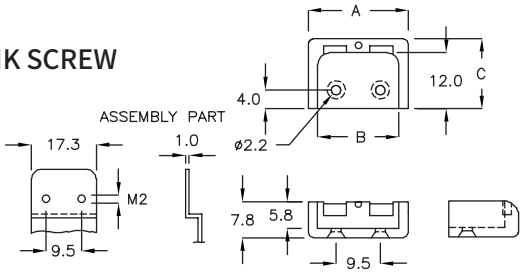


PART NO	A	B	C	PACKAGE
MHL-20	21.5	17.5	15.0	500



把手蓋 EJECTOR COVER 13-40-5

- MATERIAL: TPR
- FLAME CLASS: 94V-0
- COLOR: BLACK

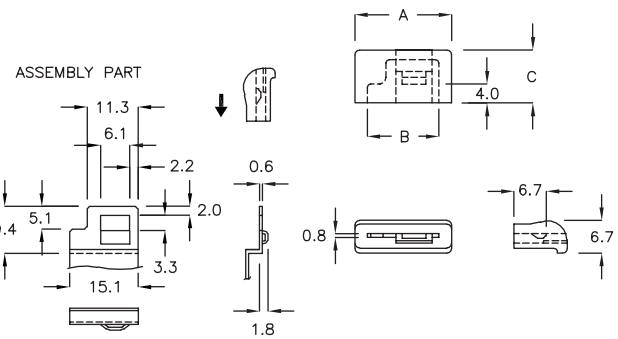


PART NO	A	B	C	PACKAGE
MHL-06	20.0	14.8	11.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手蓋 EJECTOR COVER 13-41-1

- COLOR: BLACK

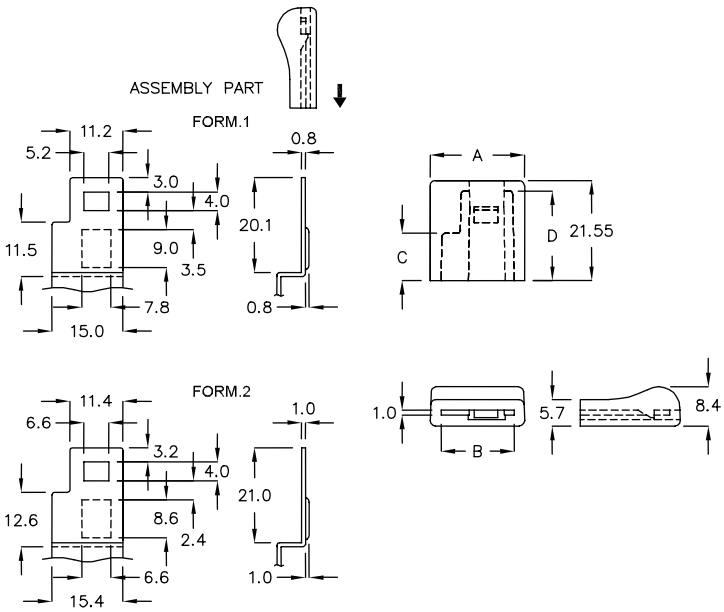


PART NO	MATERIAL	A	B	C	D	FORM	PACKAGE
MHL−05	TPR	20.35	15.75	10.16	19.3	1	500
MHL−5CN	TPR	20.4	15.8	10.16	19.3	2	
MHL−5DM	TPR	20.35	15.4	10.16	19.3	1	
MHL−5FG	TPE	20.34	15.75	10.6	20.5	2	



把手蓋 EJECTOR COVER 13-41-2

- MATERIAL: TPR
- COLOR: GREEN

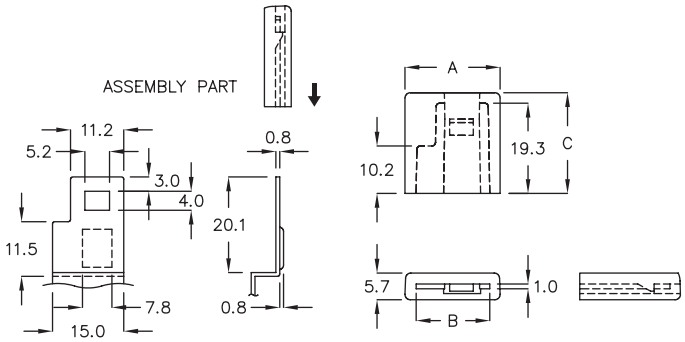


PART NO	A	B	C	PACKAGE
MHL−08	20.3	15.75	21.6	500




把手蓋 EJECTOR COVER 13-41-3

- MATERIAL: TPR
- COLOR: ORANGE

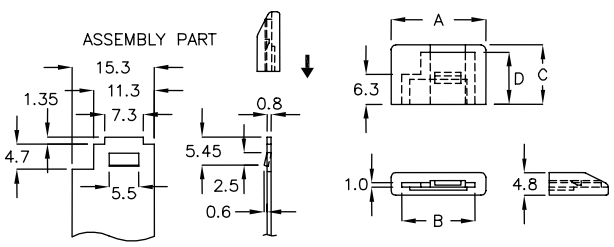


PART NO	A	B	C	D	PACKAGE
MHL−15	20.0	15.5	12.5	11.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




把手蓋 EJECTOR COVER 13-42-1

- MATERIAL: TPE
- COLOR: ORANGE

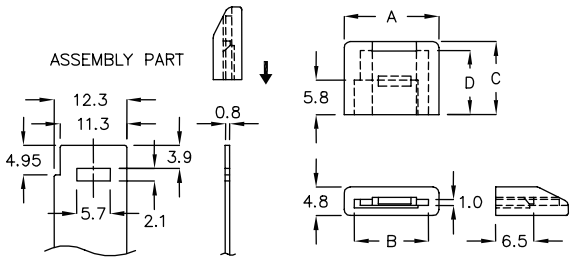


PART NO	A	B	C	D	PACKAGE
MHL−16KM	16.0	12.5	12.3	10.8	500



把手蓋 EJECTOR COVER 13-42-2

- MATERIAL: TPR
- COLOR: BLACK

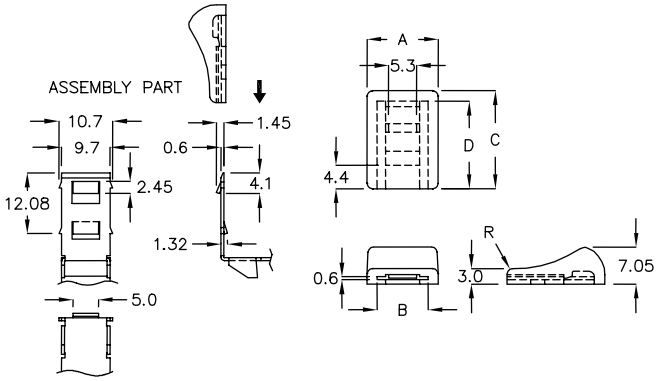


PART NO	A	B	C	D	R	PACKAGE
MHL−04	13.5	9.7	18.6	16.6	1.0	500
MHL−04TC	13.5	9.7	18.6	16.6	0.5	



把手蓋 EJECTOR COVER 13-42-3

- MATERIAL: TPR
- COLOR: ORANGE

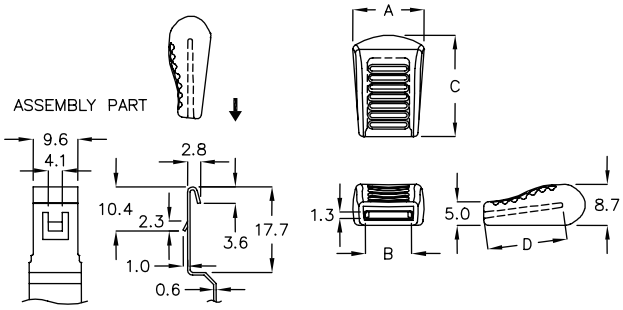


PART NO	A	B	C	D	PACKAGE
MHL−10	15.0	9.9	21.7	17.1	500



把手蓋 EJECTOR COVER 13-42-4

- MATERIAL: TPE
- COLOR: BLACK

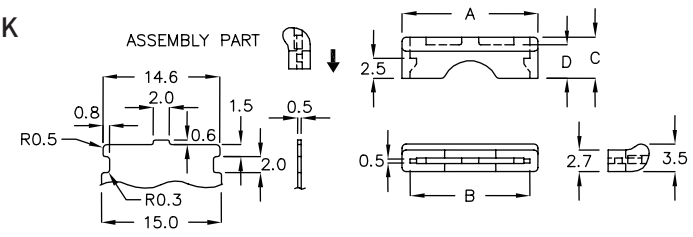


PART NO	A	B	C	D	PACKAGE
MHL−15AP	17.0	15.0	5.15	4.2	500




把手蓋 EJECTOR COVER 13-42-5

- MATERIAL: TPR
- COLOR: BLACK

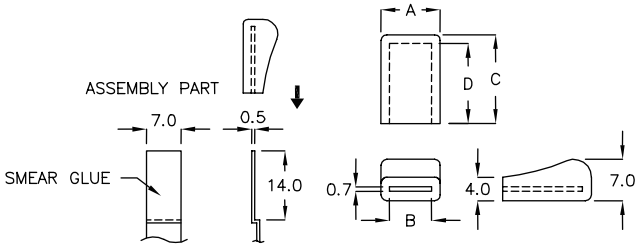


PART NO	A	B	C	D	PACKAGE
MHL−11	10.0	7.1	15.0	13.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手蓋 EJECTOR COVER 13-43-1

- MATERIAL: TPE
- COLOR: RED

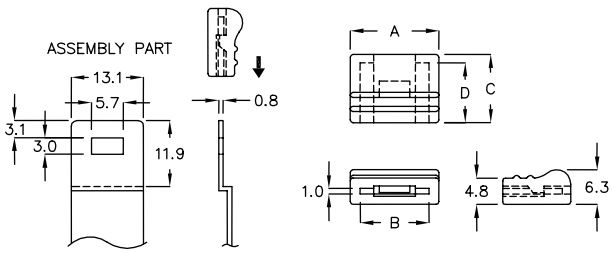


PART NO	A	B	C	D	PACKAGE
MHL-12DC	16.0	12.5	12.3	10.8	500



把手蓋 EJECTOR COVER 13-43-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

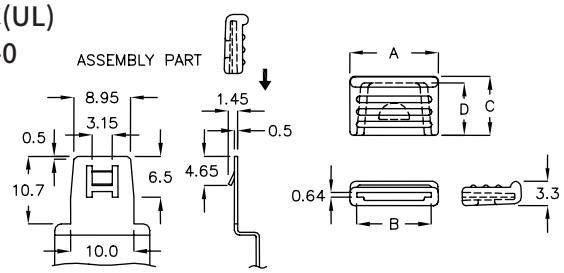


PART NO	A	B	C	D	PACKAGE
MHL-8QM	12.0	9.94	8.0	7.1	500



把手蓋 EJECTOR COVER 13-43-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLUE

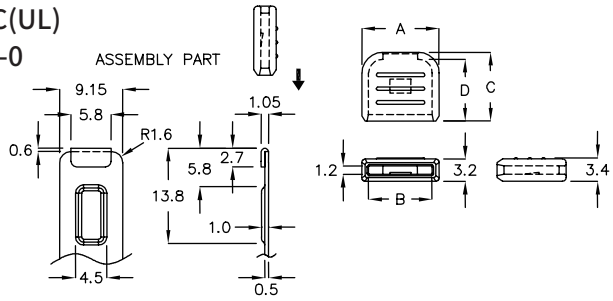


PART NO	A	B	C	D	PACKAGE
MHL-11FT	11.2	9.2	10.0	9.0	1000



把手蓋 EJECTOR COVER 13-43-4

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK,RED

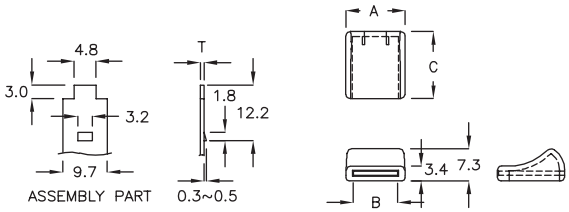


PART NO	A	B	C	T	PACKAGE
MHL-15KD	13.5	10.0	15.2	1.0	1000
MHL-19	13.5	10.0	15.2	0.8	



把手蓋 EJECTOR COVER 13-43-5

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GREEN

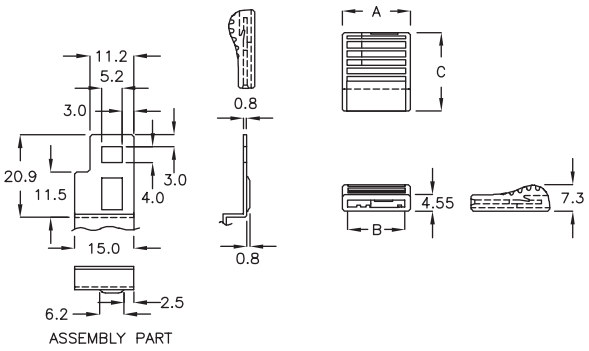


PART NO	A	B	C	PACKAGE
MHL-23	18.7	16.2	21.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手蓋 EJECTOR COVER 13-44-1

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GRAY

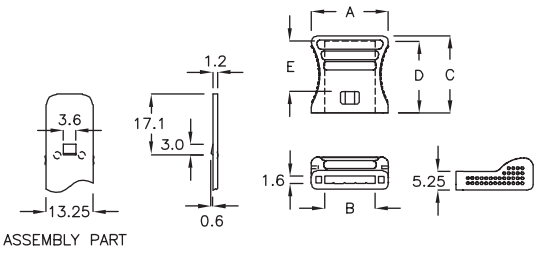


PART NO	A	B	C	D	E	PACKAGE
MHL−21FS	21.6	14.2	21.6	19.8	13.7	500



把手蓋 EJECTOR COVER 13-44-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

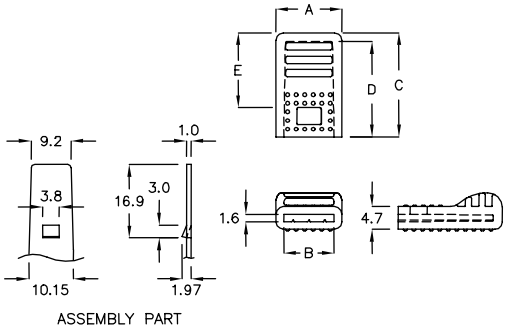


PART NO	A	B	C	D	E	PACKAGE
MHL−21KQ	13.7	10.45	21.6	19.7	13.6	500



把手蓋 EJECTOR COVER 13-44-3

- MATERIAL: TPE
- COLOR: BLACK

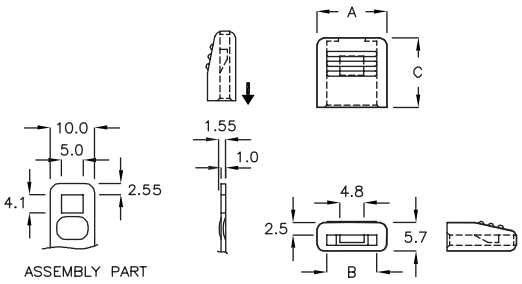


PART NO	A	B	C	PACKAGE
MHL−25	14.0	10.0	13.9	1000



把手蓋 EJECTOR COVER 13-44-4

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

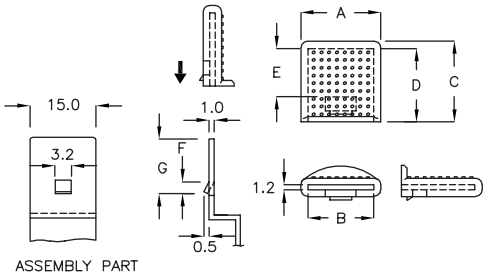


PART NO	A	B	C	D	E	F	G	PACKAGE
MHL−13	18.3	15.1	18.5	16.7	11.2	3.0	14.0	500
MHL−13A	18.3	15.2	18.5	17.2	10.9	3.3	14.5	




把手蓋 EJECTOR COVER 13-44-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

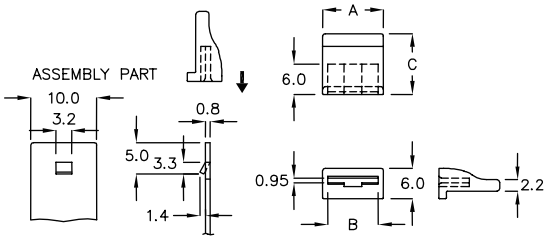


PART NO	A	B	C	PACKAGE
MHL−12	12.0	10.0	12.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




把手蓋 EJECTOR COVER 13-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: RED

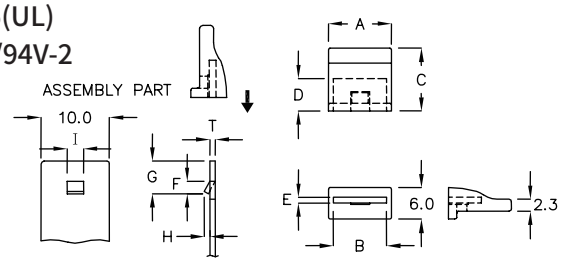


PART NO	A	B	C	D	E	F	G	H	I	T	PACKAGE
MHL−12DT	12.0	10.1	12.0	7.0	0.9	3.3	5.3	2.2	3.2	0.8	500
MHL−12KF	12.0	10.0	12.0	6.2	1.0	2.0	4.6	0.5	2.8	1.0	



把手蓋 EJECTOR COVER 13-45-2

- MATERIAL: TPE
- FLAME CLASS: 94V-0
- COLOR: GREEN

NEW

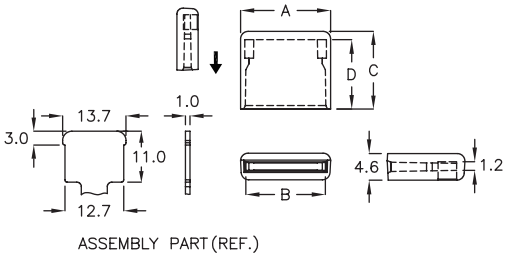


	PART NO	A	B	C	D	PACKAGE
★	MHL−13MR	15.6	13.7	13.4	12.0	500



把手蓋 EJECTOR COVER 13-45-3

- MATERIAL: ABS+PS
- FLAME CLASS: 94V-0
- COLOR: BLACK

NEW

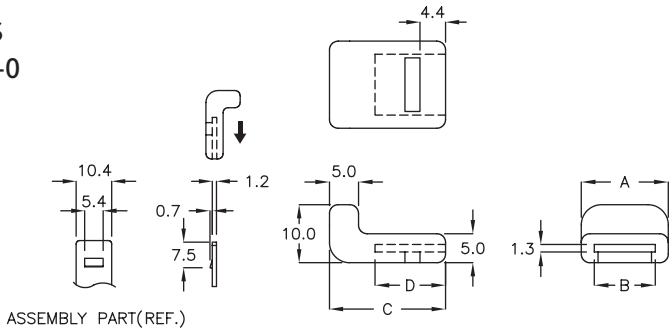


	PART NO	A	B	C	D	PACKAGE
★	MHL−15CL	15.0	10.5	20.0	12.15	1000




把手蓋 EJECTOR COVER 13-45-4

- MATERIAL: ABS+PC(UL)
- COLOR: GRAY

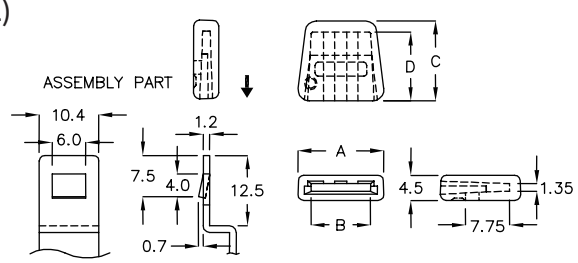


PART NO	A	B	C	D	PACKAGE
MHL−14ST	15.2	10.5	14.2	12.2	500



把手蓋 EJECTOR COVER 13-45-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,BLUE

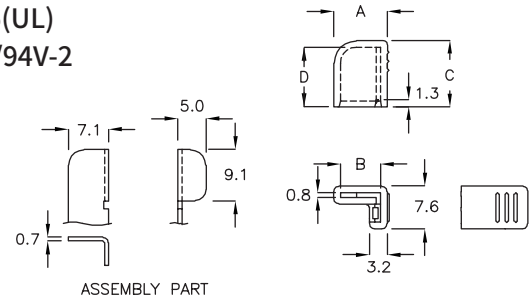


PART NO	A	B	C	D	PACKAGE
MHL−16	9.5	7.1	11.7	10.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

把手蓋 EJECTOR COVER 13-46-1




- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: RED

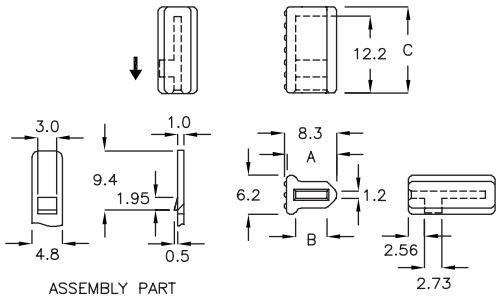


PART NO	A	B	C	PACKAGE
MHL−17	8.0	5.0	13.7	500

把手蓋 EJECTOR COVER 13-46-2



- MATERIAL: ABS+PC(UL)
- COLOR: GREEN,BLUE

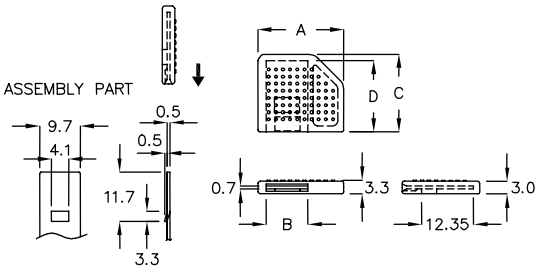


PART NO	A	B	C	D	PACKAGE
MHL−18FR	20.4	9.9	18.5	17.0	500

把手蓋 EJECTOR COVER 13-46-3



- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: GRAY

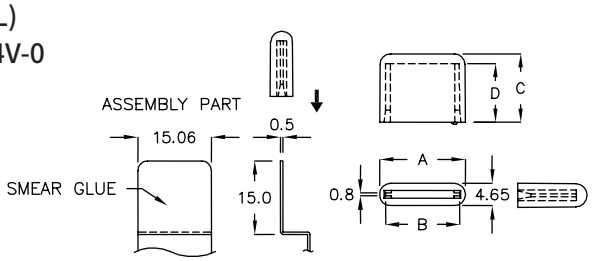


PART NO	A	B	C	D	PACKAGE
MHL−18	17.6	15.0	14.2	12.0	1000

把手蓋 EJECTOR COVER 13-46-4



- MATERIAL: ABS+PC(UL)
- COLOR: BLUE

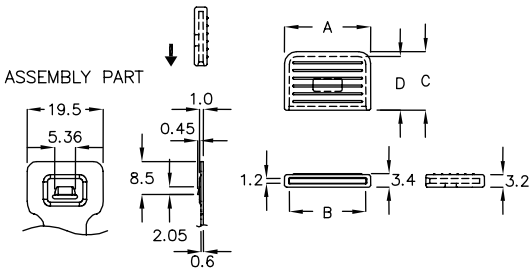


PART NO	A	B	C	D	PACKAGE
MHL−19TD	22.0	19.6	15.0	13.8	1000

把手蓋 EJECTOR COVER 13-46-5



- MATERIAL: TPR
- COLOR: BLACK

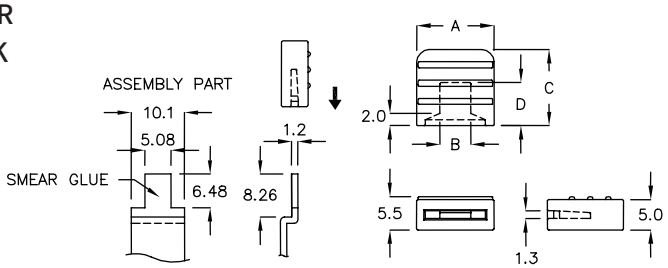


PART NO	A	B	C	D	PACKAGE
MHL−22	12.7	4.8	12.5	7.1	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手蓋 EJECTOR COVER 13-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

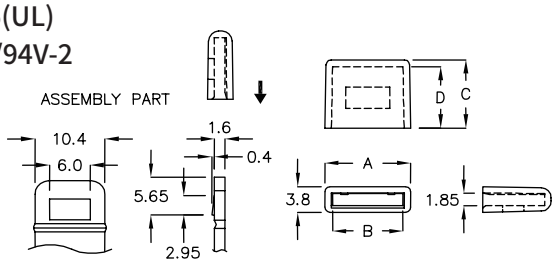


PART NO	A	B	C	D	PACKAGE
MHL-12YW	12.7	10.8	10.15	9.05	500



把手蓋 EJECTOR COVER 13-47-2

- MATERIAL: ABS+PC(UL)
- COLOR: RED

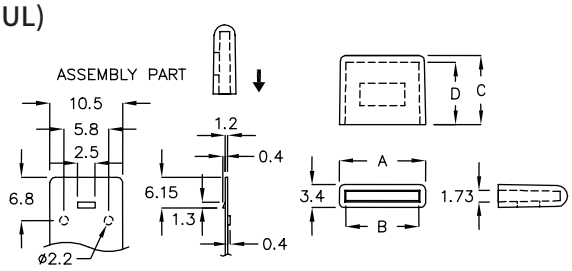


PART NO	A	B	C	D	PACKAGE
MHL-24	12.7	10.7	10.16	9.1	1000



把手蓋 EJECTOR COVER 13-47-3

- MATERIAL: ABS+PC
- COLOR: BLUE

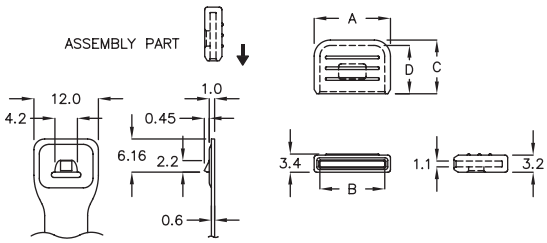


PART NO	A	B	C	D	PACKAGE
MHL-14JP	14.2	12.1	10.0	9.0	500



把手蓋 EJECTOR COVER 13-47-4

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: RED

NEW

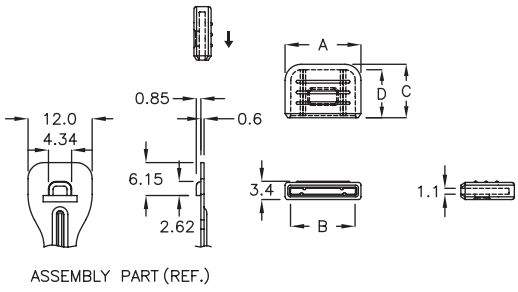


PART NO	A	B	C	D	PACKAGE
★ MHL-14KP	14.2	12.0	10.0	9.0	500




把手蓋 EJECTOR COVER 13-47-5

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GREEN

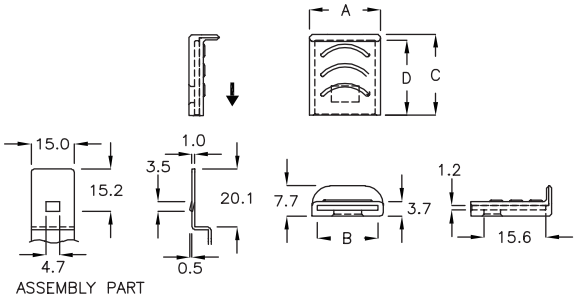


PART NO	A	B	C	D	PACKAGE
MHL-18CL	18.0	15.3	20.5	19.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



把手蓋 EJECTOR COVER 13-48-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: GREEN,BLACK,BLUE

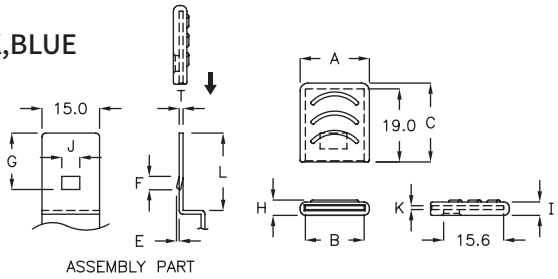


	PART NO	A	B	C	E	F	G	H	I	J	K	L	T	PACKAGE
★	MHL−24AT	18.0	15.3	20.5	0.5	3.5	15.2	4.7	4.4	4.7	1.4	20.1	1.2	500
	MHL−24QM	18.0	15.3	20.5	0.5	3.5	15.2	4.0	3.7	4.7	1.2	20.1	1.0	
	MHL−24RK	18.0	15.3	20.5	0.5	3.4	15.4	4.5	4.0	4.1	1.0	20.3	0.8	
	MHL−24SY	18.3	15.1	20.7	0.5	3.4	15.4	4.6	4.1	4.1	1.05	20.3	0.8	
	MHL−24TL	18.0	15.3	20.5	0.7	3.6	15.6	4.7	4.2	3.5	1.2	20.0	1.0	




把手蓋 EJECTOR COVER 13-48-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLUE

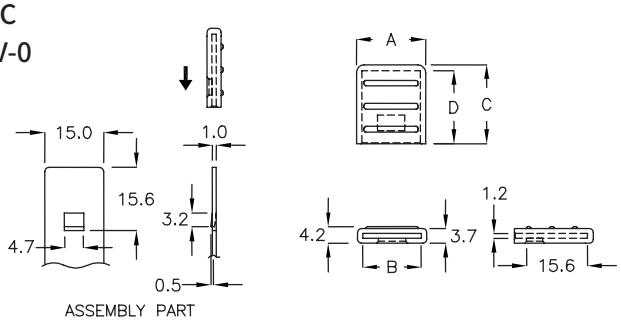


PART NO	A	B	C	D	PACKAGE
MHL−18DF	18.0	15.2	20.5	19.0	500



把手蓋 EJECTOR COVER 13-48-3

- MATERIAL: PC(UL)
- COLOR: ORANGE
- USE M2.5 COUNTERSUNK SCREW

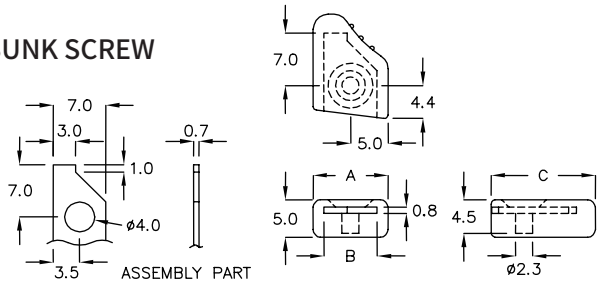


PART NO	A	B	C	PACKAGE
MHL−10KF	10.0	7.1	13.9	500



把手蓋 EJECTOR COVER 13-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

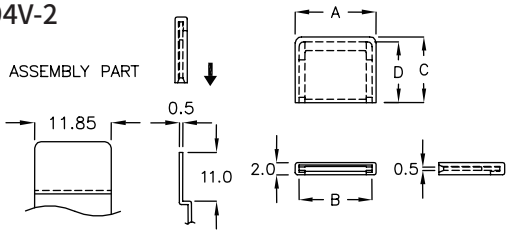


PART NO	A	B	C	D	PACKAGE
MHL−13CK	13.3	12.1	10.85	10.05	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




把手蓋 EJECTOR COVER 13-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE
- USE M2 TAPPING SCREW




PART NO	A	PACKAGE
MHLF−15A	15.2	500




把手蓋 EJECTOR COVER 13-49-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GREEN
- MATERIAL: SUS301
- COLOR: NATURAL

鐵件為客戶提供，我司協助包埋射出
(此為客製品，歡迎提供鐵件，我司協助包埋)

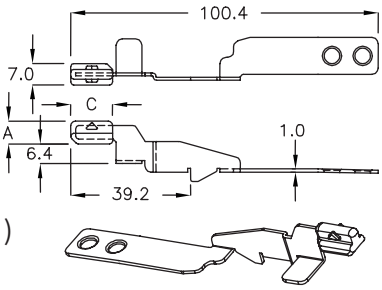


PART NO	A	C	PACKAGE
MHLA−14GP	7.5	13.7	50



E3.S 防塵蓋 E3.S COVER 13-49-3

- MATERIAL: ABS+PC
- COLOR: BLACK




PART NO	A	B	PACKAGE
E3S−22A	22.2	7.1	500



SATA 防塵蓋 SATA DUST COVER 13-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CALSS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
HTD−20A	22.2	5.4	3.6	1000




SATA 防塵蓋 SATA DUST COVER 13-49-5

- MATERIAL: NYLON 66(UL)
- FLAME CALSS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	PACKAGE
HC−21	23.4	21.6	8.2	6.4	9.0	8.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



SATA 防塵蓋 SATA DUST COVER — 13-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	F	PACKAGE
HC−21F	23.9	22.0	10.0	6.6	9.3	8.3	500
HC−21H	23.0	21.1	10.4	6.5	9.1	8.1	



SATA 防塵蓋 SATA DUST COVER — 13-50-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HC−27A	26.7	24.7	13.0	8.6	500



SATA 防塵蓋 SATA DUST COVER — 13-50-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HCQ−22KR	22.5	20.5	12.0	7.0	500



SATA 防塵蓋 SATA DUST COVER — 13-50-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK





PART NO	A	B	C	D	PACKAGE
HC−27C	26.8	24.4	12.0	8.0	500



網通光纖接頭防塵蓋 TRANSPORTER COVER — 13-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK






PART NO	A	B	C	D	PACKAGE
HB−01	9.0	ø15.0	5.5	ø9.8	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



網通光纖接頭防塵蓋
TRANSPORTER COVER — 13-51-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HB-02	9.0	ø15.0	5.5	ø10.7	1000



PS/2 防塵蓋 PS/2 DUST COVER — 13-51-2

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	PACKAGE
HB-03	10.4	ø10.5	1000



BNC 防塵蓋 BNC DUST COVER — 13-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
HBK-8D	7.6	ø10.5	500



AVI 端子防塵蓋 DUST COVER — 13-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
AVI-01	6.0	ø10.6	1000



音源孔插頭蓋
AUDIO SOURCE HOLE COVER — 13-51-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	T CHASSIS THICKNESS	D HOLE IN CHASSIS	PACKAGE
MBJ-3A	15.3	ø7.9	>8.8	ø3.6~ø3.65	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



插頭蓋 DC COVER 13-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
DCC-5JA	7.9	ø6.9	2000






插頭蓋 DC COVER 13-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
DCJ-5GK	7.9	ø6.9	2000






插頭蓋 DC COVER 13-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
DCC-7AK	10.0	ø9.5	2000






固定座 MOUNT 13-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK


PART NO	A	B	PACKAGE
DHD-01	12.8	12.0	500

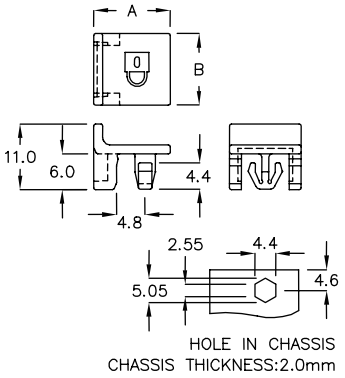



防塵蓋 DUST COVER 13-52-5

- COLOR: NATURAL,BLACK




PART NO	MATERIAL	A	B	C	D	PACKAGE
HC-5	N66	ø8.0	5.2	4.7	ø6.5	2000
HC-5S	N66	ø8.0	3.0	2.6	ø6.5	
HC-6	TPE	ø8.0	8.5	7.4	ø6.0	1000
HC-6DP	TPE	ø8.0	5.4	4.3	ø6.0	
HC-8	N66	ø10.7	8.2	6.8	ø8.0	
HC-9	TPE	ø11.0	9.7	8.7	ø9.0	
HC-10	N66	ø12.0	9.2	8.0	ø10.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防塵蓋 DUST COVER — 13-53-1

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
VCK-5A	ø6.6	8.1	7.1	ø4.8	2000
VCK-7K	ø7.7	12.0	11.5	ø6.7	1000
VCK-8D	ø9.6	12.0	11.5	ø8.6	




K-LOCK 防塵蓋 K-LOCK COVER — 13-53-2

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	E	PACKAGE
NEF-9DL	9.3	3.2	7.4	2000
NEF-9WS	9.3	3.0	7.0	




SFP 防塵蓋 SFP CONNECTOR COVER — 13-53-3

- MATERIAL: PE
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
NEP-01	14.5	9.0	6.9	500
NEP-1QM	14.0	8.9	6.8	



MINI SAS 防塵蓋 MINI SAS CONNECTOR COVER — 13-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	C	PACKAGE
NSA-10C	10.85	7.0	500



QSFP 防塵蓋 QSFP CONNECTOR COVER — 13-53-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



PART NO	A	B	C	PACKAGE
NEC-18	18.6	8.85	7.6	500
NEC-18GD	18.6	8.35	7.6	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





QSFP 防塵蓋
QSFP CONNECTOR COVER — 13-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

PART NO	A	C	PACKAGE
★ NEM−18	18.6	10.1	500






ELSFP 防塵蓋
ELSFP CONNECTOR COVER — 13-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

PART NO	A	C	PACKAGE
★ NEC−22FP	23.6	7.6	500







SFP 防塵蓋
SFP CONNECTOR COVER — 13-54-3

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	PACKAGE
NEK−14	14.6	500







MINI SII 插頭蓋 MINI SII COVER — 13-54-4

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	PACKAGE
NEY−01	19.2	500







MINI SII 插頭蓋 MINI SII COVER — 13-54-5

- MATERIAL: PP
- COLOR: BLACK

PART NO	A	PACKAGE
NEY−2A	17.8	500

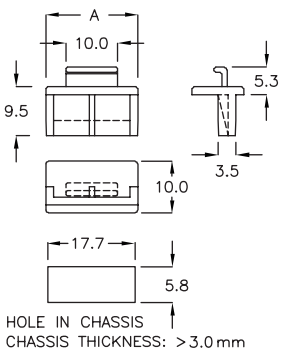


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防塵蓋 DUST COVER — 13-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
HBC−14CK	14.5	1000






防塵蓋 DUST COVER — 13-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
HBC−14FM	14.5	1000






防塵蓋 POWER CONNECTOR COVER — 13-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
HBF−01	20.5	1000







MCIO 防塵蓋
MCIO CONNECTOR COVER — 13-55-4

- MATERIAL: ABS+PC
- COLOR: BLACK

PART NO	A	B	PACKAGE
HCKA−27	27.0	7.8	500

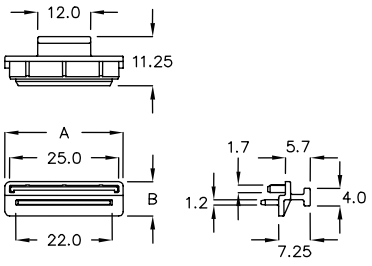





防塵蓋 DUST COVER — 13-55-5

- MATERIAL: ABS+PC
- COLOR: BLACK

PART NO	A	B	PACKAGE
HCKB−4A	7.0	5.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防塵蓋 DUST COVER — 13-56-1

- MATERIAL: ABS+PC
- COLOR: BLACK

PART NO	A	B	PACKAGE
HCKC-8A	11.0	6.0	500







SLIM SAS X4 防塵蓋
SLIM SAS X4 CONNECTOR COVER — 13-56-2

- MATERIAL: ABS+PC
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HCKF-12	12.7	12.0	6.5	500






防塵蓋 DUST COVER — 13-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
HCL-5M	7.0	1000






防塵蓋 DUST COVER — 13-56-4

- MATERIAL: TPE
- COLOR: BLACK

PART NO	A	PACKAGE
HCW-6T	9.0	1000






防塵蓋 DUST COVER — 13-56-5

- MATERIAL: ABS+PC
- COLOR: BLACK

PART NO	A	PACKAGE
HCZ-5A	5.6	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防塵蓋 DUST COVER 13-57-1

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	PACKAGE
NER-30A	32.5	500






防塵蓋 DUST COVER 13-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
CFP-41A	41.7	200






防塵蓋 DUST COVER 13-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
HBA-01	ø18.0	1000






防塵蓋 DUST COVER 13-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
HKA-20A	25.0	200






防塵蓋 VCP CAP 13-57-5

- MATERIAL: PVC
- COLOR: BLACK

PART NO	A	B	L	C	PACKAGE
VCQ-7A	7.4	9.0	12.8	1.0	1000
VCQ-08	8.3	1.0	8.0	0.8	2000
VCQ-9A	9.6	4.5	16.0	1.2	1000
VCQ-10	10.1	1.0	7.0	1.0	
VCQ-12	12.0	4.7	10.0	1.0	




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防塵蓋 VCP CAP — 13-58-1

- MATERIAL: PVC
- COLOR: BLACK,RED,WHITE,BLUE,YELLOW,GREEN
- UL STANDARD ALSO AVAILABLE




PART NO	A	L	C	PACKAGE
VCP−3.2	3.2	13.0	0.8	2000
VCP−4.0	4.0	8.0	0.8	1000
VCP−4.8	4.8	13.0	0.8	
VCP−5.7	5.7	13.0	1.0	
VCP−6.5	6.5	13.0	1.0	
VCP−7.6	7.6	8.0	1.0	
VCP−8.0	8.0	10.0	1.0	
VCP−9.5	9.4	16.0	1.0	
VCP−9.5A	9.5	13.0	1.0	
VCP−11	11.4	20.0	1.2	
VCP−12	12.0	16.0	1.2	500
VCP−14	14.0	35.0	1.2	
VCP−18	18.0	13.0	1.2	
VCP−18C	18.0	18.0	1.2	



插頭蓋 HOUSING COVER — 13-58-2

- MATERIAL: PP
- COLOR: NATURAL




PART NO	A	B	C	D	E	SUITABLE SOCKET	PACKAGE
HC−0	18.1	9.2	7.85	6.5	5.7	9 PIN FEMALE	500
HC−1	26.0	9.2	7.85	6.5	5.7	15 PIN FEMALE	
HC−2	20.0	11.0	9.2	7.2	6.1	9 PIN MALE	
HC−15	39.8	9.2	7.85	6.5	5.7	25 PIN FEMALE	
HC−16	42.0	10.9	9.1	7.3	6.3	25 PIN MALE	200



插頭蓋 HOUSING COVER — 13-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	SUITABLE SOCKET	PACKAGE
HC−15QC	40.05	9.4	7.75	6.6	5.6	25 PIN FEMALE	500



插頭蓋 HOUSING COVER — 13-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	SUITABLE SOCKET	PACKAGE
HCM−19J	19.6	11.1	9.4	9 PIN MALE	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



插頭蓋 HOUSING COVER 13-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	SUITABLE SOCKET	PACKAGE
HC−1A	26.5	9.7	8.1	15 PIN FEMALE	500



DVI 防塵蓋 DVI COVER 13-59-2

- MATERIAL: PE
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
HC−1PZ	25.85	9.25	7.65	500



插頭蓋 HOUSING COVER 13-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	SUITABLE SOCKET	PACKAGE
HCM−26F	26.5	9.7	8.1	15 PIN FEMALE	500



插頭蓋 HOUSING COVER 13-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	F	G	SUITABLE SOCKET	PACKAGE
HC−02A	17.8	9.7	8.3	6.5	5.7	10.7	16.4	9 PIN FEMALE	500
HC−02C	18.4	10.0	8.0	6.1	5.0	11.2	16.4	9 PIN FEMALE	
HC−2FH	19.6	11.1	9.3	7.0	6.0	12.5	17.8	9 PIN MALE	



插頭蓋 HOUSING COVER 13-59-5

- MATERIAL: PP
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
HC−12A	15.2	7.6	5.3	4.3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



插頭蓋 HOUSING COVER 13-60-1

- MATERIAL: PE
- COLOR: NATURAL




PART NO	A	B	C	D	E	F	SUITABLE SOCKET	PACKAGE
HC−2RF	18.0	9.4	7.8	7.7	5.2	10.1	9 PIN FEMALE	500



PDU-C14 防塵蓋
PDU-C14 CONNECTOR COVER 13-60-2

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HDZ−23C	34.6	23.0	15.4	200






PDU-C13 防塵蓋
PDU-C13 CONNECTOR COVER 13-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW


	PART NO	A	B	C	PACKAGE
★	HDZA−23A	35.0	23.8	12.0	1000

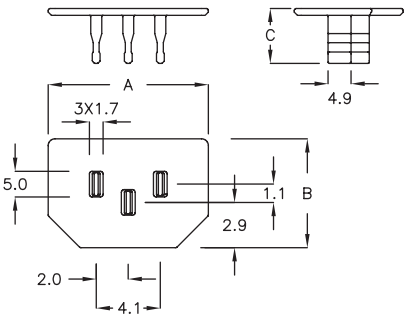



插頭蓋 HOUSING COVER 13-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

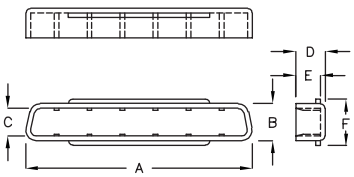


PART NO	A	B	C	D	E	F	PACKAGE
HC−17	48.0	7.9	5.9	6.3	5.3	9.9	200
HC−18	58.0	10.4	8.4	6.8	5.8	12.4	



防塵蓋 DUST COVER 13-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HC−28	28.2	5.7	3.6	7.7	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



DVI 防塵蓋 DVI COVER 13-61-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	A	B	C	D	E	F	PACKAGE
HC−24	40.1	9.8	5.7	32.6	2.5	ø3.4	500



DVI 防塵蓋 DVI COVER 13-61-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HC−24A	40.0	9.8	3.3	32.5	500



MDR 防塵蓋 MDR DUST COVER 13-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HC−28DX	28.4	8.1	6.5	6.5	500




VGA 插頭蓋 VGA COVER 13-61-4

- MATERIAL: ABS(UL),NYLON 66(UL)
- FLAME CLASS: 94HB,94V-0
- COLOR: BLACK




PART NO	MATERIAL	A	B	PACKAGE
HDD−2A	ABS HB	34.0	19.3	200
HDE−2A	N66 V0	34.0	13.5	



PLUG 防塵蓋 PLUG DUST COVER 13-61-5

- MATERIAL: PE
- COLOR: BLACK



PART NO	A	B	C	D	PACKAGE
HDK−34	34.0	13.0	15.2	19.1	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



防塵蓋 DUST COVER — 13-62-1

- MATERIAL: PP(UL)
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HCWT-37KF	29.4	22.0	200






防塵蓋 DUST COVER — 13-62-2

- MATERIAL: PP(UL)
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HCWT-41BQ	32.7	35.0	100






QPI 防塵蓋 QPI DUST COVER — 13-62-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
QPI-57A	57.1	26.6	12.3	500






插頭蓋 HOUSING COVER — 13-62-4

- MATERIAL: PP
- COLOR: NATURAL

PART NO	A	B	PACKAGE
HC-049	49.0	8.0	200






插頭蓋 HOUSING COVER — 13-62-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	C	D	PACKAGE
HC-51	22.3	8.1	6.2	5.0	500




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




插頭蓋 HOUSING COVER 13-63-1

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	B	PACKAGE
HC-5C	17.3	14.0	2000






插頭蓋 HOUSING COVER 13-63-2

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	B	PACKAGE
HC-5D	12.0	9.9	2000






插頭蓋 PS-2 COVER 13-63-3

- MATERIAL: PP(UL)
- COLOR: BLACK

PART NO	A	B	PACKAGE
HC-5A	14.0	9.1	2000






防塵蓋 DUST COVER 13-63-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	T CHASSIS THICKNESS	PACKAGE
HCR-20	20.0	1.0	0.8	2000
HCR-20CL	20.0	0.8	1.0	






保護蓋 HOLE PROTECT COVER 13-63-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	T CHASSIS THICKNESS	PACKAGE
BHR-21A	20.8	0.8	1000

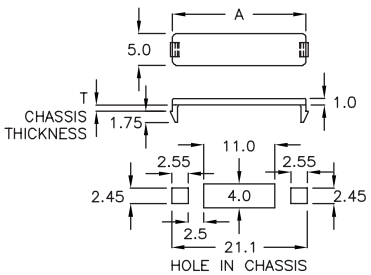


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

防塵蓋 DUST COVER 13-64-1




- MATERIAL: TPR(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK



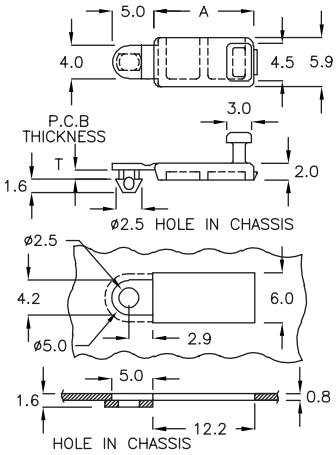


PART NO	A	T P.C.B THICKNESS	PACKAGE
HCD-01	12.0	0.8	1000

防塵蓋 DUST COVER 13-64-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	T CHASSIS THICKNESS	PACKAGE
HCP-24D	19.8	0.8	1000

固定座 MOUNT 13-64-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	T CHASSIS THICKNESS	PACKAGE
HCP-55F	50.5	0.8	200

防塵蓋 DUST COVER 13-64-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

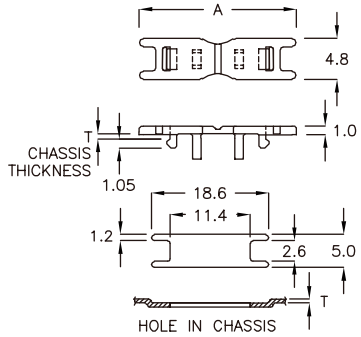

PART NO	A	T CHASSIS THICKNESS	PACKAGE
HCR-18K	18.4	0.8	2000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




防塵蓋 DUST COVER 13-65-1

- MATERIAL: TPE
- COLOR: GRAY

PART NO	A	PACKAGE
HCX-15A	15.5	1000

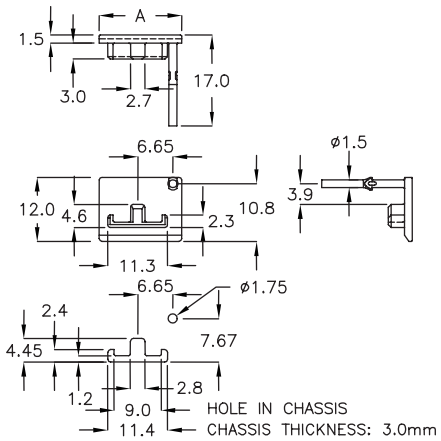




防塵蓋 DUST COVER 13-65-2

- MATERIAL: PE
- COLOR: YELLOW

PART NO	A	B	C	PACKAGE
HCS-22	22.0	20.0	10.9	1000






防塵蓋 DUST COVER 13-65-3

- MATERIAL: PE
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
HCS-15KN	15.3	13.5	10.0	1000






保護罩 INSULATION CAP 13-65-4

- MATERIAL: TPE
- FLAME CLASS:94V-0
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HDL-10C	ø10.7	4.2	5.2	1000






保護蓋 PROTECT COVER 13-65-5

- MATERIAL: PE
- COLOR: BLACK

PART NO	A	B	C	PACKAGE
HDT-30	32.6	16.3	5.6	200




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保護罩 INSULATION CAP 13-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
HDQ-5C	14.8	5.6	13.3	1000



保護蓋 PROTECT COVER 13-66-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
HDTC-17K	ø13.0	16.7	17.7	200



保護蓋 INSULATION CAP 13-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

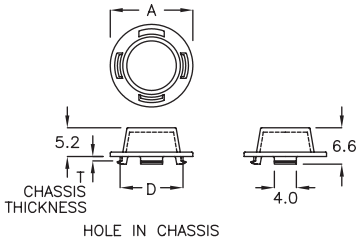


PART NO	A	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
★ HDJ-15	ø15.0	ø11.5	0.7	200



保護蓋 INSULATION CAP 13-66-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

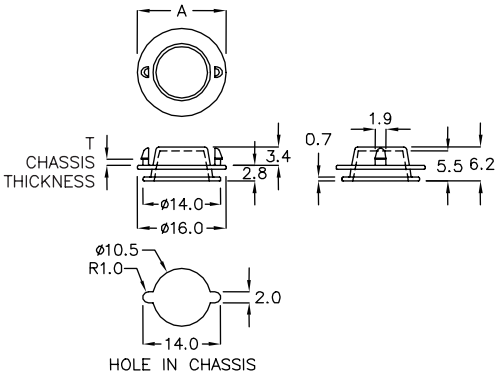


PART NO	A	T CHASSIS THICKNESS	PACKAGE
HDU-16A	ø16.0	1.0	500




光纖插頭蓋 TRANSPORTER COVER 13-66-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
HF-01	6.0	3.8	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




光纖插頭蓋 TRANSPORTER COVER — 13-67-1

- MATERIAL: TPE
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HFK−01	14.1	10.0	7.5	19.6	500



插頭蓋 COVER — 13-67-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
HCK−7A	12.0	8.6	3.3	9.6	500



插頭蓋 SATA DUST COVER — 13-67-3

- MATERIAL: PE
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
HTA−10A	12.8	5.5	3.4	7.6	1000



固定座 MOUNT — 13-67-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	øB	C	PACKAGE
PEB−01	4.3	25.3	7.3	1000



USB 插頭蓋 USB COVER — 13-67-5

- MATERIAL: PP
- COLOR: NATURAL

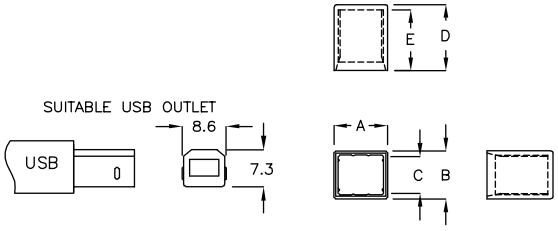


PART NO	A	B	C	D	E	PACKAGE
USB−01	10.6	9.5	7.35	13.0	12.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



USB 插頭蓋 USB COVER — 13-68-1

- MATERIAL: PP
- COLOR: NATURAL

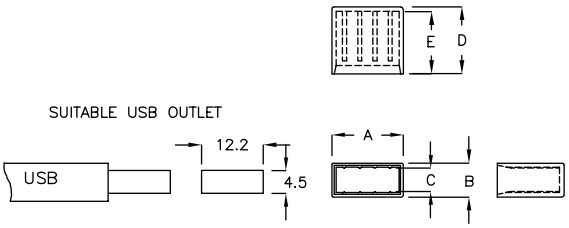


PART NO	A	B	C	D	E	PACKAGE
USB-02	14.15	6.8	4.55	13.2	12.2	1000



USB 插頭蓋 USB COVER — 13-68-2

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
USB-03	15.5	7.8	4.1	13.2	8.0	1000



USB 插頭蓋 USB COVER — 13-68-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
USB-3GJ	13.0	7.0	3.75	16.2	9.0	1000




USB 插頭蓋 USB COVER — 13-68-4

- MATERIAL: PP
- COLOR: NATURAL,BLACK




PART NO	A	B	C	D	E	PACKAGE
USB-3A	15.5	7.8	4.1	9.5	8.0	500




MICRO USB 插頭蓋 MICRO USB COVER — 13-68-5

- MATERIAL: TPE(UL)
- FLAME CLASS:94V-0
- COLOR: BLACK




PART NO	A	B	PACKAGE
USB-6AK	9.0	5.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



USB 插頭蓋 USB COVER — 13-69-1

- MATERIAL: PP
- COLOR: NATURAL,BLACK




PART NO	A	B	C	D	E	PACKAGE
USB-3FK	15.6	7.2	3.85	15.5	13.5	500



USB 3.0 插頭蓋 MICRO USB 3.0 COVER — 13-69-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	B	PACKAGE
USB-3HQ	15.0	5.5	500



USB 3.0 插頭蓋 MICRO USB 3.0 COVER — 13-69-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
USB-3RT	12.1	4.8	500




TYPE-C 插頭蓋 TYPE-C COVER — 13-69-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
USB-3WP	12.0	6.4	500



TYPE-C 插頭蓋 TYPE-C COVER — 13-69-5

- MATERIAL: PE
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
USB-3GT	10.5	5.5	2.3	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




TYPE-C 插頭蓋 TYPE-C COVER 13-70-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
USB-3KN	10.5	5.5	2.3	500




TYPE-C 插頭蓋 TYPE-C COVER 13-70-2

- MATERIAL: PE
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
USB-3QA	10.5	5.5	2.5	2000



USB1394 插頭蓋 USB COVER 13-70-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
USB-04	11.0	10.3	1000



USB 插頭蓋 USB COVER 13-70-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
USB-05	17.8	19.0	15.0	17.0	15.5	500




MINI USB 插頭蓋 USB COVER 13-70-5

- MATERIAL: PE
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
USB-06	9.5	4.8	1.0	7.2	5.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



MINI USB 插頭蓋 USB COVER 13-71-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




PART NO	A	B	PACKAGE
USB-9MT	10.0	6.0	1000



USB 插頭蓋 USB COVER 13-71-2

- MATERIAL: PP
- COLOR: BLACK

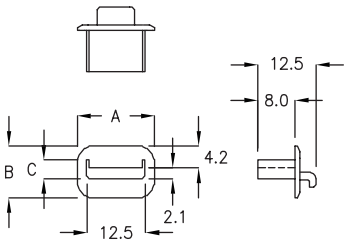


PART NO	A	B	C	PACKAGE
USB-07	16.5	10.0	3.7	2000



USB1394 保護蓋 USB COVER 13-71-3

- MATERIAL: PE
- COLOR: BLACK




PART NO	A	B	C	D	E	F	PACKAGE
USF-01	13.2	8.5	6.0	8.9	7.3	1.8	2000
USF-02	13.2	8.5	6.0	8.9	7.3	1.0	



USB1394 保護蓋 USB COVER 13-71-4

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
USF-03	16.0	10.8	6.0	2000



USB 保護蓋 USB COVER 13-71-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
USJ-2JM	15.6	16.3	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




USB 保護蓋 USB COVER — 13-72-1

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	PACKAGE
USQ-15C	7.7	7.4	500



保護蓋 GPS COVER — 13-72-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
LHZ-21K	21.5	7.17	500



電源插座保護蓋 SOCKET COVER — 13-72-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
HDB-01	ø25.0	5.5	14.0	200



電源插座防塵蓋 DUST COVER — 13-72-4

- MATERIAL: TPE(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	PACKAGE
HDY-16A	24.3	16.0	500



HDMI 插頭蓋 HDMI COVER — 13-72-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

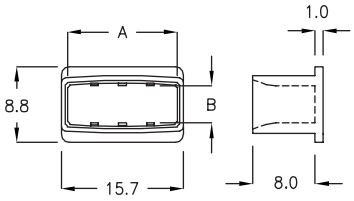


PART NO	A	B	PACKAGE
DMI-01	14.2	4.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



HDMI 插頭蓋 HDMI COVER 13-73-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

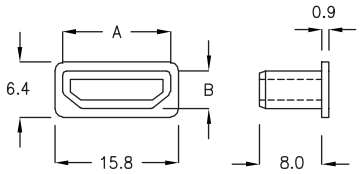



PART NO	A	B	PACKAGE
DMI−02	13.8	4.4	1000




HDMI 插頭蓋 HDMI COVER 13-73-2

- MATERIAL: PE
- COLOR: NATURAL,BLACK



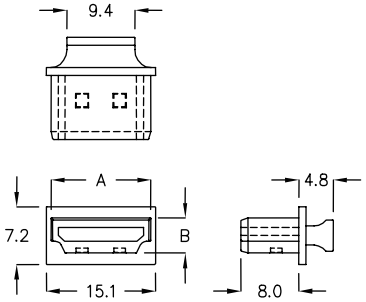


PART NO	A	B	FORM	PACKAGE
DMI−2C	13.8	4.4	1	1000
DMI−2P	13.8	4.4	2	



HDMI 插頭蓋 HDMI COVER 13-73-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
DMI −2TA	15.5	4.4	1000



HDMI 插頭蓋 HDMI COVER 13-73-4

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	PACKAGE
DMI −3K	13.9	4.4	1000



DVI 插頭蓋 DVI COVER 13-73-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	PACKAGE
DVI−01	25.1	8.5	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



DVI 插頭蓋 DVI COVER — 13-74-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
DVI-02	23.9	8.0	500






DVI 插頭蓋 DVI COVER — 13-74-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	PACKAGE
DVI-2WT	23.8	7.8	500

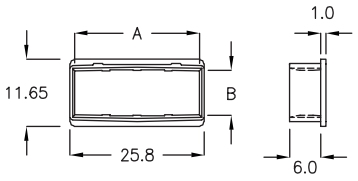





RJ45 插頭蓋 RJ45 COVER — 13-74-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
NET-1QH	11.9	9.4	500







RJ45 插頭蓋 RJ45 COVER — 13-74-4

- MATERIAL: PP
- COLOR: BLACK

PART NO	A	B	PACKAGE
NEX-01	11.9	9.4	500

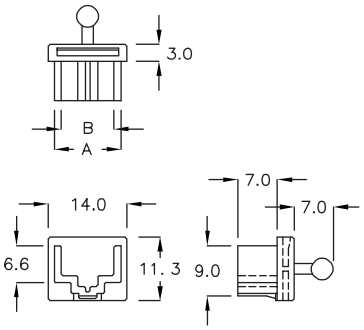




RJ45 插頭蓋 RJ45 COVER — 13-74-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: TPE
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	C	D	E	F	G	MATERIAL	PACKAGE
NEX-02	12.1	9.5	14.1	11.6	6.4	6.0	1.2	N66	500
NEX-3K	11.9	9.0	17.6	13.25	6.4	6.0	1.2	N66	
NEX-4KJ	12.0	9.5	13.5	11.6	6.4	6.0	1.2	TPE	
NEX-5FT	12.0	9.4	12.0	11.3	5.2	8.0	1.0	N66	

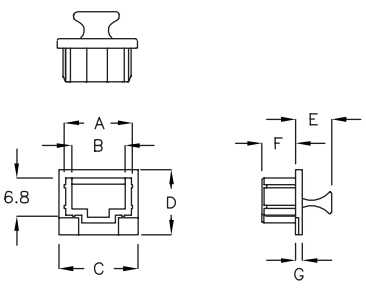


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



RJ45 插頭蓋 RJ45 COVER — 13-75-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
NET−2FM	12.0	9.4	500



RJ12 插頭蓋 RJ12 COVER — 13-75-2

- MATERIAL: PP
- COLOR: BLACK,NATURAL




PART NO	A	B	PACKAGE
NET−02	10.0	8.2	500



RJ12 插頭蓋 RJ12 COVER — 13-75-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
NET−2HK	10.0	8.0	500




RJ12 插頭蓋 RJ12 COVER — 13-75-4

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	B	PACKAGE
NET−02A	9.8	8.0	500



PCIEX1 插頭蓋 PCIEX1 COVER — 13-75-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
PCIE−1A	20.5	9.0	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



RJ11 防塵蓋 RJ11 COVER — 13-76-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
RJ-12	7.75	6.2	1000



MICRO FIT 防塵蓋 MICRO FIT COVER — 13-76-2

- MATERIAL: ABS+PC
- COLOR: BLACK




PART NO	A	PACKAGE
NEG-12K	9.0	1000



電源連接座插頭蓋 CONNECTOR COVER — 13-76-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
NES-4A	7.7	500




電源連接座插頭蓋 CONNECTOR COVER — 13-76-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
NEA-12J	8.35	500



電源連接座插頭蓋 CONNECTOR COVER — 13-76-5

- MATERIAL: PP
- COLOR: BLACK



PART NO	A	PACKAGE
NES-14A	12.04	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




防塵蓋 DUST COVER — 13-77-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

	PART NO	A	B	D HOLE IN CHASSIS	T CHASSIS THICKNESS	PACKAGE
★	HCXK-15C	15.1	14.2	ø2.5	1.2~1.6	200

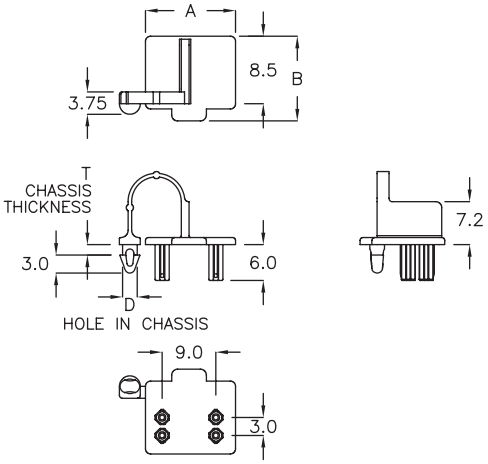





電源連接座插頭蓋 CONNECTOR COVER — 13-77-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	PACKAGE
NES-18C	16.3	500

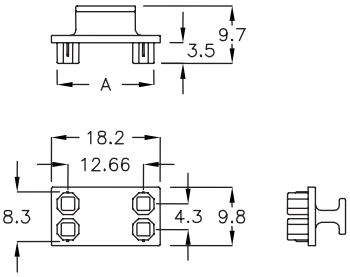




電源連接座插頭蓋 CONNECTOR COVER — 13-77-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	PACKAGE
NEQ-34K	28.7	500

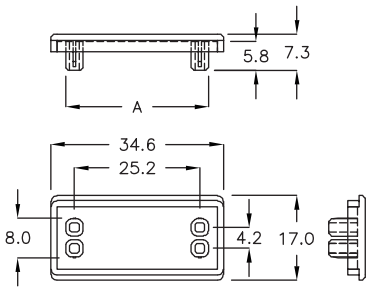




DP 防塵蓋 DP COVER — 13-77-4

- MATERIAL: PE
- COLOR: NATURAL

PART NO	A	PACKAGE
DP-2KT	15.9	1000






DP 防塵蓋 DP COVER — 13-77-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

	PART NO	A	B	PACKAGE
★	DP-1KT	15.9	5.55	1000




提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




DP 防塵蓋 DP COVER — 13-78-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
DP-01	15.9	1000



DP 防塵蓋 DP COVER — 13-78-2

- MATERIAL: PP
- COLOR: BLACK




PART NO	A	PACKAGE
DP-3F	16.0	1000



PCIE 防塵蓋 PCI EXPRESS COVER — 13-78-3

- MATERIAL: PE
- COLOR: BLACK

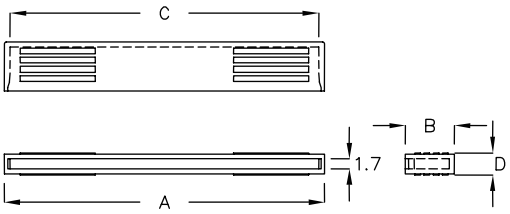


PART NO	A	B	C	D	PACKAGE
HCS-44AT	44.0	8.0	41.8	4.0	500
HCS-55FN	55.4	8.6	53.2	3.8	




PCIE 防塵蓋 PCI EXPRESSx16 COVER — 13-78-4

- MATERIAL: PE
- COLOR: NATURAL

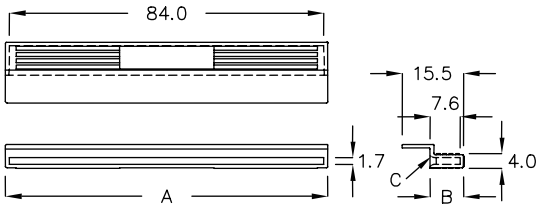


PART NO	A	B	C	PACKAGE
HCS-86FQ	86.0	8.5	—	200
HCS-86HX	86.0	8.5	1.0	




SC 型光纖蓋組合 OPTICAL FIBER COVER — 13-78-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: GREEN




PART NO	A	B	PACKAGE
FIB-13-NOH	9.4	12.9	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



光纖保護蓋 OPTICAL FIBER COVER — 13-79-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MNA−11C	9.5	14.6	2000



防塵蓋 DUST COVER — 13-79-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MNW−9A	6.6	9.0	1000



音頻插座固定座 Φ3.5 AUDIO MOUNT — 13-79-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

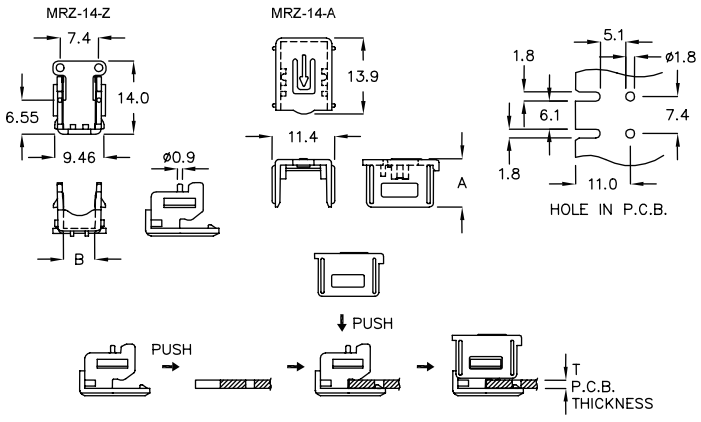


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
MRZ−14	8.6	6.0	1.65	1000



TYPE-C 固定座 MOUNT — 13-79-4

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MIR−14	6.3	14.0	7.4	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



MICRO-FIT 固定座
MICRO-FIT CONNECTOR HOLDER —— 13-80-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

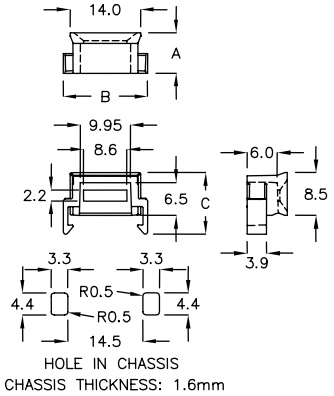


PART NO	A	B	C	PACKAGE
MJQB-18AT	8.0	16.7	12.2	500



SD 卡保護座 SD CARD SOCKET COVER —— 13-80-2

- MATERIAL: ABS(UL)
- COLOR: BLACK




PART NO	A	B	PACKAGE
SDH-01	32.0	24.0	500




連接器固定座 CONNECTOR MOUNT —— 13-80-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

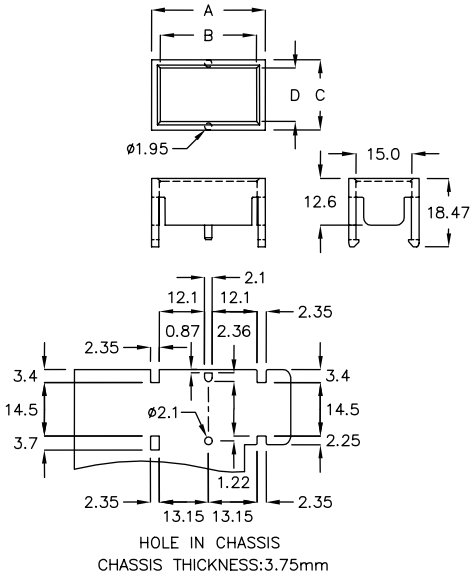


PART NO	A	B	C	D	PACKAGE
MNK-30YM	30.6	25.8	18.9	14.4	200



連接器固定座 CONNECTOR MOUNT —— 13-80-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

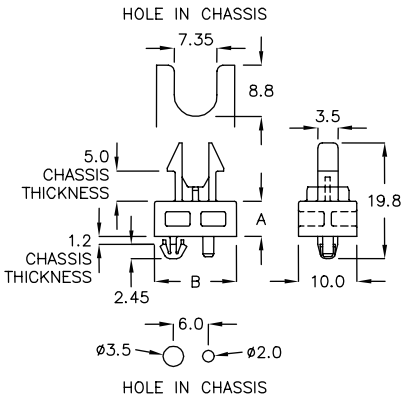


PART NO	A	B	PACKAGE
MTQA-6KF	6.0	14.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT — 13-81-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

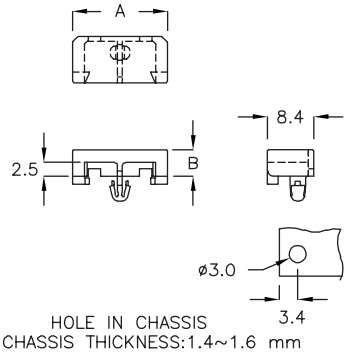


PART NO	A	B	PACKAGE
MRQ-14M	17.3	4.8	1000



固定座 MOUNT — 13-81-2

- MATERIAL: PP
- COLOR: BLACK

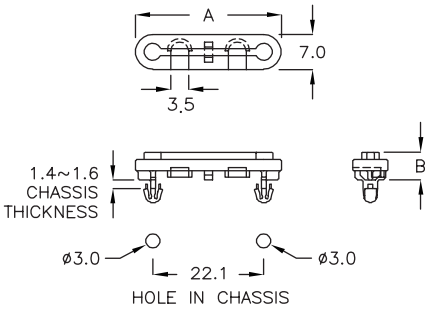


PART NO	A	B	PACKAGE
MRQ-29	29.1	5.6	1000




固定座 MOUNT — 13-81-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 SCREW

NEW

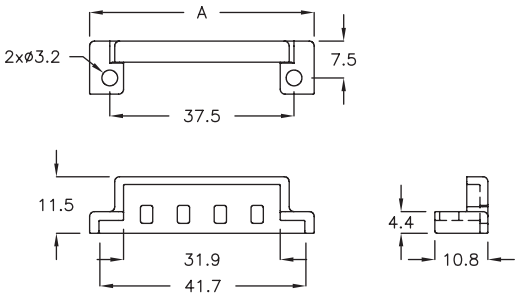


PART NO	A	PACKAGE
★ MHTK-45A	45.7	500



網通卡固定座 MOUNT — 13-81-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 SCREW

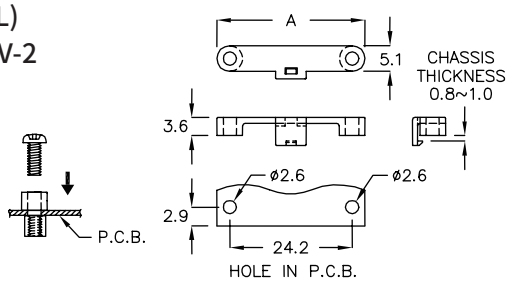


PART NO	A	PACKAGE
MRR-29	29.3	2000



網通卡固定座 MOUNT — 13-81-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 SCREW

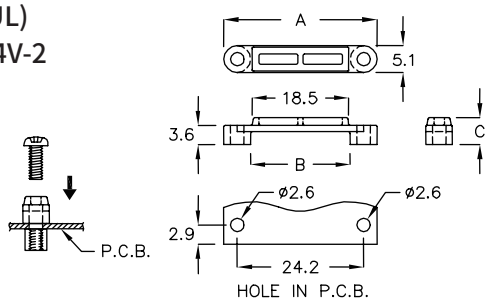


PART NO	A	B	C	PACKAGE
MRR-29AK	29.3	19.1	5.1	2000
MRR-29HC	29.3	20.1	4.4	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



M.2 卡固定座 MOUNT — 13-82-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

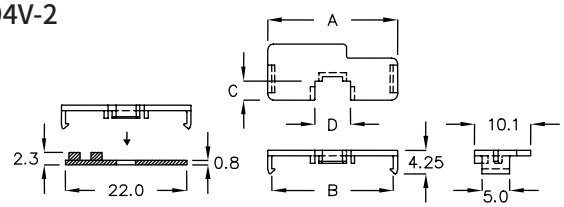


PART NO	A	B	C	D	PACKAGE
MRH−23FC	23.4	21.9	3.4	6.4	2000




M.2 卡固定座 MOUNT — 13-82-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
MRH−23AC	23.6	21.8	2.4	6.4	5.7	2000
★ MRH−23AM	23.6	22.0	2.4	6.4	5.9	
MRH−23TG	23.6	21.9	2.4	5.0	5.7	
MRH−23SK	23.6	21.9	3.4	6.4	5.7	



M.2 卡固定座 MOUNT — 13-82-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	E	PACKAGE
MRHA−23BT	24.9	22.0	5.0	6.4	6.0	2000



M.2 卡固定座 MOUNT — 13-82-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




PART NO	A	B	C	D	E	PACKAGE
★ MRH−23CL	23.7	22.0	3.9	6.4	6.7	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



M.2 卡固定座 MOUNT — 13-83-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
MRH−31FC	31.6	29.9	2.4	5.0	5.25	2000




M.2 卡固定座 MOUNT — 13-83-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	D	E	PACKAGE
MRH−31KS	31.6	29.9	2.4	5.0	4.35	2000




M.2 卡固定座 MOUNT — 13-83-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK

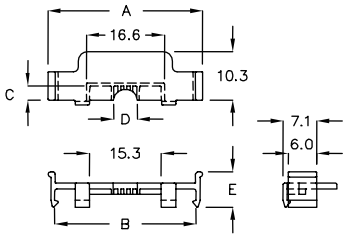


PART NO	A	B	C	D	E	PACKAGE
MRM−31FQ	32.9	30.1	3.0	5.17	7.55	1000




M.2 卡固定座 MOUNT — 13-83-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

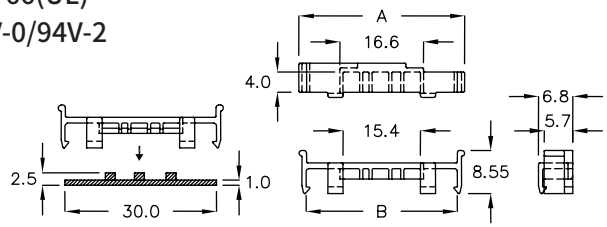


PART NO	A	B	PACKAGE
MRM−31C	32.9	30.1	1000



固定座 MOUNT — 13-83-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE:3M

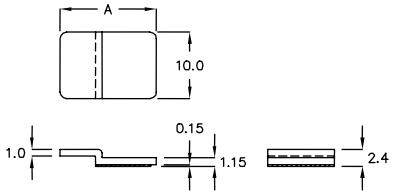


PART NO	A	PACKAGE
MRU−14A	14.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




M.2 卡固定座 MOUNT 13-84-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

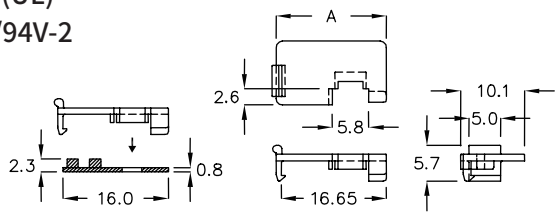


PART NO	A	PACKAGE
MRX−16D	17.5	2000




M.2 卡固定座 MOUNT 13-84-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

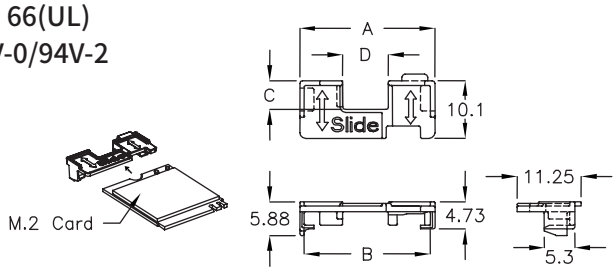


PART NO	A	B	C	D	PACKAGE
MRY−23CL	23.6	22.05	5.05	8.0	2000



固定座 MOUNT 13-84-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
CGR−52A	52.7	200



固定座 MOUNT 13-84-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK

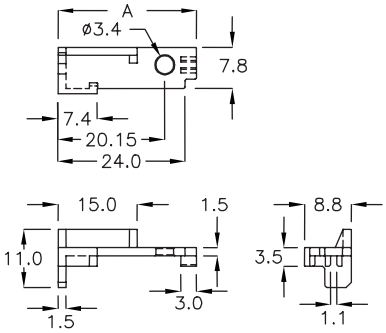


PART NO	A	PACKAGE
MJGP−26K	26.15	200




固定座 HOUSING 13-84-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

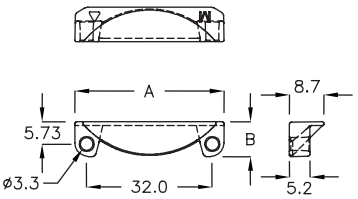


PART NO	A	B	PACKAGE
MLW−38HC	38.0	9.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNT 13-85-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




PART NO	A	B	PACKAGE
UAC−12B	11.0	12.55	500




固定座 MOUNT 13-85-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
HPM−56A	60.2	200




固定座 MOUNT 13-85-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

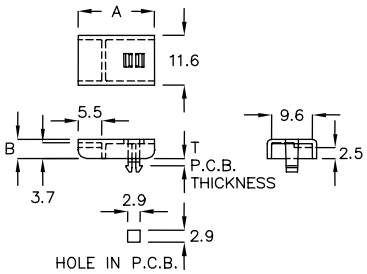


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
MMF−01	18.0	4.5	1.4~1.6	1000



固定座 MOUNT 13-85-4

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

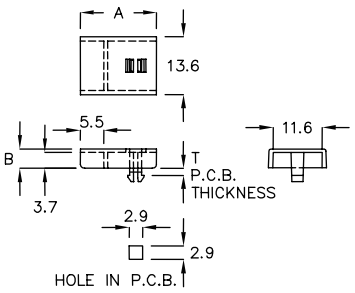


PART NO	A	B	T P.C.B. THICKNESS	PACKAGE
MMF−1K	18.0	4.5	1.4~1.6	1000



固定座 MOUNT 13-85-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

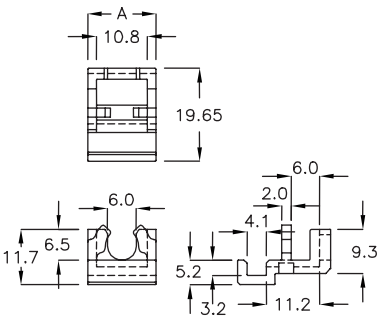

PART NO	A	PACKAGE
MMFA−20T	14.4	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNT — 13-86-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MRAT−15M	36.65	31.9	100

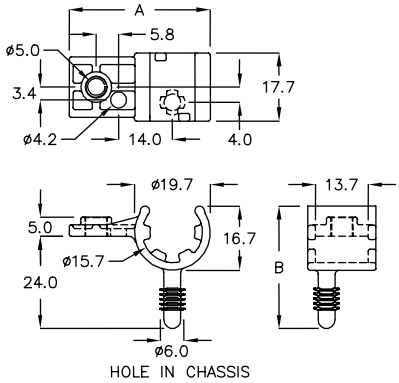




固定座 MOUNT — 13-86-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

PART NO	A	B	PACKAGE
MGL−26A	26.1	17.7	500







固定座 MOUNT — 13-86-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

PART NO	A	B	PACKAGE
MMS−20	8.4	20.0	1000







保護蓋 HOLE PROTECTOR — 13-86-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

PART NO	A	B	C	PACKAGE
MHY−01	ø16.0	1.5	6.3	1000






固定座 MOUNT — 13-86-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

PART NO	A	B	C	D	T P.C.B THICKNESS	PACKAGE
★ CNZA−8C	8.2	28.85	30.0	20.0	3.09	500

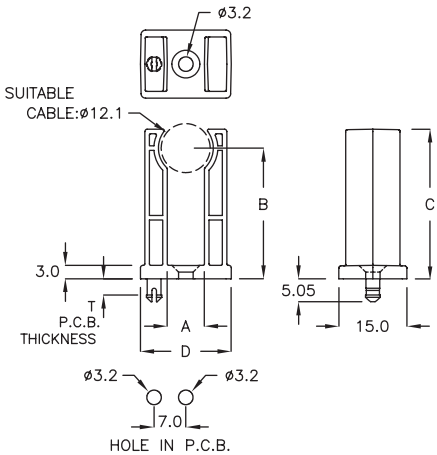


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNT 13-87-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2 COUNTERSUNK SCREW




PART NO	A	PACKAGE
MMCA-14A	17.5	500



固定座 MOUNT 13-87-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




PART NO	A	PACKAGE
MZT-25	25.0	1000



塞頭 HOLE PLUG 13-87-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
P-1	ø12.5	2.0	1000




定位銷 PIN PLANAR LOCATOR 13-87-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
P-5	ø8.5	12.0	1000




保護蓋 PIN HEADER PROTECTOR 13-87-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	D	PACKAGE
MGX-6AK	4.95	2.35	0.56	3.3	2000
MGX-6BM	7.5	2.35	0.56	5.84	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保護蓋 PIN HEADER PROTECTOR — 13-88-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MGX-6CR	6.0	3.4	1.6	2000



保護蓋 PIN HEADER PROTECTOR — 13-88-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MGX-7BL	12.6	4.6	7.5	2000



保護蓋 PIN HEADER PROTECTOR — 13-88-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MGX-8CK	8.5	3.0	8.5	2000



保護蓋 PIN HEADER PROTECTOR — 13-88-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
MGX-8MS	12.5	4.35	8.1	2000



保護蓋 PIN HEADER PROTECTOR — 13-88-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

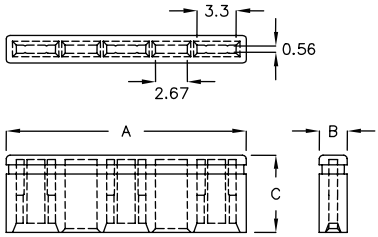


PART NO	A	B	C	PACKAGE
MGX-20FT	20.2	2.35	6.5	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



保護蓋 HOLE PROTECTOR 13-89-1

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

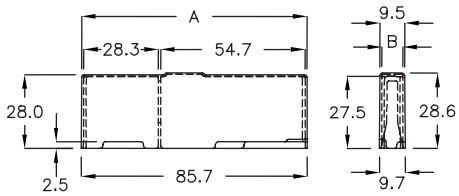


PART NO	A	B	PACKAGE
DXGF−85KB	85.5	7.9	100



保護蓋 HOLE PROTECT COVER 13-89-2

- MATERIAL: PC(UL)
- COLOR: BLACK

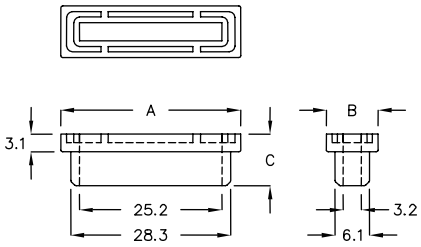


PART NO	A	B	C	PACKAGE
MDC−31A	31.8	9.1	9.1	500



保護蓋 HOLE PROTECTOR 13-89-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

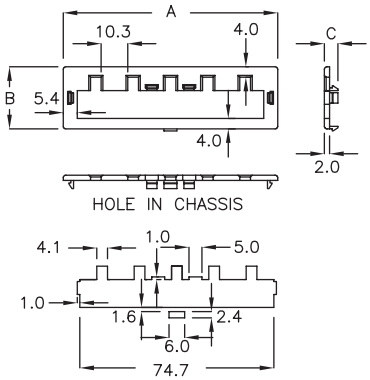


PART NO	A	B	C	PACKAGE
MPR−01	82.6	23.9	5.2	100



記憶卡保護蓋 MEMORY CARD COVER 13-89-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

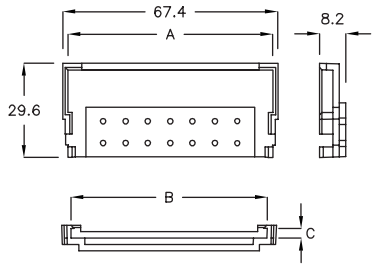



PART NO	A	B	C	PACKAGE
VFA−02	64.5	61.5	3.1	100



提把 HANDLE 13-89-5

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK



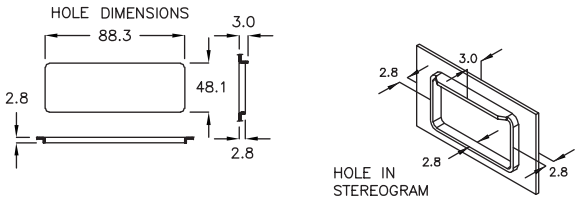


PART NO	A	B	C	PACKAGE
MKP−91	92.3	52.3	41.7	50

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

紙箱固定座 CARTON BOX HANDLE — 13-90-1



- MATERIAL: PP
- COLOR: NATURAL

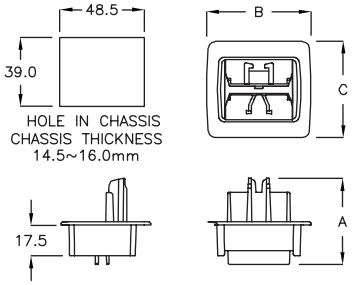


PART NO	A	B	C	PACKAGE
MKK-82A	50.0	59.0	54.0	50

紙箱固定座 CARTON BOX HANDLE — 13-90-2



- MATERIAL: PP
- COLOR: NATURAL

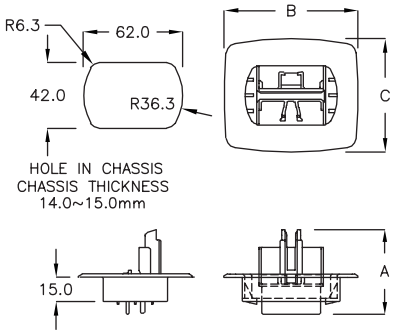


PART NO	A	B	C	PACKAGE
MKK-81DZ	51.2	81.0	69.0	50

紙箱固定座 CARTON BOX HANDLE — 13-90-3




- MATERIAL: PP
- COLOR: NATURAL

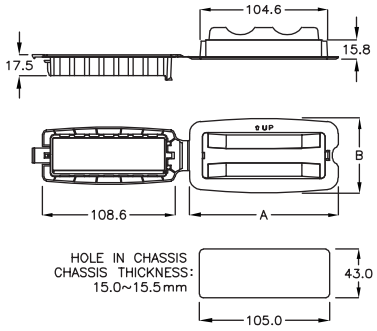


PART NO	A	B	PACKAGE
MKK-92	122.0	62.0	10

保護蓋 COVER — 13-90-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

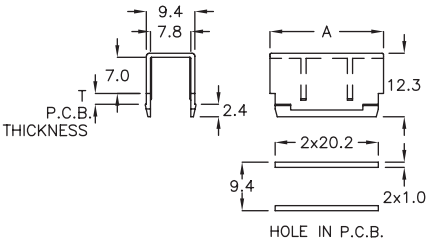


	PART NO	A	T P.C.B. THICKNESS	PACKAGE
★	LHP-22	22.0	2.0	500

端子座保護蓋 TERMINAL COVER — 13-90-5



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

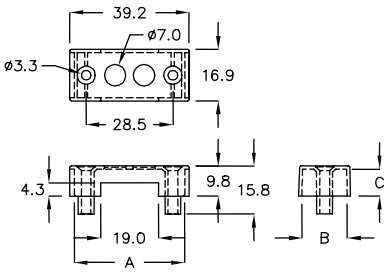


PART NO	A	B	C	PACKAGE
MD-39	36.2	14.9	8.8	100

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




端子座保護蓋 TERMINAL COVER — 13-91-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

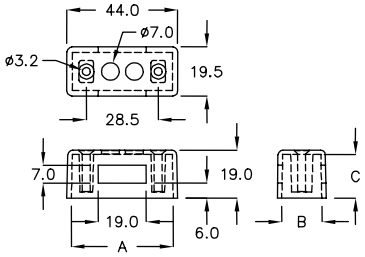


PART NO	A	B	C	PACKAGE
MD−44	40.4	15.9	17.2	100




端子座保護蓋 TERMINAL COVER — 13-91-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

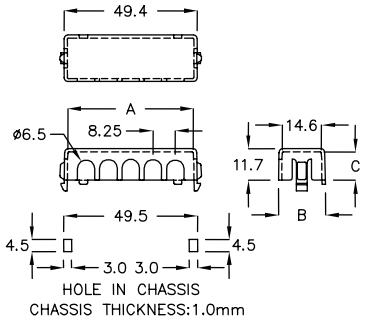


PART NO	A	B	C	PACKAGE
MDW−49A	46.6	17.4	10.5	100




端子座保護蓋 DC CONNECTOR COVER — 13-91-3

- MATERIAL: PC(UL)
- COLOR: CLEAR




PART NO	A	B	C	PACKAGE
HDP−01	27.1	23.9	14.0	200



端子固定座 MOUNT — 13-91-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
TGB−25K	25.0	12.0	8.0	500



插頭絕緣套 SOCKET INSULATOR HOLDER - 13-91-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

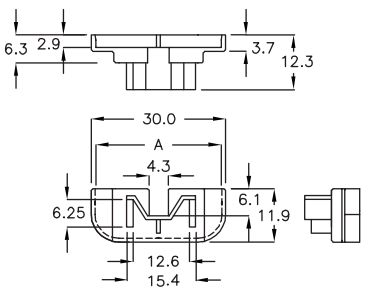


PART NO	A	PACKAGE
MTY−01	28.0	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

插頭絕緣套 SOCKET INSULATOR HOLDER - 13-92-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
MTY-3F	26.7	200

固定座 MOUNT 13-92-2



- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
MPG-15A	15.7	500

固定座 MOUNT 13-92-3




- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
MPG-15WF	15.7	500

固定座 MOUNT 13-92-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	PACKAGE
MWJ-16	16.0	1000

銷 PIN 13-92-5




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
PIN-13	13.0	ø2.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定帶 STRAP TIE — 13-93-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

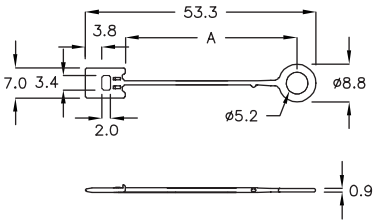


PART NO	A	PACKAGE
BFA-40	39.6	500



固定帶 STRAP TIE — 13-93-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	PACKAGE
TPW-40A	40.5	2000




固定座 MOUNT — 13-93-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MMJA-22A	19.2	22.3	200



固定座 MOUNT — 13-93-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB-03	15.0	3.0	1000



固定座 MOUNT — 13-93-5


- MATERIAL: PC(UL)
- COLOR: BLACK




PART NO	A	B	PACKAGE
MPB-12FC	7.5	2.3	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

固定座 MOUNT 13-94-1




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB-3A	11.0	3.0	500

固定座 MOUNT 13-94-2




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB-8ST	9.2	2.7	1000

固定座 MOUNT 13-94-3




- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK




PART NO	A	B	C	E	F	G	PACKAGE
MPB-9FT	9.0	2.0	9.0	4.65	9.5	1.1	1000
MPB-10GK	10.0	2.0	9.7	4.2	10.2	1.0	

固定座 MOUNT 13-94-4




- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB-4A	30.2	2.95	500

固定座 MOUNT 13-94-5



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB-15GK	13.6	2.2	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




固定座 MOUNT — 13-95-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MPB−18MD	21.4	0.45	500



固定座 MOUNT — 13-95-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
MPB−18PQ	21.4	0.45	500




固定座 MOUNT — 13-95-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

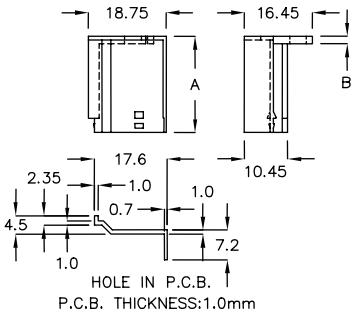


PART NO	A	B	PACKAGE
MPB−18CR	23.2	1.8	500




固定座 MOUNT — 13-95-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB−29LY	9.2	2.7	500



固定座 MOUNT — 13-95-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	PACKAGE
MPB−30KM	9.2	2.7	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-96-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

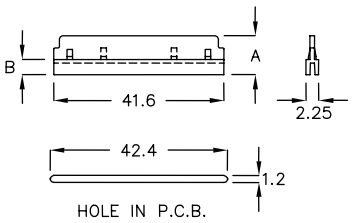


PART NO	A	B	PACKAGE
MPB−42QW	6.8	2.7	500




固定座 MOUNT 13-96-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	D	PACKAGE
MPB−21HT	8.5	2.9	20.9	6.5	1000




固定座 MOUNT 13-96-3

- COLOR: NATURAL




PART NO	MATERIAL	A	B	C	D	E	F	G	PACKAGE
MPB−27SQ	N66 94V−0	8.25	2.15	27.6	4.9	29.5	22.3	4.6	500
MPB−30J	N66 94V−0	11.55	2.95	30.8	4.8	32.4	24.6	4.9	
MPB−32HW	N66 94V−0	9.05	2.95	32.8	4.9	33.0	25.8	4.6	
MPB−32K	N66+30%FRP	11.55	2.95	32.8	4.9	33.0	25.8	4.6	



固定座 MOUNT 13-96-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
MPB−11TN	7.2	2.8	12.0	1.6	1000
MPB−11GL	14.0	2.8	12.0	1.6	500


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.





固定座 MOUNT 13-97-1

MPB-15M
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

MPB-23R/MPB-23KD
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK



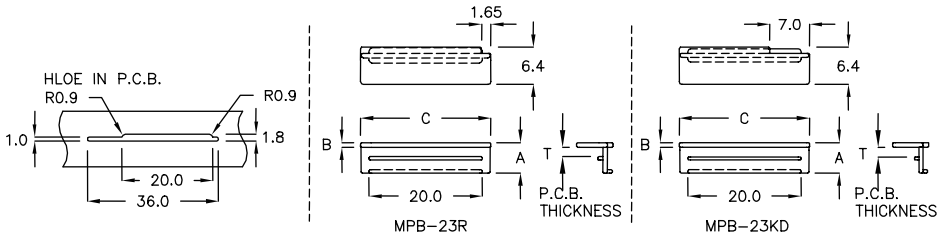

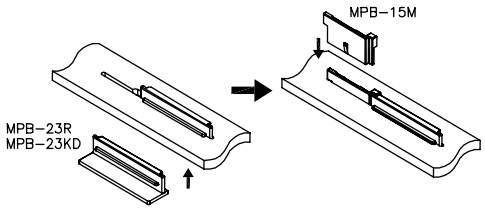


PART NO	A	B	C	T CHASSIS THICKNESS	PACKAGE
MPB–15M	7.4	2.8	15.0	1.6	1000
MPB–23R	5.3	0.8	23.0	1.6	500
MPB–23KD	5.3	0.8	23.0	1.6	




固定座 MOUNT 13-97-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

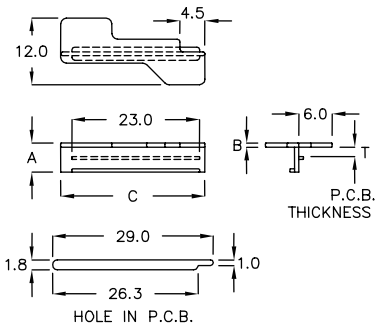


PART NO	A	B	C	T P.C.B. THICKNESS	PACKAGE
MPB–26CK	5.3	0.7	26.0	1.6	500



固定座 MOUNT 13-97-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
MPB–35TK	21.1	0.8	33.5	500

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT — 13-98-1

- MATERIAL: PC(UL)
- COLOR: BLACK
- ADHESIVE TAPE: JUSTAPE




PART NO	A	B	PACKAGE
HCHA-18M	4.8	0.9	1000



固定座 MOUNT — 13-98-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

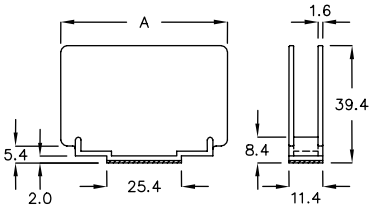


PART NO	A	PACKAGE
MPBH-56K	56.5	100



固定座 MOUNT — 13-98-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

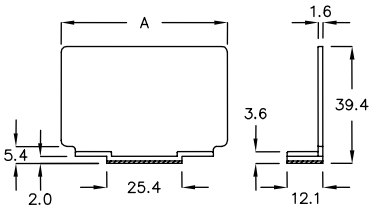


PART NO	A	PACKAGE
MPBL-56A	56.5	100



固定座 MOUNT — 13-98-4

- MATERIAL: ABS+PC
- COLOR: BLACK
- ADHESIVE TAPE: 3M

NEW




PART NO	A	B	C	D	PACKAGE
★ MPBL-54B	54.5	2.0	9.8	9.5	100
★ MPBL-54E	54.5	2.0	9.8	4.5	



固定座 MOUNT — 13-98-5

- MATERIAL: ABS+PC
- COLOR: BLACK
- ADHESIVE TAPE: 3M

NEW




PART NO	A	B	C	D	PACKAGE
★ MPBL-54C	54.5	10.5	9.8	18.0	100
★ MPBL-54D	54.5	5.5	9.0	13.0	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT 13-99-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

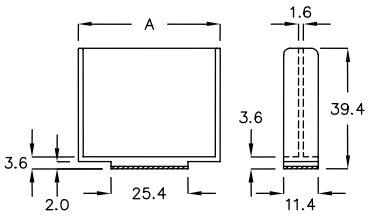


PART NO	A	PACKAGE
MPBT-46C	46.8	100



固定座 MOUNT 13-99-2

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

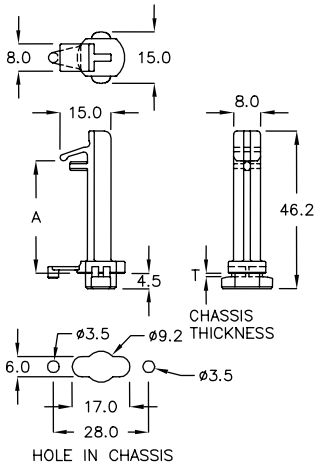


INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

PART NO	A	T CHASSIS THICKNESS	PACKAGE
MGS-46CH	32.9	1.0	100



PIN 固定座 PIN MOUNT 13-99-3

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
DC-01	2.7	500



PIN 固定座 PIN MOUNT 13-99-4

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
DC-02	2.7	500



PIN 固定座 PIN MOUNT 13-99-5

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
DC-2Q	2.6	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



PIN 固定座 PIN MOUNT — 13-100-1

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
DC−2RM	2.7	200



PIN 固定座 PIN MOUNT — 13-100-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
DC−3F	2.6	200



PIN 固定座 PIN MOUNT — 13-100-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

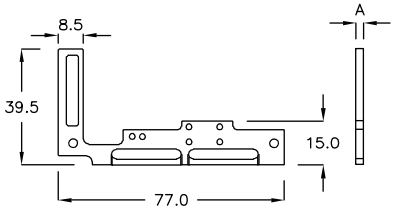


PART NO	A	PACKAGE
DC−2H	2.6	200



PIN 固定座 PIN MOUNT — 13-100-4

- MATERIAL: PPS
- FLAME CLASS: 94V-0
- COLOR: BLACK

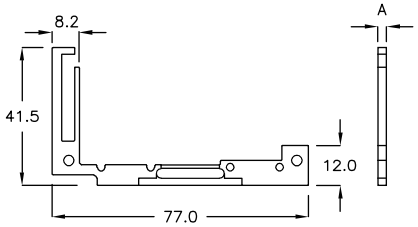


PART NO	A	PACKAGE
DC−4LS	2.7	200



PIN 固定座 PIN MOUNT — 13-100-5

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

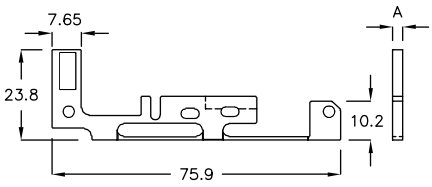


PART NO	A	PACKAGE
DC−4QF	2.6	200

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



PIN 固定座 PIN MOUNT — 13-101-1

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

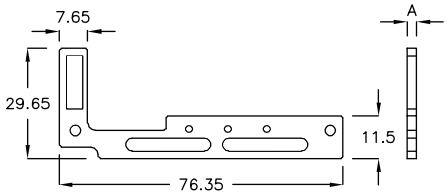


PART NO	A	PACKAGE
DC−4RK	2.6	200



PIN 固定座 PIN MOUNT — 13-101-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	PACKAGE
DC−5MA	2.7	200



PIN 固定座 PIN MOUNT — 13-101-3

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
DC−6CN	2.7	200



PIN 固定座 PIN MOUNT — 13-101-4

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

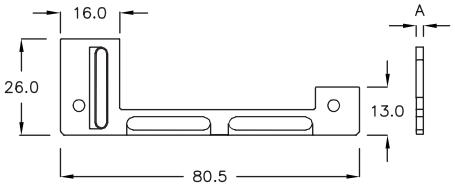


PART NO	A	PACKAGE
DC−7XK	2.6	200



燈管固定座 LAMP SADDLE — 13-101-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

NEW

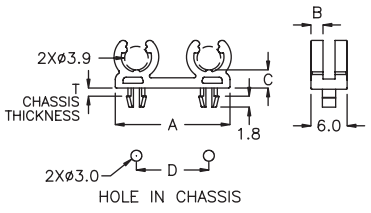


PART NO	A	B	C	D	T CHASSIS THICKNESS	PACKAGE
★ FQA−19	19.0	2.0	3.0	12.0	1.25	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



燈帽 LAMP TUBE CAP 13-102-1

- MATERIAL: PC
- FLAME CLASS: 94V-0
- COLOR: WHITE




FOR T9 LAMP				
PART NO	A	B	C	PACKAGE
T9A-3C	20.0	18.8	7.1	100



墊圈 GASKET 13-102-2

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK

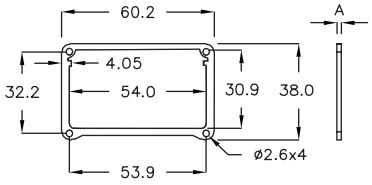


PART NO	A	PACKAGE
LRA-60	1.7	500



墊片 SILICONE PAD 13-102-3

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK

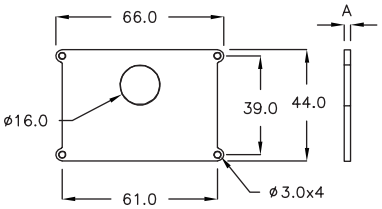


PART NO	A	PACKAGE
GCA-66	0.8	200



膠條 SILICONE TIE 13-102-4

- MATERIAL: SILICONE
- COLOR: BLACK




PART NO	A	PACKAGE
LPL-2D	ø1.0	500



固定座 MOUNT 13-102-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK

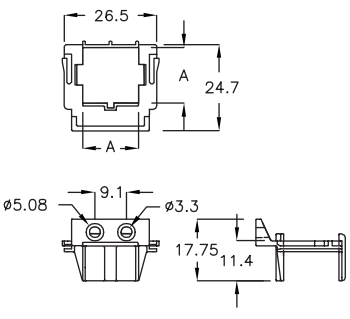

PART NO	A	PACKAGE
MPW-24Q	16.0	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT — 13-103-1

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




PART NO	A	B	PACKAGE
★ MDD-20A	20.4	8.6	500



固定座 MOUNT — 13-103-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




PART NO	A	B	C	PACKAGE
MDD-21H	21.5	19.0	1.5	500



防塵蓋 COVER — 13-103-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	C	PACKAGE
DUA-103C	84.4	103.2	97.0	20
DUA-105K	84.4	105.2	98.9	



固定座 MOUNT — 13-103-4

- MATERIAL: ABS+PC(UL)
- FLAMECLASS: 94V-0
- COLOR: BLACK

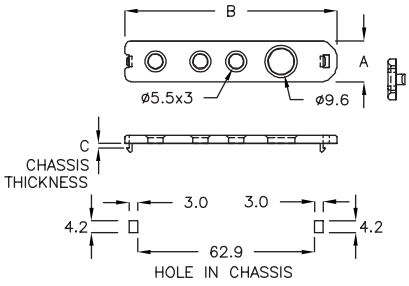


PART NO	A	B	C CHASSIS THICKNESS	PACKAGE
MGW-75	14.6	75.0	1.6	100



固定帶 STRAP MOUNT — 13-103-5

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK




PART NO	A	PACKAGE
DHM-25A	16.7	1000


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



固定座 MOUNT — 13-104-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



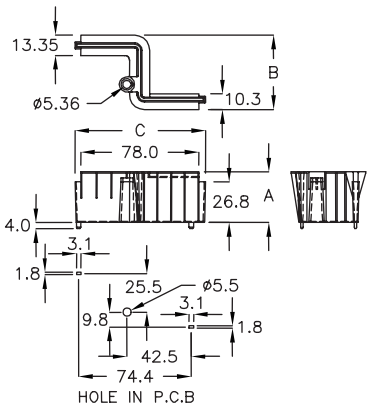


PART NO	A	B	C	PACKAGE
MPV-86GT	33.5	49.15	86.25	50



電源保護蓋 COVER — 13-104-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

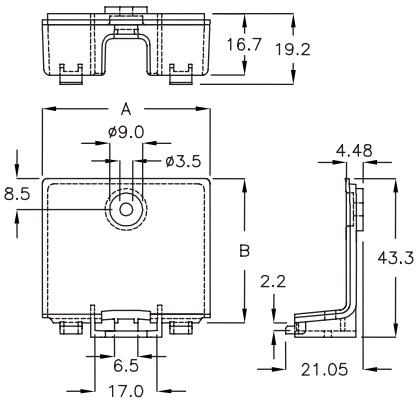


PART NO	A	B	PACKAGE
MXF-44GN	45.7	39.35	20



電源保護蓋 COVER — 13-104-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

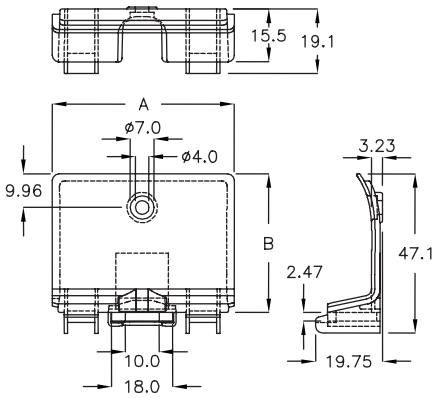


PART NO	A	B	PACKAGE
MXF-53TK	53.7	41.0	20




光纖固定座 OPTICAL FIBER MOUNT — 13-104-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

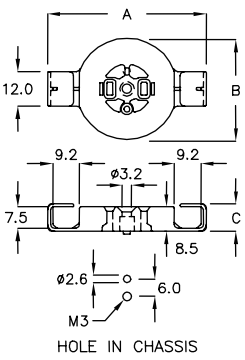

PART NO	A	B	C	PACKAGE
VVC-55F	54.8	ø35.0	9.5	200


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



CPU 插座蓋 CPU SOCKET COVER — 13-105-1

- MATERIAL: PC(UL)
- COLOR: BLACK

PART NO	A	B	PACKAGE
HFX-61CP	61.0	44.0	100

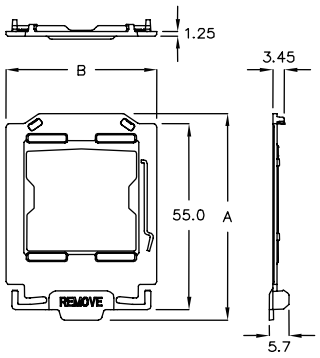




電池盒 BATTERY BRACKET — 13-105-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 SCREW

PART NO	A	B	PACKAGE
MVJ-65H	73.5	55.8	50

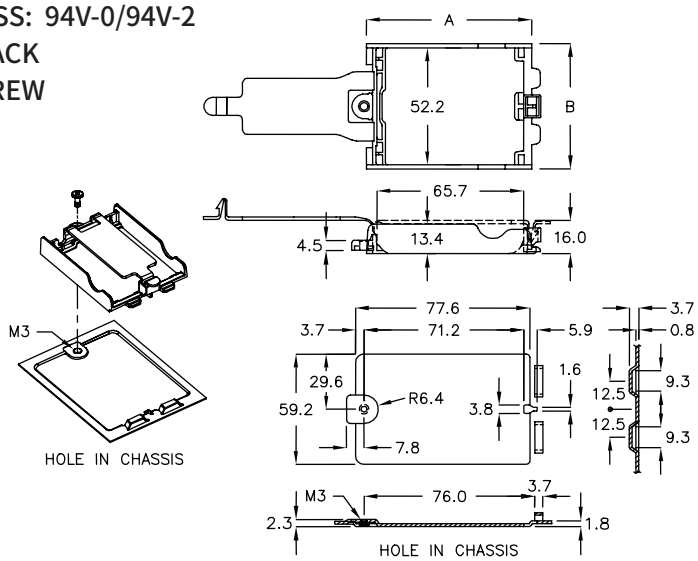


提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

14

五金

WIRE CLIPS, TEST PIN



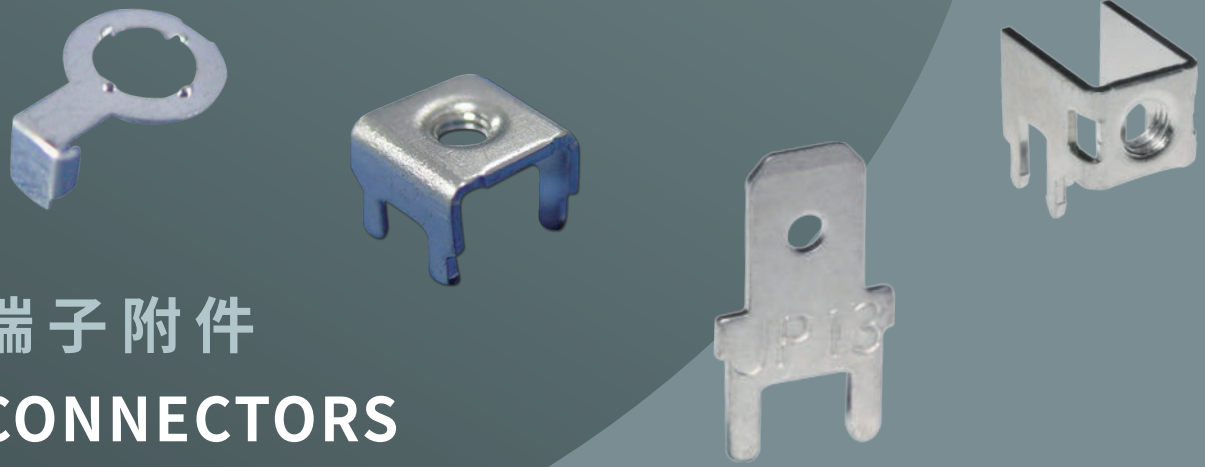


端子附件

CONNECTORS




端子隔離座 CONNECTOR SADDLE 14-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




PART NO	A	B	PACKAGE
P-2	8.7	3.5	1000
P-2C	8.7	4.5	
P-2KT	8.7	6.0	

TO BE USED WITH P.G. PART JH-8




測試點 TEST PIN 14-2-2

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- COLOR: GOLD
- HOLE IN P.C.B.: Φ0.9~Φ1.0




PART NO	A	B	C	PACKAGE
JT-0	9.5	8.1	ø2.8	1000
JT-1S	10.65	8.75	ø3.8	



測試點 TEST PIN 14-2-3

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- PLASTIC MATERIAL: PBT
- COLOR: RED,YELLOW,GREEN BLUE,BLACK,WHITE
- HOLE IN P.C.B.: Φ0.9~Φ1.0




PART NO	A	C	D	PACKAGE
JT-1P	5.0~6.0	ø3.1	2.2	1000



測試點 TEST PIN 14-2-4

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- PLASTIC MATERIAL: PBT
- COLOR: GOLD,YELLOW
- HOLE IN P.C.B.: Φ0.9~Φ1.0




PART NO	A	C	D	PACKAGE
JT-1Q	3.6~4.0	ø3.1	3.3	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



測試點 TEST PIN 14-3-1

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- COLOR: GOLD
- HOLE IN P.C.B.: Φ0.9~Φ1.0




PART NO	A	B	C	PACKAGE
JT−1N	10.2	8.55	ø3.3	1000



測試點 TEST PIN 14-3-2

- MATERIAL: BRASS
- PLATING: GOLD
- COLOR: GOLD




PART NO	A	B	C	D	F	PACKAGE
JT−8	7.9	4.7	ø2.2	ø2.5	ø1.0	1000



測試點 TEST PIN 14-3-3

- MATERIAL: BRASS
- PLATING: GOLD
- COLOR: GOLD




PART NO	A	B	C	D	F	PACKAGE
JT−13	13.0	3.45	ø2.2	ø2.5	ø0.9	1000




測試點 TEST PIN 14-3-4

- MATERIAL: BRASS
- PLATING: TIN




PART NO	A	B	C	D	E	F HOLE IN P.C.B.	PACKAGE
JT−08D	8.5	2.0	ø1.0	ø1.8	2.0	ø1.05	1000
JT−9A	9.5	1.0	ø1.0	ø1.8	5.0	ø1.05	
JT−9DM	9.0	2.5	ø2.0	ø2.8	2.0	ø2.05	
JT−10	10.0	2.0	ø1.04	ø1.8	4.5	ø1.05	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




端子 CONNECTOR 14-4-1

- MATERIAL: BRASS
- PLATING: TIN

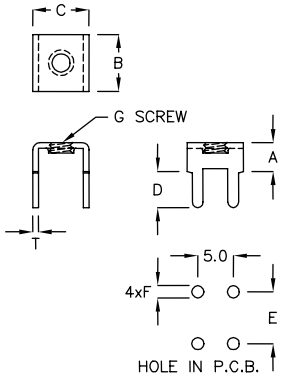


PART NO	A	B	C	D	E	F	G SCREW	T	PACKAGE
JH-4A	4.0	7.9	7.9	2.5	7.2	ø1.75	M3	0.8	500
JH-4	4.0	7.9	7.9	5.0	7.2	ø1.75	M3	0.8	
JH-4L	8.5	9.2	11.2	4.0	10.1	ø1.8	M4	1.0	200
JH-04K	8.5	9.0	11.1	4.0	10.15	ø1.8	M5	1.0	
JH-5	5.0	9.2	11.2	4.0	10.15	ø1.85	M4	1.0	500




端子 CONNECTOR 14-4-2

- MATERIAL: BRASS
- PLATING: TIN
- C: SCREW

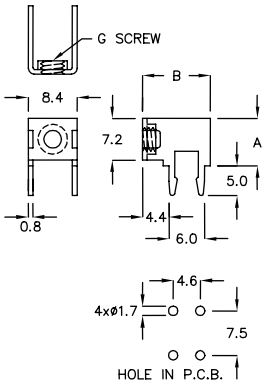


PART NO	A	B	G SCREW	PACKAGE
JH-8	8.0	11.4	M4	500
JH-8M3	8.0	11.4	M3	

TO BE USED WITH P.G. PART P-2




端子 CONNECTOR 14-4-3

- MATERIAL: BRASS
- PLATING: TIN




PART NO	A	F	T	PACKAGE
JP-13T	13.1	ø1.4	0.8	2000




端子 CONNECTOR 14-4-4

- MATERIAL: BRASS
- PLATING: TIN




PART NO	A	T	PACKAGE
JP-14A	14.1	0.5	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




端子 CONNECTOR 14-5-1

- MATERIAL: BRASS
- PLATING: TIN




PART NO	A	B	D	E	F	G	H	T	PACKAGE
JP−14B	13.7	10.2	ø1.7	5.0	ø1.48	8.2	6.3	0.8	2000
JP−14C	14.1	10.7	ø1.8	5.0	ø1.43	8.6	6.3	0.8	
JP−16B	16.2	12.2	ø1.6	5.0	ø1.38	8.8	6.3	0.8	




端子 CONNECTOR 14-5-2

- MATERIAL: BRASS
- PLATING: TIN




PART NO	A	B	D	E	F	G	H	T	PACKAGE
JP−14P	14.1	10.6	ø1.8	5.0	ø1.5	8.5	6.4	0.8	1000




端子 CONNECTOR 14-5-3

- MATERIAL: BRASS
- PLATING: TIN




PART NO	A	B	D	F	G	H	PACKAGE
JP−14	14.0	10.2	ø2.0	ø1.35~ø1.4	8.0	6.4	2000
JP−16A	16.3	12.3	ø1.6	ø1.7	9.0	6.5	



端子 CONNECTOR 14-5-4

- MATERIAL: BRASS
- PLATING: TIN

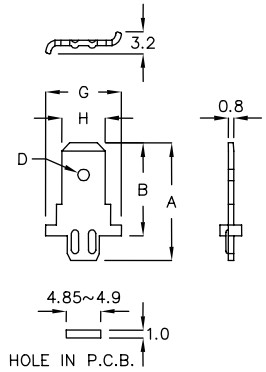


PART NO	A	B	D	G	H	PACKAGE
JP−16D	16.35	12.75	ø1.7	11.1	6.4	2000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



電線固定片 LOCKING CABLE CLIP — 14-6-1

- MATERIAL: SPTE+HEAT SHRINKING TUBE
  or SECC+ HEAT SHRINKING TUBE
- COLOR: BLACK

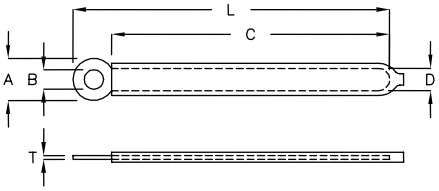


PART NO	A	B	C	D	L	T	PACKAGE
WC−1A	7.6	3.1	27.5	1.6	35.6	0.3	1000
WC−1AM	5.6	2.8	30.1	1.7	35.6	0.6	
WC−1AL	7.6	3.1	27.5	1.6	35.6	0.6	
WC−1	8.0	3.4	33.5	4.0	41.0	0.3	
WC−2	8.0	3.4	48.2	4.0	55.8	0.3	
WC−2A	8.0	3.4	52.5	3.0	60.0	0.3	
WC−3	8.0	4.1	48.2	4.0	56.0	0.3	
WC−3L	8.0	4.1	78.5	4.0	86.0	0.5	
WC−6	8.0	3.4	52.3	3.0	60.0	0.5	



電線固定片 LOCKING CABLE CLAMP — 14-6-2

- MATERIAL: SPTE
- ADHESIVE TAPE: 3M

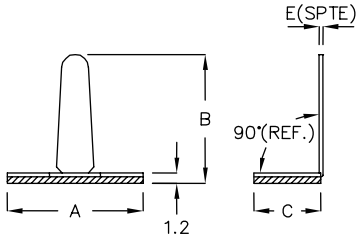


PART NO	A	B	C	E	PACKAGE
JFW−4L	15.1	14.3	7.7	0.4	500



電線固定片 LOCKING CABLE CLAMP — 14-6-3

- MATERIAL: SPTE+SPONGE
- ADHESIVE TAPE: 3M




PART NO	A	PACKAGE
JFW−7	18.5	500



接地線夾 GROUNDING CABLE CLAMP — 14-6-4

- MATERIAL: SPTE




PART NO	A	B	C	E	F	G	H	CABLE DIA	PACKAGE
FN−010	8.6	20.0	11.3	ø4.2	0.6	ø4.2	5.0	ø5.8	500
FN−011	8.5	18.7	11.0	ø4.2	0.3	ø4.2	5.0	ø4.8	

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




接地線夾 GROUNDING CABLE CLAMP — 14-7-1

- MATERIAL: SPCC (FN-005,FN-007)
- MATERIAL: STEEL (FN-017)
- PLATING: NICKEL

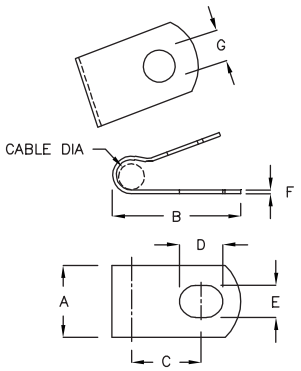


PART NO	A	B	C	D	E	F	G	CABLE DIA	PACKAGE
FN−005	10.1	18.4	10.25	6.0	ø4.5	0.5	ø4.4	ø3.0~ø2.8	500
FN−007	9.8	18.5	10.0	6.0	ø4.5	0.5	ø4.4	ø3.7~ø3.9	



接地端子 GROUNDING CONNECTOR — 14-7-2

- MATERIAL: PHOSPHOR BRONZE
- PLATING: TIN

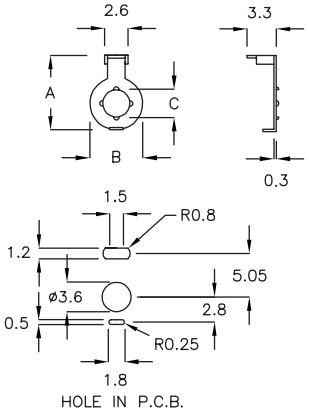


PART NO	A	B	C	PACKAGE
JG−6L	8.5	ø5.9	ø3.1	2000
JG−06A	8.5	ø5.9	ø3.6	



電晶體固定片 TRANSISTOR CLIP — 14-7-3

- MATERIAL: SUS301

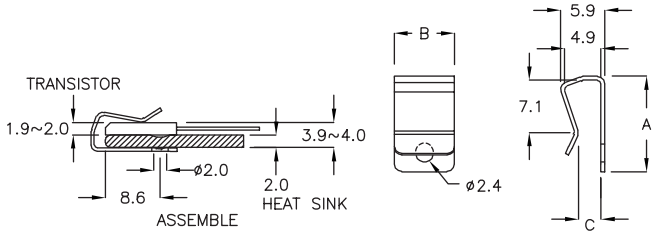

PART NO	A	B	C	PACKAGE
IRK−12H	12.7	8.0	3.0	1000

提醒：本公司產品之材料、尺寸、規格、公差及配合件要求，以產品承認書為主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

總公司
115027 台北市南港區八德路四段768巷1弄8號

HEAD OFFICE:
NO.8, ALLEY 1, LANE 768, SEC.4 PATEH RD.,
NANGAN DIST., TAIPEI, 115027 TAIWAN
TEL: 886-2-27885767 FAX: 886-2-27885768
E-MAIL: sales@pingood.com.tw
http://www.pingood.com.tw

中壢工廠
320023 桃園市中壢區東園路21號

ZHONGLI FACTORY:
No.21, DONGYUAN RD., ZHONGLI DIST.,
TAOYUAN CITY, 320023 TAIWAN

品基電子(東莞)有限公司
廣東省東莞市塘廈鎮果嶺路1號

DONGGUAN FACTORY:
No.1, GUO LING RD., TANG XIA,
DONGGUAN, GUANGDONG, CHINA
TEL: 86-769-87910231 FAX: 86-769-87910232
E-MAIL: pj@pingood.com.cn

蘇州品基電子科技有限公司
江蘇省蘇州市吳中區橫涇街道天鵝蕩路2986號

SUZHOU FACTORY:
No.2986, TIAN EDANG RD., HENGJING TOWN,
WUZHONG, SUZHOU JIANGSU PROVINCE, CHINA
TEL: 86-512-65629123 FAX: 86-512-65611221
E-MAIL: spj@pingood.com.cn


SINGAPORE BRANCH

UNITRONIC COMPONENTS PTE.LTD
TEL: 65-62847555 FAX: 65-62842877

PINGOOD (THAILAND) CO., LTD NEW

147, Moo.1, Chonburi-Ban Bueng Road., Map Phai,
Ban Buen District, Chonburi 20170



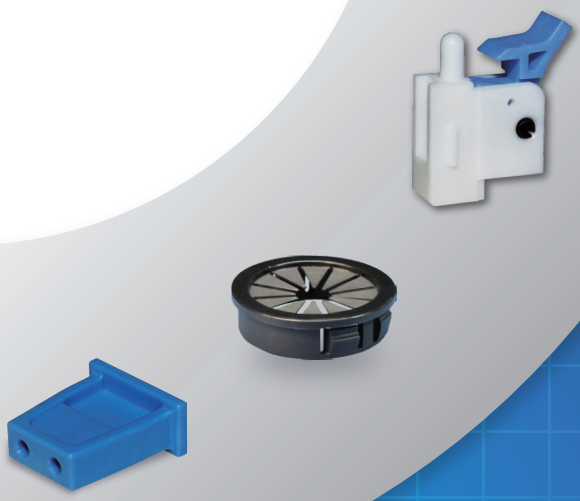

www.pingood.com.tw