# PLASTIC ELECTRONIC PRODUCTS

## 电子电脑精密零件
## 固扣件专业设计制造厂

# 品基 品固

2026
45th

# PINGOOD

IATF 16949 ISO 9001 ISO 14001 QC080000

共同设计开发制造、共同设计服务制造 JDVM,JDSM

**PINGOOD ENTERPRISE CO., LTD.**
NO.8,ALLEY 1,LANE 768,SEC.4 PATEH RD.,NANGAN DIST.,TAIPEI,115027 TAIWAN
TEL: 886-2-27885767 FAX: 886-2-27885768 http://www.pingood.com.tw

品基电子(东莞)有限公司
**FACTORY:** DONGGUAN,CHINA

苏州品基电子科技有限公司
**FACTORY:** SUZHOU,CHINA

品固企业股份有限公司 台北公司
**OFFICE:** TAIPEI,TAIWAN

品固企业股份有限公司 中坜工厂
**FACTORY:** ZHONGLI,TAIWAN

## 公司简介

**公司名称:** 品基电子(东莞)有限公司
(苏州品基，品固企业)
**设立时间:** 1982年6月15日 (成立45年)
**资 本 额:** 港币278,000,00元
**地 址:** 广东省东莞市塘厦镇果岭路1号
**电 话:** 86-769-87910231
**传 真:** 86-769-87910232
**部门分类:** 业务部、研发部、财务部、生管部、模具制造部、品管部、MIS部门、ERP部门、总经理室、厂务部、资材部等。

## Company Profile

**Company:** PINGOOD Enterprise Co.,Ltd.
**Founded:** June 15 th, 1982.
(45 th Anniversary)
**Capital:** US$4,200,000.00
**Address:** NO.1,GUO LING RD., TANG XIA, DONGGUAN, GUANGDONG, CHINA
**Telephone :** 86-769-87910231
**FAX :** 86-769-87910232
**Department:** Sales&Marketing, R&D, Finance, Production, Molding, Q.C, MIS, ERP…etc.

**台北总公司面积：** 2800 平方公尺
**中坜工厂面积：** 16000 平方公尺
**中坜工厂地址：** 桃园市中坜区东园路21号
**品基东莞工厂面积：** 36000 平方公尺
**模具厂面积：** 800 平方公尺
**品基东莞工厂地址：** 广东省东莞市塘厦镇果岭路1号
**苏州品基工厂面积：** 12000平方公尺
**苏州品基工厂地址：** 江苏省苏州市吴中区横泾街道天鹅荡路2986号
**设备：** 射出成型机、CNC放电加工机、CNC线割机、CNC综合加工机等。
**实验室仪器：** 3D影像量测仪、X-Ray光谱仪、气相色谱质谱联用仪、环境实验机、影像量测仪、显微镜投影机、绘图机、万能破坏机、拉力机、自动测试机等。
**国内主要客户：** 各大股票上市上柜之电脑电子产品制造厂及相关产品制造商。
**国外主要客户：** DELL、HITACHI、SONY、HP、SHARP 等。
**海外行销：** 本公司海外行销遍及五大洲
**产品认证：** UL
**公司认证：** ISO9001、IATF 16949。
**工厂认证：** ISO9001、ISO14001、QC080000、IATF 16949。

***所有尺寸及规格均以本公司之产品承认书为主，目录尺寸仅供参考**

*目录产品未标示单位皆采 mm 公制单位
*如有其他颜色需求，欢迎来电询问
*目录建议装配方式，仅供参考
*目录之包装数量，仅供参考
*标示 NEW ，★ 为新产品
*欢迎各界大鉴不吝来电赐教，本公司定当竭诚为您服务

***发行日期：**2025年12月31日

**Taipei ,Taiwan HQ**: 2,800 m²
**Company Owned Factory :**
**Zhongli Dist,Taiwan** : 16,000 m²
**Dongguan ,China** : 36,000 m²
**Mold Factory Area**: 800 m²
**Suzhou ,China** : 12,000 m²
**Facilities**: In-house Design, In-house tool shop, Injection line
**Sales Territory**: Worldwide
**Certificate**: UL, ISO9001, ISO14001, QC080000, IATF 16949

*This catalogue is only subsidiary for your reference; all the measurments and dimensions are according to the "DATA SHEET" issued by PINGOOD.
*All measures are in metric unit of "mm"scale except noted.
*If you have other color reguest, Kindly feel free to contant with US.
*Catalogue assembly methods for reference only.
*Catalogue package amounts for reference only.
*The marking NEW , ★ appearing on a new product.
*Detailed information will be provided upon request, please kindly contact us for the best customer service, information is available via email at pingood@pingood.com.tw.

**Issue Date**: Dec.31 , 2025

QC080000
IATF 16949 ISO 9001 ISO 14001

# Our Strengths

## We Can Offer fast services, efficient solution and High standard of reliable Quality.

### Product:
More than 10,000 SKUs standard ready parts, Specialized in Custom parts as well.

### Manufacture:
In-house total solution from Design & tooling to mass production to offer appropriate delivery.

### Upgrade Facilities:
To meet compact design trend of small size product, Our mission to Provide the best equipment fulfill the customer's request.

### Marketing support:
General Catalogue, E-catalogue; Resource website: High visibility on sourcing from PINGOOD website.

www.pingood.com.tw

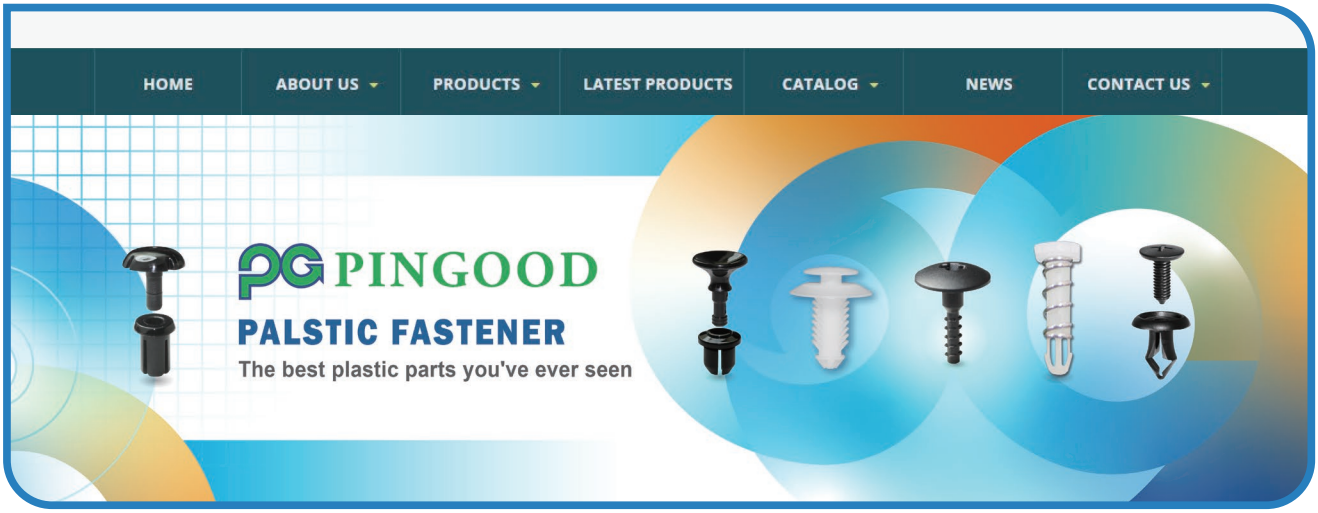

## 品固企业环境管理物质沿革

自2006年起，本公司所有产品已全面导入符合欧盟RoHS指令的要求，环保检测实验室亦同时成立。

2009年起，因应国际绿色组织提出卤素化合物对于人体及环境具有潜在危害的诉求，开始导入无卤素( Halogen Free, HF )产品。

2009年起，欧盟REACH法规公布，开始与供应商合作调查产品中化学成分，确保产品中不含REACH法规中所规范的高关注物质( Substance of Very High Concern, SVHC )。

2010年，鉴于国际间关注非洲地区所开采之冲突矿产(锡、金、钽、钨)于电子电机产品中的使用状况，品固企业产品中并不含上述成分，亦要求供应商需于材料承认阶段，即承诺产品中不可使用冲突矿产。

## ISO9001品质管理系统政策:

全员参与、客户满意、员工高兴、永续经营

品固企业致力于品质持续改善的过程，以符合ISO 9001品质管理系统之需求，为此目标我们必须提供最优等的产品和服务品质，来实现海内外广大客户群品质满意的保证。

## ISO14001环境管理系统政策:

节省能源减少废弃物、减低污染回收再利用

环境保护是品固企业身为地球公民一份子的重要责任。品固企业向其所有员工、客户及社会大众承诺，每一管理运作均以可靠的、符合环境保护的方式进行。制程中所产生的各项污染、废弃物的预防及减低，以及资源回收再利用，是我们对环境保护持续改善的主要方向。

## QC 080000产品无有害物质管理系统政策:

符合法规预防污染、绿色采购持续改善

面对当前全球环境保护趋势及各项环境保护法令之持续要求，品固企业持续以最新的技术及不间断之管理制度，善尽地球环境保护的一份心力，为社会及企业永续经营而努力，品固企业在设计初期便将环境管理物质纳入设计规划重点，严格要求供应链提供的原物料必须遵守国际相关环保法规，以及品固企业订定的环境管理物质技术标准以及管制内容。

## IATF 16949国际汽车品质管理系统:

客户满意、持续改善、预防生产、降低风险

确保品固展现对品质的承诺，达到持续性的改善，并以经济高效的方式为客户提供更优质的产品和服务，从产品设计、开发、生产到组装，以达到汽车工业严格的品质检验标准。

## 品固企业对碳排放减量之承诺

品固企业深知气候变迁是因人类活动产生大量温室气体，造成了地球温度的上升，做为地球公民的一份子，必须要善尽社会责任!

建立有效的碳/温室气体排放量的盘查，从减碳思维更进一步提升整体作业流程，每年可省62万度的电力，在生产过程中减少约300公吨的碳排放，对厂内制程进行碳管理。

品固企业推动碳/温室气体减量及改善计画，持续对环境保护尽一份心力，以提供环保、减碳的绿色产品给广大的海内外客户。

品固企业从2013推行节能至今，推动太阳能发电，对地球环保尽一份责任。

## Milestone of Green procurement of sources

2006 Meet RoHS Compliant.

2009 Meet REACH Requirement & Implement to Halogen Free products.

2010 Commit not to use conflict minerals.

## ISO9001 Quality Management System

We continue following the most effective quality management system to have continuous improvements in the quality of our product & service to achieve our domestic and global customers' satisfaction.

## ISO14001 Environmental Management System

Environmental Protection is all our responsibilities. PINGOOD has also adopted the internal controls to have ISO 14001 compliance from the resources and production processes to meet energy saving, reduction in waste and consumption of resources and minimize the impact to the environmental for a long term viability of businesses.

## QC 080000 Hazardous Substance Process Management System

Today, we are facing the ongoing global environmental protection requirements. PINGOOD has implemented with the latest technology and continuous improvement management system to meet the environmental friendly from the design phase, material from the supply chains, to mass production all comply with the updated global environmental regulations.

## IATF 16949 International Automobile Quality Management System

Our stream-line solution from design to mass production are qualified the high standard quality control in automotive industry supply chain.

## Carbon footprint Verification

In 2013, PINGOOD has conducted effective carbon/GHG emission verification to further enhance overall production process flow to reduce carbon emissions and done the extra environmental protection efforts toward a long term business goal.

By using solar energy we saved 620,000 kWh and reduced carbon emissions by 300 mt annually in Zhongli and Dongguan factory.

# 各项证书
Certificate

Certificate TW21/10406
The management system of
PINGOOD ENTERPRISE CO., LTD.
SGS
ISO 9001:2015
IAF

CERTIFICATE
DZCC
Hereby Grants To:
PinGood Enterprise (DongGuan) Co., Ltd.
Organization Credit Code: 91441900730487033N
Registered Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Business Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Has been assessed and found to be in accordance with the requirements of standard detailed below
GB/T 19001-2016/ISO 9001:2015
Scope
The Manufacture of Plastic Fittings for Electronic and Computer Equipment.
Certificate No.: 02/CN/2309016Q
Certificate Issue Date: 2023-11-07
Registration Expiration Date: 2026-11-10
The certified organization must pass surveillance audit to ensure the validity of the certificate.
IAF
IAS ACCREDITED
Authorized by :
MSCB-235

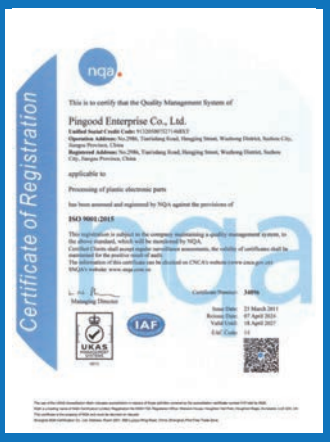
nqa
This is to certify that the Quality Management System of
Pingood Enterprise Co., Ltd.
applicable to
Processing of plastic electronic parts
has been assessed and registered by NQA against the provisions of
ISO 9001:2015
Certificate of Registration
UKAS
IAF

Certificate TW15/10786
The management system of
PINGOOD ENTERPRISE CO., LTD.
SGS
ISO 14001:2018
IAF

CERTIFICATE
DZCC
Hereby Grants To:
PinGood Enterprise (DongGuan) Co., Ltd.
Organization Credit Code: 91441900730487033N
Registered Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Business Address: Room 701,No.8 Building, No.1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, P.R. China
Has been assessed and found to be in accordance with the requirements of standard detailed below
GB/T 24001-2016/ISO 14001:2015
Scope
The Manufacture of Plastic Fittings for Electronic and Computer Equipment and Management of Related Environmental Aspects.
Certificate No.: 02/CN/2309016E
Certificate Issue Date: 2023-11-07
Registration Expiration Date: 2026-11-10
The certified organization must pass surveillance audit to ensure the validity of the certificate.
IAF
IAS ACCREDITED
Authorized by :
MSCB-235

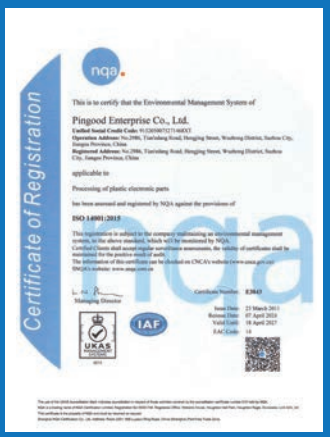
nqa
This is to certify that the Environmental Management System of
Pingood Enterprise Co., Ltd.
applicable to
Processing of plastic electronic parts
has been assessed and registered by NQA against the provisions of
ISO 14001:2015
Certificate of Registration
UKAS
IAF

Certificate IATF 0531538
Certificate TW21/10406
The management system of
PINGOOD ENTERPRISE CO., LTD.
SGS
IATF 16949:2016

IEC QUALITY ASSESSMENT SYSTEM (IECQ)
IECQ Certificate of Conformity
Hazardous Substance Process Management
Applicable to:
Customer specified requirements
PINGOOD ENTERPRISE (DONGGUAN) CO., LTD.
Building 6, Building 7,
Building 8, No.1, Guoling Road,
Tangxia Town,Dongguan City, Guangdong Province,
China
This Certificate is applicable for the following scope of activity:
Manufacture of plastic parts for electronic products
Issued by the Certification Body: NQA
Warwick House, Houghton Hall Park,
Houghton Regis, Dunstable,
Bedfordshire, LU5 5ZX
United Kingdom
Authorised person:
Laura Fletcher

IEC QUALITY ASSESSMENT SYSTEM (IECQ)
IECQ Certificate of Conformity
Hazardous Substance Process Management
Applicable to:
Customer specified requirements
Pingood Enterprise Co., Ltd.
No.2986, Tianlidong Road,
Hengjing Street, Wuzhong District,
Suzhou City, Jiangsu Province,
China
This Certificate is applicable for the following scope of activity:
Processing of plastic electronic parts
Issued by the Certification Body: NQA
Warwick House, Houghton Hall Park,
Houghton Regis, Dunstable,
Bedfordshire, LU5 5ZX
United Kingdom
Authorised person:
Laura Fletcher

nqa
This is to certify that the Quality Management System of
PINGOOD ENTERPRISE (DONGGUAN) CO., LTD.
Building 6, Building 7, Building 8, No. 1, Guoling Road, Tangxia Town, Dongguan City, Guangdong Province, 523726, China
(IATF UID: 0265,MX)
applicable to:
The design and manufacture of plastic injection moulded parts (fastener parts)
has been assessed and registered by NQA, Warwick House, Houghton Hall Park, Houghton Regis, Dunstable, LU5 5ZX, UK
against the provisions of
IATF 16949:2016
This registration is subject to the company maintaining a quality management system to the above standard, which will be monitored by NQA.
Certificate of Registration
Managing Director

# 产品开发 Product Development

Customer proposal ▶ Design Discuss Evaluation ▶ Drawing ▶ Customer confirmation ▶ Mockup ▶ Making mold ▶ Injection molding ▶ Verification acceptance

Sales and Marketing Division

Sales and Marketing Division

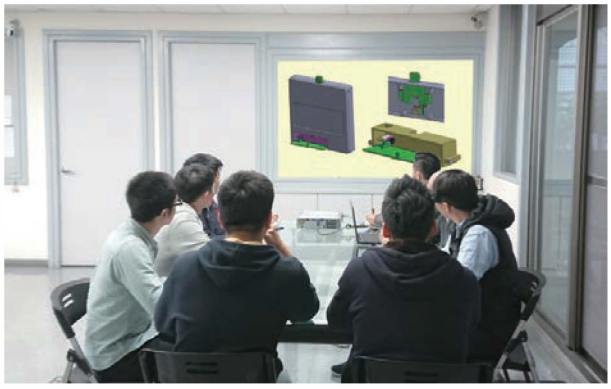

R&D Division

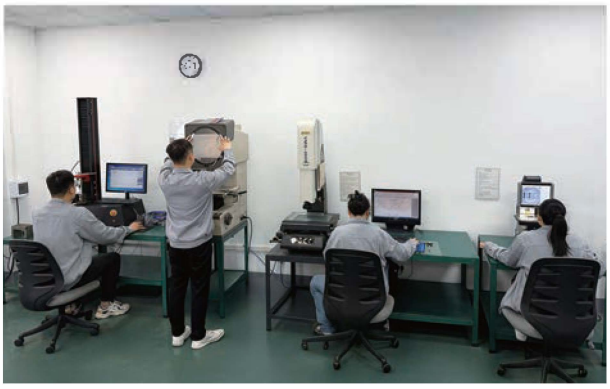

Reliability Verification

3D Printer

3D Printer

3D Printer Sample

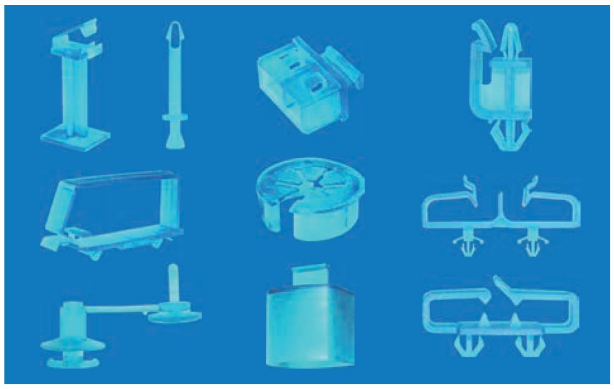

3D Printer Sample

# 模具部 Molding Division

Tooling DFM

Mold Assembly and Fitting

CNC Machining

FANUC CNC Machining

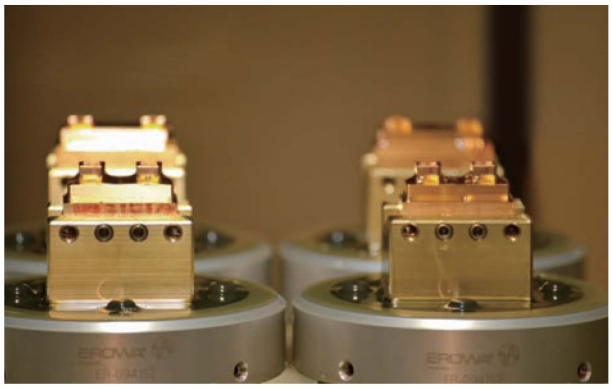

EROWA EDM SINKING SYS

Sodick CNC Electric Discharge Machine

Seibu Slow Wire Cutting Machine

Seibu Slow Wire Cutting Machine

# 成型部 Injection Division

Japan TOYO Fully Electric Injection Molding Machine

Japan TOYO Fully Electric Injection Molding Machine

Japan TOYO Fully Electric Injection Molding Machine

Japan TOYO Fully Electric Injection Molding Machine

Japan TOYO Fully Electric Injection Molding Machine

Japan TOYO Fully Electric Injection Molding Machine

Robotic Arm for Injection Molding Machine

RHCM Machine

## RoHS laboratory (GC-MS) Analysis Process

Scraping the sample and weighing ▶ Rotate Evaporator ▶ Add Solvent Extraction ▶ Purification of filtered sample ▶ GC-MS: To examine the content of organic solvents (PBB、PBDE、 Phthalates)






## RoHS laboratory (X-Ray) Inspection Process

Sample ▶ Homogeneous Material ▶ HITACHI EA1000AIII X-Ray examine sample meets RoHS、As、Sb。

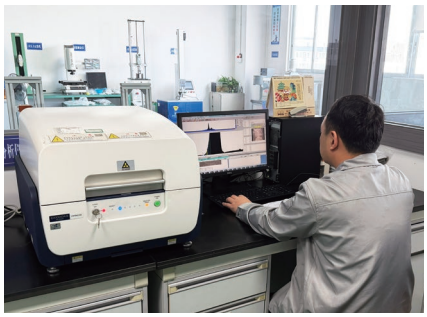

In order to fulfill the responsibility for environmental protection,the environmental friendly substances are tested and checked.

The HITACHI EA1000A III X-ray Fluorescence Analyzer: Meet the EU RoHS Directive and the rapid detection and analysis of hazardous substances in electrical and electronic product, e.g.: Cd、Pb、Hg、Cr、Br、As、Sb, etc. Complying with Halogen free requirement, we use XRF (X-ray Fluorescence Spectrometer) to analysis the content to meet customer requirement. GC-MS (Gas chromatography–mass spectrometry) for the detection of PBB, PBDE, Phthalates in organic solvents.

## 实验室仪器 Laboratory Equipment

Flame Test Equipment

Moisture Analyzer

Melt Flow Indexer

Programmable Temperature and Humidity Chamber

## 设备仪器 Equipment and Instruments

Tensile Test Equipment

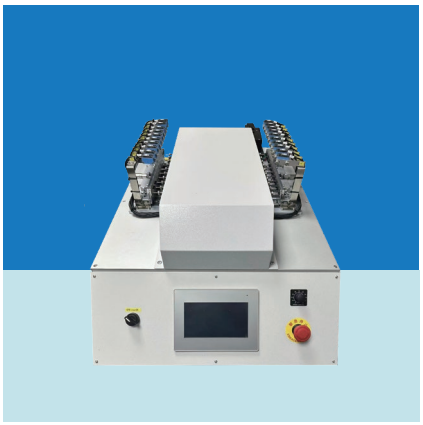

Life Cycle Test Machine

Digimatic Height Gage

Image Dimension Measurement System

2.5D Non-Contact Video Measuring System

Micro-vu 3D Measuring System

## 自动设备与自动仓储

Automatic Packaging Machine

Auto Optical Inspection

Automatic Storage System

Automatic Storage System

# 客户对我们的肯定与鼓励
Appreciation and Encouragement from Customers

# 专利
Patent

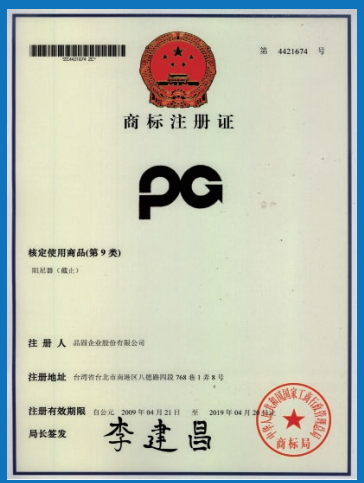


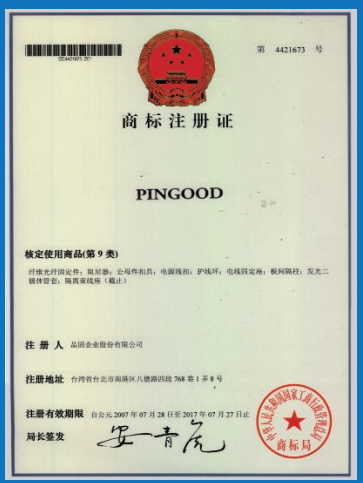

*以上已完成商标注册续展证明

PINGOOD

1-2

1-3

1-4

1-5

1-6

1-7

1-8

1-9

1-10

1-11

1-12

1-13

1-14

1-15

1-16

1-17

1-18

1-19

1-20

1-21

1-22

1-23

1-24

1-25

1-26

1-27

1-28

1-29

# 门扣，阻尼器，导光棒 LATCH, DAMPER, LIGHT PIPE

## PINGOOD



# 扣环，护线环，塞环 BUSHING, SNAP BUSHING

## PINGOOD

# 扣环，护线环，塞环 BUSHING, SNAP BUSHING

PINGOOD

2-10

2-11

2-12

2-13

2-14

2-15

2-16

2-17

2-18

2-19

2-20

2-21

2-22

2-23

2-24

2-25

2-26

2-27

2-28



# P.C.板间隔柱 SPACER SUPPORT

PINGOOD

3-2

3-3

3-4

3-5

# P.C.板间隔柱 SPACER SUPPORT

PINGOOD

3-6

3-7

3-8

3-9

3-10

3-11

3-12

3-13

3-14

3-15

3-16

3-17

3-18

3-19

3-20

3-21

3-22

3-23

3-24

3-25



3-26

3-27

3-28

3-29



3-30

3-31



3-32

3-33

# P.C.板间隔柱 SPACER SUPPORT

## PINGOOD

3-34

3-35

3-36

3-37


3-38

3-39


3-40


3-41

3-42


3-43


3-44

3-45

3-46

3-47

3-48

3-49

3-50

3-51

3-52

3-53

3-54

3-55

3-56

3-57

3-58

3-59

3-60

3-61

# P.C.板间隔柱 SPACER SUPPORT

## PINGOOD

3-62

3-63

3-64

3-65

3-66

3-67



3-68

3-69

3-70

3-71

3-72

3-73

3-74



3-75

3-76

3-77

3-78

3-79

3-80

3-81

3-82

3-83

3-84

3-85

3-86

3-87

3-88

3-89

# P.C.板间隔柱 SPACER SUPPORT

## PINGOOD

3-90

3-91

3-92

3-93

3-94

3-95

3-96

3-97

3-98

3-99

3-100

3-101

3-102

3-103

3-104

3-105

3-106

3-107

3-108

3-109

3-110

3-111

3-112

3-113

3-114

3-115

3-116

3-117

# P.C.板间隔柱 SPACER SUPPORT

PINGOOD

3-118

3-119



3-120

3-121

3-122

3-123

3-124

3-125

3-126

3-127

3-128

3-129

3-130

热情服务，转变观念

增强知识，迎接挑战

# LED套，LED座 LED HOLDER, LED, HOUSING

PINGOOD

4-2

4-3

4-4



4-5



4-6



4-7

4-8

4-9



PINGOOD

4-10

4-11

4-12

4-13

4-14


4-15

4-16

4-17

4-18

4-19

4-20

4-21

4-22


4-23

4-24

4-25

4-26

4-27

4-28

4-29

4-30

4-31

4-32

4-33

4-34

4-35

4-36

4-37

4-38

4-39

4-40

4-41

4-42

4-43



4-44

4-45



4-46



4-47



4-48

4-49



4-50

4-51

4-52



4-53

4-54



4-55



4-56



4-57



4-58



4-59

4-60



4-61



4-62

勤思巧干，精益求精

逆势而上，昂扬前行

5-2

5-3

5-4

5-5

5-6

5-7

5-8

5-9

5-10

5-11

5-12

5-13

5-14

5-15

5-16

5-17

5-18

5-19

5-20

5-21

5-22

5-23

5-24

5-25

5-26

5-27

5-28

5-29

5-30

5-31

5-32

5-33

5-34

5-35

5-36

5-37

5-38

5-39

5-40

5-41

5-42

5-43

5-44

5-45

5-46

5-47

5-48

5-49

5-50

5-51

5-52

5-53

5-54

5-55

5-56

5-57

# 铆钉, 螺丝 , 螺帽 , 扣具 PLASTIC FASTENER

## PINGOOD

5-58

5-59

5-60

5-61

5-62

5-63

5-64

5-65

5-66

品 质 为 本 , 技 术 为 根
精 工 细 作 , 稳 健 致 远

# 线材固定 , 线材隔离 CABLE CLAMP, SADDLE

## PINGOOD

6-2

6-3

6-4

6-5

6-6



6-7

6-8

6-9

6-10

6-11

6-12

6-13

6-14

6-15

6-16

6-17

6-18

6-19

6-20

6-21

6-22

6-23



6-24



6-25

6-26



6-27



6-28



6-29

6-30

6-31

6-32

6-33

6-34

6-35

6-36

6-37

6-38



6-39

6-40

6-41

6-42



6-43

6-44

6-45

6-46

6-47

6-48

6-49

6-50

6-51

6-52

6-53

6-54

6-55

6-56

6-57

6-58

6-59

6-60

6-61

6-62

6-63

6-64

6-65

6-66

6-67

6-68

6-69

6-70

6-71

6-72

6-73

6-74

6-75

6-76

6-77

6-78



6-79

6-80

6-81

6-82

6-83

6-84

6-85

6-86

6-87

6-88

6-89

6-90

6-91

6-92

6-93

6-94

6-95

6-96

6-97

6-98

6-99

6-100

6-101

6-102

6-103

6-104

6-105

6-106

6-107

6-108



6-109



6-110

6-111

6-112

6-113

6-114

6-115

6-116

6-117

6-118

6-119

6-120

6-121

6-122

6-123

6-124

6-125

# 线材固定，线材隔离 CABLE CLAMP, SADDLE

## PINGOOD

6-126

6-127

6-128

6-129

6-130

6-131

6-132

6-133

6-134

6-135

6-136

6-137

6-138

6-139

6-140

6-141

6-142

6-143

6-144

6-145

6-146

6-147

6-148

6-149

6-150

6-151



积累成底蕴

踏实铸荣光

# EMI扣 SLEEVE FERRITE CLAMP

PINGOOD

7-2

响应绿环保
推动减碳程

# 电子零配件 PCB ASSEMBLY COMPONENTS

PINGOOD

8-2

8-3

8-4

8-5

8-6

8-7

8-8

8-9

8-10

8-11

8-12

8-13

8-14

8-15

8-16

8-17

8-18

8-19

8-20

8-21

PINGOOD

8-22

8-23

8-24

8-25

8-26

8-27

8-28

8-29

8-30

8-31

8-32

8-33

8-34

8-35

8-36

8-37

8-38

8-39

8-40

8-41

8-42

8-43

8-44

8-45

8-46

8-47

8-48

8-49

PINGOOD

8-50

8-51

8-52

8-53

8-54

8-55

8-56

8-57

8-58

8-59



8-60

8-61

8-62

8-63

8-64

8-65

8-66

8-67

8-68

8-69

8-70

8-71

8-72



卓越的效能，优质的团队

顶尖的创意，专业的服务

# 脚垫，烫金脚垫，垫座 PLASTIC RUBBER FOOT

PINGOOD

9-2

9-3

9-4

9-5

9-6

9-7

9-8

9-9



9-10

9-11

9-12

9-13

# 拉柄 CIRCUIT BOARD EJECTOR

PINGOOD

10-2

10-3

10-4

10-5

# 导槽 P.C.B GUIDE RAIL

PINGOOD

11-2

11-3

11-4

11-5

# 导槽 P.C.B GUIDE RAIL

## PINGOOD

11-6

11-7

11-8

11-9

11-10

11-11

11-12

11-13

11-14

11-15

11-16

11-17

11-18

11-19

11-20

11-21

11-22

**科技驱动，创新突破**

**优化效能，智造未来**

# 束线带 CABLE TIES

## PINGOOD

12-2



12-3

12-4

12-5

# 束线带 CABLE TIES

## PINGOOD

12-6



12-7

12-8

12-9

12-10

12-11

12-12

12-13

12-14

12-15

12-16

12-17

12-18



12-19



12-20

# 其他塑胶制品 HANDLE, HOUSING, COVER

## PINGOOD

13-2

13-3

13-4

13-5

13-6

13-7



13-8

13-9

PINGOOD

13-10

13-11

13-12

13-13

13-14

13-15

13-16

13-17

13-18

13-19

13-20

13-21

13-22

13-23

13-24

13-25

13-26

13-27

13-28

13-29

13-30

13-31

13-32

13-33

13-34

13-35

13-36

13-37

PINGOOD

13-38

13-39

13-40

13-41

13-42

13-43

13-44

13-45

13-46



13-47

13-48

13-49

13-50

13-51

13-52

13-53

13-54



13-55

13-56

13-57

13-58

13-59

13-60

13-61

13-62

13-63

13-64

13-65

PINGOOD

13-66

13-67

13-68

13-69

13-70

13-71

13-72

13-73

13-74

13-75

13-76

13-77

13-78

13-79

13-80

13-81

13-82

13-83

13-84

13-85

13-86

13-87

13-88

13-89

13-90

13-91

13-92

13-93

# 其他塑胶制品 HANDLE, HOUSING, COVER

## PINGOOD

13-94

13-95

13-96

13-97

13-98

13-99

13-100



13-101

13-102



13-103

13-104

13-105

# 端子附件，五金 HARDWARE

## PINGOOD

14-2

14-3

14-4

14-5

14-6

14-7



研新竞发展
群策育良才

企业的成功来自于每位员工的付出
诚信为基、服务为根、传承人才、敬业荣群

# 索引 INDEX


【数字】
101A~112NP 3-116
103C~115MC 3-115
201~338 3-117
2A 6-113
2CH 6-144
2CS 6-50
2LEA 4-8
2LED 4-53~4-55
2RF 2-2,2-4
3CH 6-145
3LED 4-55~4-57
3LEL 4-57
3RF 2-2
304K~9634C 3-108
3-114~3-115,3-118
40M 8-50
4LED 4-58~4-59
4LEL 4-57~4-58
4RF 2-2
5LED 4-60~4-61
5LEL 4-60
5R 2-2~2-3
5RF 2-2~2-3
601~901,60* 8-49,8-50~8-53
6FW-10 6-2
6FW-11 6-114
6LED 4-61
6R 2-2,2-4
7R 2-2,2-4
8LED 4-61
8R 2-2~2-3
9R 2-2
10LED 4-62
15LED 4-62

【A】
A 6-113
AAA 3-69
AB 6-3~6-5 6-9~6-11 6-13,6-15~6-16
AB-1* 6-117
ABD 6-14
ABF 6-16~6-17
ABGX 6-143
ABH 6-13
ABK 6-17
ABL 6-117
ABP 6-135
ABT 6-5
AC 3-5
ACBK 3-5
ACBS 3-3~3-5
ACK 5-40
ACMS 3-3
ACT 3-5
AD 3-108,3-111
ADA 3-112
ADF 3-109
ADGF 3-113
ADH 3-108
ADHM 3-112
ADJ 3-110
ADK 3-108
ADM 3-112
ADP 3-109
ADQ 3-109
ADW 3-108
AF 3-5
AG 3-112
AVI 13-51

【B】
BAK 6-67
BAR 6-116
BCBS 3-62
BCMS 3-63
BFA 13-93
BFN 12-18
BH 2-18~2-19
BH-5~7 13-26~13-27
BHA 2-18
BHB 1-36
BHR 13-63
BJA 13-5
BSA 13-2~13-4
BSC 13-2
BSG 13-2
BSHC 13-3
BSQ 12-20
BSR 6-74
BST 12-2~12-3 12-14~12-20
BSTH 12-2
BSW 12-3~12-4
BSX 12-3
BWA 13-4
BWD 13-5
BWF 13-4
BWH 13-4
BWK 13-2
BWN 13-3
BXR 12-18

【C】
C系列垫座 9-9
CAC 6-56
CAF 6-143
CAM 6-14
CAP 8-50
CAR 6-13
CBD 3-125
CBG 6-52
CBL 3-126~3-127
CBLA 3-126
CBPA 3-128
CBS 3-44
CC 6-67
CCA 6-68
CCD 6-67
CCF 6-71
CD 6-65
CDA 13-11
CDF 6-65
CDS 13-5~13-11
CDT 13-12
CDY 13-11
CF 11-2
CFK 6-60
CFKA 6-61
CFP 13-57
CG 11-2~11-15
CGB 11-18
CGD 11-9
CGH 11-21
CGJ 11-14
CGL 11-13
CGM 11-20~11-21
CGR 13-84
CGT 11-15
CGU 11-10
CGW 11-16
CGZ 11-16~11-17
CGZA 11-17,11-19
CGZD 11-19
CGZF 11-18
CGZH 11-18
CH 6-43~6-45 6-47~6-49 6-53,6-59
CH-04*,06*,09* 6-49,6-66
CH-08*,10K 3-81,6-63
CH-05~30 6-55~6-58
CH-38,48 6-145
CHA 6-113
CHAD 6-11
CHB 6-103
CHF 6-11 6-125~6-126
CHF-7* 6-123
CHFA 6-12
CHFB 6-126
CHFD 6-14
CHFG 6-135
CHFK 6-128
CHFM 6-126
CHFN 6-132
CHFQ 6-12
CHFR 6-12
CHFT 6-14
CHFW 6-129
CHFY 6-135
CHFZ 6-12
CHG 6-122
CHH 6-114
CHJ 6-59
CHK 6-60
CHL 6-56
CHLA 6-57
CHM 6-53
CHN 6-67
CHP 6-72
CHQ 6-104
CHR 6-46
CHST 6-112
CHT 6-43
CHU 6-18
CHW 6-7~6-9
CHX 6-68
CIC 6-69
CID 6-42
CIK 6-70
CIM 6-112
CIS 6-69~6-70
CJA 6-44
CK 6-59
CKA 6-105
CKB 6-104
CKF 6-73
CKFA 6-134
CKFB 6-134
CKFC 6-131
CKFM 6-141
CKFN 6-141
CKH 6-63
CKHA 6-63
CKIM 6-71
CKK 6-75~6-77
CKK-02 6-109
CKKS 6-86
CKL 6-71
CKM 6-19~6-20
CKMA 6-20
CKMH 6-13
CKMY 6-142
CKMZ 6-142
CKN 6-105
CKP 6-74
CKQ 6-73
CKR 6-114
CKS 6-58
CKT 6-106~6-107
CKTW 6-121
CKW 6-20
CKX 6-82
CKY 6-105
CKZ 6-19
CKZA 6-20
CLA 4-39
CLED 4-29 4-31~4-38
CM 6-56
CMA 6-45
CMB 6-64
CMBF 6-65

# 索引 INDEX


CMC 6-43
CMD 6-137
CMG 6-106
CMGA 6-106
CMF 6-17
CMK 6-52
CML 6-14
CMLA 6-15
CMM 6-107
CMP 6-144
CMQ 6-108
CMR 6-2~6-3
CMRT 6-44
CMRW 6-43
CMRZ 6-44
CMS 6-128
CMW 6-84
CMX 6-3
CMY 6-2
CMZ 6-50
CNA 6-66
CND 6-72
CNF 6-126~6-127
CNFA 6-127
CNFK 6-126
CNL 6-17
CNG 6-71
CNH 6-132
CNHA 6-137
CNHB 6-134
CNHD 6-133
CNJ 6-142
CNK 6-127
CNQ 6-129
CNR 6-128
CNTF 6-127
CNW 6-129~6-130
CNWA 6-130
CNWB 6-130,6-132
CNWF 6-130
CNWG 6-131
CNWH 6-131
CNWK 6-136
CNWZ 6-131
CNZA 13-86
CP 10-2~10-5
CQ 13-14
CQA 3-119
CRC 6-85
CRN 6-84
CS 6-49~6-50 6-68
CSA 6-50
CSF 6-42
CSK 6-57
CST 8-72
CT 2-18
CTK 6-86
CTM 6-87
CTR 6-107
CTT 6-128
CTX 6-51
CU 6-26 6-61~6-62
CU-06A 6-69
CU-07* 6-93
CUA 6-61
CUD 6-92
CUH 6-53
CUG 6-53
CUK 6-52
CW 8-2~8-3,8-13
CWA 8-16
CWB 8-5
CWC 8-6
CWD 8-7~8-8
CWF 8-4~8-5
CWFK 8-6
CWG 8-6
CWH 8-7
CWHA 8-7
CWJ 8-8
CWL 8-8
CWM 8-4
CWP 8-12
CWQ 8-4,8-12
CWR 8-16
CWS 8-6
CWT 8-8
CWTD 8-8
CWU 8-17
CWW 8-17
CWX 8-2
CWY 8-9
CWZ 8-3
CXK 6-80
CXR 6-83
CXT 6-109
CYA 6-76
CYAA 6-77
CYB 6-83
CYC 6-83
CYD 6-85
CYF 3-75
CYFG 3-76
CYFJ 3-76
CYFK 3-76
CYFQ 3-76
CYFT 3-77
CYHG 6-64
CYG 6-77
CYH 6-64
CYJ 6-91
CYK 6-64
CYL 6-84
CYM 6-85
CYP 6-86
CYQ 6-84
CYR 6-85
CYS 6-65
CYW 6-60
CYWF 6-61
CYWK 6-67
CYX 6-143
CZA 6-47
CZB 6-47
CZC 6-45
CZD 6-121
CZF 6-48
CZG 6-139
CZH 6-46
CZJ 6-9
CZK 6-18
CZL 6-52
CZM 6-54
CZP 6-54
CZPA 6-54
CZQ 6-9
CZR 6-48
CZS 6-50
CZSA 6-83
CZT 6-18
CZW 6-18
CZX 6-48
CZY 6-54


## 【D】


D-0710 13-31
DAB 13-19~13-20
DAG 3-98
DAGH 3-99
DAGK 3-98
DAH 13-37
DAP 13-19
DC 13-99~13-101
DCBS 3-50~3-51
DCC 13-52
DCJ 13-52
DCMS 3-57
DCQ 13-27
DCR 3-128
DCRJ 3-128
DDS 2-11~2-12
DDS-04 2-19
DFA 6-110
DFB 6-151
DFG 6-117
DFK 6-116
DFQ 6-151
DHD 13-52
DHM 13-103
DL-001~20* 1-2~1-8
DL-100*~700* 1-8~1-12
DLA 1-2
DLB 1-6
DLC 1-5
DLF 1-5
DLK 1-6~1-7
DLM 1-5
DMI 13-72~13-73
DMK 3-25
DP 13-77~13-78
DPM 13-25
DPS 13-25
DPX 3-124
DS 2-11 2-13~2-17
DSC 2-17
DSF 2-12
DSH 2-16
DSW 2-12
DUA 13-103
DVI 13-73~13-74
DXA 8-9~8-11
DXC 8-12
DXD 8-12
DXF 8-11
DXGF 13-89
DXH 8-12
DXJ 8-9
DXK 8-9
DXM 8-9
DXP 8-10
DXS 8-11
DXW 8-23
DXZB 8-13
DXZC 8-13


## 【E】


E3S 13-49
ECW 4-48
EDA 4-23
EDC 4-21
EDD 4-47
EDE 4-7
EDF 4-7
EDG 4-47~4-48
EDH 4-3
EDJ 4-20
EDK 1-24~1-26
EDL 4-21
EDM 4-23
EDN 1-21~1-22
EDN-05,5C 1-26
EDP 4-47
EDQ 4-27
EDR 4-9
EDT 4-16
EDW 4-17
EDZ 1-22~1-24
EEA 4-39
EEB 4-26
EEC 4-20
EED 13-12
EEF 4-27
EEG 4-48
EEH 4-20
EEJ 4-27

# 索引 INDEX


EEK 4-21
EEL 4-9
EEM 4-20
EEN 4-16
EEP 4-48
EES 4-7
EET 4-46
EEW 4-13
EKB 4-22
EKC 4-17
EKF 4-15
EKL 4-8
EKM 4-26
EKN 4-21
EKT 4-22
ELA 4-12
EMQ 7-2
EMR 7-2
EQA 4-42~4-43
EQC 4-40
EQF 4-43
EQH 4-43
【F】
FAA 6-78~6-79
FAB 6-76
FAC 6-123~6-124
FAF 6-124
FAG 6-124
FAK 6-138
FAKT 6-138~6-139
FAM 6-108
FAP 6-125
FAS 6-107
FB 6-38
FBA 13-13
FBC 6-94
FBF 6-42
FBM 6-94
FC 6-37~6-38
FC-27N 6-96
FC-45N 6-96
FCA 6-91
FCAT 6-91
FCB 3-8
FCC 6-40
6-77,6-79,6-95
FCD 6-39~6-41
FCE 6-137,6-139
FCF 6-41
FCFA 6-42
FCG 6-95
FCH 6-115
FCJ 6-95
FCJK 6-138
FCJS 6-138
FCK 6-92
FCM 6-38~6-39
6-89
FCM-01 6-137
FCM-20* 6-115
FCM-35* 6-116
FCMW 6-80
FCNQ 6-128
FCP 6-5
FCQ 6-81~6-82
FCR 6-38
FCS 6-78
FCSD 6-78
FCT 3-8
FCTA 3-9
FCW 6-34~6-36
FCWA 6-91
FCWB 6-139
FCWC 6-140
FCWG 6-140
FCWT 6-36
FCWY 6-140
FCX 6-80~6-81
FCY 6-37
FCZ 6-80
FDD 6-32
FDH 6-88
FDK 6-27
FDM 6-27
FDP 6-94
FDQ 6-39
FDW 6-25~6-26
FDX 6-27
FFR 3-9
FGH 6-9
FH 13-32
FIB 13-78
FJH 3-129
FJW 3-127
FK 3-8
FKC 3-75
FKD 3-74
FKJ 3-77
FKJD 3-77
FKJR 3-77
FKK 3-102
FKM 3-74
FLA 6-109
FLED 4-38
FMG 3-130
FMQ 3-130
FMT 6-140
FMY 3-129~3-130
FN 14-6~14-7
FQA 13-101
FQC 6-115
FQCM 6-84
FRAC 6-20
FS 6-5
FSA 6-122
FSB 6-122
FSC 6-27
FSD 6-30
FSK 6-123
FSL 6-27
FTHM 13-27
FU 6-6
FUA 6-6
FUM 6-6
FUS 6-6
FW 6-21~6-25
6-28~6-33
FW-08A,12C
6-128
FW-24 6-87
FW-24CM 6-88
FW-CD30 6-31
FWA 6-33
FWB 6-30
FWC 6-69
FWD 6-68
FWF 6-6~6-7
FWG 6-30~6-31
FWGA 6-31
FWGH 6-29
FWH 6-74
FWI 6-124
FWJ 6-30
FWK 6-121
FWM 12-11
FWP 6-33
FWQ 6-87
FWR 6-88
FWS 6-60
FWT 6-36~6-37
FWTA 6-74~6-75
FWW 6-87
FWX 6-34
FWY 6-41
FWZ 6-32
FXA 3-127
FYA 12-11
FYB 12-10
FYC 6-92~6-93
FYCA 6-93
FYCB 6-132
FYCD 6-133
FYCG 6-122
FYCH 6-133
FYCS 6-125
FYD,FYDA 12-12
FYH 6-86
FYK 6-28
FYL 12-12
FYM 6-28
FYS 6-24
FZA 3-128
【G】
GCA 13-102
GL 9-2~9-4
GLA 9-4~9-5
GLC 9-12
GLD 9-13
GLE 9-6
GLED 4-34
GLH 8-40
GLQ 9-11~9-12
GMC 9-6
GQH 8-41
GSA 8-42~8-44
GSB 8-45
GSD 8-42
GSE 8-43
GSG 8-40
GSH 8-42
GSK 8-41
GSM 8-44
GSP 9-13
GSQ 8-41
GTT 9-12
GXA 9-13
【H】
H,H2M,H4
3-120~3-121
HB 13-50~13-51
HBA 13-57
HBC 13-55
HBF 13-55
HBK 13-51
HC-0~18* 13-52
13-58~13-60,13-63
HC-21*~51
13-49~13-50
13-60~13-62
HCA 13-39~13-40
HCD 13-64
HCG 11-21~11-22
HCGT 11-22
HCHA 13-98
HCK 13-67
HCKA 13-55
HCKB 13-55
HCKC 13-56
HCKF 13-56
HCL 13-56
HCM 13-58~13-59
HCP 13-64
HCQ 13-50
HCR 13-63~13-64
HCS 13-65,13-78
HCW 13-56
HCWT 13-62
HCX 13-65
HCXK 13-77
HCZ 13-56
HD 13-30~13-31
HDA 13-30
HDB 13-72
HDD 13-61
HDE 13-61
HDJ 13-66
HDK 13-61
HDL 13-65
HDP 13-91
HDQ 13-66

# 索引 INDEX


| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| HDTC | 13-66 | HUP | 8-23 | LCA2 | 3-23 | LED3 | 4-41 | LEZD | 1-30 |
| HDT | 13-65 | HUQ | 8-57 | LCA3 | 3-26 | | 4-43~4-46 | LFC | 6-96 |
| HDU | 13-66 | HUT | 8-56 | LCA35 | 3-34~3-35 | LEDX | 4-40 | LFD | 6-89 |
| HDY | 13-72 | HUX | 8-16 | LCA4 | 3-40 | LEE | 4-23 | LFE | 6-70 |
| HDZ | 13-60 | HWH | 3-120 | LCAS | 3-39 | LEF | 4-13 | LFK | 6-70 |
| HDZA | 13-60 | 【I】 | | LCB3 | 3-30 | LEF5 | 4-13 | LFN | 6-89~6-90 |
| HF | 13-66 | ICA | 8-56 | LCBA | 3-30 | LEFD | 1-34~1-35 | LFW | 6-31 |
| HFC | 13-13 | ICC | 8-56 | LCBS | 3-42~3-43 | LEG3 | 4-19 | LFZ | 6-90 |
| HFK | 13-67 | IRK | 14-7 | LCBS-48 | 3-39 | LEGD | 1-41~1-42 | LFZN | 6-90 |
| HFX | 13-105 | 【J】 | | LCC | 3-43~3-44 | LEH5 | 4-10 | LGA | 9-6 |
| HHB | 3-120 | JFW | 14-6 | LCD | 3-40 | | 4-16,4-20 | LH | 5-53~5-55 |
| HHJ | 3-120 | JG | 14-7 | LCF | 3-36 | LEHD | 1-30 | LHA | 5-55 |
| HHP | 1-27 | JH | 14-4 | LCFA | 3-39 | LEI | 4-17 | LHG | 5-56 |
| HHQ | 1-35 | JLED | 4-39 | LCG | 3-58 | LEJ | 4-3 | LHJ | 5-56 |
| HJA | 8-55 | JP | 14-4~14-5 | LCH | 3-30 | LEJD | 1-38 | LHK | 5-15 |
| HKA | 13-57 | JT | 14-2~14-3 | LCJ | 3-24 | LEK2 | 4-23 | LHM | 5-55 |
| HLED | 4-31 | 【K】 | | LCK | 3-43 | | 4-25,4-28 | LHP | 13-90 |
| HP | 13-15 | KCA | 3-38 | LCM* | 13-23 | LEK4 | 4-23 | LHQ | 5-16 |
| HPA | 13-25 | KDD | 3-9 | LCQ | 3-33 | | 4-25~4-26 | LHY | 5-56 |
| HPM | 13-85 | KDH | 3-9 | LCR | 3-24 | LEK5 | 4-22 | LHZ | 13-72 |
| HS | 13-32~13-38 | KDM | 3-10 | LCS | 3-32 | LEKC | 4-22 | LJA | 4-11 |
| HSA | 13-32 | KFD | 3-125 | LCX | 3-25 | LELD | 1-39 | LJD | 4-18 |
| HSD | 13-37 | KFDX | 3-130 | LCWS | 3-42 | LEM* | 4-16~4-17 | LKB | 3-82 |
| HSF | 13-38~13-39 | KFJ | 3-126 | LCY | 3-23 | LEMD | 1-32~1-33 | LKC | 3-83 |
| HSL | 13-37 | KFL | 3-126 | LCZ | 3-83 | LEMK | 1-34 | LKN | 3-83 |
| HSM | 13-35 | KHA | 3-20 | LD | 3-103~3-104 | LEN | 4-28 | LLS | 3-41 |
| HSQ | 13-33 | KLED | 4-29~4-30 | LDA | 9-13 | LEND | 1-41 | LMA | 3-35 |
| HSW | 13-37 | KPD | 3-73 | LDAD | 1-43 | LEQ | 4-2 | LMB | 3-90 |
| HTA | 13-67 | KWT | 3-115~3-116 | LDHD | 1-43 | LEQD | 1-40 | LMD | 4-13 |
| HTD | 13-49 | KYA | 6-143 | LDMD | 1-27 | LER | 4-22 | LMF | 3-86 |
| HTH | 3-124 | KYC | 6-110 | LEA | 4-8,4-24 | LERD | 1-41 | LMG | 3-89~3-90 |
| HU | 8-14~8-15 | KYF | 6-110~6-111 | LEAD | 1-28~1-32 | LERS | 1-41 | LMGA | 3-91 |
| | 8-17~8-22 | KYH | 6-112 | | 1-36~1-40 | LES | 4-40 | LMH | 3-86 |
| HU-07T | 8-54 | KYK | 6-110 | | 1-42,1-44 | LESD | 1-38 | LMJ | 3-87 |
| HU-19,19* | | KYM | 6-111 | LEC | 4-26 | LET* | 4-13~4-15 | LMK | 3-86 |
| | 8-53~8-54 | KYR | 6-111 | LECD | 1-40 | LETD | 1--38 | LMM | 3-85,3-87 |
| HU4,HU6 | 3-121 | KYT | 6-111~6-112 | LED | 4-41~4-42 | LEU | 4-25 | LMP | 3-88 |
| HUA | 8-22 | KYW | 6-112 | LED-2F~10Y | | LEUD | 1-33 | LMQ | 3-89 |
| HUC | 8-22~8-23 | 【L】 | | | 4-9~4-12 | LEVD | 1-37 | LMR | 3-89 |
| HUD | 8-22 | L 系列垫座 | | LED-2x10 | 4-2 | LEW | 4-17,4-29 | LMX | 3-87 |
| HUDK | 8-21 | | 9-10 | LED-3.8,4A | 4-45 | LEWA | 1-40 | LMW | 3-91 |
| HUF | 8-62 | L-9A | 3-45 | LED-13.5 | 4-2 | LEWD | 1-37 | LMWY | 3-83 |
| HUG | 8-14 | L-16* | 3-45 | LED-3x* | 4-4 | LEWF | 1-43 | LPL | 13-102 |
| HUH | 8-21 | LBB | 3-45 | LED-*x3 | | LEX | 4-17 | LQC | 13-26 |
| HUJ | 8-54~8-56 | LBC | 3-33~3-34 | | 4-3,4-51~4-52 | LEXD | 1-43 | LRA | 13-102 |
| HUK | 8-54 | LBCM | 3-30 | LED-*x3A | 4-51 | LEY | 4-25 | LS | 3-100~3-102 |
| HUL | 8-22 | LBD | 3-28 | LED-**T | 4-18 | LEYD | 1-34 | LSA | 3-2 |
| HUM | 8-23 | LBK | 3-21 | LED3x4 | 4-3 | LEZ | 4-40 | LSB | 3-82 |

# 索引 INDEX


| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| LSC | 3-72~3-73 | 【M】 | | MCN | 3-29 | MGMA | 13-22 | MNS | 8-17 |
| LSD | 3-2~3-3,3-6 | M | 2-22~2-23 | MCP | 3-32 | MGMB | 13-22 | MNW | 13-79 |
| LSF | 3-71 | M3*,M4* | 8-29 | MCQ | 3-29 | MGS | 13-99 | MPB | 13-93~13-97 |
| LSH | 3-71 | MA | 3-73 | MCQA | 3-36 | MGW | 13-103 | MPBH | 13-98 |
| LSJ | 3-71 | MAA | 5-24 | MCR | 3-37 | MGX | 13-87~13-88 | MPBL | 13-98 |
| LSK | 3-88~3-89 | MAB | 5-25 | MCS | 3-20 | MGZ | 13-23 | MPBT | 13-99 |
| LSL | 3-105 | MAF | 2-26 | MCT | 12-14 | MH | 13-28~13-29 | MPG | 13-92 |
| LSN | 3-91 | MAH | 13-20 | MCU | 3-32 | MHG | 2-24~2-26 | MPL | 1-7,2-25,2-27 |
| LSNT | 3-91 | MB | 5-33~5-49 | MCW | 3-35 | MHG-3A | 5-37 | MPLA | 2-27 |
| LSP | 3-92 | MBB | 5-37 | MCX | 3-31 | MHG-05 | 3-74 | MPR-01 | 13-89 |
| LSQ | 3-101 | MBC | 5-40 | MCY | 3-26 | MHL | 13-40~13-48 | MPR-05 | 8-57 |
| LSR | 3-93 | MBDA | 5-50 | MCZ | 3-31 | MHLA | 13-49 | MPT | 8-55 |
| LSS | 3-74 | MBDG | 6-117 | MD | 13-15~13-16 | MHLF | 13-49 | MPV | 13-104 |
| LST | 12-19 | MBE | 5-35 | | 13-90~13-91 | MHLG | 10-5 | MPW | 13-102 |
| LSY | 3-103 | MBF | 2-24,2-27 | MDA | 13-16 | MHM | 13-28 | MPZ | 2-25 |
| LSZ | 3-92 | MBH | 5-46 | MDB | 13-17 | MHMK | 13-28 | MQB | 3-58 |
| LSZQ | 3-92 | MBJ | 13-51 | MDC | 13-89 | MHT | 3-113 | MQC | 3-31 |
| LT | 3-41~3-42 | MBK | 5-39 | MDD | 13-103 | MHTK | 13-81 | MQD | 3-22 |
| LTA3 | 3-28 | MBL | 5-33~5-34 | MDJ | 13-16 | MHW | 13-28 | MQF | 3-29 |
| LTBS | 3-43 | MBM | 5-38 | MDK | 13-19 | MHY | 13-86 | MQG | 3-82 |
| LTD | 3-6~3-7 | MBP | 5-41 | MDL | 13-21 | MIA | 8-38 | MQT | 3-39 |
| LTEL | 3-84 | MBQ | 5-39 | MDP | 5-56 | MIR | 13-79 | MQW | 3-40 |
| LTER | 3-85 | MBR | 5-38 | MDV | 13-15 | MJB | 13-15 | MQY | 3-28 |
| LTF | 3-99 | MBT | 5-47 | MDW | 13-91 | MJC | 13-31 | MRA | 13-21 |
| LTG | 3-41 | MBTB | 5-49 | MEA | 3-20 | MJGP | 13-84 | MRAT | 13-86 |
| LTH | 3-88 | MBTH | 5-49 | MEC | 5-51 | MJKT | 13-31 | MRH | 13-82~13-83 |
| LTK | 3-100 | MBTR | 5-49 | MEG | 3-21~3-22 | MJQB | 13-80 | MRHA | 13-82 |
| LTKL | 3-84 | MBS | 5-37 | MEH | 3-23 | MKK | 13-90 | MRM | 13-83 |
| LTKR | 3-84 | MBSK | 5-41 | MEK | 5-42 | MKL | 10-2 | MRN | 13-30 |
| LTN | 3-85,3-88 | MBU | 5-40 | MEL | 5-51 | MKP | 13-89 | MRQ | 13-81 |
| LTQ | 3-92 | MBY | 5-48 | MEP | 5-51 | MLA | 8-7 | MRR | 13-81 |
| LTQB | 3-40 | MBZ | 5-46 | MF | 3-56~3-57 | MLED | 4-31 | MRT | 5-57 |
| LTQM | 3-43 | MC | 3-61~3-62 | MFC | 3-54 | MLW | 13-84 | MRU | 13-83 |
| LTQR | 3-93 | MCA | 3-21 | MFD | 3-53 | MMCA | 13-87 | MRX | 13-84 |
| LTR | 3-99 | MCB | 3-36~3-38 | MFG | 13-21 | MMCB | 6-142 | MRY | 13-84 |
| LTRC | 3-93 | MCB3 | 3-27 | MFH | 13-32 | MMD | 2-24 | MRZ | 13-79 |
| LTS | 3-102 | MCC | 3-59 | MFKA | 3-63 | MMF | 13-85 | MS | 3-70 |
| LTU | 3-41 | MCD2 | 3-22 | MFQ | 3-57 | MMFA | 13-85 | MSA | 3-68 |
| LTW | 3-99 | MCE | 3-34 | MFR | 3-53 | MMH | 8-5 | MSB | 3-69 |
| LTX | 3-7 | MCF | 3-27 | MFRK | 3-53 | MMJA | 13-93 | MSBA | 3-69 |
| LTY | 3-82 | MCFA | 3-27 | MFS | 3-60 | MML | 13-24 | MSC | 3-69 |
| LTZ | 3-84 | MCH | 3-26 | MFW | 3-63 | MMQ | 2-26 | MSD | 3-71 |
| LW | 3-104 | MCI | 3-29 | MGF | 13-24 | MMR | 13-24 | MSF | 3-70 |
| LWC | 3-104 | MCJ | 3-21,3-110 | MGK | 13-25 | MMS | 13-86 | MSH | 3-70 |
| LWH | 3-105 | MCJA | 3-109 | MGKH | 13-26 | MMW | 13-23 | MSK | 3-66~3-67 |
| LWP | 3-104 | MCK | 3-21 | MGL-04 | 13-23 | MMX | 13-30 | MSLQ | 3-67 |
| LXC | 3-97 | MCL | 3-19,3-25 | MGL-26A | 13-86 | MNA | 13-79 | MSP | 3-69 |
| LXCG | 3-98 | MCM | 3-25 | MGM | 13-22 | MNK | 13-80 | MSQ | 3-68 |

# 索引 INDEX


MSR 3-67
MSS 3-68
MST 3-68
MSY 3-70
MSZ 3-67
MTB 13-22
MTC 3-103
MTD 4-51
MTG 3-103
MTH 13-18
MTJ 13-19
MTN 13-18
MTQ 13-20
MTQA 13-80
MTU 8-23~8-24
MTX 4-53
MTY 13-91~13-92
MTZ 8-5
MU 2-24
MVA 13-16
MVJ 13-105
MWC 13-25
MWF 3-74
MWJ 13-92
MWZ 13-23
MXF 13-104
MXR 2-26
MXT 2-27
MYC 8-28
MZT 13-87

【N】

NBB 13-12
NBC 13-13
NBR 13-12
NBT 13-13
NEA 13-76
NEC 13-53~13-54
NEF 13-53
NEG 13-76
NEK 13-54
NEM 13-54
NEP 13-53
NEQ 13-77
NER 13-57
NES 13-76~13-77
NET 13-74~13-75
NEX 13-74
NEY 13-54
NSA 13-53
NWT 8-31

【O】

OIL 8-28
OPW 8-28

【P】

P-1,5 13-87
P-2* 14-2
PAC 6-18
PACA 6-136
PACB 6-135
PACD 6-133
PACF 6-136
PAD10 6-19
PAD11 6-19
PAK11 6-19
PC 6-96
6-146~6-147
PCA 3-48
PCBS 3-110
PCC 3-48
PCE 3-46~3-47
PCF 3-52
PCG 6-146
PCIE 13-75
PCJ 3-50
PCK 3-48~3-49
PCM 3-59
PCN 3-53
PCQ 3-58
PCR 3-46
PCS 6-45~6-46
PCS-2A 3-50
PCT 6-150
PCU 6-150
PCW 6-151
PCX 6-31
PCY 3-47
PDB 6-145
PDT 6-108
PEB 13-67
PED 13-24
PF 12-20
PG 1-13~1-21
PH 13-14
PHA 3-48
PIN 13-92
PL 6-148
PLA 6-149
PLB 6-149
PLC 6-149
PLD 6-148
PSA 12-4~12-5
PSF 12-8
PSK 12-8
PST 12-19
PTC 8-13

【Q】

Q系列垫座 9-11
QBE 4-52
QBF 4-41
QBK 4-53
QBT 4-24
QBU 4-49
QDC 8-5
QLA 4-16
QLB 4-6
QLC 4-10,4-15
QLD 4-60
QLE 4-4~4-5
QLED 4-38
QLEH 4-5
QLF 4-51
QLG 4-4
QLH 4-50
QLJ 4-11
QLK 4-6
QLL 8-62
QLM 4-50
QLP 4-50
QLQ 4-6
QLR 4-50
QLS 4-49
QLT 4-24
QLU 4-24
QLW 4-49
QLX 4-15
QLY 4-29
QPI 13-62
QQA 4-49
QQD 4-11
QQR 4-21
QRN 1-42

【R】

R系列垫座 9-8,9-9
RJ 13-76
RL 3-114
RMF 3-106~3-107
RMG 3-107
RMJ 3-107
RMK 3-107
RMT 3-107
RS 3-114
RX* 9-9

【S】

S系列垫座 9-7
S系列螺帽
5-65~5-66
S系列螺丝
5-57~5-63,5-65
SA 2-8~2-9
SAQ 2-16
SB 2-6~2-8,2-10
SBD 2-5
SBK 2-5
SC 2-9
SCA 3-19
SCB 3-16
SCC 3-15~3-17
SCD 3-13,3-17
SCE 3-11
SCF 3-17
SCG 3-11
SCK 3-11~3-12
SCL 3-19
SCM 3-18~3-19
SCN 3-18
SCP 3-18
SCQ 3-10
SCS 3-13
SCT 3-14~3-15
SCTA 3-15
SCTMS 3-70
SCU 3-13
SCW 3-12
SCX 3-12
SCY 3-14
SCZ 3-12
SDA 3-18
SDC 3-55
SDF 3-54
SDH 13-80
SDM 3-55
SDN 3-55
SDS 3-55
SDT 3-56
SF 5-61
SG 2-4~2-5
SH 3-112~3-113
SHB 3-113
SHC 8-27
SK 3-10
SL 2-5
SLED 4-3
SLM 2-5
SM 5-64~5-65
SMA4,SMA6 5-66
SMC4 5-66
SN4 5-61
SNT 5-58
SP 13-26
SQ 3-119
SQA 5-60
SQR 5-17
SQRC 5-17
SQRD 5-21
SR 5-5,5-9~5-11
5-13,5-15~5-33
5-52~5-53
SRBK 5-14
SRCK 5-6~5-7
5-13~5-14
SRCM 5-12
SRCQ 5-3
SRD 5-5~5-12
5-14~5-15
SRDK 5-5
SRDM 5-4
SRDW 5-32
SRF 5-2
SRFK 5-30~5-31
SRG 5-6
SRH 5-7
SRJ 5-2
SRL 5-12
SRM 5-4
SRMD 5-32
SRMF 5-24
SRMQ 5-26
SRMR 5-23
SRMS 5-23
SRMT 5-24

# 索引 INDEX


| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| SRN | 5-19 | T9A | 13-102 | TF8 | 6-98 | TU14 | 6-103 | UWM | 8-36 |
| SRNT | 5-19 | TA,TA* | 6-97~6-99 | TG12 | 6-100 | TUA | 6-100 | UWQ | 8-35 |
| SRQ | 5-33 | TAA | 3-7~3-8 | TGB | 13-91 | TUT | 6-103 | UWS | 8-36 |
| SRQA | 5-2 | TAH | 3-119 | TH,TH2,TH4 | | TX11 | 6-102 | UWT | 8-25 |
| SRQB | 5-2 | TAJ | 3-64 | | 3-122~3-123 | 【U】 | | UWX | 8-28 |
| SRQF | 5-2 | TAK | 3-54 | TH4F | 3-124 | U系列垫座 | 9-7 | UWXC | 8-37 |
| SRQM | 5-32 | TAN | 3-60 | THB | 3-123 | U系列华司 | | 【V】 | |
| SRS* | 3-111 | TAX | 3-52 | THC | 3-123 | | 8-24~8-27,8-31 | VCK | 13-53 |
| SRTA | 3-93 | TB | 3-105~3-106 | THK | 3-123 | UA | 3-80 | VCP | 13-58 |
| SRTB | 3-96 | TB8,TB20 | 6-98 | THM | 3-123 | UAC | 13-85 | VCQ | 13-57 |
| SRTC | 3-94 | TBK | 3-72 | THT | 3-124 | UB | 3-78~3-80 | VFA | 13-89 |
| SRTD | 3-96 | TBW | 3-73 | THU4,THU6 | 3-122 | UBA | 13-20 | VKW | 5-66 |
| SRTF | 3-94 | TC20 | 6-103 | TH3F | 3-124 | UBC | 3-80 | VTU | 2-27~2-28 |
| SRTH | 3-94 | TCA | 3-64~3-65 | THU6-712F | 3-124 | UBL | 3-80 | VVC | 13-104 |
| SRTK | 3-95 | TCBS | 3-65 | TK6 | 6-101 | UCB | 3-36,3-39 | 【W】 | |
| SRTL | 3-97 | TCBK | 3-72 | TN16 | 6-98 | UCC | 3-24 | WC | 14-6 |
| SRTM | 3-96 | TCBR | 3-61 | TO | 8-72 | UCD | 3-32 | WCB | 3-45 |
| SRTP | 3-97 | TCC | 3-58 | TPW | 13-93 | UCF | 3-24 | WCC | 8-29 |
| SRTQ | 3-94 | TCD | 3-58 | TQ | 8-2 | UCH | 3-37 | WCD | 5-48 |
| SRTR | 3-95 | TCF | 3-52 | TQA | 8-72 | UCK | 3-32 | WHT | 9-5 |
| SRTY | 3-95 | TCG | 3-72 | TQJ | 8-47 | UCX | 3-22 | WRA | 8-25 |
| SRU | 5-51~5-52 | TCH | 3-54 | TQP | 8-47 | UN4,UN6 | 5-65 | WRB | 8-36 |
| SRX | 5-25 | TCJ | 3-60 | TR-01~10** | | UN6K | 8-29 | WRC | 8-33 |
| SRXD | 5-25 | TCK | 3-59 | | 8-57~8-70 | UN10 | 5-66 | WRD | 8-34 |
| SRXM | 5-16 | TCKY | 3-10 | TRA | 8-47 | UNB | 3-81 | WRF | 8-36 |
| SRY | 5-3 | TCL | 3-66 | TRC | 8-45~8-47 | UNC | 3-81 | WRK | 8-33 |
| SRYC | 5-3 | TCM3 | 3-66 | TRE | 8-65 | UNG | 3-81 | WRP | 8-34 |
| SRYD | 5-4 | TCN | 3-59 | TRJ | 8-69 | US | 2-22 | WRX | 9-7 |
| SRYK | 5-3 | TCP | 3-73 | TRJP | 8-70 | USB | 13-67~13-71 | WS | 8-27,8-30 |
| SRZ | 5-4 | TCQ | 3-54 | TRJQ | 8-70 | USC | 2-21 | | 8-33~8-34 |
| SS | 2-10 | TCR | 3-65 | TRJW | 8-70 | USCF | 2-21 | WSA | 8-35~8-36 |
| SSA | 3-56 | TCS | 3-59 | TRK | 8-60 | USF | 13-71 | WSB | 8-38 |
| SSBS* | 3-56 | TCT | 3-71 | TRL | 8-61 | USJ | 13-71 | WSC | 8-37 |
| SSK | 2-10 | TCU | 3-33 | TRM | 8-69 | USK | 2-20 | WSE | 8-49 |
| SSR | 3-110 | TCW | 3-53 | TRN | 8-61 | USM | 2-20~2-21 | WSEA | 8-50 |
| STR | 5-32 | TCX | 3-60 | TRNC | 8-62 | USQ | 13-72 | WSF | 8-32~8-33 |
| SU | 5-57 | TCY | 3-63 | TRQ | 8-71 | UST | 2-20~2-21 | WSG | 8-47~8-49 |
| SU2,SU6 | 5-62 | TCYA | 3-64 | TRR | 8-57 | UTF | 6-120 | WSGB | 8-48 |
| SU6A | 5-59 | TD* | 6-100 | TRT | 8-60 | UTU | 2-28 | WSGT | 8-48 |
| SUN4,SUN6 | 5-60 | TDA | 6-49 | TRW | 8-60 | UW | 1-25 | WSH | 8-35 |
| SUP | 3-127 | TDD | 6-47 | TRX | 8-69 | | 13-17~13-18 | WSI | 8-48 |
| SW4,SW5 | 5-63 | TDF | 6-47 | TRY | 8-61 | UWA | 8-24 | WSJ | 8-38 |
| SWA | 8-45 | TDH | 6-72 | TRZ | 8-59 | UWB | 8-24 | WSL | 8-38 |
| SY | 2-9 | TDR16 | 6-101 | TS | 3-105 | UWC | 8-25 | WSM | 8-39 |
| SYB | 2-9 | TDY8 | 6-101 | TSA | 3-105 | UWD | 8-32,8-35 | WSN | 8-40 |
| SZ | 5-50 | TDY11 | 6-101 | TSC | 3-106 | UWF | 8-36 | WSNA | 8-50 |
| 【T】 | | TE21 | 6-102 | TSD | 3-106 | UWJ | 8-32 | WSP | 2-6 |
| T系列垫座 | 9-11 | TEY4 | 6-102 | TT15 | 6-102 | UWK | 8-32 | WSQ | 8-39 |

# 索引 INDEX


| | | | | | |
|---|---|---|---|---|---|
| WSR | 8-28 | | | | |
| WSS | 8-41 | | | | |
| WST | 8-38 | | | | |
| WSU | 8-28,8-39 | | | | |
| WSX | 8-34 | | | | |
| WSZ | 2-6 | | | | |
| WU | 8-39 | | | | |
| WUS | 8-39 | | | | |
| WWA | 8-49 | | | | |
| WWD | 8-4 | | | | |
| WWF | 8-37 | | | | |
| WWK | 8-35 | | | | |
| 【Y】 | | | | | |
| YAA | 12-13 | | | | |
| YAD | 12-4 | | | | |
| YAK | 12-17 | | | | |
| YAKS | 12-17 | | | | |
| YAM | 12-14 | | | | |
| YAT | 12-12 | | | | |
| YJ | 12-2 | | | | |
| | 12-13~12-14 | | | | |
| YJA | 12-5 | | | | |
| YJB | 12-9 | | | | |
| YJC | 12-6 | | | | |
| YJD | 12-16 | | | | |
| YJF | 12-8 | | | | |
| YJG | 12-17 | | | | |
| YJH | 12-10 | | | | |
| YJK | 12-9 | | | | |
| YJL | 12-9 | | | | |
| YJM | 12-10 | | | | |
| YJP | 12-6 | | | | |
| YJQ | 12-7 | | | | |
| YJR | 12-5 | | | | |
| YJS | 12-7 | | | | |
| YJW | 12-7 | | | | |
| YL | 6-118,6-120 | | | | |
| YLA | 6-119 | | | | |
| YLB | 6-119 | | | | |
| YLC | 6-118 | | | | |
| YLED | 4-34 | | | | |
| YLF | 6-119 | | | | |
| 【其他】 | | | | | |
| 热收缩套管 | 8-72 | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

# 01

## 门扣
## MAGNET LATCH, STRIKER LATCH, PUSH LATCH

## 塑胶阻尼器
## ROTARY DAMPER

## 导光棒
## LIGHT PIPE



## 扣具 MAGNET LATCH( 磁铁式 ) 1-2-1

- MATERIAL: NYLON 66(UL)+STEEL
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

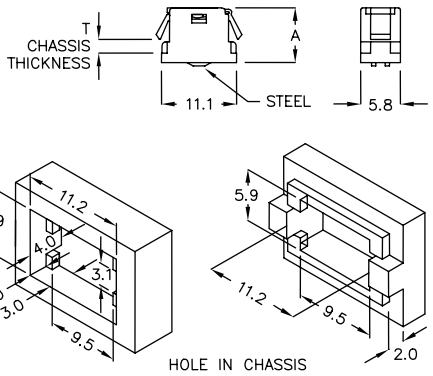


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DLA–01 | 8.4 | 2.0 | 1000 |

## 扣具 MAGNET LATCH( 磁铁式 ) 1-2-2

- MATERIAL: NYLON 66(UL)+STEEL
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

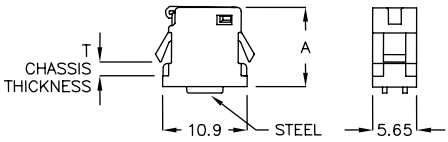


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DLA–02 | 10.2 | 1.9 | 1000 |

HOLE IN CHASSIS SAME AS DLA-01 (Page 1-2-1)

## 扣具 MAGNET LATCH( 磁铁式 ) 1-2-3

- MATERIAL: NYLON 66(UL)+STEEL
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

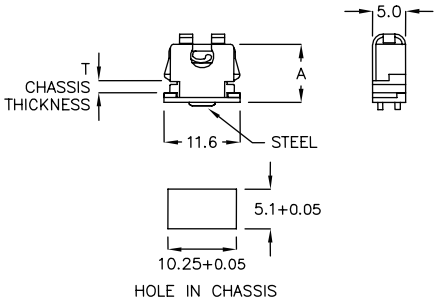


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DLA–03 | 8.9 | 2.0 | 1000 |



## 扣具 STRIKER 1-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

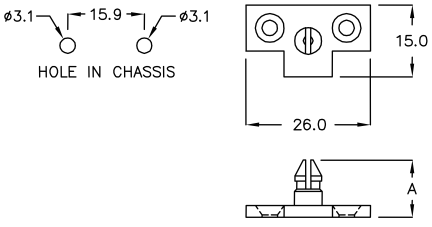


| PART NO | A | PACKAGE |
|---|---|---|
| DL–10A | 12.0 | 500 |

TO BE USED WITH P.G. PART DL-10 , DL-10F (Page 1-3-3 , 1-3-2)



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 扣具 STRIKER 1-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

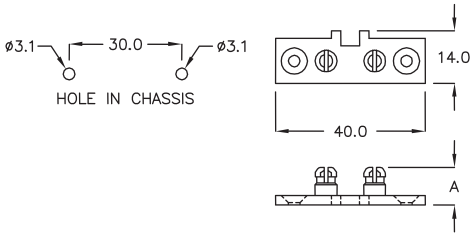


| PART NO | A | PACKAGE |
|---|---|---|
| DL-10K | 10.1 | 500 |

TO BE USED WITH P.G. PART DL-10H (Page 1-3-4)

## 扣具 LATCH 1-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DL-10 | 8.5 | 1.4 | 500 |

TO BE USED WITH P.G. PART DL-10A (Page 1-2-4)

## 扣具 LATCH 1-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DL-10F | 8.5 | 1.2~1.6 | 500 |

TO BE USED WITH P.G. PART DL-10A (Page 1-2-4)



## 扣具 LATCH 1-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS : 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DL-10H | 8.5 | 1.4~1.6 | 500 |

TO BE USED WITH P.G. PART DL-10K (Page 1-3-1)

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 扣具 LATCH 1-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

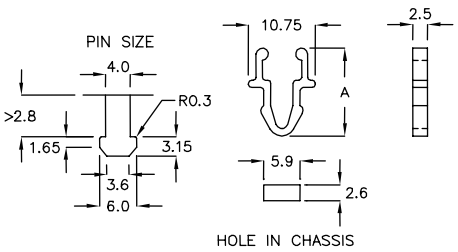


| PART NO | A | PACKAGE |
|---|---|---|
| DL−2 | 14.7 | 1000 |

## 扣具 STRIKER 1-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DL−008 | 13.0 | 1.5 | 9.9 | 18.0 | 1000 |
| DL−8DK | 8.0 | 2.0 | 8.7 | 15.2 | |

DL-8DK TO BE USED WITH P.G. PART DL-9DK (Page 1-4-4)
DL-008 TO BE USED WITH P.G. PART DL-009 ,
DL-9KA , DLC-14 (Page 1-4-3 , 1-5-1)



## 扣具 LATCH 1-4-3

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

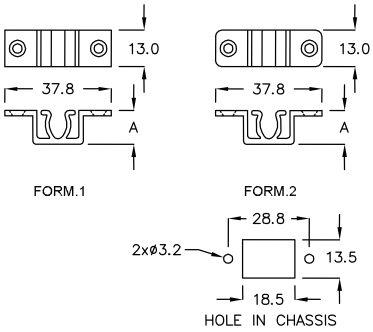


| PART NO | A | FORM | PACKAGE |
|---|---|---|---|
| DL−009 | 12.1 | 1 | 200 |
| DL−9KA | 12.0 | 2 | |

TO BE USED WITH P.G. PART DL-008 (Page 1-4-2)



## 扣具 LATCH 1-4-4

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW




| PART NO | A | PACKAGE |
|---|---|---|
| DL−9DK | 10.8 | 200 |

TO BE USED WITH P.G. PART DL-8DK (Page 1-4-2)



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 扣具 LATCH 1-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x4 TAPPING SCREW




| PART NO | A | PACKAGE |
|---|---|---|
| DLC-14 | 13.7 | 500 |

TO BE USED WITH P.G. PART DL-008 (Page 1-4-2)

## 扣具 LATCH 1-5-2

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

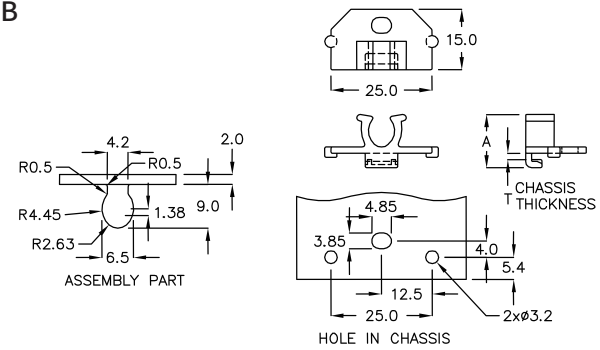


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DLM-06 | 13.15 | 1.5 | 2000 |

## 扣具 LATCH 1-5-3

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

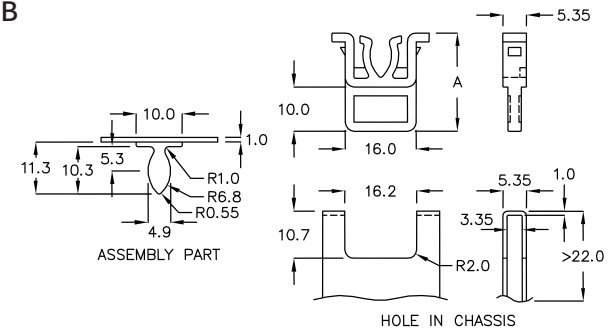


| PART NO | A | PACKAGE |
|---|---|---|
| DLF-22QT | 22.2 | 200 |

## 扣具 STRIKER 1-5-4

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| DL-20A | 20.6 | 500 |

TO BE USED WITH P.G. PART DL-20 (Page 1-6-1)

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 扣具 LATCH 1-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- METAL MATERIAL: SK7 BLUE ZINE PLASTED
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| DL-20 | 14.9 | 500 |

TO BE USED WITH P.G. PART DL-20A (Page 1-5-4)

## 扣具 LATCH 1-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

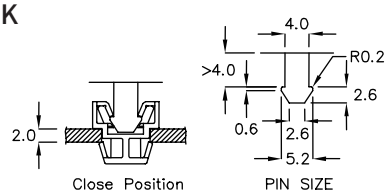





| PART NO | A | PACKAGE |
|---|---|---|
| DLB-4A | 10.2 | 1000 |

## 扣具 LATCH 1-6-3

- MATERIAL: PP(UL),NYLON 6(UL)
- COLOR: BLACK




| PART NO | MATERIAL | A | PACKAGE |
|---|---|---|---|
| DLK-01 | PP V0 | ø6.0 | 500 |
| DLK-02 | N6 V2 | ø5.85 | |

TO BE USED WITH P.G. MALE PART DLK-1A (Page 1-6-4)

## 扣具 STRIKER 1-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | D SCREW | PACKAGE |
|---|---|---|---|---|
| DLK-1A | 18.0 | 4.0 | M6 | 500 |

TO BE USED WITH P.G. FEMALE PART DLK-01 , DLK-02 (Page 1-6-3)



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 扣具 STRIKER 1-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

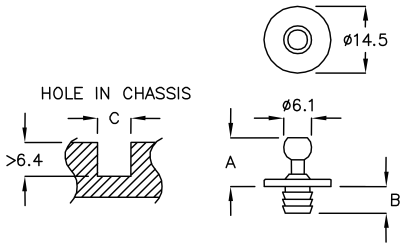


| PART NO | A | B | C HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|
| DLK-2A | 10.6 | 5.8 | ø6.1 | 500 |

TO BE USED WITH P.G. FEMALE PART MPL-02 , MPL-04 (Page 1-7-3)

## 扣具 STRIKER 1-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

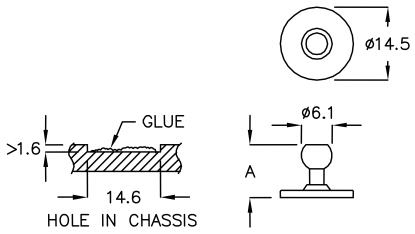


| PART NO | A | PACKAGE |
|---|---|---|
| DLK-2C | 10.6 | 500 |

TO BE USED WITH P.G. FEMALE PART MPL-02 , MPL-04 (Page 1-7-3)

## 固定座 LATCH 1-7-3

- MATERIAL: TPE
- COLOR: BLACK

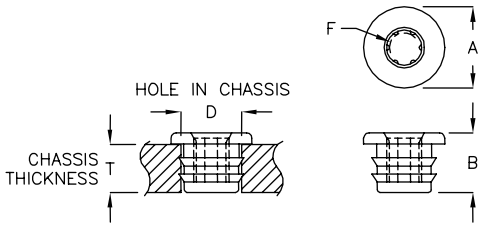


| PART NO | A | B | F | T CHASSIS THICKNESS | D HOLE IN CHASSIS | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|
| MPL-01 | ø15.0 | 10.8 | ø6.0 | 10.0 | ø10.0 | TPE 55° | 500 |
| | | | | | ø10.5 | TPE 70° | |
| MPL-02 | ø15.0 | 11.0 | ø5.5 | 10.0 | ø10.0 | TPE 55° | |
| | | | | | ø10.5 | TPE 70° | |
| MPL-04 | ø14.0 | 10.5 | ø5.9 | 9.5 | ø10.0 | TPE 55° | |
| | | | | | ø10.5 | TPE 70° | |

## 扣具 PUSH LATCH STRIKER 1-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

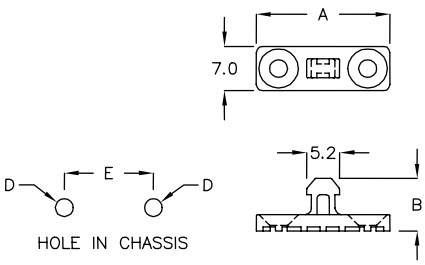


| PART NO | A | B | D | E | SUITABLE PUSH LATCH WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| DL-03C | 21.0 | 8.3 | ø2.8 | 14.0 | DL-150C, DL-400D | 1000 |

TO BE USED WITH P.G. PART DL-SERIES (Page 1-11-1 , 1-11-3)

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 扣具 PUSH LATCH STRIKER 1-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

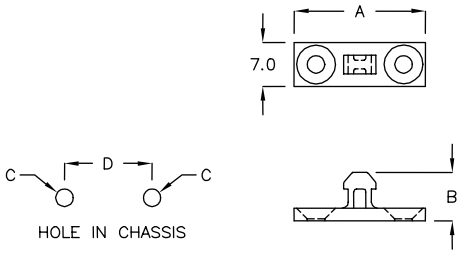


| PART NO | A | B | C | D | SUITABLE PUSH LATCH WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| DL-001 | 25.0 | 10.1 | ø3.2 | 15.0 | DL-100B, DL-400D | 1000 |
| DL-003 | 21.0 | 7.7 | ø2.8 | 14.0 | DL-100C, DL-150C DL-400D | |
| DL-07SK | 25.0 | 10.1 | ø3.2 | 15.0 | DL-700F | |

TO BE USED WITH P.G. PART DL-SERIES (Page 1-10-2 , 1-11-3 , 1-10-3 , 1-11-1 , 1-12-2 )

## 扣具 PUSH LATCH STRIKER 1-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

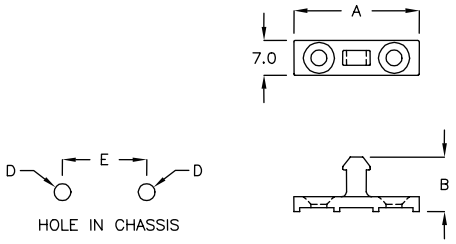


| PART NO | A | B | D | E | SUITABLE PUSH LATCH WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| DL-002 | 25.0 | 11.0 | ø3.2 | 15.0 | DL-100A, DL-100C DL-150C, DL-400D | 1000 |

TO BE USED WITH P.G. PART DL-SERIES (Page 1-10-1 , 1-10-3 , 1-11-1 , 1-11-3 )

## 门扣 PUSH LATCH 1-8-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: STEEL,SPRING

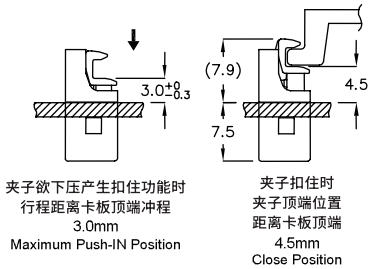


| PART NO | A | PACKAGE |
|---|---|---|
| DL-250 | 19.2 | 1000 |

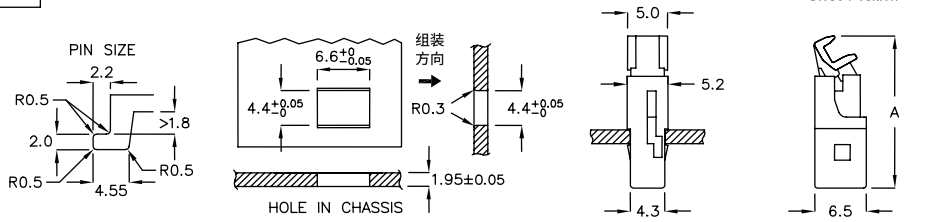




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 门扣 PUSH LATCH 1-9-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: STEEL,SPRING

| PART NO | A | PACKAGE |
|---|---|---|
| DL-220C | 2.95 | 2000 |

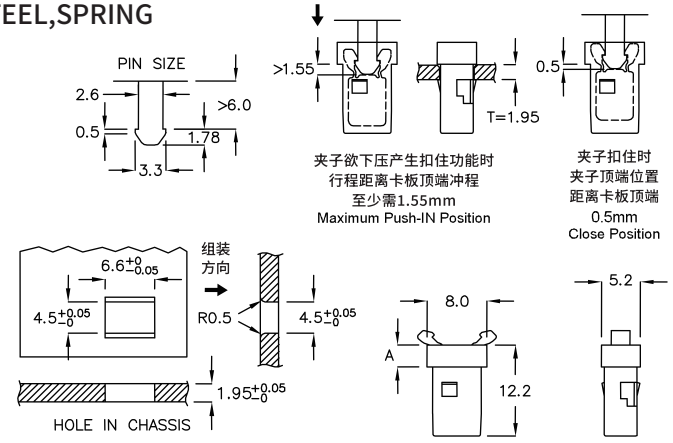

## 门扣 PUSH LATCH 1-9-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

| PART NO | A | PACKAGE |
|---|---|---|
| DL-550 | 5.0 | 1000 |

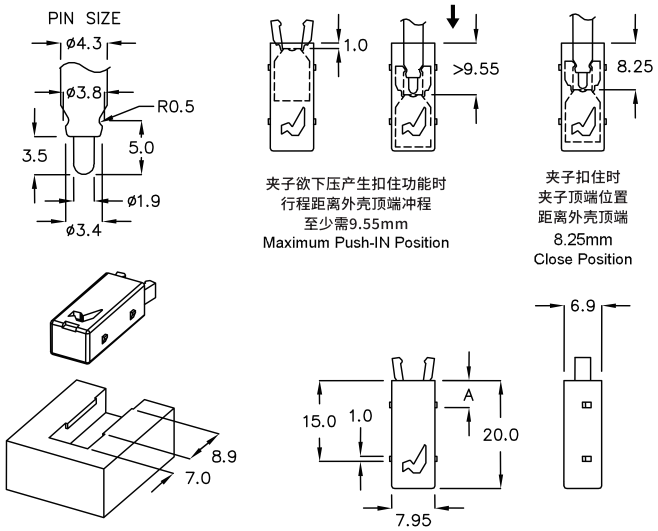




## 门扣 PUSH LATCH 1-9-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: STEEL,SPRING

| PART NO | A | PACKAGE |
|---|---|---|
| DL-650C | 2.9 | 1000 |

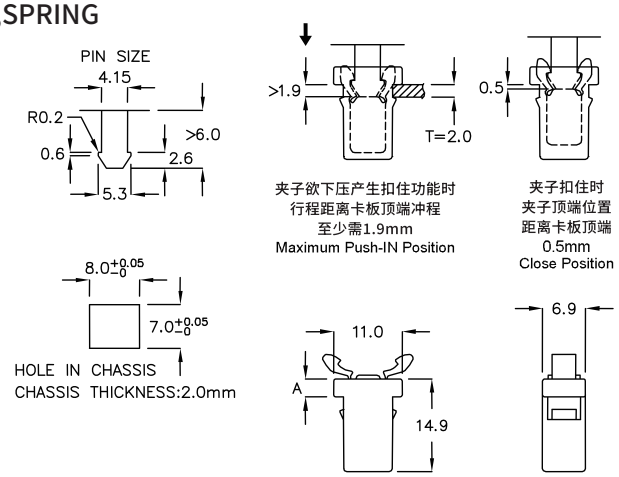


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

| PART NO | A | PACKAGE |
|---|---|---|
| DL-100A | 2.9 | 1000 |

## 门扣 PUSH LATCH 1-10-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- MATERIAL: POM,SPRING

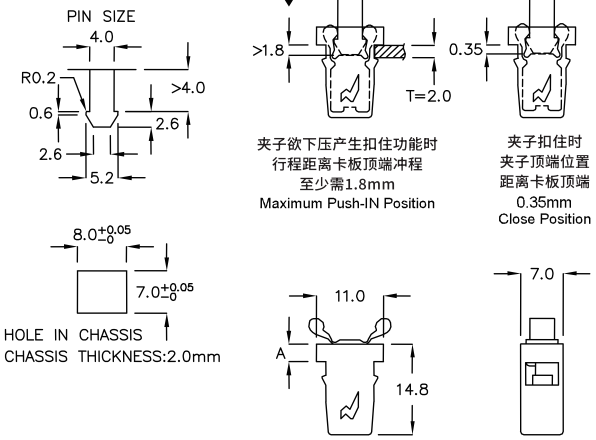

| PART NO | A | PACKAGE |
|---|---|---|
| DL-100B | 2.9 | 1000 |

## 门扣 PUSH LATCH 1-10-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

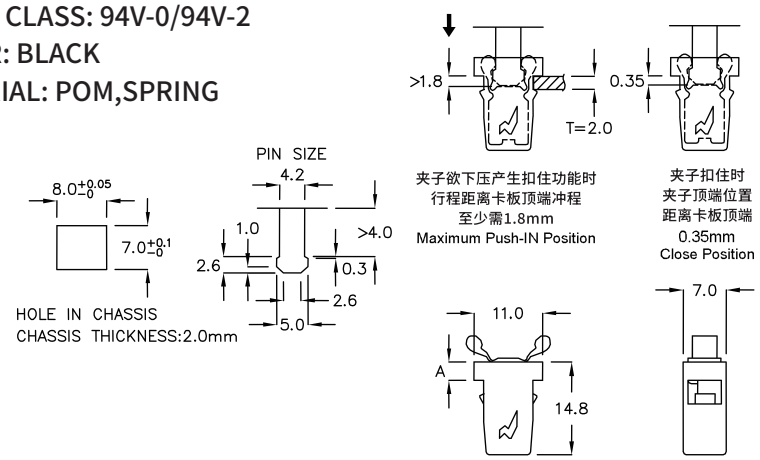

| PART NO | A | PACKAGE |
|---|---|---|
| DL-100C | 2.9 | 1000 |

## 门扣 PUSH LATCH 1-10-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

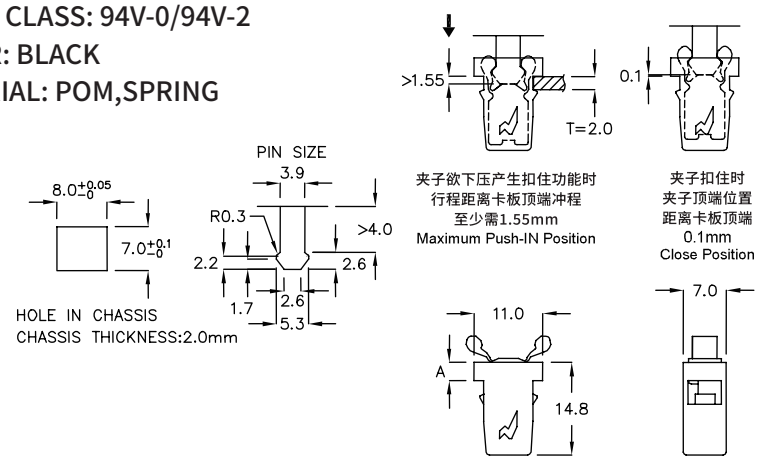




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 门扣 PUSH LATCH 1-11-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

| PART NO | A | PACKAGE |
|---|---|---|
| DL-150C | 2.9 | 1000 |

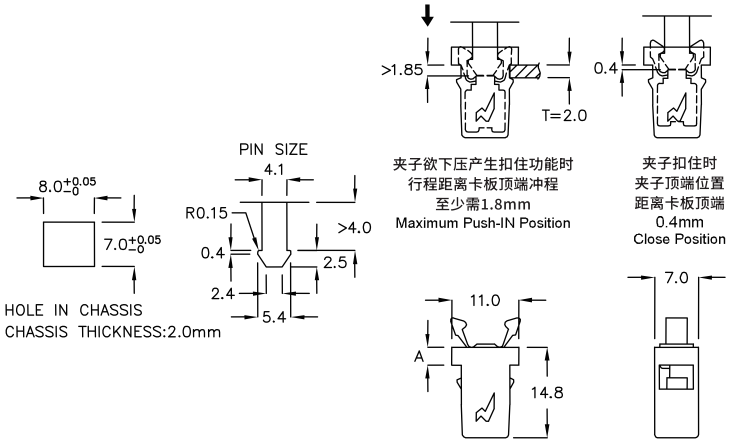

## 门扣 PUSH LATCH 1-11-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

| PART NO | A | PACKAGE |
|---|---|---|
| DL-150F | 2.9 | 1000 |

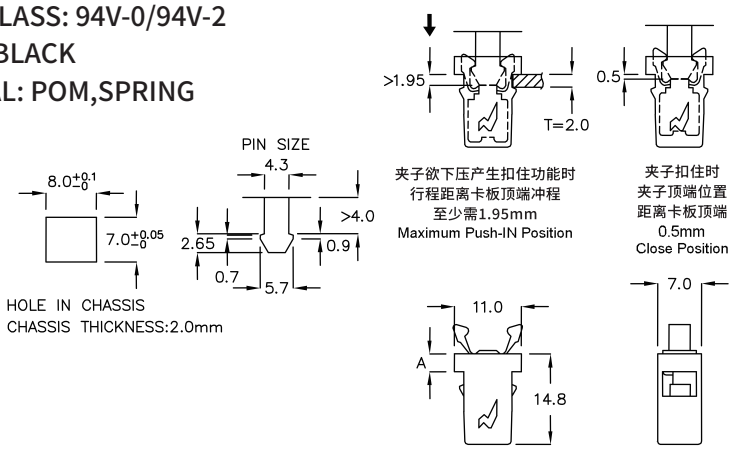

## 门扣 PUSH LATCH 1-11-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- MATERIAL: POM,SPRING

| PART NO | A | PACKAGE |
|---|---|---|
| DL-400D | 3.1 | 1000 |

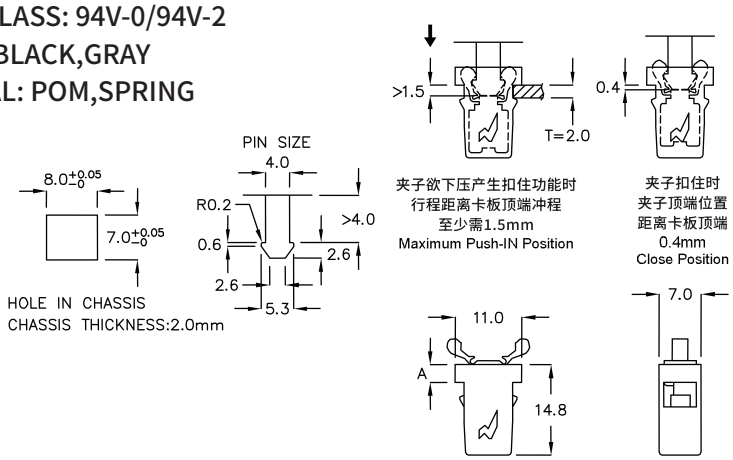


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

| PART NO | A | PACKAGE |
|---|---|---|
| DL-400H | 3.1 | 1000 |

## 门扣 PUSH LATCH 1-12-1

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

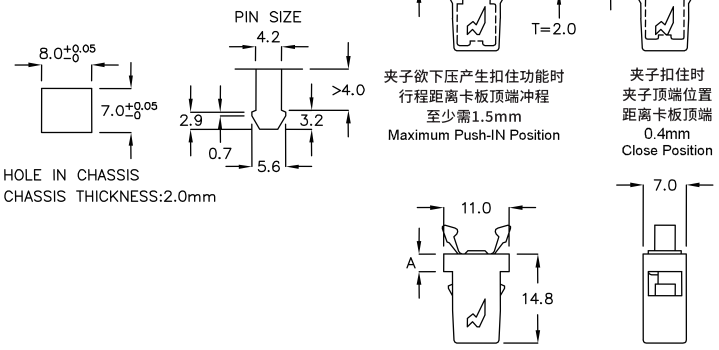

| PART NO | A | PACKAGE |
|---|---|---|
| DL-700F | 2.9 | 1000 |

## 门扣 PUSH LATCH 1-12-2

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- MATERIAL: POM,SPRING

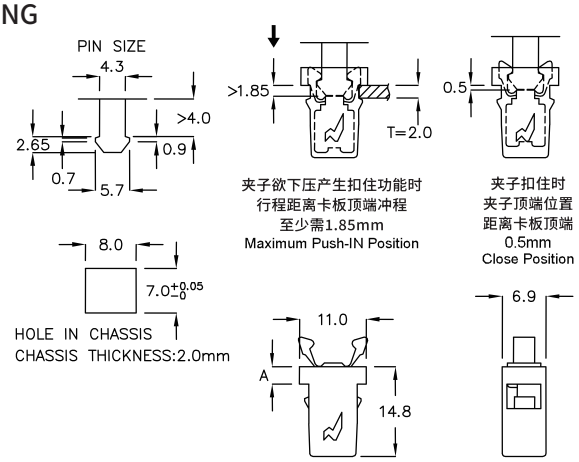

| PART NO | A | PACKAGE |
|---|---|---|
| DL-400P | 3.1 | 1000 |

## 门扣 PUSH LATCH 1-12-3

- MATERIAL: NYLON 66(UL),PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- MATERIAL: POM,SPRING

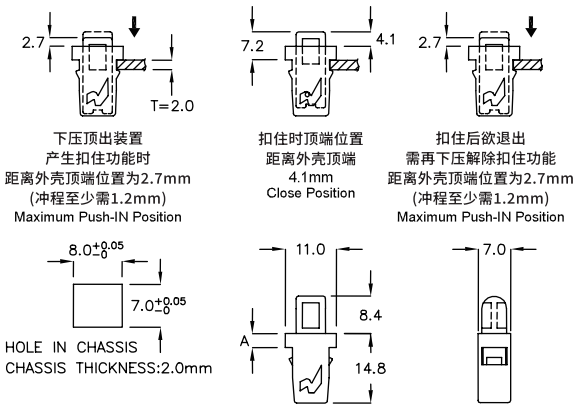




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 塑胶阻尼器 ROTARY DAMPER 1-13-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

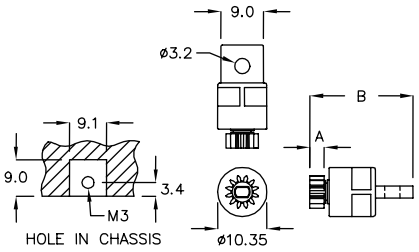


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-10 | ø6.0 | 0.5 | 12 | 20° | 3.0 | 21.7 | 10~30 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



## 塑胶阻尼器 ROTARY DAMPER 1-13-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

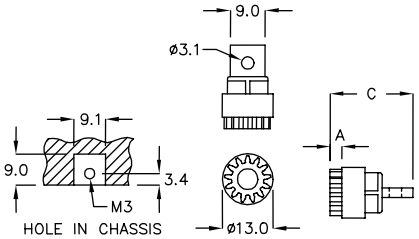


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | C | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-01K | ø8.8 | 0.8 | 11 | 20° | 3.0 | 21.7 | 23,38,63 | 500 |
| PG-01A | ø10.4 | 0.8 | 13 | 20° | 3.2 | 21.9 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-13-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-04K | ø6.0 | 0.5 | 12 | 20° | 1.8 | 5.7 | 7~30 | 1000 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-13-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-07S | ø6.0 | 0.6 | 10 | 20° | 3.0 | 6.1 | 10~75 | 1000 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-14-1

- MATERIAL: ABS,POM
- FLAME CLASS: 94HB
- COLOR: BLACK

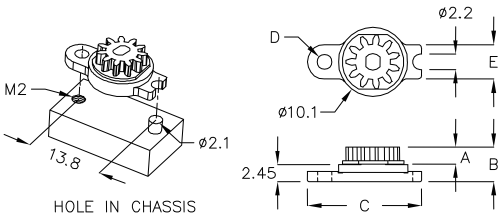


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | C | D | E | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PG-7MK | ø6.6 | 0.6 | 11 | 20° | 2.45 | 5.1 | 16.5 | ø2.15 | 5.0 | 15,25 45,60 | 1000 |
| PG-7CN | ø6.6 | 0.6 | 11 | 20° | 3.45 | 6.1 | 16.5 | ø2.15 | 5.0 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-14-2

- MATERIAL: ABS,POM
- FLAME CLASS: 94HB
- COLOR: BLACK

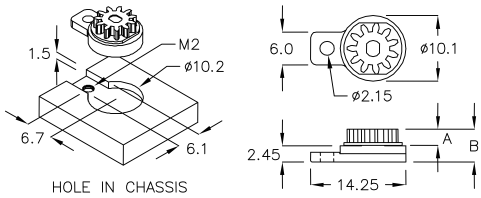


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-7BP | ø6.6 | 0.6 | 11 | 20° | 2.45 | 5.1 | 15,25,45,60 | 1000 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-14-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-3AS | ø8.8 | 0.8 | 11 | 20° | 3.55 | 7.5 | 15 | 500 |
| PG-3MS | ø10.4 | 0.8 | 13 | 20° | 3.55 | 7.5 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-14-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-13 | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.7 | 45,70,100,130 150,200,230,270 | 500 |
| PG-13M | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.7 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-15-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-13QR | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.5 | 15~175 | 500 |
| PG-13YP | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.5 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-15-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | C | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| PG-13DF | ø8.8 | 0.8 | 11 | 20° | 5.6 | 10.0 | 24.0 | 40~280 | 500 |
| PG-13HJ | ø8.8 | 0.8 | 11 | 20° | 5.6 | 10.0 | 25.5 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-15-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-13PC | ø8.8 | 0.8 | 11 | 20° | 3.0 | 6.15 | 45~155 | 500 |
| PG-13PL | ø10.4 | 0.8 | 13 | 20° | 3.0 | 6.15 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-15-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-21 | ø12.8 | 0.8 | 16 | 20° | 3.0 | 6.8 | 12,25 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 塑胶阻尼器 ROTARY DAMPER 1-16-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-8CS | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.85 | 15,45 100,130 | 500 |
| PG-8FS | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.85 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-16-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-08H | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.8 | 60,110,190 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-16-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: GRAY




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-15 | ø7.0 | 0.5 | 14 | 20° | 3.0 | 6.4 | 25~110 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



## 塑胶阻尼器 ROTARY DAMPER 1-16-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: GRAY




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-15A | ø8.8 | 0.8 | 11 | 20° | 3.0 | 6.4 | 25~110 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-17-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-8AS | ø8.8 | 0.8 | 11 | 20° | 3.0 | 8.0 | 15,45 100,130 | 500 |
| PG-8MS | ø10.4 | 0.8 | 13 | 20° | 3.0 | 8.0 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-17-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

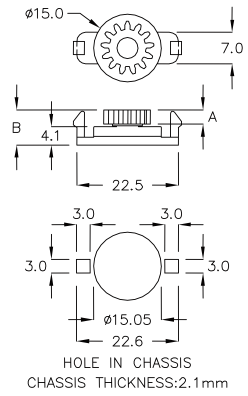


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-8LS | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.6 | 15,45 100,130 | 500 |
| PG-8DS | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.6 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-17-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

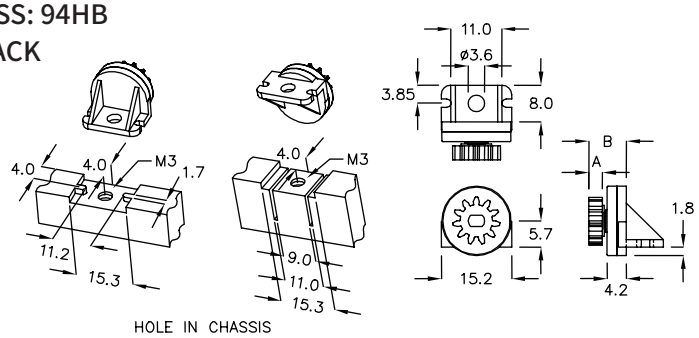


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-5AS | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.6 | 15 | 500 |
| PG-5MS | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.6 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-18-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

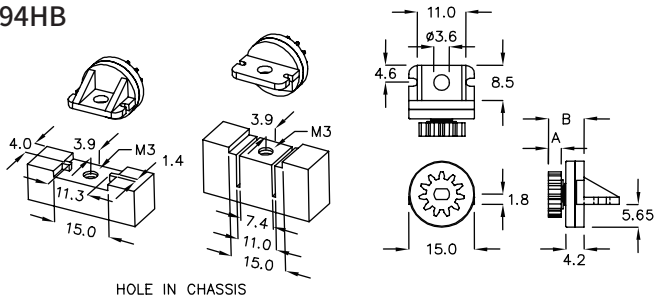


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-5CS | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.6 | 15,45 100,130 | 500 |
| PG-5LS | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.6 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-18-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

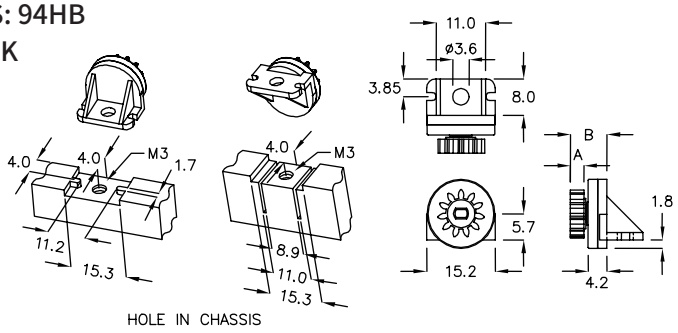


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-12 | ø8.8 | 0.8 | 11 | 20° | 3.0 | 7.6 | 45,70,100,130 150,200,230,270 | 500 |
| PG-12M | ø10.4 | 0.8 | 13 | 20° | 3.0 | 7.6 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-18-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

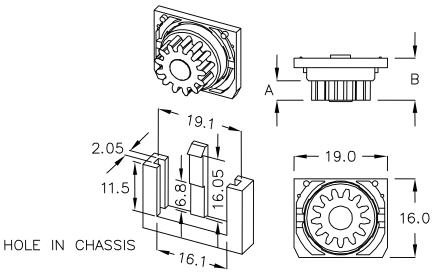


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-06A | ø10.4 | 0.8 | 13 | 20° | 4.0 | 8.9 | 45,85 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND
INSTALLATION: IS JAMED BY THE CLIP



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-19-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

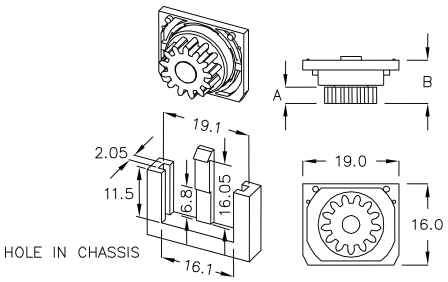


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-06C | ø10.4 | 0.8 | 13 | 20° | 3.2 | 8.55 | 25,37,65 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND
INSTALLATION: IS JAMED BY THE CLIP

## 塑胶阻尼器 ROTARY DAMPER 1-19-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-16D | ø8.8 | 0.8 | 11 | 20° | 5.5 | 14.0 | 60~500 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-19-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

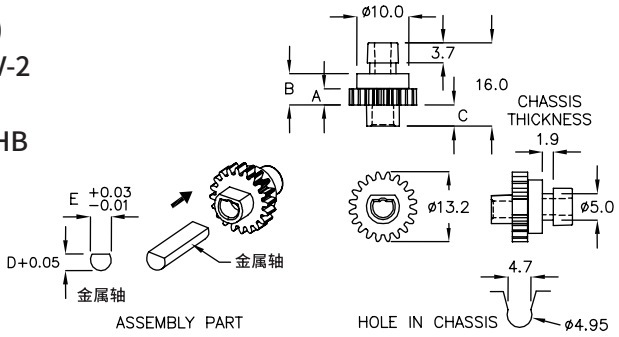


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | C | D | E | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PG-17 | ø12.0 | 0.6 | 20 | 20° | 3.0 | 6.2 | 4.0 | 3.05 | ø4.05 | 13 | 500 |
| PG-18 | ø12.0 | 0.6 | 20 | 20° | 3.0 | 7.2 | 3.0 | 3.7 | ø4.7 | 25 | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-19-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

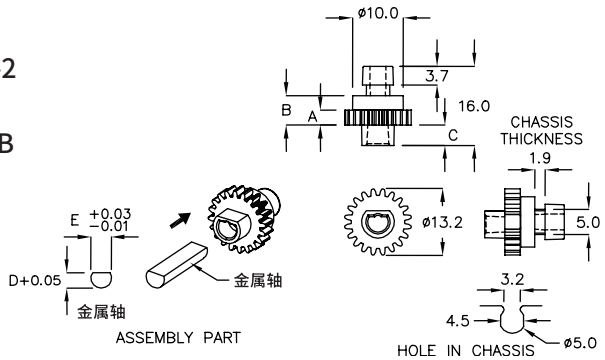


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | C | D | E | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PG-17MD | ø12.0 | 0.6 | 20 | 20° | 3.0 | 6.2 | 4.0 | 3.05 | ø4.05 | 13 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-20-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-22 | ø8.8 | 0.8 | 11 | 20° | 4.5 | 13.85 | 220 | 500 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-20-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-20 | ø12.0 | 1.0 | 12 | 20° | 5.0 | 18.2 | 500 | 64 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-20-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK







| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | TORQUE(gf-cm) | | PACKAGE |
|---|---|---|---|---|---|---|---|
| | | | | | withershin | clockwise | |
| PG-30-600 | ø12.0 | 1.0 | 12 | 20° | 600 | 100 | 64 |
| PG-30-1400 | ø12.0 | 1.0 | 12 | 20° | 1400 | 100 | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-20-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK







| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | TORQUE(gf-cm) | | TYPE OF GEARS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| | | | | | withershin | clockwise | | |
| PG-50-600 | ø12.0 | 1.0 | 12 | 20° | 600 | 100 | SPUR GEARS | 64 |
| PG-50-1400 | ø12.0 | 1.0 | 12 | 20° | 1400 | 100 | | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶阻尼器 ROTARY DAMPER 1-21-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

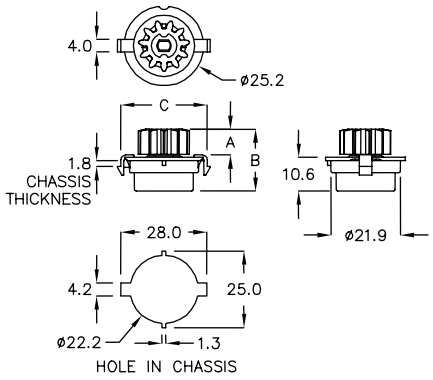


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | C | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| PG-27 | ø13.75 | 1.25 | 11 | 20° | 7.9 | 19.5 | 27.3 | 100 | 200 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-21-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

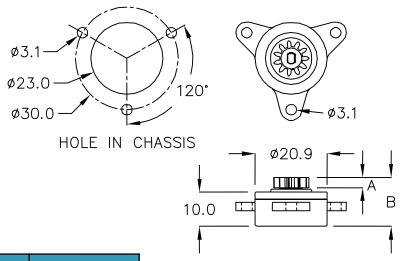


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | A | B | TORQUE (gf-cm) | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| PG-40 | ø8.8 | 0.8 | 11 | 20° | 3.0 | 14.3 | 400 | 200 |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 塑胶阻尼器 ROTARY DAMPER 1-21-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: BLACK

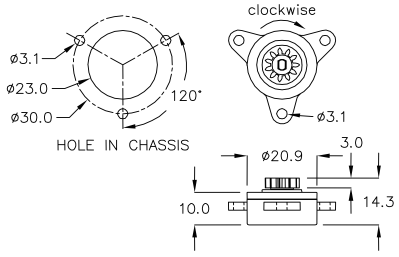


| PART NO | PITCH DIAMETER | MODULE | TOOTH NUMBER | PRESSURE ANGLE | TORQUE(gf-cm) | | PACKAGE |
|---|---|---|---|---|---|---|---|
| | | | | | withershin | clockwise | |
| PG-45-380 | ø8.8 | 0.8 | 11 | 20° | 380 | 140 | 200 |
| PG-45-700 | ø8.8 | 0.8 | 11 | 20° | 700 | 200 | |

TORQUE VALVE CAN BE CUSTOMIZED PER CUSTOMERS' DEMAND

## 导光罩 LIGHT TRANSPORTER 1-21-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

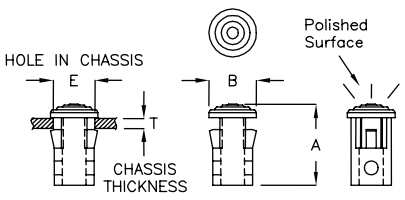


搭配 ∅2 导光光纤使用

| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | SUITABLE FIBER DIAMETER | PACKAGE |
|---|---|---|---|---|---|---|
| EDN-03 | 6.9 | ø4.1 | ø3.5 | 1.0 | ø2.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光罩 LIGHT TRANSPORTER 1-22-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

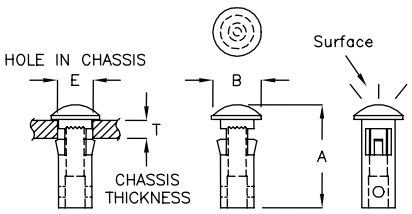


搭配 ∅2、∅3 导光光纤使用

| PART NO | Surface | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | SUITABLE FIBER DIAMETER | PACKAGE |
|---|---|---|---|---|---|---|---|
| EDN-3C | Matt | 11.6 | ø5.0 | ø3.55 | 3.0 | ø2.0 | 1000 |
| EDN-5A | Polished | 6.9 | ø5.1 | ø4.5 | 1.0 | ø3.0 | |

## 导光罩 LIGHT TRANSPORTER 1-22-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

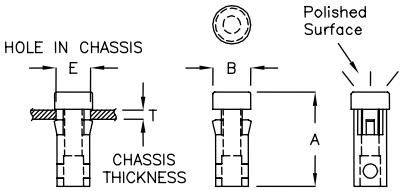


搭配 ∅2 导光光纤使用

| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | SUITABLE FIBER DIAMETER | PACKAGE |
|---|---|---|---|---|---|---|
| EDN-3K | 9.8 | ø4.0 | ø3.5 | 1.0 | ø2.0 | 1000 |

## 导光罩 LIGHT TRANSPORTER 1-22-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

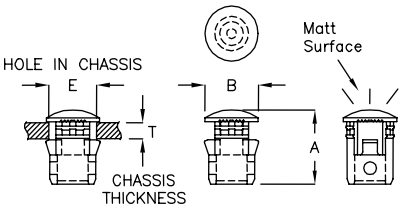


搭配 ∅3 导光光纤使用

| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | SUITABLE FIBER DIAMETER | PACKAGE |
|---|---|---|---|---|---|---|
| EDN-5SP | ø6.9 | ø5.1 | ø4.5 | 1.6 | ø3.0 | 1000 |

## SMD 座 SMD HOUSING 1-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

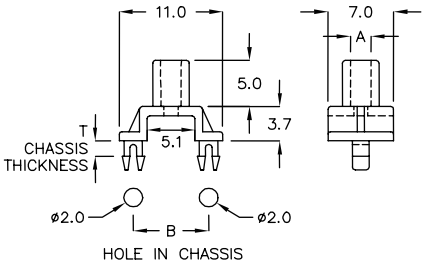


搭配 ∅2、∅3 导光光纤使用

| FOR SMD LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | T CHASSIS THICKNESS | SUITABLE FIBER DIAMETER | PACKAGE |
| EDZ-01 | ø2.2 | 8.0 | 1.6 | ø2.0 | 1000 |
| EDZ-2F | ø3.0 | 8.0 | 1.6 | ø3.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 1-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

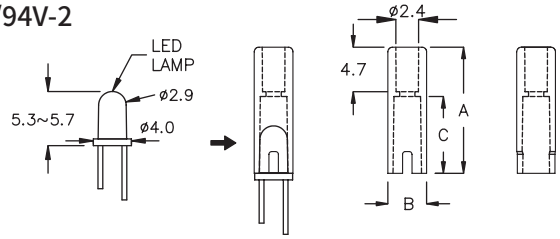


搭配 ∅2 导光光纤使用

| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | SUITABLE FIBER DIAMETER | PACKAGE |
| ★ EDZ−13C | 13.3 | ø4.1 | 8.1 | ø2.0 | 1000 |

## LED 座 LED HOUSING 1-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

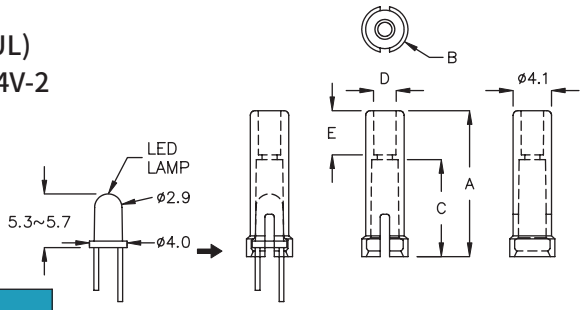


搭配 ∅2 导光光纤使用

| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | SUITABLE FIBER DIAMETER | PACKAGE |
| EDZ−3A | 12.5 | ø4.9 | 7.0 | ø2.1 | 5.0 | ø2.0 | 1000 |
| EDZ−15F | 15.5 | ø4.9 | 10.3 | ø2.4 | 4.7 | ø2.0 | |

## LED 座 LED HOUSING 1-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

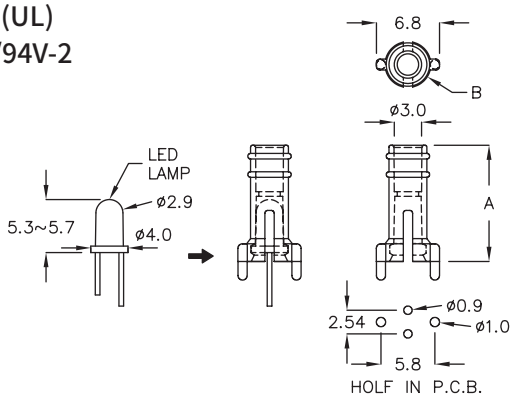


搭配 ∅3 导光光纤使用

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | SUITABLE FIBER DIAMETER | PACKAGE |
| EDZ−2A | 12.5 | ø4.9 | ø3.0 | 1000 |

## LED 座 LED HOUSING 1-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

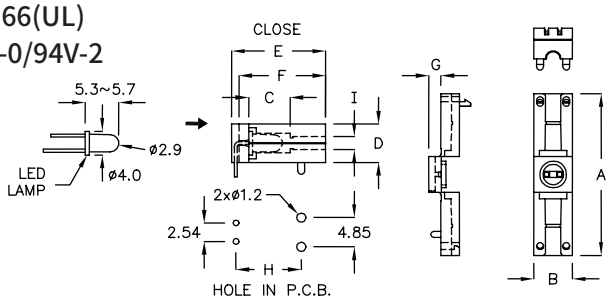


搭配 ∅2、∅3 导光光纤使用

| FOR ø3 2PIN LED | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | H | I | FIBER DIAMETER | PACKAGE |
| EDZ−03 | 32.8 | 6.0 | 7.0 | 7.0 | 15.9 | 14.6 | 2.9 | 11.05 | 2.2 | ø2.0 | 500 |
| EDZ−2C | 31.6 | 7.5 | 6.0 | 7.2 | 14.8 | 13.5 | 2.4 | 10.05 | 3.0 | ø3.0 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 1-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

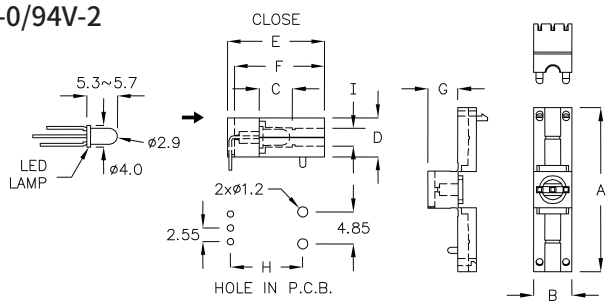


搭配 ∅3 导光光纤使用

| FOR ø3 3PIN LED | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | H | I | FIBER DIAMETER | PACKAGE |
| EDZ-04 | 31.5 | 7.5 | 6.0 | 7.2 | 18.15 | 16.9 | 5.8 | 13.5 | 3.05 | ø3.0 | 500 |

## LED 导光罩 LED CAP 1-24-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

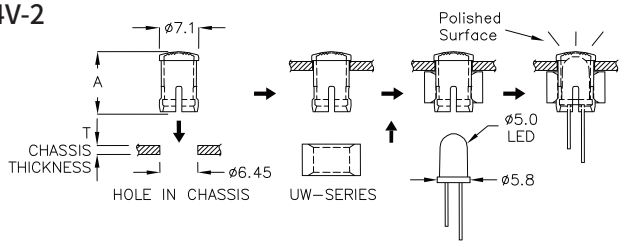


| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | T CHASSIS THICKNESS | SUITABLE HOLDER | PACKAGE |
| EDK-01 | 10.8 | 0.8 | UW-07C | 1000 |
| | | 1.0 | UW-07A | |
| | | 1.2 | UW-06C | |
| | | 1.6 | UW-06A | |
| | | 2.0 | UW-05C | |
| | | 2.5 | UW-05A | |
| | | 3.0 | UW-04C | |
| | | 6.7 | | |

ALSO CAN ASSEMBLE WITH UW-SERIES (Page 1-25-1 )

## LED 导光罩 LED CAP 1-24-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

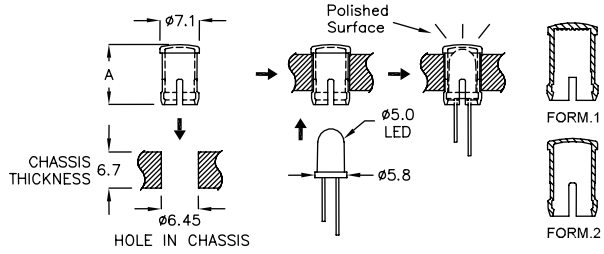


| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | FORM | PACKAGE |
| EDK-1C | 10.9 | 1 | 1000 |
| EDK-1TP | 10.8 | 2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 LAMP HOLDER 1-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| UW-04C | 4.5 | 2000 |
| UW-05A | 5.0 | |
| UW-05C | 5.5 | |
| UW-06A | 5.9 | 1000 |
| UW-06C | 6.3 | |
| UW-07A | 6.5 | |
| UW-07C | 6.7 | |

ALSO CAN ASSEMBLE WITH EDK-01 (Page 1-24-2 )

## LED 导光罩 LED CAP 1-25-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

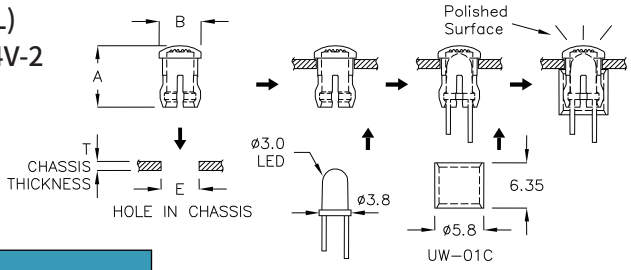


| FOR ø3 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | SUITABLE HOLDER | PACKAGE |
| EDK-02 | 7.3 | ø5.0 | ø4.3 | 0.8~2.8 | UW-01C | 1000 |

ALSO CAN ASSEMBLE WITH UW-SERIES (Page 13-17-5 )

## LED 导光罩 LED CAP 1-25-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

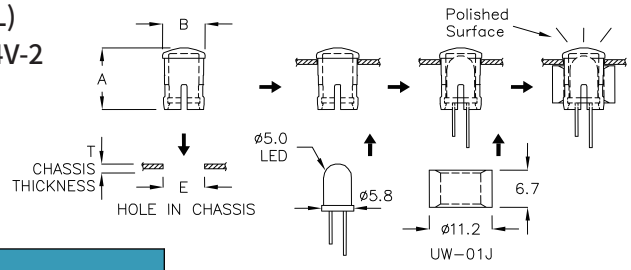


| FOR ø5 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | SUITABLE HOLDER | PACKAGE |
| EDK-03 | 11.1 | ø7.6 | ø7.2 | 0.8 | UW-01J | 1000 |

ALSO CAN ASSEMBLE WITH UW-SERIES (Page 13-17-5 )

## LED 导光罩 LED CAP 1-25-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

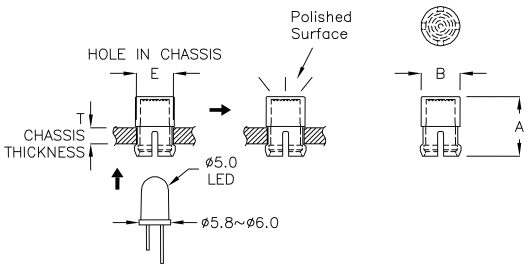


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
| EDK-1A | 10.9 | ø7.15 | ø6.4 | 3.2 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 导光罩 LED CAP 1-26-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

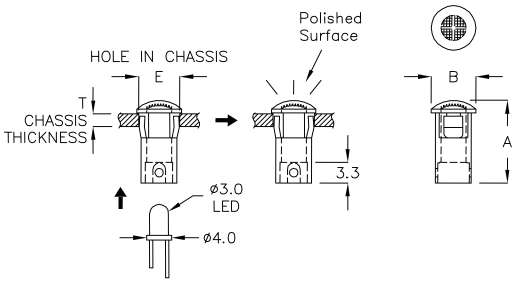


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
| EDN-05 | 13.2 | ø7.1 | ø6.0 | 1.6~2.0 | 1000 |

## LED 导光罩 LED CAP 1-26-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

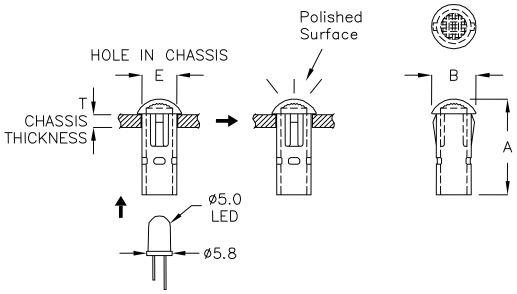


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
| EDN-5C | 24.2 | ø10.1 | ø8.5 | 2.0 | 500 |

## LED 导光罩 LED CAP 1-26-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

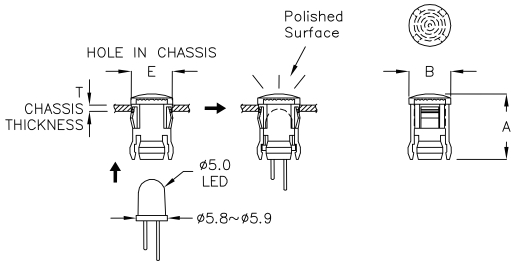


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
| EDK-5A | 10.9 | ø7.0 | ø6.4 | 0.8 | 1000 |

## LED 导光罩 LED CAP 1-26-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

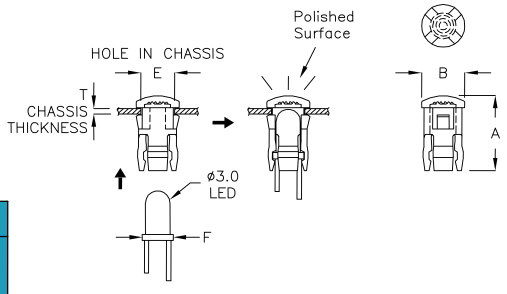


| FOR ø3 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | E HOLE IN CHASSIS | F | T CHASSIS THICKNESS | PACKAGE |
| EDK-3F | 9.1 | ø5.0 | ø4.3 | ø3.8 | 1.1 | 1000 |
| EDK-3HW | 9.3 | ø5.3 | ø4.8 | ø3.9 | 0.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-27-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

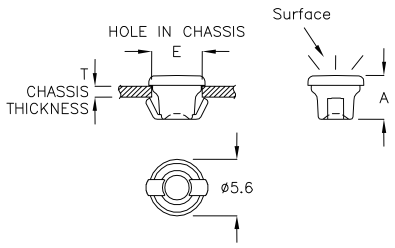


| PART NO | Surface | A | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| HHP-04 | Polished | 4.5 | ø5.0 | 1.0 | 1000 |
| HHP-4A | Polished | 4.9 | ø5.0 | 1.2 | |
| HHP-4F | Polished | 3.8 | ø5.0 | 0.8 | |
| HHP-4JP | Matt | 3.8 | ø5.0 | 0.8 | |

## 导光柱 LIGHT PIPE 1-27-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

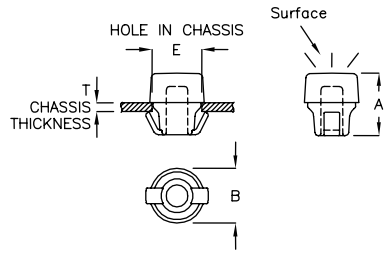


| PART NO | SURFACE | A | B | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| HHP-4C | Polished | 6.4 | ø5.6 | ø5.0 | 0.8 | 1000 |
| HHP-11JC | Matt | 10.8 | ø10.0 | ø8.5 | 2.0 | |

## 导光柱 LIGHT PIPE 1-27-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: CLEAR

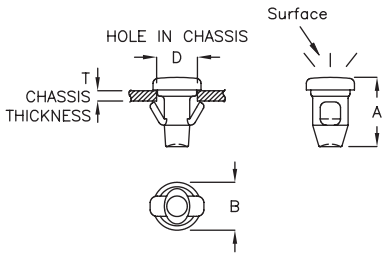


| PART NO | SURFACE | A | B | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| ★ HHP-6BC | Polished | 6.0 | ø5.6 | ø5.0 | 1.2 | 1000 |
| HHP-09 | Polished | 5.5 | ø3.8 | ø3.2 | 0.8 | |
| HHP-9AC | Matt | 9.0 | ø5.0 | ø4.3 | 0.8 | |
| HHP-13F | Matt | 13.9 | ø5.0 | ø4.3 | 0.8 | |

## 导光柱 LIGHT PIPE 1-27-4

- MATERIAL：PC(UL)
- COLOR：CLEAR




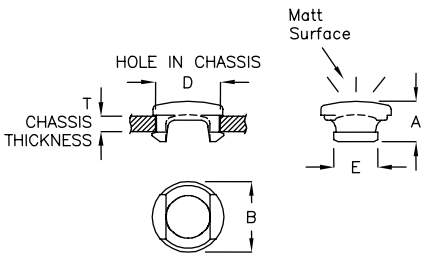


| PART NO | A | B | D HOLE IN CHASSIS | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| LDMD-3A | 2.7 | ø4.0 | ø3.0 | 2.6 | 1.0 | 2000 |
| LDMD-4A | 2.9 | ø5.25 | ø4.2 | 3.8 | 1.0 | |
| LDMD-5A | 3.2 | ø5.6 | ø5.0 | 3.5 | 1.2 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-28-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

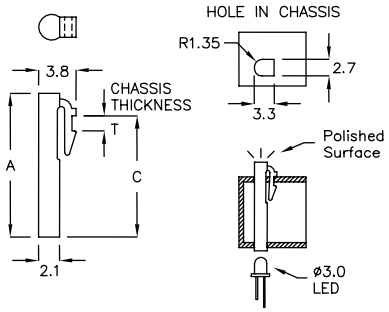


| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LEAD−14 | 14.4 | 12.15 | 1.2 | 2000 |

## 导光柱 LIGHT PIPE 1-28-2

- MATERIAL: PMMA
- FLAME CLASS: 94HB
- COLOR: CLEAR

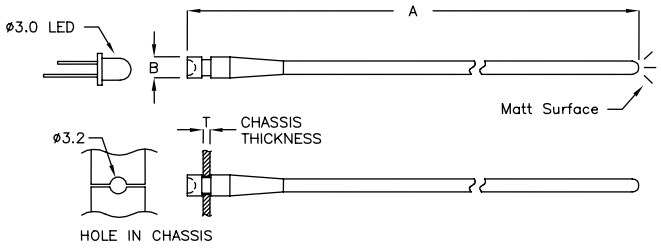


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LEAD−15 | 223.2 | ø4.0 | 1.5 | 100 |




## 导光柱 LIGHT PIPE 1-28-3

- MATERIAL: PC、NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR、BLACK

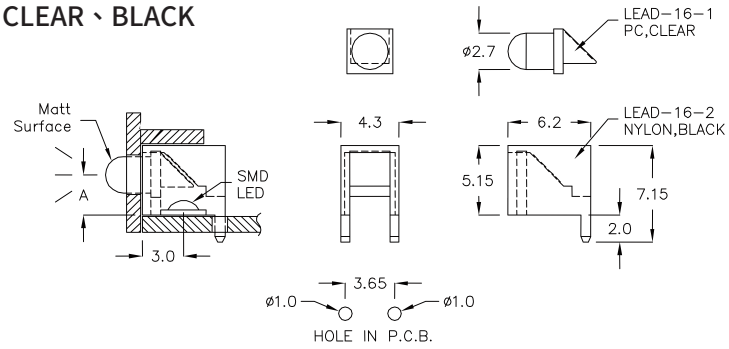


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD−16 | 3.0 | 1000 |




## 导光柱 LIGHT PIPE 1-28-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

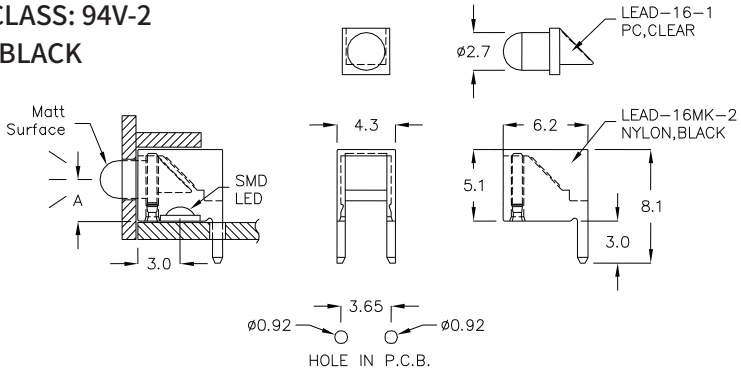


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD−16MK | 3.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 导光柱 LIGHT PIPE 1-29-1

- MATERIAL: PMMA
- COLOR: CLEAR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEAD−17 | 15.0 | 6.0 | 3.0 | 1000 |

## 导光柱 LIGHT PIPE 1-29-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

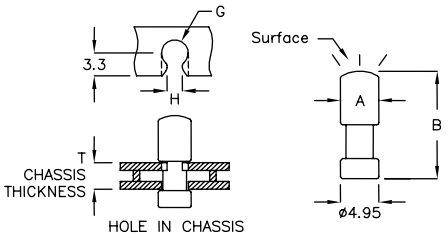


| PART NO | A | B | G HOLE IN CHASSIS | H | T CHASSIS THICKNESS | Surface | PACKAGE |
|---|---|---|---|---|---|---|---|
| LEAD−20 | ø4.95 | 14.1 | ø3.65 | 3.45 | 4.2 | Matt | 2000 |
| LEAD−20AC | ø4.95 | 15.8 | ø3.55 | 3.35 | 4.3 | Polished | |

## 导光柱 LIGHT PIPE 1-29-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

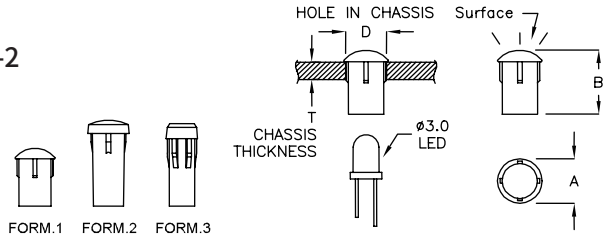


| PART NO | A | B | D HOLE IN CHASSIS | T CHASSIS THICKNESS | SURFACE | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| LEAD−3TM | ø3.3 | 3.95 | ø2.85 | >1.0 | Matt | 1 | 2000 |
| LEAD−9HP | ø3.3 | 8.55 | ø2.95 | >1.8 | Polished | 3 | |
| LEAD−18KT | ø3.8 | 5.5 | ø3.1 | >1.6 | Polished | 1 | |
| LEAD−18 | ø3.8 | 5.5 | ø3.2 | >1.8 | Matt | 1 | |
| LEAD−30 | ø3.8 | 4.1 | ø3.1 | >1.4 | Matt | 1 | |
| LEAD−30FQ | ø3.8 | 3.5 | ø3.1 | >1.4 | Matt | 1 | |
| LEAD−30M | ø3.8 | 9.7 | ø3.1 | >1.0 | Polished | 2 | |
| LEAD−39 | ø3.8 | 24.8 | ø3.1 | >1.0 | Matt | 2 | 1000 |



## 导光柱 LIGHT PIPE 1-29-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

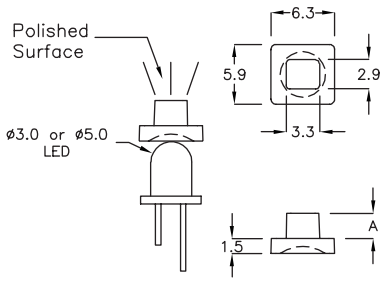


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD−29 | 2.5 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-30-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

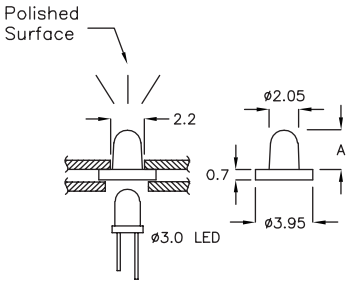


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD-3FK | 2.75 | 2000 |

## 导光柱 LIGHT PIPE 1-30-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




| PART NO | A | PACKAGE |
|---|---|---|
| LEAD-35 | 6.0 | 2000 |

## 导光柱 LIGHT PIPE 1-30-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

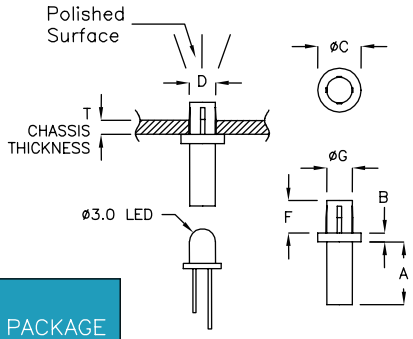


| PART NO | A | B | C | D HOLE IN CHASSIS | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| LEHD-5Q | 1.4 | 1.3 | 3.8 | ø3.0 | 2.3 | 2.6 | 1.4 | 2000 |
| LEHD-12F | 7.0 | 1.0 | 4.9 | ø3.0 | 3.6 | 2.9 | 1.6 | |

## 导光柱 LIGHT PIPE 1-30-4

- MATERIAL: PMMA
- COLOR: CLEAR

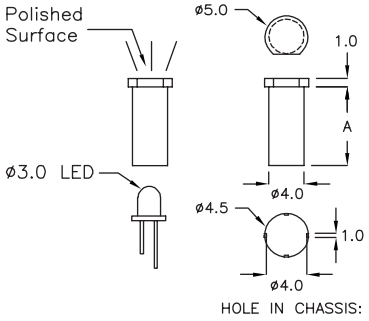


| PART NO | A | PACKAGE |
|---|---|---|
| LEZD-10 | 9.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-31-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

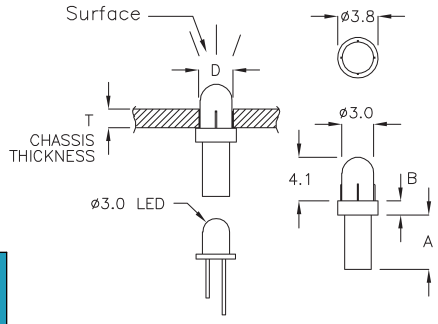


| PART NO | A | B | D HOLE IN CHASSIS | T CHASSIS THICKNESS | SURFACE | PACKAGE |
|---|---|---|---|---|---|---|
| LEAD-36 | 5.1 | 1.3 | ø3.1 | 1.6 | Matt | 1000 |
| LEAD-36PQ | 5.1 | 1.3 | ø3.0 | 1.6 | Polished | |
| LEAD-37 | 1.9 | 1.3 | ø3.1 | 1.6 | Matt | |




## 导光柱 LIGHT PIPE 1-31-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

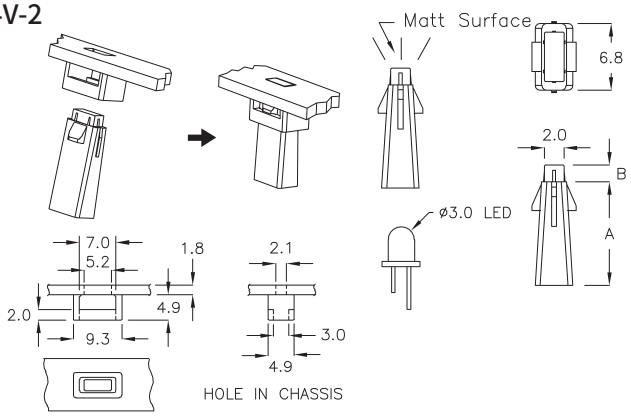


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LEAD-52MK | 14.2 | 1.7 | 2000 |

## 导光柱 LIGHT PIPE 1-31-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

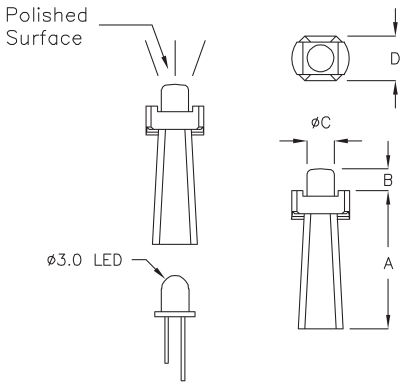


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| LEAD-40 | 10.1 | 2.0 | 2.5 | 3.0 | 2000 |
| LEAD-51 | 12.6 | 2.0 | 2.5 | 4.1 | |
| LEAD-51K | 13.5 | 2.0 | 1.6 | 3.0 | |



## 导光柱 LIGHT PIPE 1-31-4

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

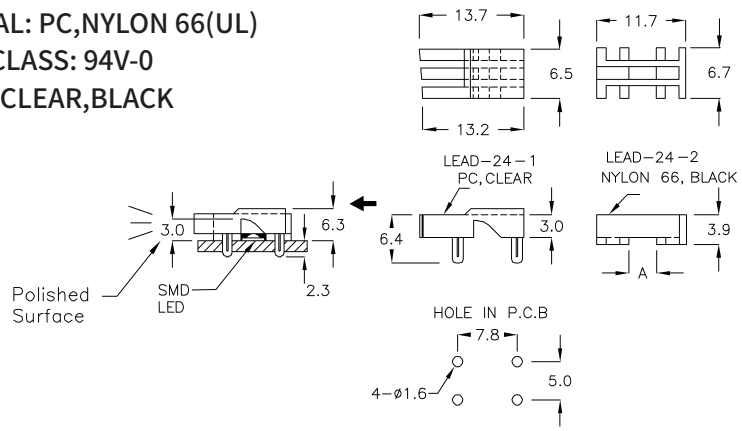


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD-24 | 3.6 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 导光柱 LIGHT PIPE 1-32-1

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR,BLACK

| PART NO | A | P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LEAD−12JC | 4.0 | 1.6 | 1000 |

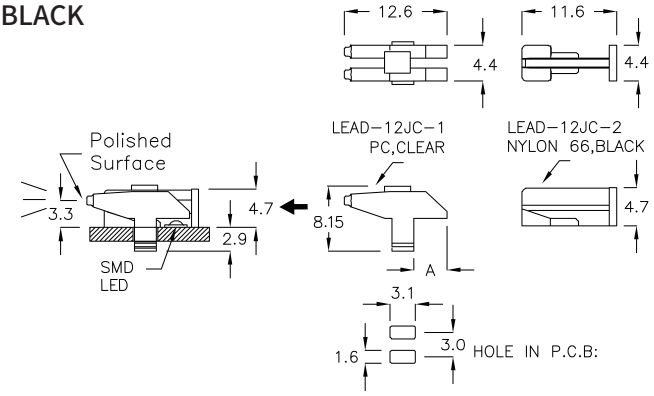




## 导光柱 LIGHT PIPE 1-32-2

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| LEMD−42A | 42.8 | 200 |

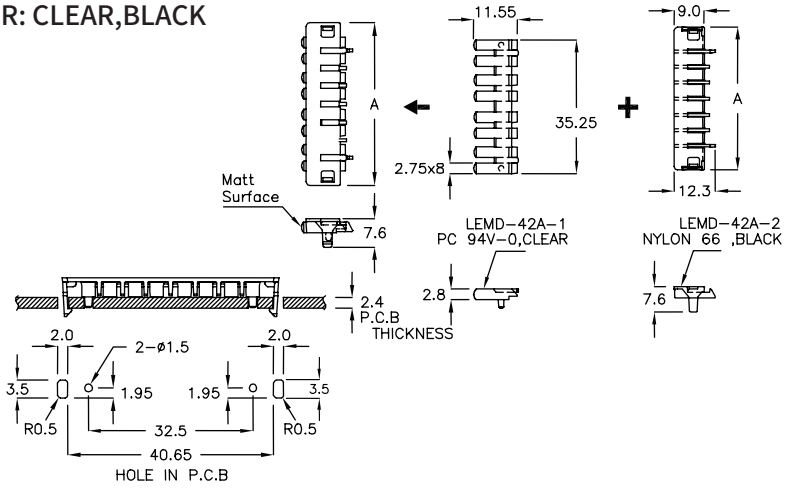

## 导光柱 LIGHT PIPE 1-32-3

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| LEMD−42RT | 42.8 | 200 |

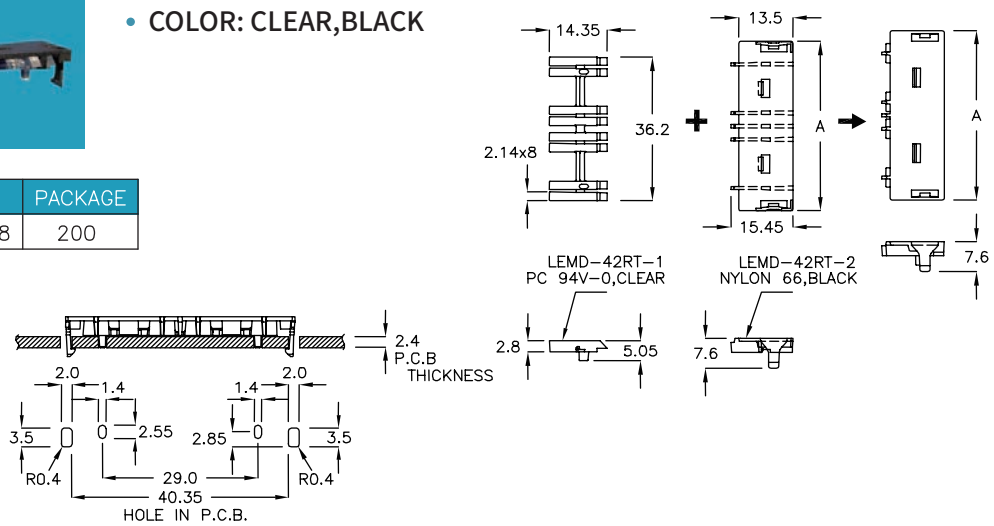




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 导光柱 LIGHT PIPE 1-33-1

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| LEMD-61FA | 61.8 | 200 |

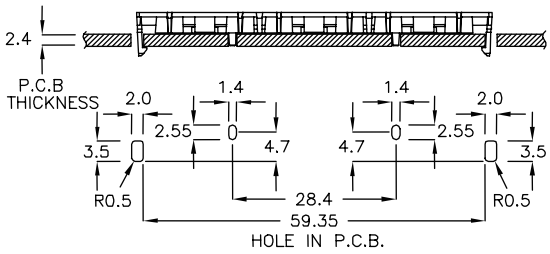


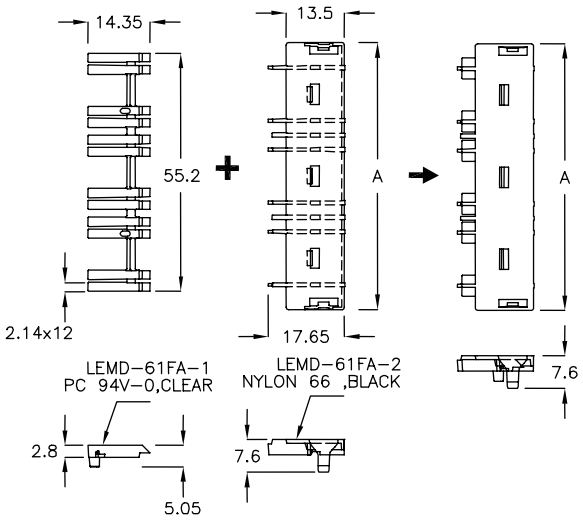

## 导光柱 LIGHT PIPE 1-33-2

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| LEUD-60JH | 60.15 | 200 |

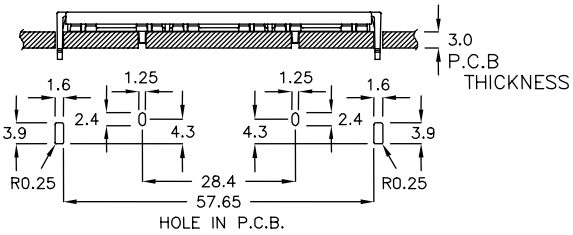


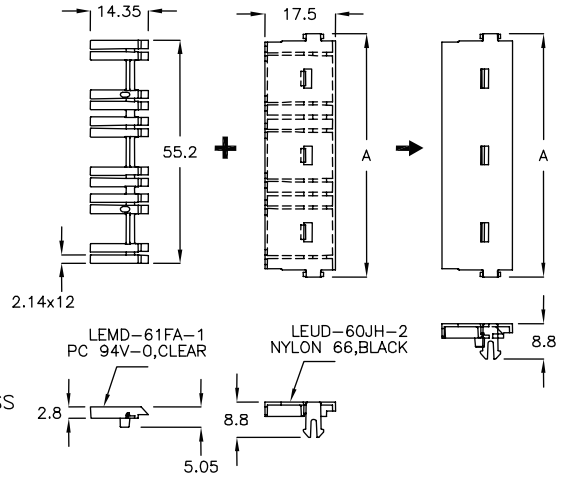

## 导光柱 LIGHT PIPE 1-34-1

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| LEYD-24BG | 24.7 | 200 |

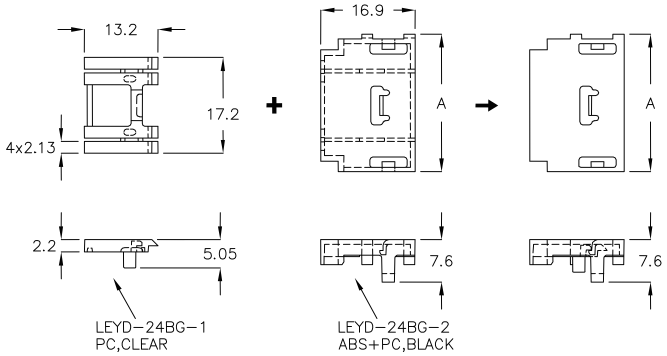


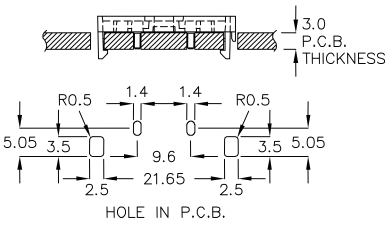

## 导光柱 LIGHT PIPE 1-34-2

- MATERIAL: PC,NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| LEMK-31A | 31.9 | 500 |

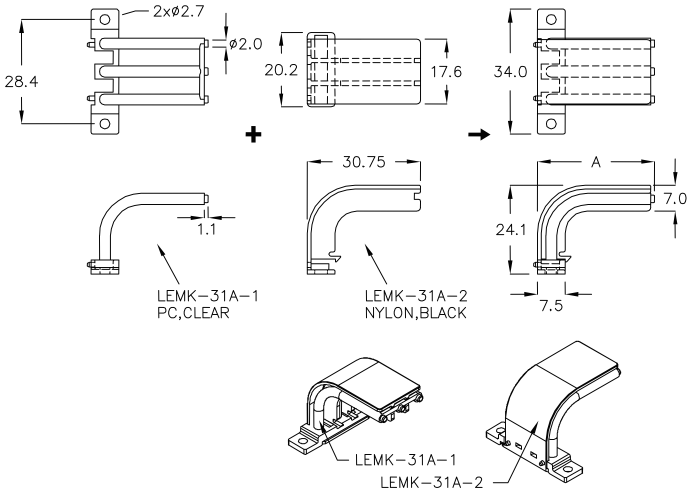

## 导光柱 LIGHT PIPE 1-34-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

| PART NO | A | PACKAGE |
|---|---|---|
| LEFD-4A | 4.7 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 导光柱 LIGHT PIPE 1-35-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

| PART NO | A | PACKAGE |
|---|---|---|
| LEFD-4RZ | 4.65 | 1000 |






## 导光柱 LIGHT PIPE 1-35-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

| PART NO | A | PACKAGE |
|---|---|---|
| LEFD-9DK | 9.7 | 1000 |

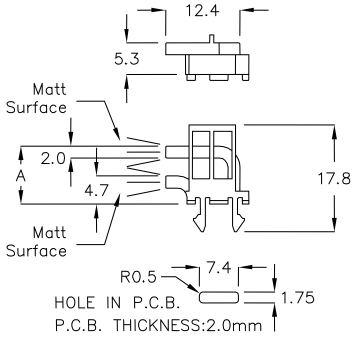




## 导光柱 LIGHT PIPE 1-35-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

| PART NO | A | PACKAGE |
|---|---|---|
| LEFD-9MQ | 9.7 | 1000 |

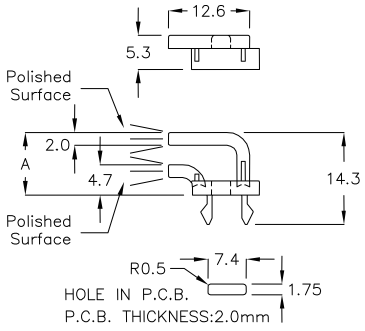

## 导光柱 LIGHT PIPE 1-35-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HHQ-01 | ø5.0 | ø3.3 | 9.2 | 2000 |

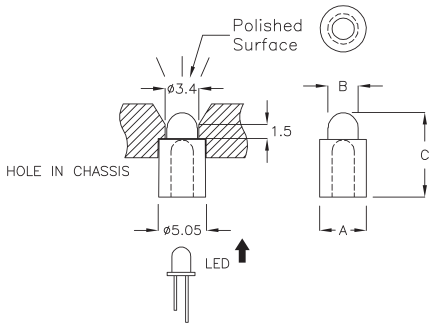

## 保护盖 COVER 1-36-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BHB-06 | 6.0 | 2.5 | 2000 |

## 导光柱 LIGHT PIPE 1-36-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

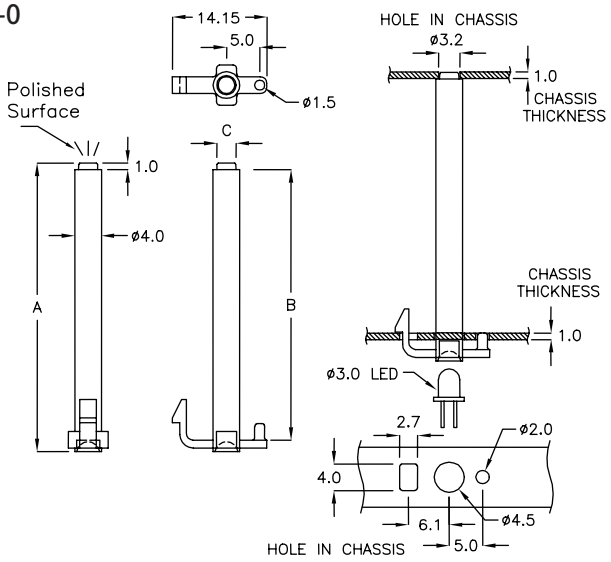


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEAD-43KT | 43.2 | 40.5 | ø2.9 | 200 |

## 导光柱 LIGHT PIPE 1-36-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

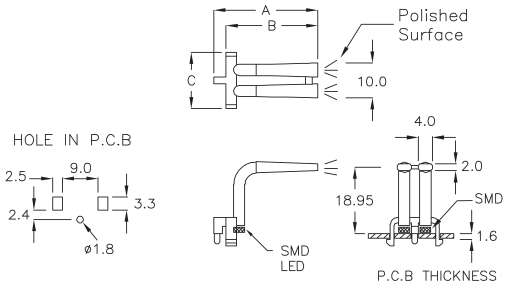


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEAD-25 | 29.7 | 26.2 | 16.0 | 500 |

## 导光柱 LIGHT PIPE 1-36-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

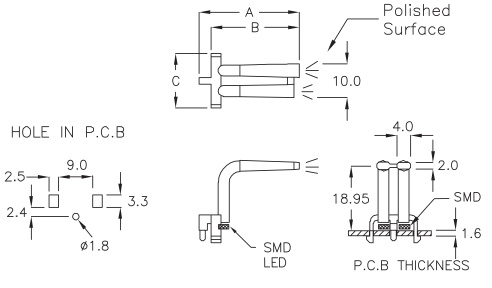


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEAD-26 | 29.7 | 26.2 | 16.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-37-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

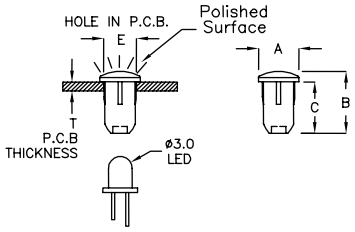


| PART NO | A | B | C | E HOLE IN P.C.B. | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| LEAD-7QS | ø5.0 | 7.7 | 6.4 | ø3.9 | ≥2.0 | 2000 |

## 导光柱 LIGHT PIPE 1-37-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

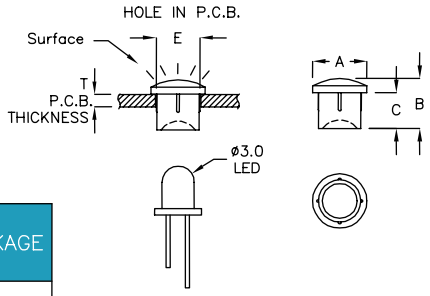


| PART NO | A | B | C | E HOLE IN P.C.B. | T P.C.B. THICKNESS | SURFACE | PACKAGE |
|---|---|---|---|---|---|---|---|
| LEAD-4RK | ø3.8 | 3.95 | 2.95 | ø3.1 | ≧1.4 | Matt | 2000 |
| LEAD-28 | ø5.0 | 4.6 | 3.3 | ø3.96 | ≧1.6 | Matt | |
| LEAD-28AM | ø5.0 | 4.6 | 3.3 | ø3.96 | ≧1.6 | Polished | |

## 导光柱 LIGHT PIPE 1-37-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

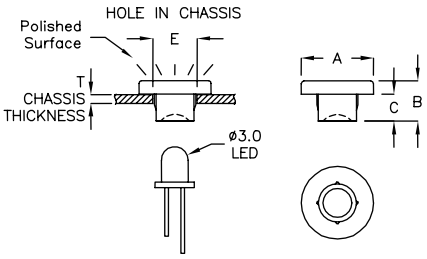


| PART NO | A | B | C | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| LEVD-5GS | ø5.5 | 3.05 | 2.05 | ø3.0 | ≧2.0 | 2000 |

## 导光柱 LIGHT PIPE 1-37-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

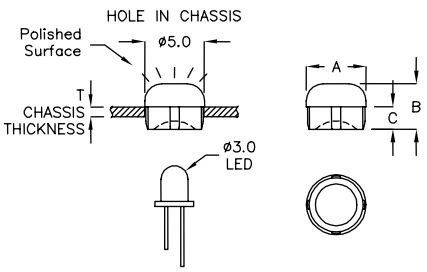


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LEWD-04 | ø5.25 | 4.0 | 2.0 | ≧0.8 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-38-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

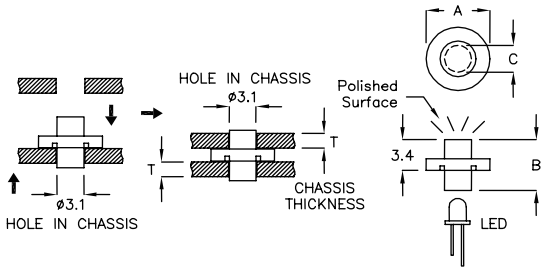


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LEAD−5A | ø7.0 | 5.6 | ø2.95 | 2.0 | 2000 |

## 导光柱 LIGHT PIPE 1-38-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL

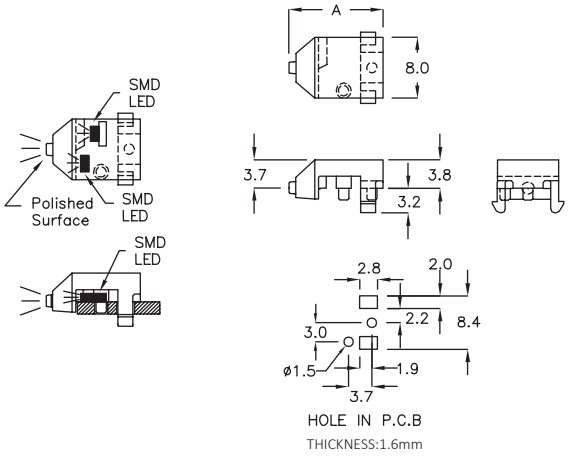


| PART NO | A | P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LESD−12K | 12.4 | 1.6 | 1000 |

## 导光柱 LIGHT PIPE 1-38-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

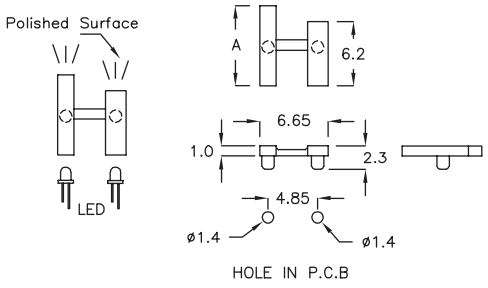


| PART NO | A | P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LETD−6K | 7.75 | 1.6 | 2000 |

## 导光柱 LIGHT PIPE 1-38-4

- MATERIAL: PC
- FLAME CLASS: 94V-0
- COLOR: CLEAR

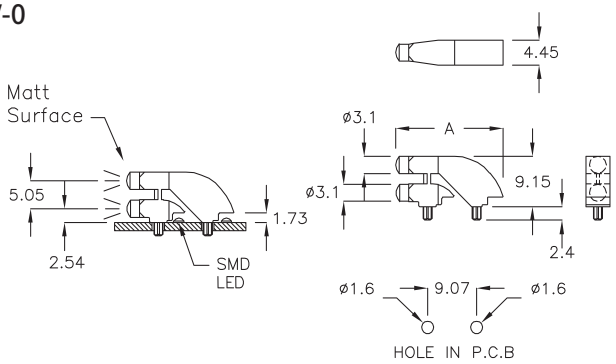


| PART NO | A | P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LEJD−19K | 19.85 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 导光柱 LIGHT PIPE 1-39-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- WITH M3 SCREW

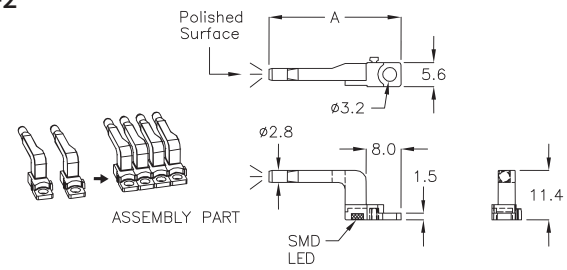


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD-29CT | 30.5 | 500 |



## 导光柱 LIGHT PIPE 1-39-2

- MATERIAL: PC(UL)
- COLOR: NATURAL

NEW

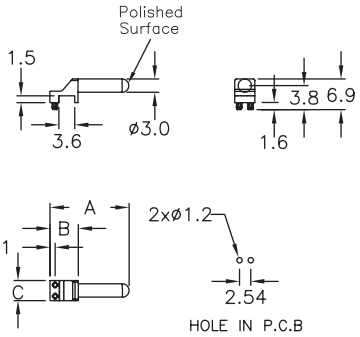


| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| ★ | LELD-17A | 17.8 | 6.3 | 4.5 | 500 |

## 导光柱 LIGHT PIPE 1-39-3

- MATERIAL: PMMA
- COLOR: CLEAR

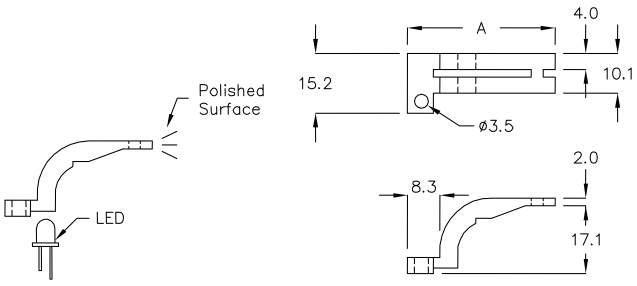


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD-2 | 37.5 | 500 |



## 导光柱 LIGHT PIPE 1-39-4

- MATERIAL: PMMA
- COLOR: CLEAR

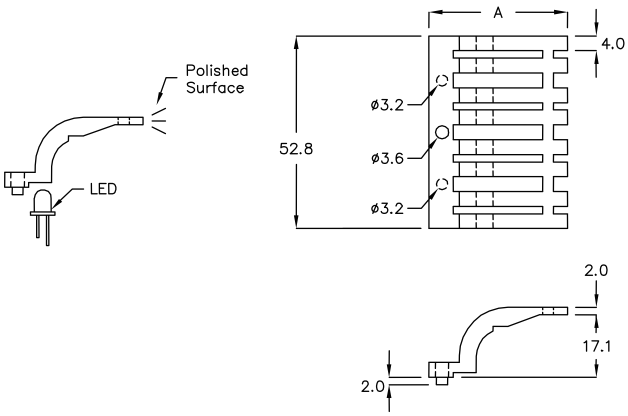


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD-8 | 37.5 | 100 |



## 导光柱 LIGHT PIPE 1-40-1

- MATERIAL: PMMA
- COLOR: CLEAR

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LEAD-10 | 41.5 | 23.3 | 500 |
| LEAD-11 | 45.5 | 23.3 | |
| LEAD-12 | 76.5 | 23.3 | |

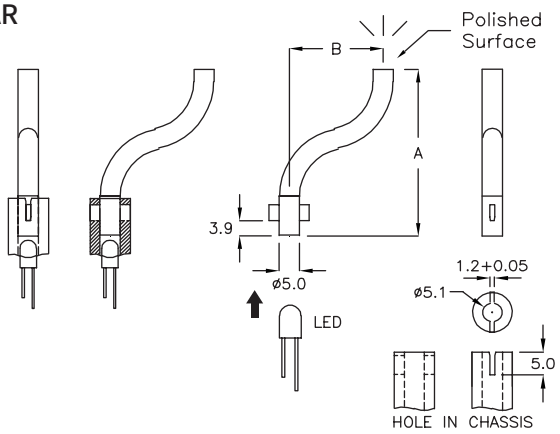

## 导光柱 LIGHT PIPE 1-40-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

| PART NO | A | PACKAGE |
|---|---|---|
| LEQD-13K | 13.5 | 2000 |

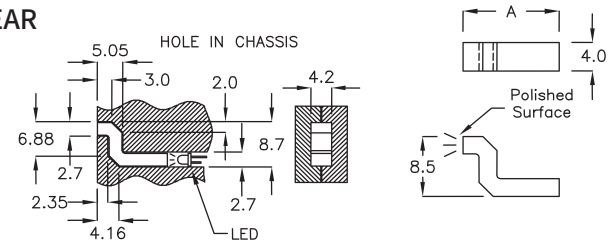

## 导光柱 LIGHT PIPE 1-40-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

| PART NO | A | PACKAGE |
|---|---|---|
| LECD-3K | 3.0 | 1000 |

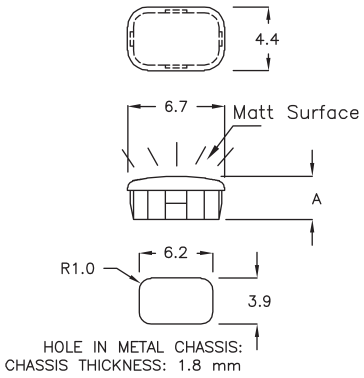




## 导光柱 LIGHT PIPE 1-40-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| LEWA-17C | 8.2 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-41-1

- MATERIAL: PMMA
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

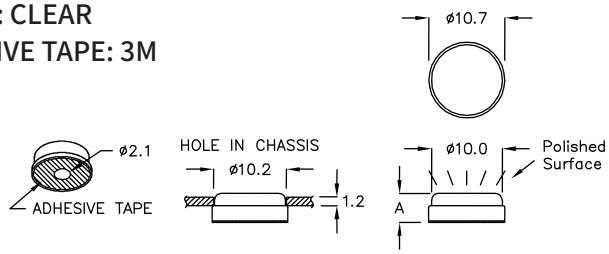


| PART NO | A | PACKAGE |
|---|---|---|
| LERD-3K | 4.03 | 2000 |

## 导光柱 LIGHT PIPE 1-41-2

- MATERIAL: PC
- FLAME CLASS: 94V-2
- COLOR: NATURAL

NEW




| PART NO | A | PACKAGE |
|---|---|---|
| ★ LERS-15A | 4.45 | 500 |

## 导光柱 LIGHT PIPE 1-41-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

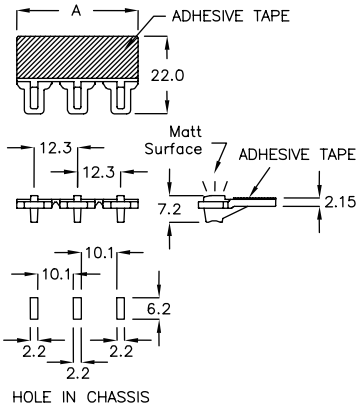


| PART NO | A | PACKAGE |
|---|---|---|
| LEND-22A | 34.6 | 200 |



## 导光柱 LIGHT PIPE 1-41-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

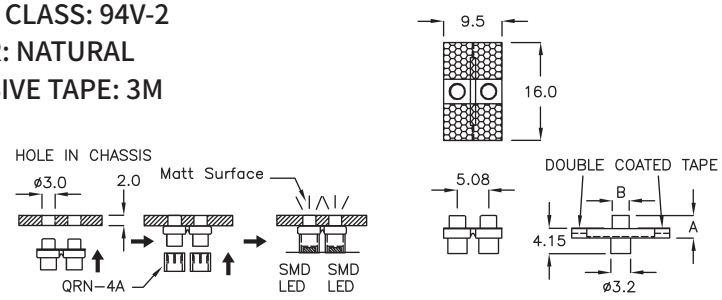


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LEGD-2A | 3.7 | 2xø2.7 | 1000 |
| LEGD-2KM | 3.3 | 2xø2.7 | |

## 导光柱 LIGHT PIPE 1-42-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LEGD−4C | 3.7 | 4xø2.7 | 1000 |
| LEGD−4QN | 3.3 | 4xø2.7 | |



## 遮光罩 LIGHT COVER 1-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| QRN−4A | 4.7 | ø5.0 | ø4.0 | 2000 |

## 导光柱 LIGHT PIPE 1-42-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

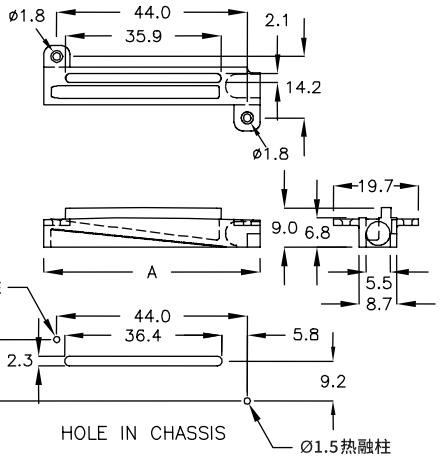


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD−1KC | 50.0 | 500 |

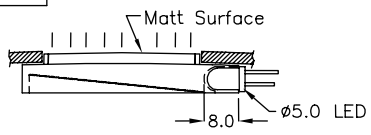

## 导光柱 LIGHT PIPE 1-42-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

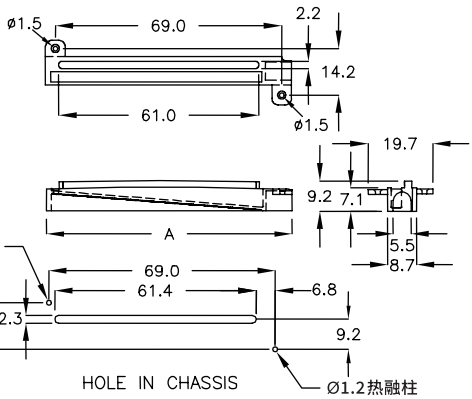


| PART NO | A | PACKAGE |
|---|---|---|
| LEAD−1NJ | 75.0 | 100 |

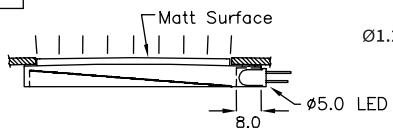




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 导光罩 LED CAP 1-43-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

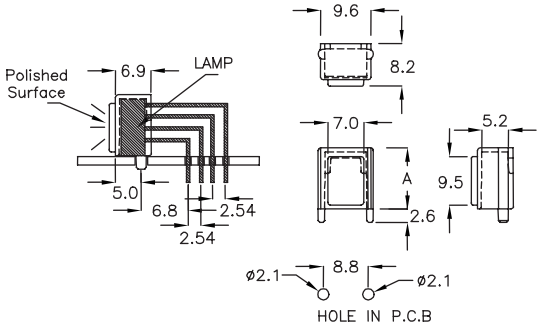


| PART NO | A | PACKAGE |
|---|---|---|
| LDHD-12MG | 11.9 | 1000 |




## 导光柱 LIGHT PIPE 1-43-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL

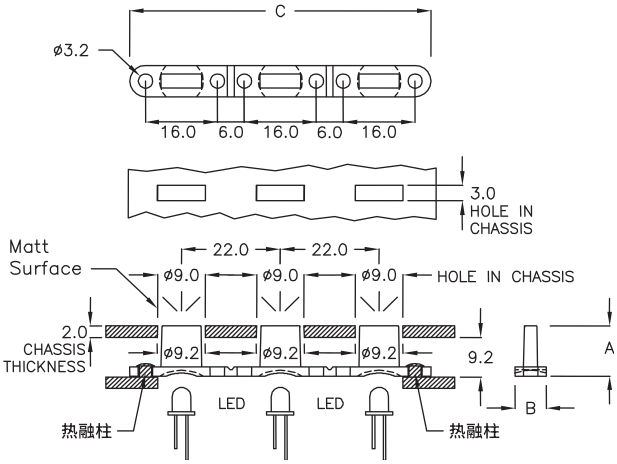


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEXD-67D | 11.2 | 7.0 | 67.0 | 200 |

## 导光棒 LIGHT PIPE 1-43-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR

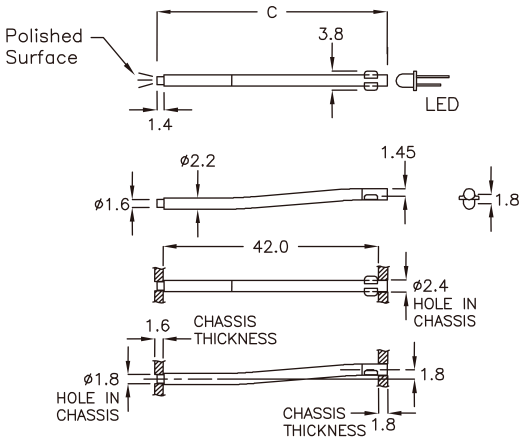


| PART NO | C | PACKAGE |
|---|---|---|
| LDAD-45AT | 44.9 | 2000 |

## 导光柱 LIGHT PIPE 1-43-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

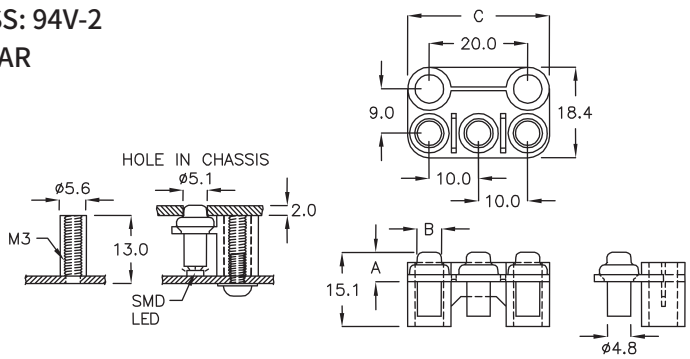


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEWF-28HS | 6.0 | ø4.95 | 28.8 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 导光柱 LIGHT PIPE 1-44-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

NEW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ LEAD-45PCW | 41.0 | ø3.4 | 2.8 | 1000 |

## 导光柱 LIGHT PIPE 1-44-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

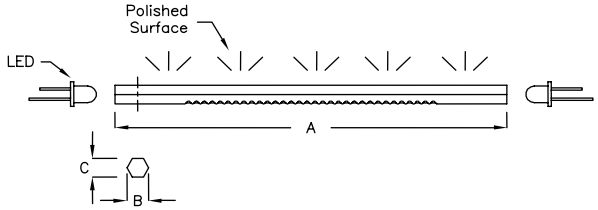


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEAD-50 | 113.0 | 2.75 | 2.38 | 200 |

## 导光柱 LIGHT PIPE 1-44-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LEAD-81 | 81.0 | ø3.0 | 500 |

## 导光柱 LIGHT PIPE 1-44-4

- MATERIAL: PC(UL)
- COLOR: CLEAR

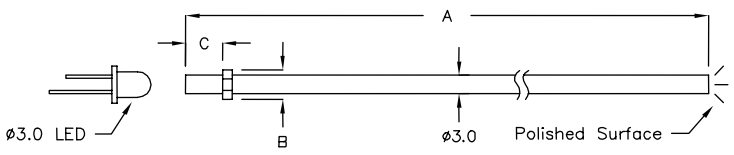


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LEAD-102C | 101.9 | 4.8 | 5.9 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 02

## 塞环
## HOLE PLUG

## 护线环
## SNAP BUSHING

## 线扣
## BUSHING

## 电源线扣 STRAIN RELIEF BUSHING — 2-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

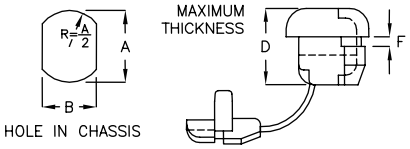


PG Cord Bushings are the easy and low-cost way to insulate and protect your AC Cords. Provide non-slip grip and will not damage the insulation of AC Cord.

E88476

| PART NO | SUITABLE CABLE TYPE & DIMENSIONS OF CHASSIS | | | | | | D PART LENGTH | UL | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| | CROSS SECTION SHAPE | WIRE ACCOMMODATED | SIZE | A | B TO PREVENT ROTATION | F MAXIMUM THICKNESS | | | |
| 2RF-2 | FLAT | SPT-1 | 2.8x5.3 | 9.5 | 8.7 | 3.2 | 10.8 | UL | 500 |
| 3RF-1 | FLAT | SPT-2 | 3.0x5.6 | 11.1 | 9.9 | 2.6 | 10.3 | | |
| 3RF-2 | FLAT | SPT-2 | 3.0x5.6 | 11.1 | 10.1 | 1.6 | 10.3 | UL | |
| 4RF-4 | FLAT | SPT-2 | 3.0x5.6 | 12.7 | 11.5 | 2.5 | 11.2 | UL | |
| 4RF-5 | FLAT | SPT-2 | 3.8x7.6 | 12.7 | 11.8 | 1.6 | 10.4 | UL | |
| 4RF-6 | FLAT | SPT-2 | 3.0x6.5 | 12.5 | 11.6 | 2.7 | 10.5 | UL | |
| 5R-2 | ROUND | SVI | 7.6 | 12.7 | 11.5 | 1.6 | 11.3 | | |
| 5R-4 | ROUND | SV,SVT | 6.4 | 12.7 | 11.5 | 1.6 | 11.3 | UL | |
| 5R-4A | ROUND | SV,SVT | 6.4 | 12.7 | 11.5 | 2.5 | 11.0 | UL | |
| 5RF-4 | FLAT | SPT-2 | 3.8x8.9 | 14.3 | 13.4 | 1.6 | 15.45 | UL | 200 |
| | | SPT-3 | 5.0x10.0 | | | | | | |
| 6R-4 | ROUND | SVI | 7.6 | 15.9 | 14.0 | 1.6 | 14.9 | UL | |
| 6R-6 | ROUND | SJ,SJT | 8.2 | 15.9 | 14.0 | 1.6 | 14.5 | UL | |
| 6R-6A | ROUND | SJ,SJT | 8.2 | 15.9 | 14.0 | 3.2 | 14.5 | | |
| 7R-2 | ROUND | S,ST | 9.2-10.5 | 19.0 | 16.8 | 1.6 | 19.0 | UL | 100 |
| | | | 11.0 | 19.8 | | | | | |
| 7R-2A | ROUND | S,ST | 9.2-10.5 | 19.0 | 16.8 | 3.2 | 19.0 | UL | |
| | | | 11.0 | 19.8 | | | | | |
| 7R-2LT | ROUND | SJT | 9.6-10.0 | 19.0 | 16.8 | 1.0 | 15.0 | | |
| 8R-2 | ROUND | SJT | 13.5-15.2 | 22.2 | 21.5 | 3.2 | 20.0 | UL | |
| 8R-2A | ROUND | SJT | 13.5 | 23.0 | 22.0 | 2.0 | 19.9 | | |
| 9R-2 | ROUND | SJT | 15.2-16.3 | 28.0 | 25.2 | 2.4 | 25.6 | | 50 |
| | | | 17.5 | 30.2 | 25.2 | 6.7 | | | |
| 9R-2A | ROUND | SJT | 15.5 | 28.0 | 25.2 | 2.4 | 14.5 | | 100 |
| 9R-2B | ROUND | SJT | 18.2 | 28.0 | 25.2 | 2.4 | 23.9 | | 50 |

## 电源线扣 STRAIN RELIEF BUSHING — 2-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

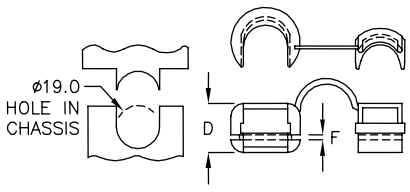


E88476

| PART NO | SUITABLE CABLE TYPE & DIMENSIONS OF CHASSIS | | | | D PART LENGTH | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| | CROSS SECTION SHAPE | WIRE ACCOMMODATED | SIZE | F MAXIMUM THICKNESS | | | |
| 7R-7 | ROUND | S.P.S | 14.0 | 1.6 | 17.6 | UL | 100 |
| 7R-7B | ROUND | S.P.S | 12.5 | 1.3 | 17.5 | | |
| 7R-7C | ROUND | S.P.S | 13.5 | 1.3 | 17.6 | | |
| 7R-7E | ROUND | S.P.S | 12.0 | 1.6 | 17.7 | | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线扣 STRAIN RELIEF BUSHING —— 2-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

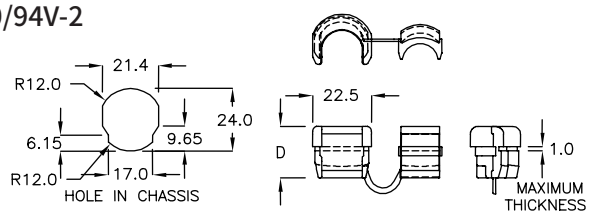


| PART NO | D | WIRE ACCOMMODATED | PACKAGE |
|---|---|---|---|
| 8R−2QT | 19.8 | ø15.0 | 100 |

## 电源线扣 STRAIN RELIEF BUSHING —— 2-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

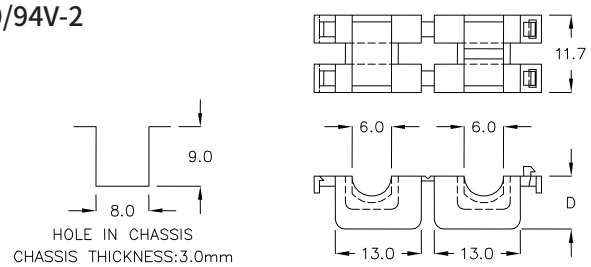


| PART NO | D | PACKAGE |
|---|---|---|
| 5R−1 | 8.0 | 200 |

## 电源线扣 STRAIN RELIEF BUSHING —— 2-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

E88476

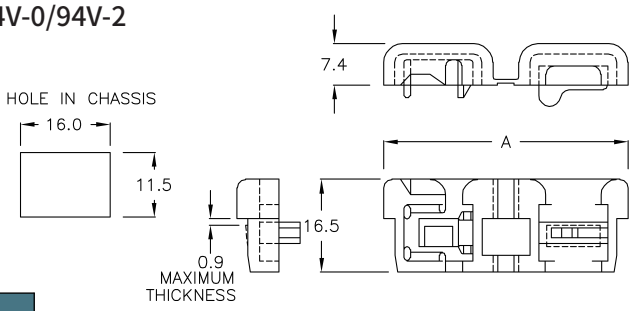


| PART NO | A | WIRE ACCOMMODATED | UL | PACKAGE |
|---|---|---|---|---|
| 5RF−5A | 42.6 | SPT−2 | UL | 200 |
| 5RF−5B | 42.8 | SPT−2 | UL | |
| 5RF−5D | 42.8 | SPT−2 | | |

## 电源线扣 STRAIN RELIEF BUSHING —— 2-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

E88476




| PART NO | WIRE ACCOMMODATED | MAXIMUM THICKNESS | A | UL | PACKAGE |
|---|---|---|---|---|---|
| 5R−6 | SPT−2(3x6.6) | 2.5 | 17.6 | UL | 200 |
| 5R−7 | SV(ø6) | 2.5 | 17.7 | UL | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线扣 STRAIN RELIEF BUSHING 2-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

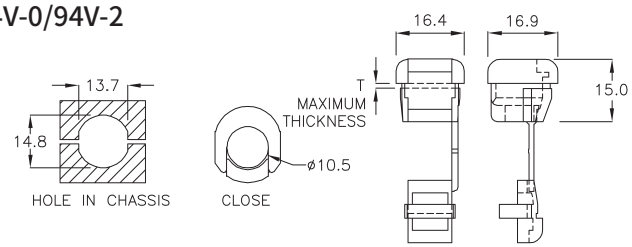


| PART NO | MAXIMUM THICKNESS:T | PACKAGE |
|---|---|---|
| 7R-2D | 1.0 | 100 |

## 电源线扣 STRAIN RELIEF BUSHING 2-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: GRAY,BLACK

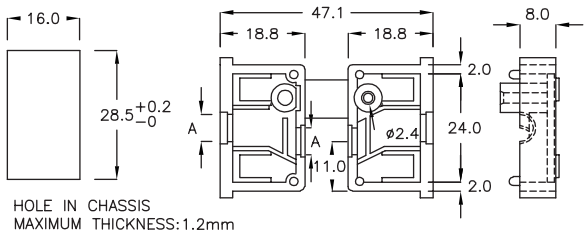


| PART NO | A | PACKAGE |
|---|---|---|
| 6R-9 | ø6.0 | 100 |
| 6R-09C | ø8.5 | 200 |

## 电源线扣 STRAIN RELIEF BUSHING 2-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

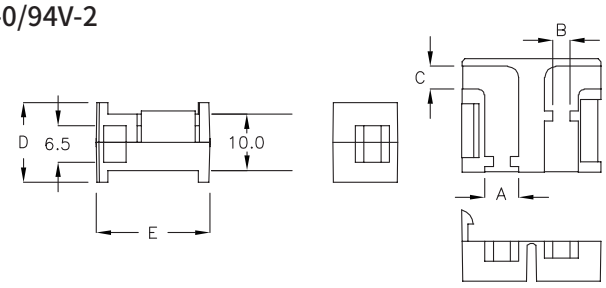


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 2RF-25 | 6.0 | 3.2 | 4.0 | 14.0 | 20.0 | 500 |

## 保护座 PROTECT HOUSING 2-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

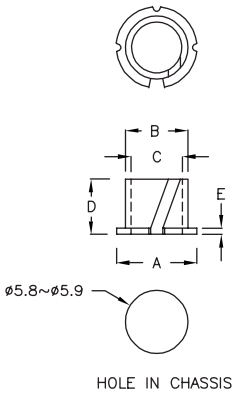


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SG-05 | ø8.0 | ø6.2 | ø5.05 | 5.4 | 0.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 保护座 PROTECT HOUSING 2-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

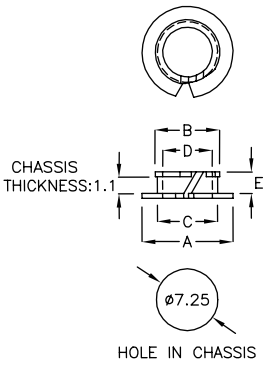


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SG-0610A | ø11.0 | ø7.8 | ø7.3 | ø6.0 | 3.2 | 1000 |

## 塞环 BUSHING 2-5-2

- MATERIAL: POM
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SLM-05 | ø8.0 | ø5.2 | ø3.1 | 6.5 | 1000 |



## 护线环 SNAP BUSHING 2-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

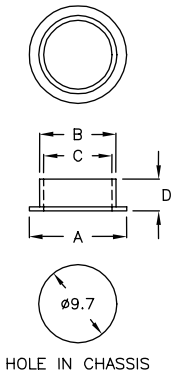


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SL-0910 | ø12.2 | ø9.6 | ø8.6 | 4.0 | 1000 |

## 护线环 SNAP BUSHING 2-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| SBK-5AQ | 8.5 | 5.1 | 1000 |

## 护线环 SNAP BUSHING 2-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| SBD-06 | ø8.5 | ø6.2 | 8.2 | ø7.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 护线环 SNAP BUSHING 2-6-1

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK

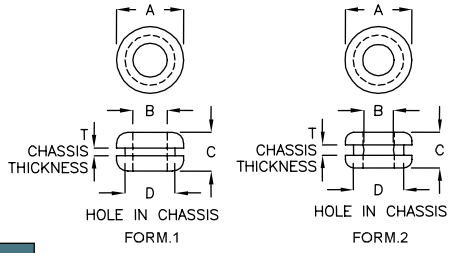


| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| WSP-8QN | ø8.8 | ø4.4 | 5.7 | ø6.8 | 1.6 | 2 | 1000 |
| WSP-12F | ø12.0 | ø6.1 | 7.0 | ø9.0 | 1.3 | 1 | |
| WSP-12AC | ø12.8 | ø6.8 | 6.8 | ø10.0 | 1.4 | 2 | 2000 |
| WSP-16BK | ø16.0 | ø5.4 | 8.5 | ø12.0 | 2.4 | 2 | 1000 |
| WSP-16GR | ø16.0 | ø7.1 | 7.5 | ø12.0 | 1.4 | 2 | |
| WSP-16C | ø16.0 | ø7.1 | 8.5 | ø12.0 | 2.4 | 2 | |
| WSP-20K | ø20.0 | ø8.2 | 8.5 | ø16.0 | 2.4 | 2 | 500 |
| WSP-20RY | ø20.0 | ø6.8 | 8.5 | ø16.0 | 2.4 | 2 | |

## 护线环 SNAP BUSHING 2-6-2

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| WSZ-9AC | ø9.4 | ø3.1 | 8.5 | ø7.0 | 1000 |
| WSZ-12KM | ø12.6 | ø4.8 | 9.8 | ø8.9 | |
| WSZ-13BR | ø13.9 | ø5.3 | 9.7 | ø10.4 | |
| WSZ-14A | ø15.5 | ø6.6 | 9.5 | ø12.0 | |
| WSZ-14DX | ø14.2 | ø6.2 | 9.5 | ø10.6 | |
| WSZ-15DZ | ø15.5 | ø6.9 | 9.7 | ø12.0 | |
| WSZ-16AM | ø16.0 | ø7.4 | 9.7 | ø12.5 | |

## 护线环 SNAP BUSHING 2-6-3

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SB-0603 | 8.5 | 3.3 | 4.5 | ø5.3 | 1.4 | 2000 |
| SB-0806 | 10.5 | 5.5 | 5.5 | ø7.5 | 1.4 | 1000 |
| SB-1208 | 16.0 | 10.0 | 8.0 | ø12.0 | 3.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 护线环 SNAP BUSHING 2-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




E88476

| PART NO | CHASSIS THICKNESS | HOLE IN CHASSIS | A | B | C | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| SB-4757 | 3.6~6.4 | ø57.2 | 63.1 | 47.1 | 18.3 | | 50 |
| SB-3845 | 1.5~3.2 | ø44.5 | 47.7 | 35.3 | 11.6 | | 100 |
| SB-3338K | 1.0~3.2 | ø38.1 | 40.9 | 33.3 | 11.5 | | 200 |
| SB-3338 | 6.4 | ø38.1 | 41.2 | 33.3 | 14.3 | | |
| SB-2634 | 1.0~2.8 | ø34.2 | 38.0 | 26.2 | 11.5 | UL | 100 |
| SB-2530 | 1.0~3.1 | ø30.0 | 33.5 | 25.2 | 11.5 | | |
| SB-2428 | 1.0~3.3 | ø28.0 | 31.5 | 24.1 | 11.3 | | 200 |
| SB-1822 | 0.9~2.3 | ø22.0 | 24.8 | 18.2 | 11.5 | UL | |
| SB-1519 | 1.0~3.0 | ø19.0 | 21.7 | 15.3 | 11.1 | UL | |
| SB-1316 | 1.4~3.5 | ø16.0 | 18.0 | 12.8 | 10.4 | UL | 500 |
| SB-1316K | 0.8~1.8 | ø16.0 | 18.0 | 12.8 | 10.4 | | |
| SB-1013 | 0.8~3.0 | ø13.0 | 15.3 | 10.2 | 9.1 | UL | |
| SB-0710 | 0.8~1.8 | ø10.0 | 12.1 | 7.2 | 6.6 | UL | 1000 |
| SB-0305 | 1.6~1.7 | ø4.8 | 6.5 | 3.2 | 6.0 | | |

## 开口式护线环 OPEN CLOSED BUSHING 2-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

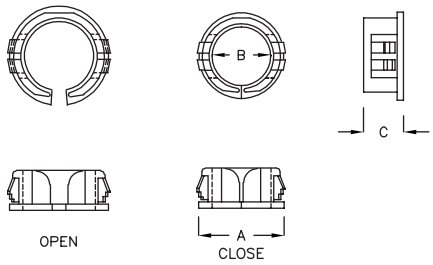


E88476

| PART NO | CHASSIS THICKNESS | HOLE IN CHASSIS | A | B | C | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| SB-1822A | 1.0~3.5 | ø22.0 | 24.8 | 17.3 | 11.5 | UL | 200 |
| SB-1922A | 0.8~1.2 | ø22.0 | 25.0 | 19.0 | 7.4 | | 500 |
| SB-1720A | 0.8~1.0 | ø20.0 | 23.5 | 17.0 | 7.2 | | |
| SB-1519A | 1.2~3.3 | ø19.0 | 20.6 | 14.4 | 11.0 | UL | 200 |
| SB-1316A | 1.2~3.5 | ø16.0 | 18.0 | 10.5 | 10.5 | UL | 500 |
| SB-1216A | 0.7~3.3 | ø16.0 | 18.6 | 12.3 | 10.0 | UL | |
| SB-1013A | 0.8~3.5 | ø13.0 | 14.9 | 9.0 | 10.5 | UL | |
| SB-0609A | 0.7~1.7 | ø9.5 | 11.4 | 6.6 | 6.5 | UL | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开口式护线环 OPEN CLOSED BUSHING —— 2-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

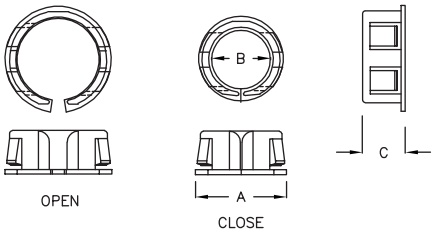


E88476

| PART NO | CHASSIS THICKNESS | HOLE IN CHASSIS | A | B | C | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| SB-2126A | 0.8~1.2 | ø25.4~25.6 | 28.0 | 21.1 | 8.0 | | 500 |
| SB-2024A | 0.8~1.2 | ø24.0 | 26.4 | 20.0 | 11.3 | UL | |
| SB-2228A | 0.8~1.2 | ø27.8 | 28.8 | 22.0 | 9.0 | | 200 |

## 开口式护线环 OPEN CLOSED BUSHING —— 2-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

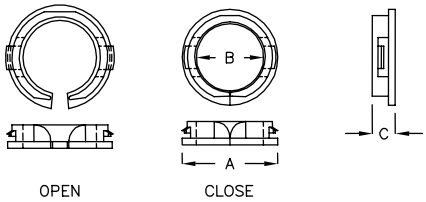


E88476

| PART NO | A | B | C | CHASSIS THICKNESS | HOLE IN CHASSIS | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| SA-0204K | ø5.1 | ø2.8 | 5.0 | 0.7~0.9 | ø4.5 | | 1000 |
| SA-0407A | ø9.8 | ø4.8 | 5.0 | 0.7~0.9 | ø6.8~ø7.0 | UL | |
| SA-0407T | ø9.8 | ø4.8 | 5.2 | 0.4~1.0 | ø6.8~ø7.0 | | |
| SA-1013C | ø15.5 | ø9.6 | 5.9 | 1.9~2.0 | ø13.0 | | 500 |
| SA-1013A | ø15.5 | ø9.6 | 5.4 | 1.0~1.5 | ø13.0 | UL | |
| SA-1316A | ø18.4 | ø12.5 | 5.4 | 1.0~1.4 | ø16.0 | | |
| SA-1317Q | ø19.5 | ø13.5 | 5.9 | 1.8~2.0 | ø17.0 | | |
| SA-1519A | ø21.8 | ø14.9 | 5.7 | 0.8~1.0 | ø19.0 | UL | |
| SA-1822A | ø24.6 | ø17.6 | 5.6 | 0.8~1.0 | ø22.0 | | |
| SA-2024A1 | ø26.0 | ø20.0 | 5.4 | 0.8~1.0 | ø24.0 | | |
| SA-2024A | ø26.0 | ø20.0 | 5.3 | 1.0~1.2 | ø24.0 | | |
| SA-2327A | ø30.6 | ø23.0 | 6.0 | 0.4~1.0 | ø27.0~ø27.2 | | 200 |

## 开口式护线环 OPEN CLOSED BUSHING——2-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

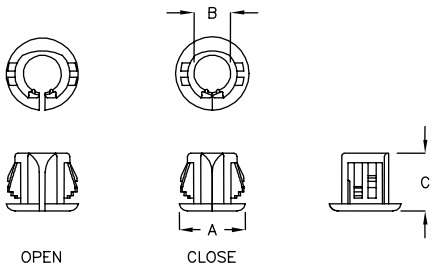


| PART NO | A | B | C | CHASSIS THICKNESS | HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|---|
| SB-0609C | ø11.8 | ø6.1 | 9.8 | 1.0~3.5 | ø9.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开口式护线环 OPEN CLOSED BUSHING —— 2-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

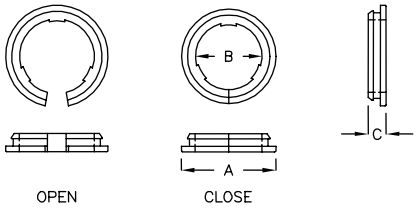


| PART NO | A | B | C | CHASSIS THICKNESS | HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|---|
| SYB-1316C | ø19.2 | ø13.0 | 3.5 | 1.0 | ø16.0 | 500 |

## 开口式护线环 OPEN CLOSED BUSHING —— 2-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK

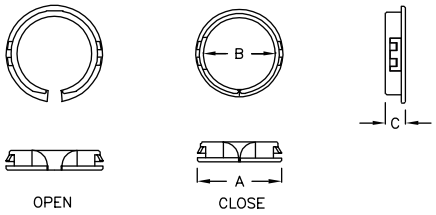


| PART NO | CHASSIS THICKNESS | HOLE IN CHASSIS | A | B | C | PACKAGE |
|---|---|---|---|---|---|---|
| SY-2832A | 0.8~1.4 | ø32.0 | 35.1 | 28.2 | 6.7 | 200 |

## 开口式护线环 OPEN CLOSED BUSHING —— 2-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

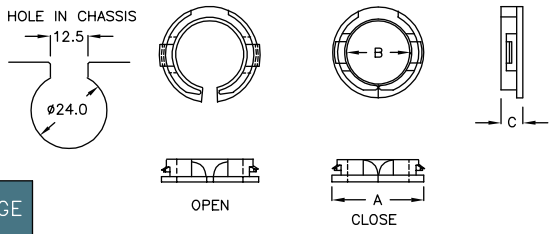


| | MAXIMUM THICKNESS | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| SA-2024C | 0.8~1.1 | 26.0 | 20.0 | 5.3 | 500 |

## 开口式护线环 OPEN CLOSED BUSHING —— 2-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

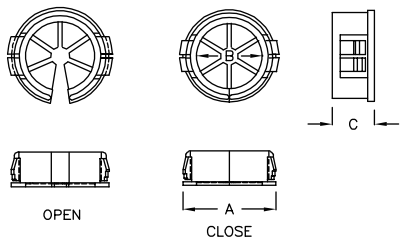


| PART NO | MAXIMUM THICKNESS | HOLE IN CHASSIS | A | B | C | PACKAGE |
|---|---|---|---|---|---|---|
| SC-2128A | 0.8~3.0 | ø27.8~ø28.0 | 29.5 | 20.7 | 11.5 | 200 |
| SC-1926A | 0.8~3.0 | ø25.4~ø25.5 | 27.0 | 19.0 | 11.5 | |
| SC-1926C | 0.8~1.0 | ø25.4~ø25.5 | 27.0 | 19.0 | 5.3 | 500 |
| SC-1422A | 0.8~3.0 | ø22.2~ø22.4 | 23.8 | 14.6 | 11.5 | |
| SC-1319A | 0.8~3.0 | ø19.0~ø19.1 | 21.8 | 14.1 | 9.9 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 护线环 SNAP BUSHING — 2-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK




| PART NO | CHASSIS THICKNESS | HOLE IN CHASSIS | A | B | C | PACKAGE |
|---|---|---|---|---|---|---|
| SS-3238 | 1.2~3.2 | ø38.1~ø38.2 | 41.0 | 32.0 | 11.0 | 200 |

## 护线环 SNAP BUSHING — 2-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | CHASSIS THICKNESS | A | B | C | D | E | G | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| SSK-7175 | 1.2 | 79.4 | 75.0 | 8.5 | 45.0 | 30.0 | 34.7 | 71.4 | 100 |
| SSK-106110 | 1.2 | 115.4 | 110.0 | 8.5 | 60.0 | 50.0 | 55.7 | 106.4 | |

## 护线环 SNAP BUSHING — 2-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

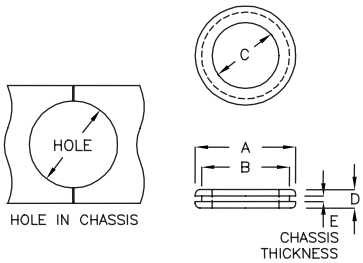


| PART NO | HOLE IN CHASSIS | A | B | C | D | E CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SB-2114 | ø18.0 | ø21.2 | ø18.0 | ø14.1 | 4.0 | 1.0 | 1000 |

## 开口式护线环 OPEN CLOSED BUSHING — 2-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

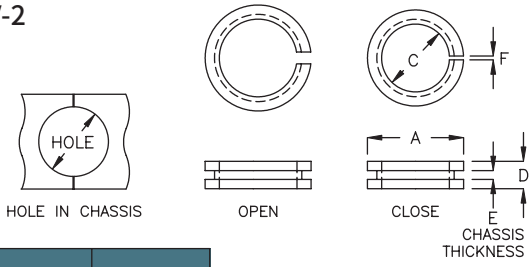


| PART NO | HOLE IN CHASSIS | A | C | D | E CHASSIS THICKNESS | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| SB-1223A | ø19.0 | 22.0 | 11.9 | 4.8 | 1.3 | 1.2~2.3 | 500 |
| SB-1318A | ø14.8 | 18.0 | 12.7 | 6.1 | 2.4 | 0.7~1.3 | |
| SB-1420A | ø16.0 | 18.9 | 13.8 | 3.65 | 1.7 | 0.3~0.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 方型护线环 EDGE SADDLE 2-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

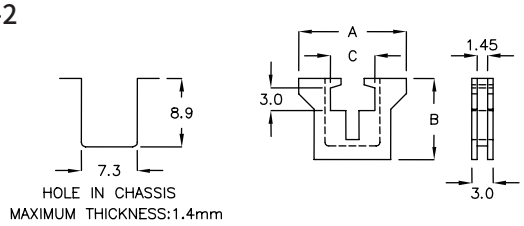


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DS-7 | 14.0 | 10.65 | 5.8 | 1000 |

## 方型护线环 EDGE SADDLE 2-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

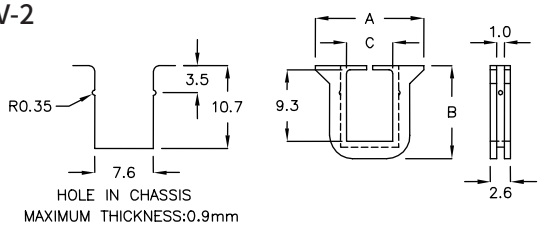


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DS-8 | 14.0 | 12.0 | 6.0 | 2000 |

## 方型护线环 EDGE SADDLE 2-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

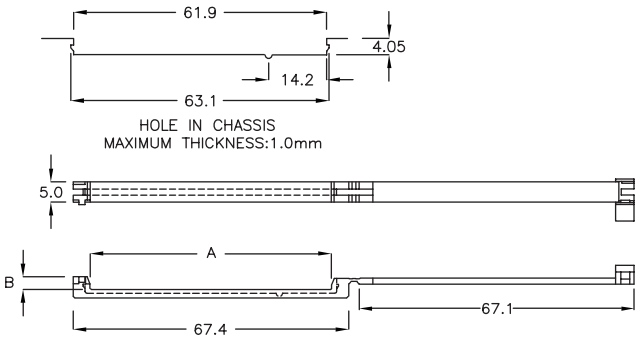


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DDS-02 | 59.0 | 3.1 | 200 |

## 方型护线环 EDGE SADDLE 2-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

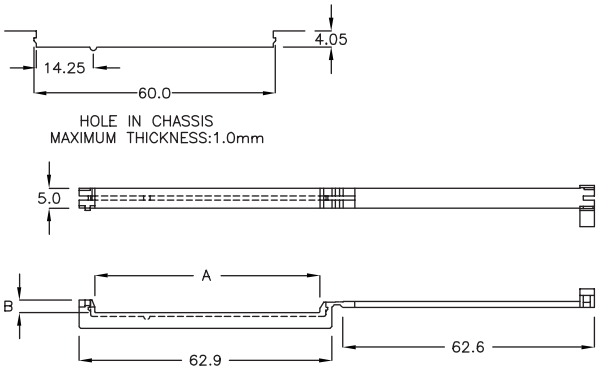


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DDS-03 | 56.0 | 3.1 | 200 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 方型护线环 EDGE SADDLE 2-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

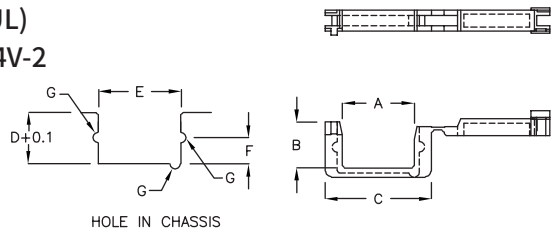


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| DDS-01 | 17.4 | 11.2 | 25.8 | 12.6 | 20.0 | 6.3 | R1.4 | 2.1 | 500 |
| DDS-06 | 28.0 | 6.6 | 36.6 | 9.0 | 31.0 | 3.3 | R1.35 | 2.0 | 200 |

## 方型护线环 EDGE SADDLE 2-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

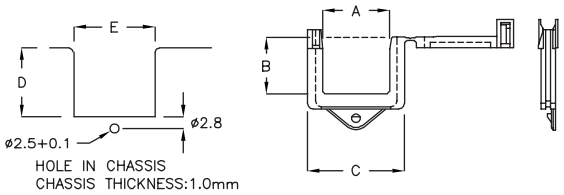


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| DDS-17 | 17.0 | 14.4 | 24.6 | 21.0 | 21.0 | 200 |
| DDS-22 | 22.4 | 21.3 | 30.6 | 29.0 | 27.1 | |

## 方型护线环 EDGE SADDLE 2-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

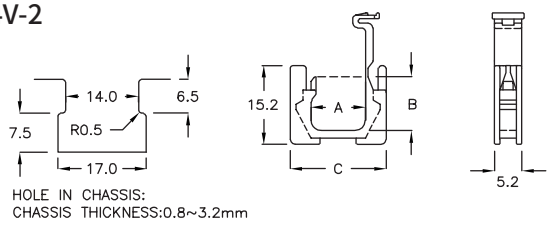


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DSF-10A | 10.5 | 10.8 | 18.5 | 500 |



## 方型护线环 EDGE SADDLE 2-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

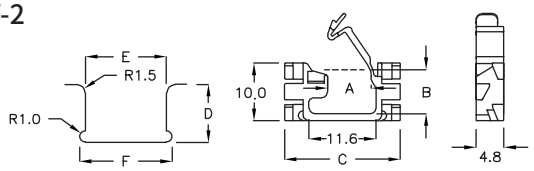


| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| DSW-11A | 7.6 | 7.7 | 20.0 | 10.0 | 14.0 | 16.0 | 1000 |



## 方型护线环 EDGE SADDLE 2-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

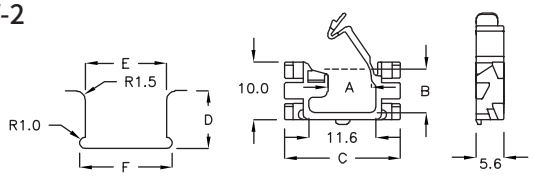


| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| DSW-11MQ | 7.6 | 7.7 | 20.0 | 10.0 | 14.0 | 16.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 方型护线环 EDGE SADDLE 2-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

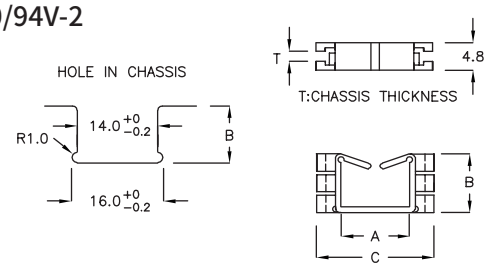


| PART NO | A | B | C | T | PACKAGE |
|---|---|---|---|---|---|
| DS−1 | 12.0 | 10.0 | 20.2 | 0.9 | 1000 |
| DS−3 | 12.0 | 10.0 | 20.2 | 1.9 | |



## 方型护线环 EDGE SADDLE 2-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

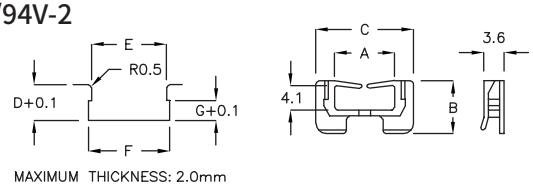


| PART NO | A | B | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| DS−02S | 5.2 | 8.5 | 11.5 | 6.1 | 8.1 | 9.1 | 3.6 | 2000 |
| DS−2 | 10.2 | 9.1 | 16.9 | 6.1 | 12.8 | 13.8 | 3.4 | 1000 |



## 方型护线环 EDGE SADDLE 2-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

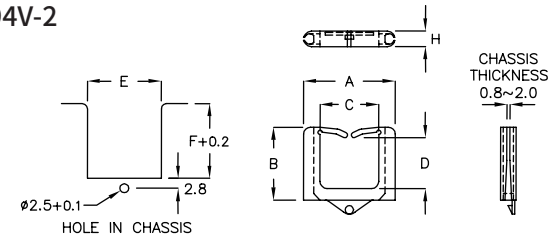


| PART NO | A | B | C | D | E | F | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| DS−11A | 25.0 | 12.5 | 11.5 | 6.2 | $13.6^{+0.1}_{-0}$ | 12.5 | 7.1 | 1000 |
| DS−12 | 19.8 | 12.1 | 11.5 | 7.2 | $14.0^{+0.1}_{-0}$ | 12.3 | 4.7 | |
| DS−16TR | 26.0 | 21.0 | 17.0 | 14.6 | $21.0^{+0.2}_{-0}$ | 21.0 | 4.6 | 500 |
| DS−23 | 33.1 | 29.2 | 22.4 | 21.8 | $27.0^{+0.2}_{-0}$ | 29.0 | 4.7 | |

## 方型护线环 EDGE SADDLE 2-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

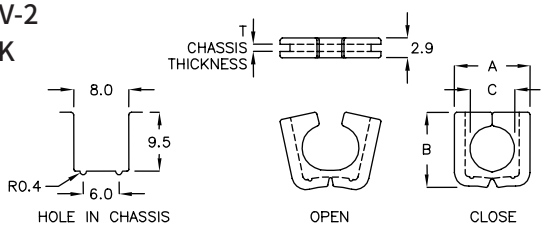


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| DS−4RT | 11.0 | 10.9 | ø6.6 | 0.7~0.8 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 方型护线环 EDGE SADDLE 2-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

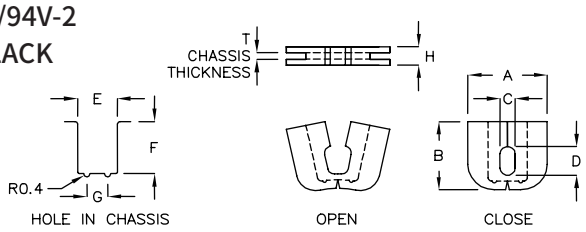


| PART NO | A | B | C | D | E | F | G | H | R | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| DS-04K | 12.0 | 10.9 | 2.3 | 4.56 | 6.05 | 9.45 | 4.0 | 2.9 | R0.4 | 0.8~1.0 | 1000 |
| DS-4WY | 12.5 | 11.5 | 2.4 | 4.8 | 7.2 | 10.3 | 4.35 | 2.5 | R0.3 | 0.5~0.6 | |
| DS-4KJ | 12.0 | 10.9 | 2.6 | 5.2 | 6.05 | 9.45 | 4.0 | 2.9 | R0.4 | 0.8~1.0 | |
| DS-4YL | 12.0 | 10.9 | 3.0 | 6.0 | 5.9 | 9.7 | 4.0 | 2.9 | R0.5 | 0.8~1.0 | |
| DS-4FR | 16.0 | 10.9 | 2.65 | 5.3 | 9.9 | 9.7 | 8.0 | 2.9 | R0.5 | 0.8~1.0 | |

## 方型护线环 EDGE SADDLE 2-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

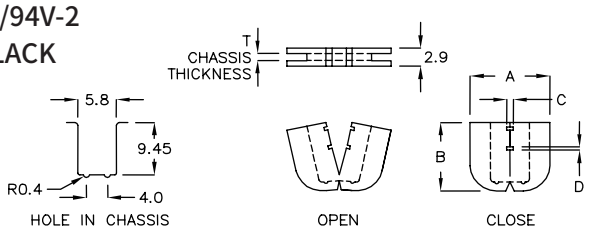


| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| DS-04P | 12.0 | 10.85 | 1.0 | 0.5 | 0.8~1.0 | 1000 |

## 方型护线环 EDGE SADDLE 2-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

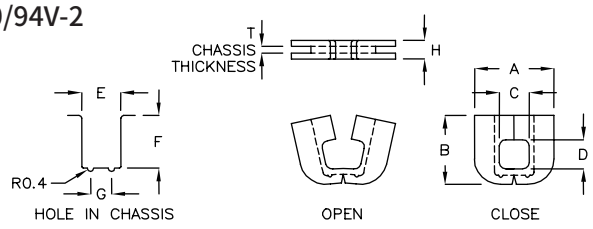


| PART NO | A | B | C | D | E | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| DS-04Q | 12.0 | 10.9 | 4.6 | 4.6 | 5.9 | 9.45 | 4.0 | 2.9 | 0.8~1.0 | 1000 |
| DS-04F | 12.0 | 10.9 | 4.6 | 7.0 | 6.0 | 9.45 | 4.0 | 2.9 | 0.8~1.0 | |
| DS-04R | 12.0 | 10.9 | 6.5 | 7.0 | 8.0 | 9.5 | 6.0 | 2.9 | 0.8~1.0 | |
| DS-4FA | 12.0 | 10.9 | 4.5 | 7.0 | 6.1 | 9.45 | 4.0 | 2.9 | 0.4~0.6 | |
| DS-4GL | 13.3 | 10.9 | 6.9 | 7.0 | 8.3 | 9.5 | 6.3 | 3.0 | 0.6~0.8 | |
| DS-06 | 14.6 | 8.8 | 7.0 | 4.6 | 8.3 | 7.4 | 6.4 | 2.9 | 0.8~1.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 方型护线环 EDGE SADDLE 2-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

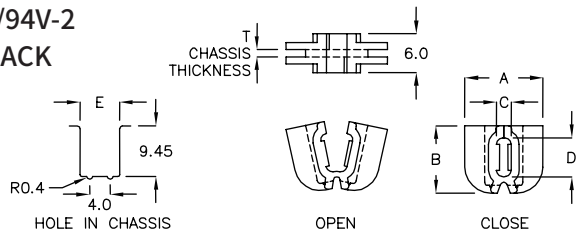


| PART NO | A | B | C | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| DS-04H | 12.0 | 10.35 | 2.3 | 6.05 | 6.05 | 0.8~1.0 | 1000 |
| DS-04J | 12.0 | 10.4 | 4.6 | 4.6 | 6.0 | 0.8~1.0 | |
| DS-04L | 12.0 | 10.4 | 2.44 | 4.7 | 6.0 | 0.8~1.0 | |



## 方型护线环 EDGE SADDLE 2-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

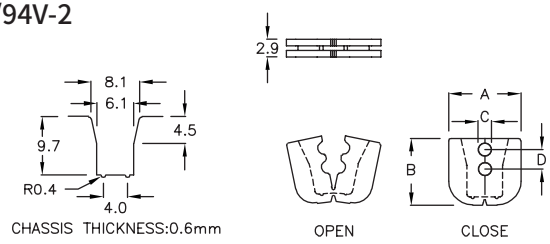


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DS-4AD | 12.0 | 11.1 | ø2.2 | 3.2 | 1000 |

## 方型护线环 EDGE SADDLE 2-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

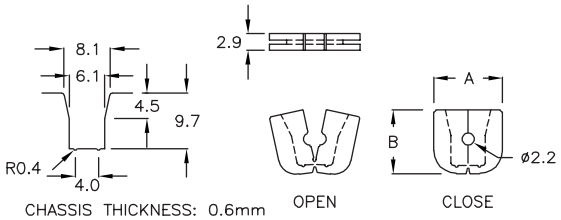


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DS-4MP | 12.0 | 11.1 | 1000 |



## 方型护线环 EDGE SADDLE 2-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

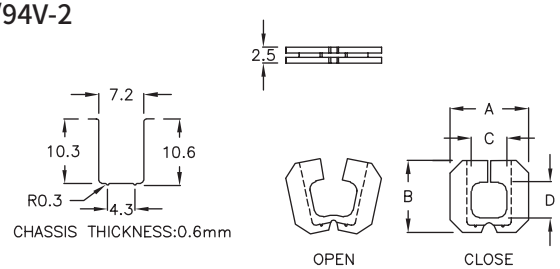


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DS-4CF | 12.5 | 11.5 | 4.3 | 6.5 | 1000 |
| DS-4DG | 12.5 | 11.5 | 4.3 | 4.3 | |
| DS-4HQ | 12.5 | 11.5 | 4.3 | 2.15 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 方型护线环 EDGE SADDLE 2-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

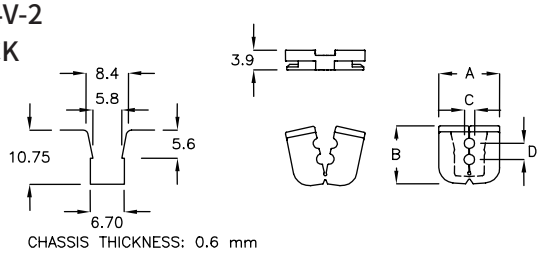


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DSH-12K | 12.2 | 11.55 | ø2.1 | 3.2 | 1000 |

## 方型护线环 EDGE SADDLE 2-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

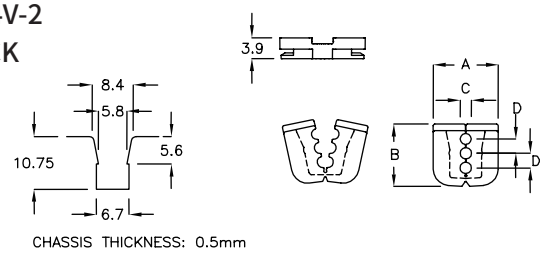


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DSH-12HM | 12.2 | 11.55 | ø2.1 | 2.6 | 1000 |

## 方型护线环 EDGE SADDLE 2-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

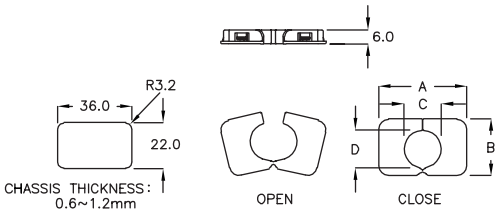


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SAQ-16 | 37.8 | 24.0 | 16.0 | 16.0 | 200 |

## 方型护线环 EDGE SADDLE 2-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

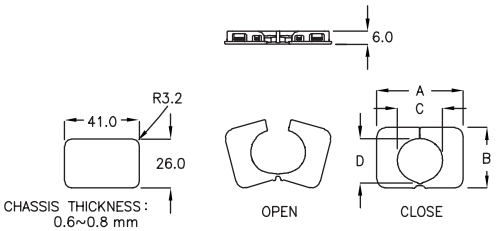


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SAQ-20A | 42.8 | 28.0 | 22.0 | 20.0 | 200 |

## 方型护线环 EDGE SADDLE 2-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

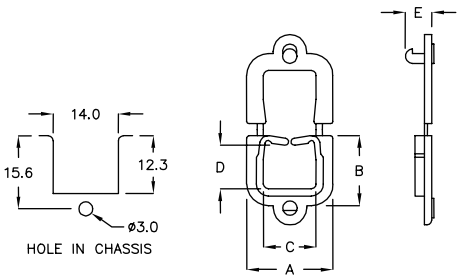


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| DS-10A | 18.0 | 14.45 | 10.8 | 8.9 | 6.7 | 2.2 | 500 |
| DS-10 | 18.5 | 14.5 | 11.0 | 8.6 | 6.0 | 1.6 | |
| DS-10S | 18.6 | 14.7 | 11.0 | 8.7 | 4.2 | 0.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 方型护线环 EDGE SADDLE 2-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

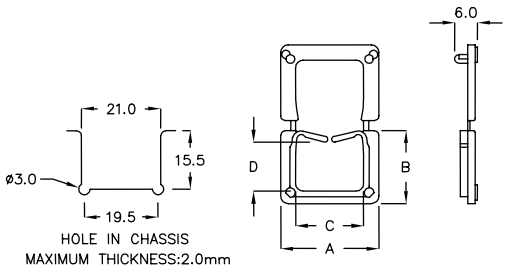


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DS-14 | 26.2 | 20.0 | 18.0 | 12.8 | 500 |

## 方型护线环 EDGE SADDLE 2-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

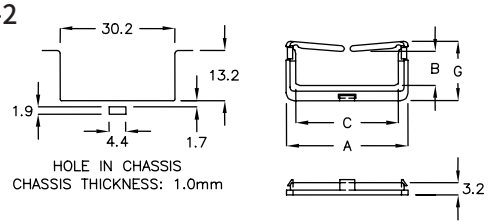


| PART NO | A | B | C | G | PACKAGE |
|---|---|---|---|---|---|
| DS-27 | 32.0 | 9.0 | 27.0 | 15.6 | 500 |

## 方型护线环 EDGE SADDLE 2-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

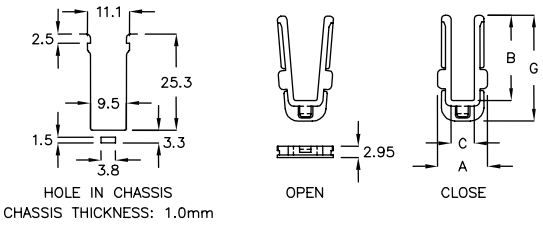


| PART NO | A | B | C | G | PACKAGE |
|---|---|---|---|---|---|
| DSC-6FN | 12.7 | 22.5 | 6.2 | 28.0 | 500 |

## 方型护线环 EDGE SADDLE 2-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

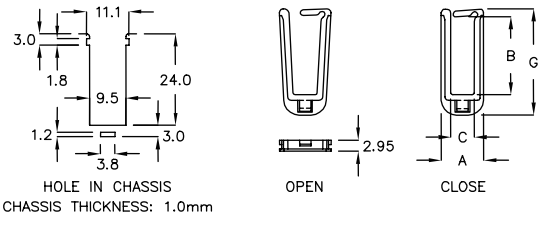


| PART NO | A | B | C | G | PACKAGE |
|---|---|---|---|---|---|
| DSC-6GM | 11.1 | 20.0 | 6.3 | 27.8 | 500 |

## 方型护线环 EDGE SADDLE 2-17-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

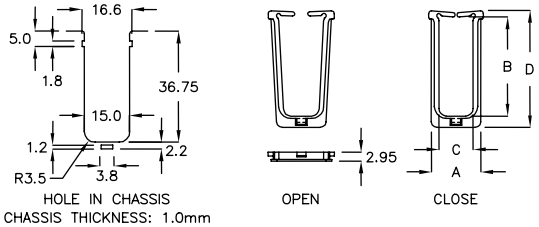


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| DSC-12NT | 16.4 | 32.7 | 11.8 | 38.7 | 500 |

## 方型护线环 EDGE SADDLE — 2-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CT–16 | 27.9 | 6.8 | 16.0 | 2.0 | 500 |



## 保护盖 HOLE PROTECT COVER — 2-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| BH–8 | 25.0 | 10.0 | 20.0 | ø3.2 | 1.0 | 1000 |
| BH–9 | 46.0 | 12.0 | 34.0 | ø3.5 | 0.8 | |
| BH–10 | 35.0 | 16.0 | 25.0 | ø3.1 | 1.6 | |
| BH–10A | 35.0 | 16.0 | 25.0 | ø3.1 | 2.6 | |
| BH–10C | 42.0 | 16.0 | 32.0 | ø3.2 | 3.6 | |
| BH–51A | 51.0 | 10.0 | 46.0 | ø3.2 | 0.8 | 200 |

## 保护盖 HOLE PROTECT COVER — 2-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| BHA–03 | 21.3 | 15.2 | 2.0 | 8.0 | 500 |

## 保护盖 HOLE PROTECT COVER — 2-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| BHA–01 | 21.0 | 15.0 | 2.0 | 6.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 保护盖 HOLE PROTECT COVER 2-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BH-011 | 20.3 | 10.6 | 1.0 | 1000 |

## 保护盖 HOLE PROTECT COVER 2-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BH-019 | 18.7 | 6.0 | 3.7 | 1000 |



## 端子保护盖 CONNECTOR COVER 2-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BH-012 | 24.5 | 10.2 | 10.5 | 500 |

## 护线套 EDGING 2-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

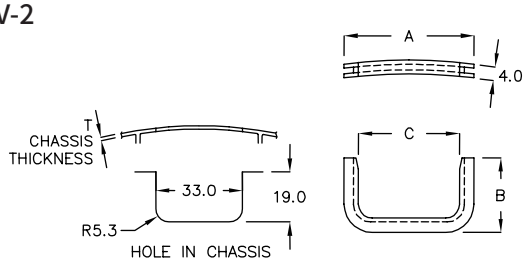


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| DDS-04 | 37.9 | 21.65 | 29.5 | 1.3 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 护线套 EDGING 2-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

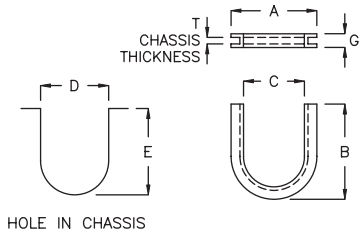


| PART NO | A | B | C | D | E | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| UST-01 | 24.2 | 26.8 | 17.2 | 19.2 | 25.0 | 3.85 | 1.6 | 500 |
| UST-02 | 24.0 | 21.0 | 16.0 | 18.0 | 18.0 | 3.8 | 1.7 | |
| UST-03 | 21.4 | 29.7 | 16.0 | 17.8 | 27.9 | 3.0 | 0.8 | |
| UST-04 | 16.0 | 16.0 | 10.0 | 12.0 | 14.0 | 3.4 | 1.3 | |
| UST-05 | 21.4 | 27.5 | 16.0 | 17.8 | 25.7 | 3.0 | 1.0 | |
| UST-06 | 31.3 | 36.5 | 21.3 | 26.0 | 35.0 | 3.8 | 1.6 | |
| UST-07 | 31.3 | 36.8 | 21.3 | 26.1 | 34.2 | 4.3 | 1.7 | |
| UST-08 | 28.3 | 29.5 | 20.7 | 22.0 | 26.7 | 4.0 | 1.6~1.8 | |
| UST-12 | 24.0 | 21.0 | 16.0 | 18.0 | 18.0 | 3.3 | 1.0 | |
| ★ UST-30C | 35.4 | 33.9 | 29.8 | 32.0 | 32.7 | 3.0 | 0.8 | |



## 护线套 EDGING 2-20-2

- MATERIAL：NYLON 66(UL)
- FLAME CLASS：94V-0/94V-2
- COLOR：BLACK

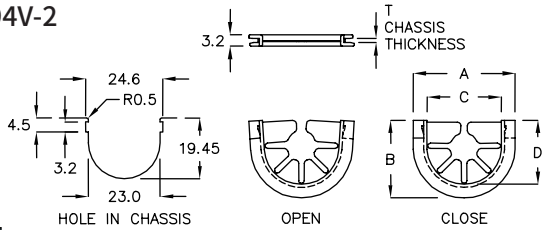


| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| USK-21A | 29.0 | 22.1 | 21.2 | 18.0 | 1.0 | 500 |



## 方型护线环 EDGE SADDLE 2-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

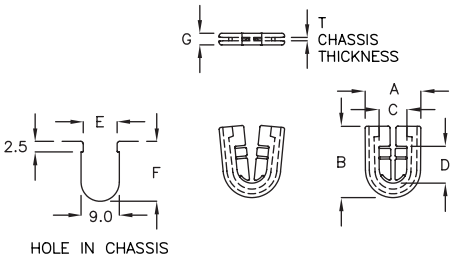


| PART NO | A | B | C | D | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| USM-6KP | 13.0 | 16.8 | 6.4 | 8.7 | 8.0 | 15.0 | 2.75 | 0.6 | 1000 |
| ★ USM-6LQ | 13.0 | 16.8 | 6.4 | 8.7 | 8.0 | 15.0 | 3.20 | 1.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 方型护线环 EDGE SADDLE 2-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

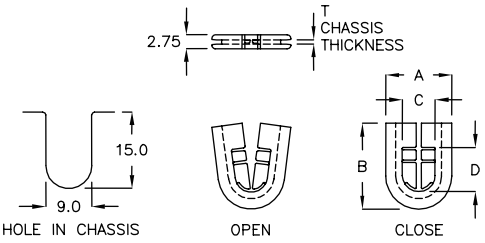


| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| USM-6M | 13.0 | 16.8 | 6.4 | 8.7 | 0.6 | 1000 |

## 方型护线环 EDGE SADDLE 2-21-2

- MATERIAL: TPE
- COLOR: BLACK

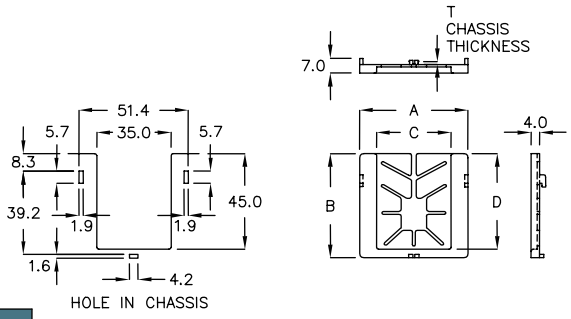


| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| USCF-51G | 51.0 | 49.0 | 35.0 | 45.0 | 1.0 | 200 |

## 护线套 EDGING 2-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK

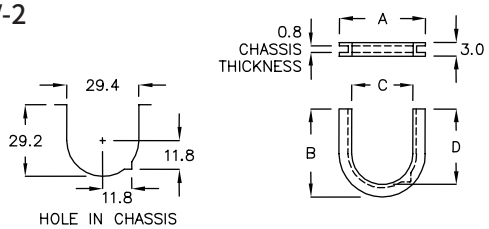


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| UST-27Q | 35.1 | 31.7 | 27.4 | 27.8 | 500 |

## 方型护线环 EDGE SADDLE 2-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

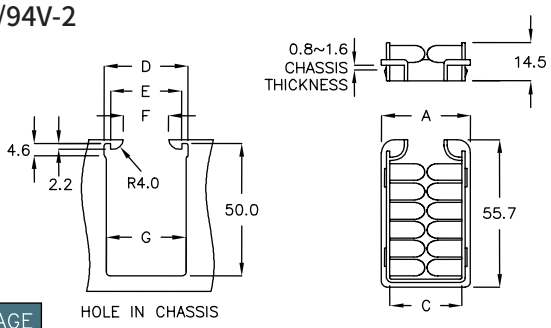


| PART NO | A | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| USC-27KH | 33.6 | 27.2 | 31.6 | 26.8 | 17.0 | 30.0 | 100 |
| USC-37FG | 43.6 | 37.2 | 41.6 | 36.8 | 29.2 | 40.0 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 活动护线套 MOVABLE BUSHING — 2-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | SUITABLE THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| US-12.31 | 31.2 | 3.2 | 4.0 | 1.2 | 1.1 | 1.2 | 2000 |
| US-116.7 | 66.5 | 3.7 | 3.9 | 1.0 | 1.0 | 1.2 | |
| US-127.9 | 79.0 | 3.2 | 4.3 | 1.3 | 1.2 | 1.3 | 1000 |
| US-2010 | 100.0 | 4.4 | 4.3 | 1.3 | 2.0 | 2.0 | |
| US-0725 | 255.0 | 3.2 | 4.6 | 1.7 | 0.7 | 0.7 | |
| US-0926 | 260.0 | 3.1 | 3.8 | 0.8 | 0.9 | 1.0 | |
| US-1125 | 256.0 | 3.4 | 4.4 | 1.6 | 1.0 | 1.1 | |
| US-1126 | 265.0 | 3.5 | 4.4 | 1.6 | 0.9 | 1.0 | |
| US-1225 | 256.0 | 3.2 | 4.2 | 1.4 | 1.2 | 1.3 | |
| US-1317 | 176.0 | 3.7 | 4.3 | 1.3 | 1.3 | 1.5 | |
| US-1325 | 256.0 | 3.7 | 4.3 | 1.3 | 1.3 | 1.5 | |
| US-1725 | 256.0 | 4.2 | 4.4 | 1.4 | 1.6 | 1.7 | 500 |
| US-2025 | 256.0 | 4.4 | 4.3 | 1.4 | 2.0 | 2.1 | |
| US-2425 | 256.0 | 5.2 | 4.6 | 1.7 | 2.4 | 2.4 | |
| US-3025 | 255.0 | 5.8 | 4.5 | 1.25 | 3.0 | 3.2 | |
| US-3525 | 256.0 | 6.2 | 5.5 | 2.3 | 3.4 | 3.6 | 200 |

## 塞环 HOLE PLUG — 2-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: BLACK






| PART NO | CHASSIS THICKNESS | HOLE IN CHASSIS | A | B | C | PACKAGE |
|---|---|---|---|---|---|---|
| M-8A | 1.6 | ø8.5 | ø11.5 | 1.8 | 6.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 塞环 HOLE PLUG 2-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | MAXIMUM THICKNESS | HOLE IN CHASSIS | A | B | C | PACKAGE |
|---|---|---|---|---|---|---|
| M-3K | 1.6 | ø3.0~ø3.1 | 5.2 | 1.65 | 4.3 | 2000 |
| M-3LM | 1.6 | ø3.4~ø3.6 | 5.6 | 1.8 | 4.3 | |
| M-4DR | 1.6 | ø3.9~ø4.1 | 5.8 | 1.65 | 5.0 | |
| M-4MF | 1.6 | ø4.4~ø4.6 | 6.0 | 1.65 | 5.0 | |
| M-4 | 1.6 | ø4.7~ø4.9 | 6.0 | 1.8 | 5.2 | |
| M-5 | 1.0 | ø4.95~ø5.0 | 7.5 | 1.3 | 5.7 | |
| M-6 | 1.6 | ø6.3~ø6.5 | 7.6 | 1.8 | 5.6 | |
| M-6A | 1.6 | ø6.2~ø6.5 | 8.0 | 1.85 | 8.0 | 1000 |
| M-7 | 1.6 | ø7.0~ø7.1 | 11.0 | 1.9 | 7.0 | |
| M-8 | 1.6 | ø7.6~ø8.0 | 9.5 | 1.8 | 6.0 | |
| M-9 | 1.2 | ø9.5~ø9.6 | 13.0 | 2.0 | 6.5 | |
| M-10 | 1.4 | ø9.6~ø10.0 | 13.0 | 1.8 | 6.0 | |
| M-11A | 1.4 | ø11.45~ø11.55 | 18.6 | 2.0 | 7.0 | |
| M-11DC | 0.8 | ø11.2~ø11.25 | 15.0 | 1.35 | 6.9 | |
| M-13 | 2.1 | ø12.7~ø13.0 | 17.0 | 2.3 | 8.0 | |
| M-16 | 2.0 | ø15.9~ø16.0 | 20.0 | 2.3 | 7.7 | 500 |



## 塞环 HOLE PLUG 2-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: BLACK




| PART NO | MAXIMUM THICKNESS | HOLE IN CHASSIS | A | B | C | PACKAGE |
|---|---|---|---|---|---|---|
| M-15 | 1.6 | ø15.0~ø15.1 | 16.8 | 1.8 | 7.0 | 500 |
| M-19 | 3.2 | ø18.9~ø19.0 | 23.5 | 3.5 | 10.5 | |
| M-22 | 3.0 | ø21.9~ø22.0 | 26.0 | 3.4 | 9.6 | |
| M-22C | 3.5 | ø21.9~ø22.0 | 25.8 | 3.7 | 11.7 | 200 |
| M-25 | 3.2 | ø25.4~ø25.6 | 28.0 | 4.0 | 12.7 | |
| M-28A | 3.5 | ø28.3~ø28.4 | 32.0 | 3.9 | 13.1 | |
| M-30 | 3.2 | ø30.5~ø30.6 | 34.0 | 4.0 | 13.0 | |
| M-32 | 2.2 | ø32.0~ø32.1 | 35.7 | 2.6 | 13.0 | |



## 塞环 HOLE PLUG 2-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | MAXIMUM THICKNESS | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| M-22A | 2.0 | 19.4 | 2.2 | 7.5 | 25.6 | 200 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 塞头 HOLE PLUG 2-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | MAXIMUM THICKNESS | A | B | PACKAGE |
|---|---|---|---|---|
| MU-9JP | 3.4 | ø12.0 | 10.5 | 1000 |

## 保护盖 HOLE PROTECTOR 2-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MBF-01 | ø8.9 | 4.9 | 1000 |

## 塞头 HOLE PLUG 2-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MHG-1A | ø6.2 | 5.0 | 2000 |

## 塞头 HOLE PLUG 2-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MHG-02 | ø6.0 | 6.0 | 2000 |

## 塞头 HOLE PLUG 2-24-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMD-01 | 14.4 | 7.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塞头 HOLE PLUG 2-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MHG-04 | ø13.4 | 7.9 | 2000 |

## 塞头 HOLE PLUG 2-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MHG-4A | ø9.5 | 8.0 | 2000 |

## 塞头 HOLE PLUG 2-25-3

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPL-05 | ø5.0 | 4.0 | 2000 |

## 塞头 HOLE PLUG 2-25-4

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPL-21Q | ø21.8 | 12.0 | 100 |

## 塞头 HOLE PLUG 2-25-5

- MATERIAL: TPE
- COLOR: BLACK

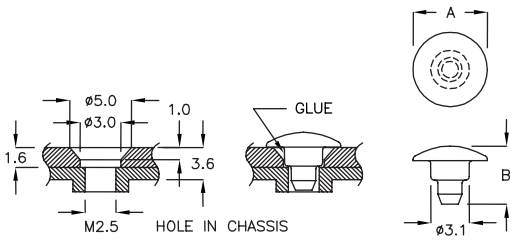


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPZ-6Q | ø6.0 | 4.7 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塞头 HOLE PLUG 2-26-1

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| MHG-5F | ø7.7 | 1000 |

## 塞头 HOLE PLUG 2-26-2

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| MAF-4D | ø12.0 | 1000 |

## 固定座 MOUNT 2-26-3

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMQ-01 | ø7.0 | 4.0 | 2000 |

## 固定座 MOUNT 2-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMQ-02 | ø3.0 | 2.0 | 2000 |

## 塞头 HOLE PLUG 2-26-5

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MXR-7BK | 11.75 | 4.4 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 塞头 HOLE PLUG 2-27-1

- MATERIAL: TPE
- COLOR: BLACK

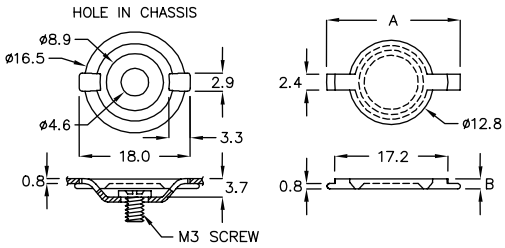


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MXT-12GR | 20.3 | 1.5 | 1000 |

## 塞头 HOLE PLUG 2-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MBF-6A | ø7.0 | 5.4 | 2000 |

## 塞头 HOLE PLUG 2-27-3

- MATERIAL: TPE
- COLOR: BLACK

NEW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ MPLA-11C | ø11.5 | 9.0 | 1000 |



## ANT3 RFID 塞头 ANT3 RFID HOLE PLUG 2-27-4

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPL-9A | ø9.0 | 5.7 | 2000 |



## 护板套 EDGING 2-27-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

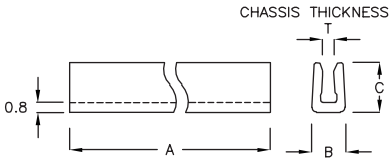


| PART NO | A | B | C | T | PACKAGE |
|---|---|---|---|---|---|
| VTU-14 | 14.0 | 2.4 | 3.2 | 0.8 | 1000 |
| VTU-20DM | 20.0 | 2.8 | 5.5 | 1.0 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 护板套 EDGING 2-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| VTU−20A | 20.0 | 4.8 | 5.0 | 2.5 | 1000 |
| VTU−30C | 30.0 | 4.4 | 5.0 | 1.6 | |
| VTU−47 | 47.0 | 4.4 | 5.0 | 1.6 | |



## 护板套 EDGING 2-28-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

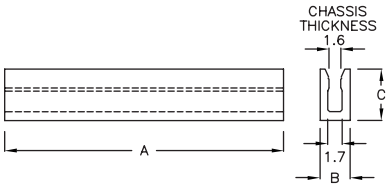


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UTU−30 | 30.0 | 3.6 | 6.0 | 1000 |
| UTU−60 | 60.0 | 3.6 | 6.0 | 500 |
| UTU−60A | 59.0 | 5.5 | 8.0 | |
| UTU120 | 120.0 | 5.5 | 8.0 | 100 |



## 护线套 EDGING 2-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

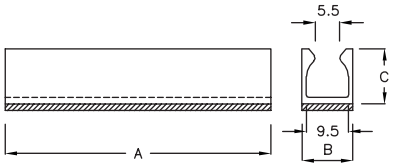


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UTU−60C | 60.0 | 11.5 | 12.5 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 03

## P.C.板间隔柱
## SPACER SUPPORT



## P.C. 板间隔柱 SPACER SUPPORT 3-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LSA−2A | 3.0 | 1.6 | 1.2 | 6.8 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

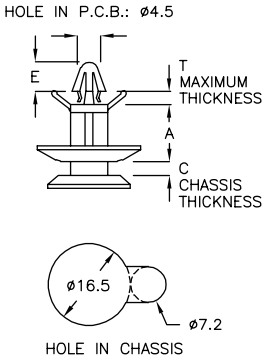


| PART NO | A | T MAXIMUM THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LSD−9B | 8.6 | 4.0 | 2.5 | 5.8 | 500 |
| LSD−11A | 11.1 | 2.0 | 2.5 | 5.8 | |
| LSD−12 | 12.1 | 1.6 | 2.5 | 5.8 | |
| LSD−12A | 12.1 | 2.0 | 2.5 | 5.8 | |
| LSD−14 | 14.0 | 1.6 | 2.5 | 5.8 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T MAXIMUM THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| LSD−4A | 4.5 | ø4.5 | 2.0 | 2.5 | 5.8 | 500 |
| LSD−6 | 6.0 | ø6.0 | 1.6 | 1.8 | 7.6 | |
| LSD−9A | 9.5 | ø4.5 | 1.6 | 1.8 | 5.8 | |
| LSD−9C | 8.6 | ø6.0 | 1.6 | 1.8 | 7.6 | |
| LSD−13A | 13.3 | ø6.0 | 1.6 | 1.8 | 7.6 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

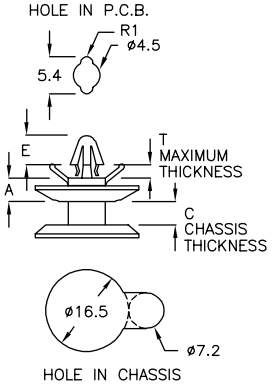


| PART NO | A | T MAXIMUM THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LSD−8 | 3.3 | 2.0 | 2.5 | 6.5 | 500 |
| LSD−8C | 3.2 | 2.0 | 5.0 | 6.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LSD-11 | 11.0 | 2.0 | 2.2 | 5.8 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LSD-11C | 11.0 | 2.0 | 2.1 | 5.8 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS-3C | 3.5 | 1.4~1.8 | 0.8~1.0 | 7.1 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| ACMS-3RK | 3.5 | 1.6 | 0.6 | 4.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS-2 | 2.5 | 1.4~1.7 | 0.8~1.4 | 7.1 | 1000 |
| ACBS-3A | 3.5 | 1.4~1.7 | 0.8~1.0 | 7.1 | |
| ACBS-5 | 5.0 | 1.2~1.7 | 0.8~1.4 | 7.1 | |
| ACBS-6 | 6.5 | 1.2~1.7 | 0.8~1.2 | 7.3 | |
| ACBS-6B | 6.35 | 1.4~1.9 | 0.8~1.4 | 7.1 | |
| ACBS-6C | 6.35 | 1.4~2.0 | 0.8~1.4 | 7.2 | |
| ACBS-6M | 6.85 | 1.2~1.6 | 0.5~0.8 | 7.0 | |
| ACBS-8 | 8.0 | 1.4~1.8 | 0.8~1.4 | 7.1 | |
| ACBS-10 | 10.0 | 1.4~1.8 | 0.8~1.5 | 7.1 | |
| ACBS-12 | 12.7 | 1.4~1.8 | 1.0~1.6 | 7.1 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

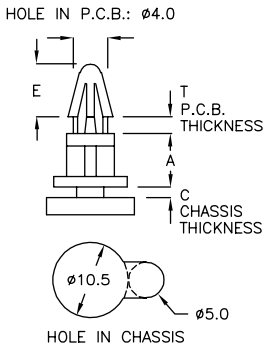


| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS-8A | 8.0 | 1.4~1.9 | 1.6~2.2 | 7.1 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS-6K | 6.5 | 1.8~2.3 | 0.6~0.8 | 7.1 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

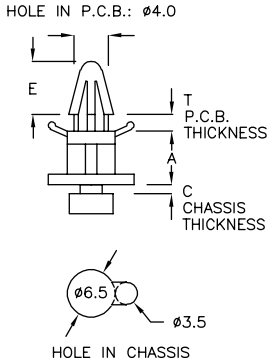


| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS-6T | 6.4 | 1.5~2.3 | 0.8~1.5 | 7.1 | 1000 |
| ACBS-17T | 17.0 | 1.4~1.8 | 0.6~0.8 | 7.1 | 500 |
| ACBS-74T | 74.0 | 1.4~1.6 | 1.0~1.2 | 7.3 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| AF−003 | 3.2 | 1.6 | 1.0~1.7 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| AC−003 | 3.2 | 1.6 | 1.0~1.7 | 10.3 | 1000 |
| AC−006 | 6.4 | 1.6 | 1.0~1.7 | 10.2 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS−6Y | 6.4 | 1.2~1.6 | ø11.8 | 7.2 | 1000 |
| ACBS−8X | 8.0 | 1.2~1.7 | ø15.0 | 7.2 | |
| ACBS−8Y | 8.0 | 1.2~1.7 | ø11.6 | 7.2 | |
| ACBS−8K | 8.0 | 1.2~1.7 | ø18.0 | 7.1 | |
| ACT−17 | 17.0 | 1.4~1.8 | ø11.3 | 7.0 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|
| ACBS−8D | 8.0 | 1.2~1.6 | ø11.8 | 7.5 | 1000 |
| ACBS−9K | 8.5 | 1.6~2.2 | ø12.0 | 6.0 | |
| ACBS−9Y | 9.0 | 1.2~1.6 | ø12.0 | 7.1 | |
| ACBS−10Y | 10.0 | 1.2~1.6 | ø12.0 | 7.1 | |
| ACBS−11Y | 11.0 | 1.2~1.6 | ø11.9 | 7.1 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T P.C.B. THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|
| ACBK−9HG | 9.6 | 1.6 | ø15.0 | 8.3 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LSD-13 | 13.3 | 2.0 | 5.8 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LSD-21 | 19.0 | 2.0 | 5.8 | 200 |



## P.C. 板间隔柱 SPACER SUPPORT 3-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LTD-10 | 9.9 | 2.0 | 5.4 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| LTD-11 | 11.0 | 2.0 | 5.8 | 2.0 | 500 |
| LTD-14 | 14.0 | 2.0 | 5.8 | 2.0 | |

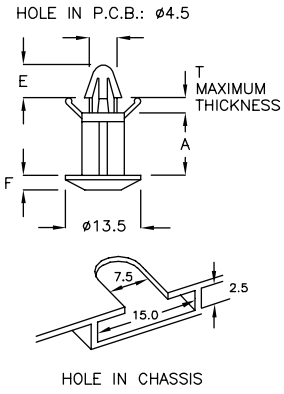

## P.C. 板间隔柱 SPACER SUPPORT 3-6-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| LTD-18 | 18.0 | 1.8 | 5.8 | 3.5 | 500 |
| LTD-18A | 18.0 | 1.8 | 5.8 | 3.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| LTD-18C | 18.0 | 1.7 | 6.0 | 3.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

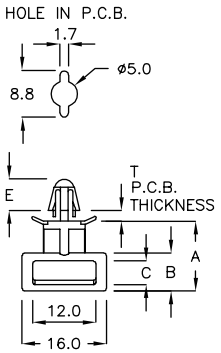


| PART NO | A | B | C | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| LTX-13 | 13.2 | 7.2 | 3.7 | 1.6 | 6.0 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

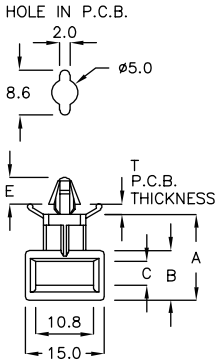


| PART NO | A | B | C | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| LTX-16A | 16.2 | 9.4 | 4.5 | 1.6 | 5.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

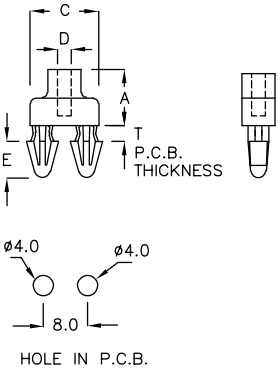


| PART NO | A | T P.C.B. THICKNESS | C | D TAPPING SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| TAA-01 | 13.8 | 2.0 | 12.5 | M3X8 | 6.7 | 500 |
| TAA-03 | 21.0 | 1.6 | 12.5 | M3X8 | 6.7 | |
| TAA-04 | 15.0 | 2.0 | 12.5 | M3X8 | 6.7 | |
| TAA-05 | 5.0 | 1.6 | 12.5 | M3X4 | 6.7 | |
| TAA-06 | 14.1 | 2.5 | 12.5 | M3X8 | 6.7 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

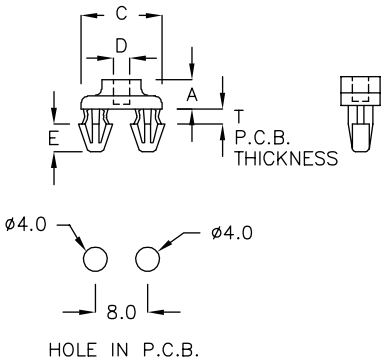


| PART NO | A | T P.C.B. THICKNESS | C | D TAPPING SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| TAA-07 | 4.5 | 2.0 | 12.5 | M3X4 | 4.3 | 500 |
| TAA-4A | 8.5 | 1.6 | 12.5 | M3X6 | 4.8 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

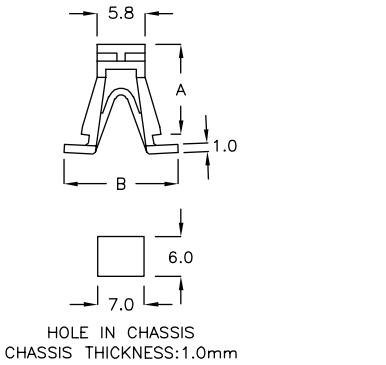


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FK-011 | 11.0 | 13.0 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | B | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCB-4M | 4.5 | ø9.8 | 0.8~1.2 | 1000 |
| FCB-5 | 5.0 | ø11.5 | 1.4~2.0 | |
| FCB-6 | 6.35 | ø10.4 | 1.0~2.0 | |
| FCB-6A | 6.35 | ø10.0 | 1.5~2.3 | |
| FCB-7 | 7.0 | ø10.4 | 1.3~1.9 | |
| FCB-8 | 8.0 | ø9.8 | 1.0~1.4 | |
| FCB-10 | 10.0 | ø9.8 | 1.0~1.4 | |
| FCB-10A | 10.0 | ø11.5 | 1.4~2.0 | |
| FCB-12 | 12.7 | ø9.8 | 1.0~1.4 | |
| FCB-12A | 12.7 | ø9.9 | 1.2~2.2 | |
| FCB-14 | 13.9 | ø9.9 | 1.5~2.0 | 500 |
| FCB-15 | 15.7 | ø9.8 | 1.6~2.2 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | B | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCT-14 | 14.0 | ø9.8 | 1.0~2.0 | 1000 |
| FCT-19A | 19.0 | ø10.0 | 0.8~1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5

| PART NO | A | B | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCTA−14A | 14.0 | 8.0 | 0.5~1.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.8

| PART NO | A | B | C CHASSIS THICKNESS | FORM | PACKAGE |
|---|---|---|---|---|---|
| FFR−05 | 5.0 | ø6.75 | 1.4~1.6 | 1 | 1000 |
| FFR−15H | 15.5 | ø9.0 | 1.4~1.6 | 2 | |



FORM.1



FORM.2



## P.C. 板间隔柱 SPACER SUPPORT 3-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0

| PART NO | A | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|
| KDD−11 | 11.0 | 1.6 | ø4.2 | 4.6 | 500 |
| KDD−12C | 12.5 | 1.6 | ø4.2 | 4.1 | |
| KDD−12MK | 12.5 | 1.6 | ø5.0 | 4.7 | |
| KDD−12TS | 12.5 | 1.6 | ø5.0 | 5.5 | |
| KDD−14C | 14.6 | 1.6 | ø4.2 | 5.1 | |
| KDD−15A | 15.0 | 1.6 | ø5.0 | 4.6 | |
| KDD−19 | 19.0 | 1.6 | ø4.2 | 5.2 | |
| KDD−22A | 22.3 | 1.6 | ø4.2 | 5.2 | |
| KDD−24 | 24.0 | 1.6 | ø5.0 | 4.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.6

| PART NO | A | C CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| KDH−09 | 9.0 | 0.8~1.6 | 4.3 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ3.5




| PART NO | A | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|
| KDM−14K | 15.0 | 1.4~1.6 | ø6.0 | 5.8 | 500 |
| KDM−16 | 16.0 | 1.4~1.6 | ø6.0 | 5.8 | 2000 |
| KDM−21C | 21.6 | 1.4~1.6 | ø7.5 | 12.8 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

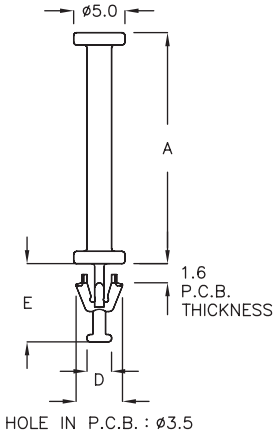


| | PART NO | A | D | E | PACKAGE |
|---|---|---|---|---|---|
| ★ | TCKY−22A | 22.5 | 2.4 | 7.6 | 500 |
| ★ | TCKY−22C | 22.3 | 2.6 | 6.6 | |
| ★ | TCKY−22D | 22.5 | 2.8 | 6.1 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.6




| PART NO | A | B | C CHASSIS THICKESS | PACKAGE |
|---|---|---|---|---|
| SCQ−09 | 9.0 | ø10.0 | 1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

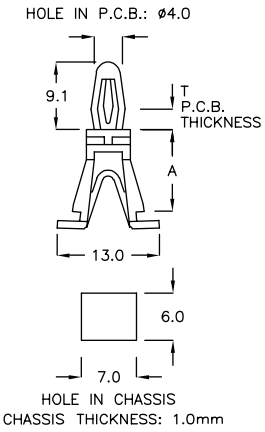


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| SK−011 | 11.0 | 1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCK-2C | 2.5 | 1.4~1.6 | 0.8~1.0 | ø5.8 | 2.7 | 2000 |
| SCK-2K | 2.5 | 1.6~1.9 | 0.8~1.0 | ø5.8 | 2.65 | |
| SCK-3A | 3.2 | 1.4~1.6 | 0.8~1.6 | ø8.0 | 3.0 | 1000 |
| SCK-04 | 4.0 | 1.4~1.6 | 0.8~1.6 | ø8.2 | 3.1 | |
| SCK-4AM | 4.5 | 1.4~1.6 | 0.8~1.6 | ø8.2 | 3.1 | |
| SCK-05 | 5.0 | 1.4~1.6 | 0.8~1.2 | ø5.8 | 3.1 | |
| SCK-5QN | 5.5 | 1.4~1.6 | 1.4~1.6 | ø8.2 | 3.1 | |
| SCK-06 | 6.0 | 1.4~1.6 | 0.8~1.6 | ø8.2 | 2.95 | |
| SCK-07 | 7.0 | 1.4~1.6 | 1.4~1.6 | ø8.2 | 3.1 | |
| SCK-08 | 8.0 | 1.4~1.6 | 0.8~1.6 | ø8.2 | 3.1 | |
| SCK-10 | 10.0 | 1.4~1.6 | 0.8~1.6 | ø8.2 | 3.1 | |
| SCK-12 | 12.0 | 1.4~1.6 | 0.8~1.6 | ø8.0 | 2.95 | |
| SCK-16YT | 16.0 | 1.4~1.6 | 1.4~1.6 | ø8.0 | 2.9 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCE-3A | 3.5 | 1.2~1.7 | 1.1~1.7 | ø11.45 | 3.6 | 1000 |
| SCE-4KD | 4.8 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | |
| SCE-6 | 6.35 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | |
| SCE-07 | 7.0 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | |
| SCE-8 | 8.0 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | |
| SCE-10 | 9.7 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | 500 |
| SCE-10A | 10.5 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | |
| SCE-10C | 9.7 | 1.2~1.7 | 1.1~1.6 | ø7.0 | 3.6 | |
| SCE-11 | 11.0 | 1.2~1.7 | 1.1~1.6 | ø11.45 | 3.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCG-2A | 2.5 | 1.6 | 0.5 | ø8.0 | 3.2 | 2000 |
| SCG-3D | 3.8 | 1.6 | 0.8 | ø8.0 | 3.2 | |
| SCG-05 | 5.0 | 1.6 | 0.5 | ø8.0 | 3.2 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

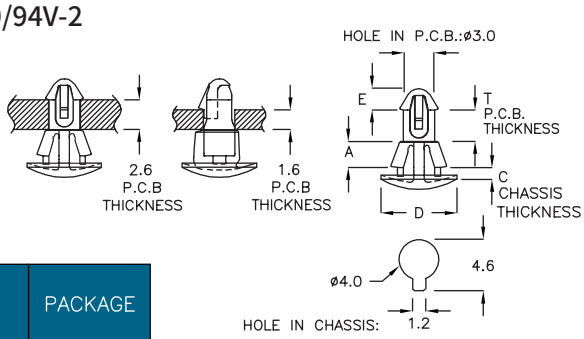


| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCZ-2M | 2.5 | 1.6 | 0.8~1.0 | ø7.0 | 2.0 | 2000 |
| | | 2.6 | | | | |



## P.C. 板间隔柱 SPACER SUPPORT 3-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCK-2DM | 2.8 | 0.8~1.0 | 1.8 | ø8.0 | 3.0 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ4.0




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCX-15 | 15.0 | 1.6 | 1.0 | ø8.0 | 3.0 | 1000 |
| SCX-35C | 35.3 | 1.6 | 1.0 | ø8.0 | 3.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCW-05 | 5.0 | 1.2~1.6 | 0.6~1.2 | ø8.0 | 3.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCS−4KP | 4.5 | 1.6~1.8 | 0.8~1.0 | ø7.8 | 3.5 | 1000 |
| SCU−11K | 11.0 | 1.4~1.6 | 0.8~1.2 | ø9.5 | 2.8 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCD−10S | 10.0 | 0.8~1.9 | 1.0~1.6 | ø11.5 | 9.65 | 500 |
| SCD−12S | 11.8 | 0.8~1.9 | 1.2~2.0 | ø11.5 | 9.65 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B HOLE IN CHASSIS | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| SCD−10 | 10.0 | ø5.5 | 1.2~1.7 | 1.0~1.6 | ø11.4 | 10.6 | 500 |
| SCD−12 | 12.7 | ø5.5 | 1.2~1.7 | 1.0~1.5 | ø12.8 | 10.6 | |
| SCD−15K | 15.9 | ø5.4 | 1.2~1.6 | 1.5~1.6 | ø12.7 | 9.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCD−10A | 10.0 | 1.2~1.6 | 1.0~1.1 | ø10.0 | 10.8 | 500 |
| SCD−25 | 25.0 | 1.2~1.6 | 1.0~1.1 | ø10.0 | 10.6 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCY-10 | 10.0 | 1.2~1.6 | 1.2~1.6 | ø9.85 | 10.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCT-06 | 6.0 | 1.2~1.6 | 1.2~1.6 | ø10.0 | 4.0 | 1000 |
| SCT-7 | 7.0 | 1.2~1.6 | 1.3~2.0 | ø11.2 | 4.0 | |
| SCT-12A | 12.0 | 1.2~1.6 | 1.1~2.0 | ø9.9 | 4.0 | |
| SCT-13A | 13.5 | 1.2~1.6 | 0.8~1.6 | ø9.9 | 4.0 | |
| SCT-14 | 14.0 | 1.2~1.6 | 1.3~2.0 | ø9.9 | 4.0 | |
| SCT-21A | 21.7 | 1.2~1.6 | 0.8~1.6 | ø9.9 | 4.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCT-3 | 3.0 | ø9.8 | 4.0 | 0.8~1.6 | 1.2~1.6 | 1000 |
| SCT-3A | 3.5 | ø9.8 | 3.6 | 0.8~1.0 | 1.2~1.6 | |
| SCT-10 | 10.0 | ø9.8 | 4.5 | 1.4~2.0 | 1.2~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCT-7AF | 7.05 | ø11.1 | 3.8 | 1.3~2.2 | 1.2~1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCT−05 | 5.0 | ø9.8 | 3.8 | 1.4~2.0 | 1.2~1.6 | 1000 |
| SCT−6KT | 6.35 | ø9.8 | 3.8 | 1.4~2.0 | 1.2~1.6 | |
| SCT−08 | 8.0 | ø9.8 | 3.8 | 1.2~1.6 | 1.2~1.6 | |
| SCT−8C | 7.9 | ø9.6 | 4.0 | 1.1~1.8 | 1.2~1.6 | |
| SCT−12C | 11.9 | ø9.7 | 4.0 | 1.1~1.8 | 1.2~1.6 | |
| SCT−18 | 18.0 | ø9.8 | 4.0 | 1.0~2.0 | 1.2~1.6 | |
| SCT−18K | 18.0 | ø9.8 | 4.0 | 1.8~2.2 | 1.2~1.6 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCT−10A | 10.0 | ø10.0 | 3.2 | 0.8~1.6 | 1.2~1.6 | 1000 |
| SCT−19 | 19.0 | ø10.0 | 3.2 | 0.8~1.6 | 1.2~1.6 | |
| SCT−19A | 19.0 | ø10.0 | 3.4 | 0.6 | 1.2~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C P.C.B THICKNESS | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCTA−10 | 10.0 | ø9.6 | 4.0 | 1.6 | 2.0 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCC−21 | 21.0 | ø10.0 | 4.0 | 0.8~1.0 | 1.4~1.6 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCB−5 | 5.0 | ø10.0 | 7.4 | 0.8~1.4 | 1.2~1.6 | 1000 |
| SCB−5.5 | 5.5 | ø10.0 | 7.1 | 0.8~1.7 | 1.2~1.6 | |
| SCB−6 | 6.35 | ø10.0 | 7.5 | 0.8~1.2 | 1.2~1.6 | |
| SCB−6A | 6.5 | ø10.2 | 7.1 | 0.8~1.7 | 1.4~1.8 | |
| SCB−6F | 6.5 | ø10.0 | 4.9 | 1.0~1.7 | 1.2~1.6 | |
| SCB−8 | 8.0 | ø9.9 | 7.1 | 0.8~1.4 | 1.2~1.6 | |
| SCB−8A | 8.0 | ø10.1 | 7.4 | 0.8~1.1 | 1.2~1.6 | |
| SCB−9A | 9.0 | ø9.9 | 7.3 | 0.8~1.4 | 1.2~1.8 | |
| SCB−10 | 10.0 | ø10.0 | 7.6 | 0.8~1.2 | 1.2~1.6 | |
| SCB−10A | 10.0 | ø10.0 | 7.1 | 1.0~1.4 | 1.5~2.4 | |
| SCB−11F | 11.0 | ø9.9 | 7.3 | 0.8~1.2 | 1.2~1.6 | |
| SCB−12 | 12.4 | ø9.9 | 7.2 | 0.8~1.4 | 1.2~1.6 | |
| SCB−15 | 15.7 | ø9.8 | 7.3 | 0.8~1.4 | 1.2~1.6 | |
| SCB−16 | 16.2 | ø9.8 | 6.6 | 0.7~1.2 | 1.2~1.6 | 500 |
| SCB−19 | 19.0 | ø9.9 | 7.5 | 0.8~1.4 | 1.2~1.6 | |
| SCB−24 | 24.1 | ø9.8 | 7.5 | 0.8~1.4 | 1.2~1.6 | |
| SCB−28A | 28.2 | ø9.9 | 6.4 | 0.8~1.0 | 1.4~1.8 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCC−3 | 3.5 | ø11.4 | 4.0 | 1.6~2.2 | 1.2~1.6 | 1000 |
| SCC−3A | 3.2 | ø11.4 | 4.0 | 1.8~2.2 | 1.5~1.7 | |
| SCC−3C | 3.5 | ø11.4 | 4.0 | 1.8~2.3 | 1.8~2.2 | |
| SCC−5 | 5.0 | ø11.4 | 4.0 | 1.6~2.2 | 1.2~1.6 | |
| SCC−6 | 6.35 | ø11.5 | 4.0 | 1.6~2.2 | 1.4~1.9 | |
| SCC−8 | 8.2 | ø11.4 | 4.0 | 1.6~2.2 | 1.3~1.7 | |
| SCC−8D | 7.9 | ø11.5 | 4.0 | 1.6~2.2 | 1.3~1.7 | |
| SCC−10 | 10.0 | ø11.5 | 4.0 | 1.6~2.2 | 1.4~1.8 | |
| SCC−10A | 10.1 | ø11.5 | 4.0 | 1.6~2.2 | 1.8~2.2 | |
| SCC−10C | 10.0 | ø11.5 | 4.0 | 1.6~2.2 | 2.8~3.2 | |
| SCC−12 | 12.8 | ø11.4 | 4.0 | 1.6~2.2 | 1.2~1.6 | |
| SCC−15 | 15.7 | ø11.4 | 4.0 | 1.6~2.2 | 1.3~1.7 | |
| SCC−19 | 19.1 | ø11.4 | 4.0 | 1.6~1.8 | 1.3~1.7 | |
| SCC−19A | 19.1 | ø11.4 | 4.0 | 1.6~2.2 | 1.6~2.0 | |
| SCC−20 | 20.0 | ø11.5 | 4.0 | 1.6~2.2 | 1.2~1.6 | 500 |
| SCC−24 | 23.8 | ø11.4 | 4.0 | 1.6~2.0 | 1.3~1.7 | |
| SCC−26A | 25.8 | ø11.4 | 4.0 | 1.7~2.3 | 1.4~1.6 | |
| SCC−32 | 32.0 | ø11.4 | 4.0 | 1.7~2.3 | 1.4~1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.6




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCC-34 | 34.0 | ø11.4 | 3.6 | 1.6~1.8 | 1.4~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ6.0




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCF-5 | 5.3 | ø11.5 | 4.0 | 0.8~1.6 | 1.2~1.7 | 1000 |
| SCF-06 | 6.35 | ø11.6 | 4.1 | 0.8~1.6 | 1.2~1.7 | |
| SCF-8 | 8.2 | ø11.6 | 4.0 | 0.8~1.6 | 1.2~1.7 | 500 |
| SCF-10 | 10.0 | ø11.6 | 4.1 | 0.8~1.6 | 1.2~1.7 | |
| SCF-12 | 12.7 | ø11.6 | 4.0 | 0.8~1.6 | 1.2~1.7 | |
| SCF-15AP | 15.9 | ø11.0 | 3.0 | 0.8~2.0 | 1.2~1.7 | |
| SCF-21J | 21.6 | ø11.5 | 4.0 | 0.6~0.8 | 1.2~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ6.0




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCD-6A | 6.4 | ø10.0 | 10.0 | 0.8~1.2 | 1.2~1.7 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ6.0




| PART NO | A | D | E | C P.C.B THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SCD-14K | 14.0 | ø10.0 | 10.0 | 0.8~1.2 | 1.2~1.7 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5

NEW




| PART NO | A | D | E | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| ★ SCN-08 | 8.0 | 8.0 | 4.5 | 0.5~1.0 | 1.2~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCP-3A | 3.5 | 1.4~1.6 | 0.5~0.8 | ø9.5 | 4.0 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SDA-10 | 10.0 | 1.2~1.6 | 0.8~1.2 | ø10.0 | 7.1 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCM-19 | 19.0 | 1.0 | 0.6~0.8 | ø10.0 | 3.3 | 500 |
| SCM-25 | 25.0 | 1.6 | 0.6~0.8 | ø10.0 | 2.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCM−05 | 5.0 | 1.6 | 0.6 | ø10.0 | 3.3 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCL−9 | 9.0 | 1.1 | 1.5~1.8 | ø9.5 | 5.1 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN CHASSIS: Φ5.5




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SCA−19 | 19.0 | 1.6 | 0.8 | ø10.0 | 3.1 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MCL−14 | 14.0 | ø3.2 | 2.0 | 1.0 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | F | C P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| KHA-3A | 3.2 | 2.0 | 2.95 | 1.6 | 0.8 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MCS-2A | 2.2 | ø3.2 | 1.85 | 1.0 | 2000 |
| MCS-2F | 2.2 | ø3.2 | 1.85 | 1.6 | |
| MCS-03 | 3.0 | ø3.2 | 1.95 | 1.0 | |
| MCS-3DF | 3.5 | ø3.2 | 1.85 | 1.0 | |
| MCS-04 | 4.0 | ø3.2 | 1.85 | 1.0 | |
| MCS-4GW | 4.1 | ø3.2 | 1.9 | 0.9 | |
| MCS-4A | 4.5 | ø3.2 | 1.85 | 1.0 | |
| MCS-4C | 4.0 | ø3.2 | 1.85 | 1.6 | |
| MCS-4F | 4.5 | ø3.2 | 1.85 | 1.6 | |
| MCS-05 | 5.0 | ø3.2 | 1.85 | 1.0 | |
| MCS-5A | 5.5 | ø3.2 | 1.85 | 1.0 | |

| PART NO | A | B | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MCS-5C | 5.0 | ø3.2 | 1.85 | 1.6 | 2000 |
| MCS-5F | 5.5 | ø3.2 | 1.85 | 1.6 | |
| MCS-06 | 6.0 | ø3.2 | 1.85 | 1.0 | |
| MCS-6A | 6.5 | ø3.2 | 1.85 | 1.0 | |
| MCS-6C | 6.0 | ø3.2 | 1.85 | 1.6 | |
| MCS-6F | 6.5 | ø3.2 | 1.85 | 1.6 | |
| MCS-08 | 8.0 | ø3.2 | 1.85 | 1.0 | |
| MCS-8C | 8.0 | ø3.2 | 1.85 | 1.6 | |
| MCS-10A | 10.5 | ø3.2 | 2.1 | 1.6 | |
| MCS-18 | 18.2 | ø3.0 | 1.5 | 1.0 | |
| MCS-22 | 22.0 | ø3.2 | 2.0 | 1.6 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MEA-2M | 2.5 | 1.6 | 2000 |
| MEA-4M | 4.5 | 1.6 | |
| MEA-05 | 5.0 | 1.6 | |
| MEA-5M | 5.5 | 1.6 | |
| MEA-6M | 6.5 | 1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MCJ−6 | 6.0 | 1.6 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B THICKNESS | C P.C.B THICKNESS | PACKAGE |
|---|---|---|---|---|
| LBK−04 | 3.0 | 0.8~1.0 | 0.8~1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| MCK−3A | 3.5 | ø4.4 | 1.7 | 2.2 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| MCA−4 | 3.8 | 0.8~1.6 | 5.8 | 1.5 | 2000 |
| MCA−06 | 6.0 | 0.8~1.6 | 5.8 | 1.4 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MEG−03 | 3.0 | 0.9 | 1.6 | 2000 |
| MEG−06 | 6.0 | 1.6 | 2.3 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C CHASSIS THICKNESS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MEG-04A | 4.0 | 0.8 | 0.5 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



FORM.1



FORM.2

| PART NO | A | B | E | T | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| MCD2-2 | 2.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | 2000 |
| MCD2-2M | 2.5 | ø4.5 | 2.0 | 1.2~1.6 | 1 | |
| MCD2-3 | 3.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-3A | 3.2 | ø4.3 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-3M | 3.5 | ø4.5 | 2.0 | 1.2~1.6 | 1 | |
| MCD2-4 | 4.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-4M | 4.5 | ø4.5 | 2.1 | 1.2~1.6 | 1 | |
| MCD2-5 | 5.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-5M | 5.5 | ø4.5 | 2.0 | 1.2~1.6 | 1 | |

| PART NO | A | B | E | T | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| MCD2-6 | 6.0 | ø4.6 | 2.2 | 1.2~1.6 | 1 | 2000 |
| MCD2-6M | 6.5 | ø4.5 | 2.0 | 1.2~1.6 | 1 | |
| MCD2-7 | 7.0 | ø4.5 | 2.4 | 1.2~1.6 | 1 | |
| MCD2-7A | 7.5 | ø4.5 | 2.2 | 1.6~1.8 | 2 | |
| MCD2-8 | 8.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-9M | 9.5 | ø4.5 | 2.0 | 1.2~1.6 | 1 | 1000 |
| MCD2-10 | 10.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-12 | 12.0 | ø4.5 | 2.2 | 1.2~1.6 | 1 | |
| MCD2-20 | 20.0 | ø4.5 | 2.0 | 1.2~1.6 | 2 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| UCX-5K | 5.0 | ø4.5 | 2.0 | 1.2~1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MQD-2DK | 2.8 | 1.4~1.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

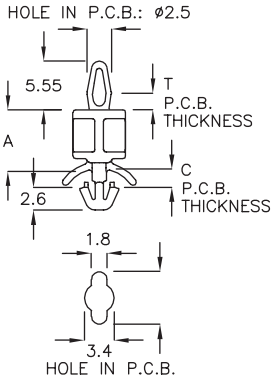


| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCY−7MR | 7.0 | 1.6 | 1.0~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

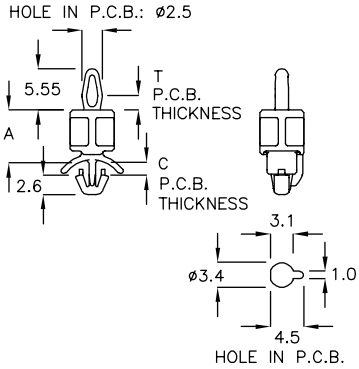


| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCY−7SA | 7.0 | 1.6 | 1.0~1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MEH−02 | 2.0 | 1.0 | 1.0 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| LCA2−5 | 5.0 | 1.0~1.7 | 1.7 | 3.3 | 2000 |
| LCA2−8 | 7.7 | 1.0~1.7 | 1.7 | 3.3 | |
| LCA2−9 | 9.0 | 1.0~1.7 | 1.7 | 3.3 | |
| LCA2−10 | 9.9 | 1.0~1.7 | 1.7 | 3.3 | |
| LCA2−12 | 11.6 | 1.0~1.7 | 1.7 | 3.3 | |
| LCA2−14 | 13.6 | 1.0~1.7 | 1.6 | 3.3 | |
| LCA2−16 | 15.7 | 1.0~1.7 | 1.7 | 3.3 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCJ-19 | 19.0 | 7.4 | 0.3~0.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCR-11A | 11.6 | 1.6 | 2.0 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| UCF-03 | 3.0 | ø3.0 | 0.8 | 1.5 | 2000 |
| UCF-9H | 9.5 | ø4.5 | 1.6 | 1.8 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| UCC-05 | 5.0 | 0.8 | 1.0 | 1.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| MCM−2A | 1.4 | 1.4~1.6 | 5.4 | 2.4 | 2000 |
| MCM−02 | 2.0 | 1.4~1.6 | 5.3 | 2.4 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCX−3A | 3.25 | 1.4~1.6 | 0.8~1.0 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | B HOLE IN P.C.B. | C P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| MCL−03 | 3.0 | 2.1 | ø3.0 | 1.6 | 0.8 | 2000 |
| MCL−18 | 18.0 | 2.2 | ø1.5 | 1.0 | 1.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

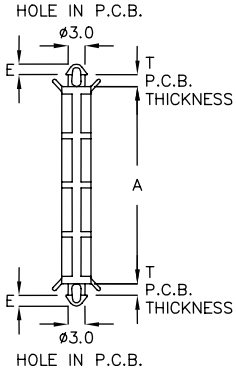


| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| DMK−49J | 49.6 | 1.8 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCY−25 | 25.0 | 1.4 ~ 1.6 | 1.0~ 1.2 | 2.0 | 2.4 | 500 |
| MCY−26A | 26.8 | 1.4 ~ 1.6 | 1.0~ 1.2 | 2.0 | 2.4 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCY−36P | 36.5 | 1.6 | 1.2 | 2.0 | 2.4 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| MCH−28A | 28.2 | 1.0 ~ 1.2 | 1.4 ~ 1.6 | 1.9 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LCA3−3A | 3.1 | 1.0~1.7 | 3.2 | 2000 |
| LCA3−3 | 3.2 | 1.0~1.7 | 3.2 | |
| LCA3−7 | 6.8 | 1.6~1.9 | 3.2 | |
| LCA3−11 | 11.5 | 1.0~1.6 | 3.2 | 1000 |
| LCA3−15 | 15.2 | 1.0~1.6 | 3.2 | |
| LCA3−20 | 19.8 | 1.0~1.8 | 3.2 | |
| LCA3−25 | 25.0 | 1.6~1.7 | 3.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| MCB3−6 | 6.35 | 1.2~1.7 | 9.1 | 3.3 | 2000 |
| MCB3−12 | 12.7 | 1.2~1.7 | 9.1 | 3.3 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MCFA−2A | 2.5 | 2.6 | 0.7~0.9 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MCF−2A | 2.5 | 1.2~1.8 | 3.6 | 2000 |
| MCF−03 | 3.0 | 1.2~1.8 | 3.7 | |
| MCF−3M | 3.5 | 1.2~1.8 | 3.6 | |
| MCF−04 | 4.0 | 1.2~1.8 | 3.7 | |
| MCF−4M | 4.5 | 1.2~1.8 | 3.6 | |
| MCF−05 | 5.0 | 1.2~1.8 | 3.7 | |
| MCF−5M | 5.5 | 1.2~1.8 | 3.6 | |
| MCF−6 | 6.35 | 1.2~1.8 | 3.7 | |
| MCF−07 | 7.0 | 1.2~1.8 | 3.7 | |
| MCF−8 | 8.0 | 1.2~1.8 | 3.7 | |
| MCF−09 | 9.0 | 1.2~2.0 | 3.6 | |
| MCF−10 | 9.7 | 1.2~1.8 | 3.7 | |
| MCF−12 | 12.7 | 1.2~1.8 | 3.7 | 1000 |
| MCF−57 | 57.0 | 1.4~1.6 | 3.5 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT 3-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCF−6A | 6.0 | 0.8~1.0 | 1.2~1.7 | 3.6 | 3.6 | 2000 |
| MCF−3RK | 3.1 | 1.0~1.35 | 1.5~1.7 | 3.5 | 2.5 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B THICKNESS | C P.C.B THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| MQY−4MA | 4.3 | 0.8～1.0 | 1.4～1.6 | 2.8 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-28-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LTA3−10M | 10.5 | 1.2~1.6 | 2.5 | 1000 |
| LTA3−12 | 12.0 | 1.2~1.6 | 2.5 | |
| LTA3−13 | 13.0 | 1.2~1.6 | 2.5 | |
| LTA3−18M | 18.3 | 1.2~1.6 | 2.5 | |
| LTA3−36A | 36.8 | 0.8~1.8 | 2.5 | 500 |
| LTA3−40 | 40.0 | 1.2~1.6 | 2.5 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

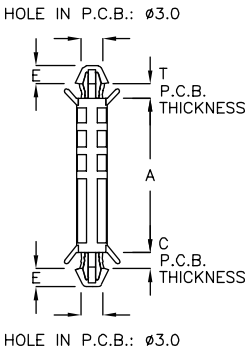


| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LTA3−40A | 40.8 | 1.2~1.6 | 1.4~1.6 | 2.4 | 1000 |
| LTA3−41A | 41.5 | 1.2~1.6 | 1.4~1.8 | 2.4 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-28-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LBD−7A | 7.65 | 0.8～1.0 | 1.4～1.6 | 4.0 | 2.7 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MQF−14DC | 14.4 | 1.2~1.6 | 0.6 | 3.05 | 2.35 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MCQ−1AT | 1.0 | 1.0 | 3.1 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

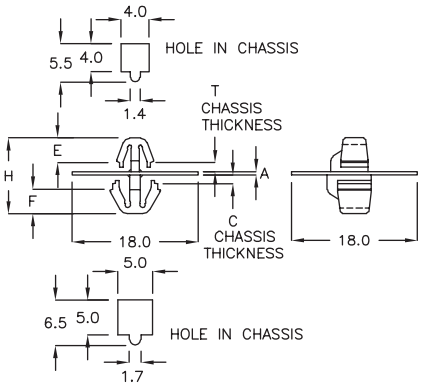


| PART NO | A | T CHASSIS THICKNESS | C CHASSIS THICKNESS | E | F | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| MCI−1GS | 0.5 | 1.0 | 1.0~1.5 | 3.5 | 3.5 | 10.8 | 1000 |
| MCI−1JR | 0.5 | 0.5 | 1.0~1.5 | 3.5 | 3.5 | 10.1 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCN−31 | 31.0 | 1.2~1.6 | 3.6~4.0 | 3.5 | 4.1 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LCB3−8 | 7.4 | 0.8~1.7 | 0.8~2.0 | 3.5 | 3.5 | 1000 |
| LCB3−10 | 10.0 | 0.8~1.7 | 0.8~2.0 | 3.5 | 3.5 | |
| LCB3−13 | 13.0 | 1.2~1.6 | 0.8~1.8 | 3.5 | 3.3 | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LCBA−15L | 16.4 | 0.8~1.8 | 1.2~2.0 | 2.8 | 3.4 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LBCM−5GA | 5.0 | 0.8~2.0 | 1.2~2.6 | 2.8 | 3.4 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-30-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LCH−6A | 6.6 | 0.6~1.0 | 1.6~1.8 | 3.1 | 1000 |
| LCH−8A | 8.6 | 0.6~1.0 | 1.6~1.8 | 3.1 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-31-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MQC-14 | 13.9 | 1.4~1.6 | 0.8~2.0 | 3.5 | 5.1 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCX-4A | 4.8 | 1.4~1.6 | 1.4~1.6 | 8.7 | 1.6 | 2000 |
| MCX-4GR | 4.0 | 1.4~1.6 | 0.8~1.0 | 8.7 | 1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| MCX-9C | 9.5 | 1.4 ~ 1.6 | 8.7 | 2.0 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-31-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCZ-10A | 10.5 | 1.4~1.6 | 2.1~2.3 | 3.3 | 3.7 | 2000 |
| MCZ-10MR | 10.45 | 1.4~1.6 | 1.8~2.0 | 3.1 | 2.7 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| MCP−7A | 7.9 | ø5.6 | 1.4 ~ 1.6 | 3.8 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-32-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| UCD−10A | 10.1 | 1.4 ~ 1.6 | 1.9 | 2000 |
| UCD−11A | 11.1 | 1.4 ~ 1.6 | 1.9 | |
| UCD−16A | 15.9 | 1.4 ~ 1.6 | 1.9 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| UCK−10F | 10.1 | 1.4 ~ 1.6 | 1.9 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LCS−14D | 14.3 | 0.8~2.0 | 4.0 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-32-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MCU−10 | 10.3 | 1.4 ~ 1.6 | 3.4 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| TCU−4A | 4.8 | 1.4 ~ 1.6 | 8.7 | 3.3 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LCQ−15A | 15.6 | 1.8～2.0 | 2.3～2.5 | 3.1 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LBC−4A | 5.0 | 1.2~1.6 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LBC−03 | 3.0 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | 1000 |
| LBC−04 | 4.0 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−5A | 5.0 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−05 | 5.35 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−6A | 6.35 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−06 | 6.75 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−07 | 7.0 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−7A | 7.5 | 1.2~1.7 | 0.8~1.6 | 4.0 | 2.5 | |
| LBC−8A | 8.0 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−08 | 8.35 | 1.0~1.6 | 0.8~1.6 | 4.0 | 2.8 | |
| LBC−09 | 9.60 | 1.0~1.6 | 0.8~2.0 | 4.0 | 2.4 | |
| LBC−11 | 11.2 | 1.0~1.6 | 0.8~2.0 | 4.0 | 2.4 | |
| LBC−12 | 12.7 | 1.0~1.6 | 0.8~2.0 | 4.0 | 2.4 | |
| LBC−16 | 16.0 | 1.0~1.6 | 0.8~2.0 | 4.0 | 2.4 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LCA35-13C | 13.6 | 2.0~2.75 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LBC-3A | 3.4 | 1.0~1.6 | 2.0~2.4 | 4.0 | 3.4 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LBC-10 | 9.6 | 0.8~1.6 | 4.0 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MCE-2A | 2.5 | 1.4~1.8 | 3.75 | 2000 |
| MCE-03 | 3.0 | 1.4~1.8 | 3.7 | |
| MCE-3A | 3.5 | 1.4~1.8 | 3.75 | |
| MCE-4 | 4.0 | 1.4~1.8 | 3.7 | |
| MCE-4A | 4.5 | 1.4~1.8 | 3.75 | |
| MCE-05 | 5.0 | 1.4~1.8 | 3.7 | |
| MCE-5A | 5.5 | 1.4~1.8 | 3.75 | |
| MCE-6A | 6.0 | 1.4~1.8 | 3.75 | |
| MCE-6 | 6.35 | 1.4~1.8 | 3.7 | |
| MCE-07 | 7.0 | 1.4~1.8 | 3.7 | |
| MCE-7A | 7.0 | 1.4~1.8 | 2.8 | |
| MCE-8 | 8.0 | 1.4~1.8 | 3.7 | |
| MCE-10 | 9.7 | 1.4~1.8 | 3.7 | 1000 |
| MCE-12 | 12.7 | 1.4~1.8 | 3.7 | |
| MCE-15A | 15.0 | 1.4~1.6 | 2.8 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | E | T P.C.B. THICKNESS | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMA−3A | 3.6 | 3.2 | 0.8~1.6 | 2.0~2.6 | 1000 |
| LMA−27 | 27.5 | 3.5 | 0.4~1.1 | 2.5~3.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MCW−20 | 20.0 | 1.2~1.6 | 3.4 | 1000 |

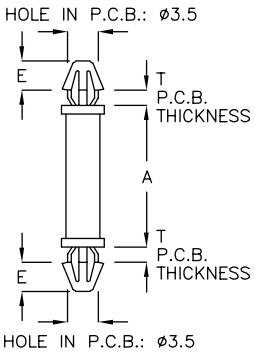




## P.C. 板间隔柱 SPACER SUPPORT 3-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LCA35−3 | 2.1 | 0.8~2.0 | 3.5 | 1000 |
| LCA35−3A | 3.0 | 0.8~2.0 | 3.4 | |
| LCA35−3M | 3.5 | 0.8~2.0 | 3.4 | |
| LCA35−4 | 4.0 | 0.8~2.0 | 3.4 | |
| LCA35−5 | 4.8 | 0.8~2.0 | 3.5 | |
| LCA35−5M | 5.5 | 0.8~2.0 | 3.4 | |
| LCA35−7 | 7.0 | 0.8~2.0 | 3.5 | |
| LCA35−10 | 10.0 | 0.8~2.0 | 3.5 | |
| LCA35−18 | 18.0 | 1.1~1.7 | 3.5 | |
| LCA35−20 | 20.0 | 1.0~1.6 | 3.5 | |
| LCA35−21 | 20.8 | 1.2~1.6 | 3.5 | |
| LCA35−25 | 25.0 | 1.4~1.6 | 3.4 | 500 |

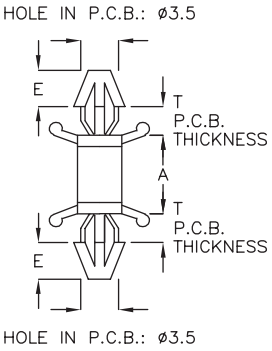

## P.C. 板间隔柱 SPACER SUPPORT 3-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LCA35−3H | 3.05 | 0.3~0.6 | 3.4 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| UCB−5A | 4.8 | 1.4 ~ 1.6 | 2.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LCF−18A | 17.8 | 1.4 ~ 1.6 | 0.6~1.0 | 3.5 | 3.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| MCB−19K | 19.0 | 1.4~1.6 | 4.0 | 3.8 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCQA−2HC | 2.0 | 0.8 | 2.2 | 2.8 | 3.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| UCH-29AM | 29.0 | 1.0~1.6 | 3.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| MCR-3A | 3.6 | ø7.4 | 1.4 ~ 1.6 | 2.0 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCB-8A | 7.9 | 1.0~1.6 | 1.4~1.6 | 3.6 | 2.0 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D HOLE IN CHASSIS | E | F | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| MCB-3 | 3.2 | ø4.0 | 3.6~3.8 | 2.1 | 0.8~1.6 | 2000 |
| MCB-6 | 6.35 | ø4.0 | 3.6~3.8 | 2.2 | 0.8~1.6 | |
| MCB-8 | 8.2 | ø4.0 | 3.6~3.8 | 2.2 | 0.8~1.6 | |
| MCB-10 | 10.5 | ø4.0 | 3.6~3.8 | 2.1 | 0.8~1.6 | |
| MCB-12 | 12.7 | ø4.0 | 3.6~3.8 | 2.2 | 0.8~1.6 | |
| MCB-15 | 15.7 | ø4.0 | 3.6~3.8 | 2.2 | 0.8~1.6 | 1000 |
| MCB-19 | 19.1 | ø4.0 | 3.6~3.8 | 2.2 | 0.8~1.6 | |
| MCB-28 | 28.5 | ø3.85 | 3.6~3.8 | 1.9 | 1.4~1.6 | |
| MCB-30A | 30.7 | ø3.85 | 3.6~3.8 | 1.8 | 0.8~1.6 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

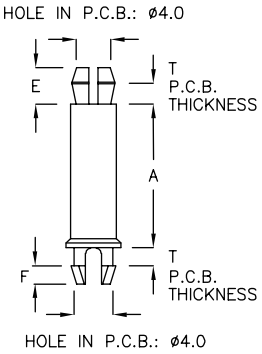


| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| MCB−24 | 24.1 | 1.2~1.6 | 3.6 | 1.9 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MCB−10K | 10.5 | 0.8 | 2.2~2.3 | 3.8 | 2.1 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| KCA−2M | 2.5 | 3.0 | 1.4~1.6 | 2000 |
| KCA−3 | 3.2 | 3.6 | 1.4~1.6 | |
| KCA−04 | 4.0 | 3.8 | 1.4~1.6 | |
| KCA−4A | 4.5 | 3.6 | 1.4~1.6 | |
| KCA−5 | 5.0 | 3.6 | 1.4~1.6 | 1000 |
| KCA−5A | 5.5 | 3.6 | 1.4~1.6 | |
| KCA−6 | 6.35 | 3.6 | 1.4~1.6 | |
| KCA−07 | 7.0 | 3.0 | 1.2~1.7 | |
| KCA−7A | 7.5 | 3.6 | 1.4~1.6 | |
| KCA−8 | 8.0 | 3.6 | 1.4~1.6 | |
| KCA−9 | 9.5 | 3.6 | 1.4~1.6 | |
| KCA−10 | 10.5 | 3.6 | 1.4~1.6 | |
| KCA−11 | 11.0 | 3.6 | 1.4~1.6 | |
| KCA−12 | 12.7 | 3.6 | 1.4~1.6 | |
| KCA−12S | 12.7 | 3.2 | 1.4~1.6 | |

| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| KCA−14 | 14.0 | 3.0 | 1.4~1.6 | 1000 |
| KCA−15 | 15.7 | 3.6 | 1.4~1.6 | |
| KCA−15L | 15.9 | 3.0 | 1.2~1.7 | |
| KCA−19 | 19.0 | 3.6 | 1.4~1.6 | |
| KCA−20 | 19.9 | 3.6 | 1.4~1.6 | |
| KCA−25 | 25.0 | 3.7 | 1.4~1.6 | |
| KCA−28A | 28.5 | 3.5 | 1.4~1.6 | 500 |
| KCA−30 | 30.0 | 3.7 | 1.4~1.6 | |
| KCA−34 | 34.0 | 3.6 | 1.4~1.6 | |
| KCA−34A | 34.0 | 3.6 | 1.4~1.6 | |
| KCA−40A | 40.4 | 3.6 | 1.4~1.6 | |
| KCA−47 | 47.0 | 3.25 | 1.4~1.6 | 200 |
| KCA−69 | 69.0 | 3.7 | 1.4~1.6 | |
| KCA−80 | 80.0 | 3.0 | 1.4~1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| UCB-9M | 9.5 | 1.2~1.6 | 2.4 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

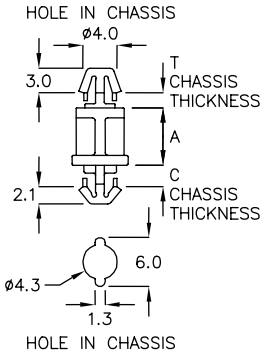


Built-In Anti-Spin Function

| PART NO | A | C CHASSIS THICKNESS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MQT-7CL | 7.0 | 2.36 | 1.6 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




FORM. 1




FORM. 2

| PART NO | A | T P.C.B. THICKNESS | E | FORM | PACKAGE |
|---|---|---|---|---|---|
| LCAS-3 | 3.5 | 0.8~1.8 | 7.0 | 1 | 1000 |
| LCAS-10 | 10.5 | 0.8~1.8 | 7.0 | 1 | |
| LCAS-15 | 14.8 | 0.8~1.8 | 7.0 | 2 | |
| LCAS-16M | 16.6 | 0.8~1.8 | 7.0 | 2 | |
| LCAS-44 | 44.0 | 0.8~1.8 | 6.0 | 2 | 200 |
| LCBS-48 | 47.8 | 0.8~1.8 | 7.0 | 2 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCFA-7K | 7.6 | 0.8~1.2 | 0.8 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LCA4−4 | 4.0 | 1.0~1.6 | 1.0~1.6 | 3.4 | 1000 |
| LCA4−5 | 4.8 | 1.6~1.9 | 1.6~1.9 | 3.0 | |
| LCA4−6 | 6.0 | 1.0~1.6 | 1.0~1.6 | 3.4 | |
| LCA4−7 | 7.0 | 1.0~1.6 | 1.0~1.6 | 3.4 | |
| LCA4−8 | 7.1 | 1.2~1.8 | 1.2~1.8 | 3.6 | |
| LCA4−8A | 7.6 | 2.5~3.0 | 2.5~3.0 | 2.6 | |
| LCA4−9 | 8.8 | 1.6~2.0 | 1.6~2.0 | 3.0 | |
| LCA4−10 | 10.0 | 1.2~2.0 | 1.2~2.0 | 3.6 | |
| LCA4−10A | 10.4 | 1.1~1.8 | 1.6~3.1 | 3.6 | |
| LCA4−12 | 13.1 | 1.1~2.0 | 1.1~2.0 | 3.6 | |
| LCA4−15 | 15.9 | 1.1~2.0 | 1.1~2.0 | 3.6 | |
| LCA4−16 | 16.2 | 1.3~2.2 | 1.3~2.2 | 3.6 | |

| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LCA4−17 | 17.2 | 1.1~2.0 | 1.1~2.0 | 3.6 | 1000 |
| LCA4−20A | 19.6 | 1.1~2.0 | 1.7~3.5 | 3.6 | 500 |
| LCA4−29M | 29.8 | 1.0~1.7 | 1.0~1.7 | 3.6 | |
| LCA4−31 | 30.8 | 1.0~1.7 | 1.0~1.7 | 3.6 | |
| LCA4−34A | 34.0 | 1.1~1.9 | 1.6~3.1 | 3.6 | |
| LCA4−34C | 34.0 | 0.8~2.0 | 1.7~3.5 | 3.6 | |
| LCA4−36 | 36.0 | 2.0~3.0 | 2.0~3.0 | 3.6 | |
| LCA4−36A | 35.3 | 2.5~3.8 | 2.5~3.8 | 3.6 | |
| LCA4−44 | 43.6 | 0.8~1.9 | 0.8~1.9 | 3.6 | |
| LCA4−55 | 55.0 | 0.8~1.8 | 0.8~1.8 | 3.6 | 200 |
| LCA4−56 | 56.4 | 1.0~1.6 | 1.0~1.6 | 3.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LTQB−12CH | 12.7 | 0.8~1.7 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LCD−151 | 151.8 | 1.8~2.0 | 10.0 | 100 |






## P.C. 板间隔柱 SPACER SUPPORT 3-40-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MQW−51A | 51.7 | 1.6 | 3.3 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LLS−12 | 12.6 | 2.0 | 6.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LTU−20 | 20.0 | 1.7 | 1.7 | 6.0 | 500 |
| LTU−20A | 20.0 | 1.7 | 2.0 | 6.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-41-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C MAXIMUM THICKNESS | D HOLE IN CHASSIS | E | F | G | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| LT−10 | 9.2 | 5.5 | 2.0 | ø4.0 | 7.4 | 5.2 | 5.0 | 0.8~2.0 | 500 |
| LT−12 | 11.9 | 5.5 | 2.0 | ø4.0 | 7.35 | 4.5 | 5.0 | 0.8~2.0 | |
| LT−15 | 15.1 | 5.5 | 2.0 | ø4.0 | 7.4 | 5.2 | 5.0 | 0.8~2.0 | |
| LT−18 | 17.2 | 5.5 | 2.0 | ø4.0 | 7.35 | 5.2 | 5.0 | 0.8~2.0 | |
| LT−26 | 26.2 | 6.4 | 2.0 | ø5.0 | 15.0 | 5.2 | 6.0 | 0.8~2.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-41-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C MAXIMUM THICKNESS | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTG−5A | 5.7 | 2.4 | 6.5 | 0.8~1.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C CHASSIS THICKNESS | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LT-08A | 7.5 | 1.2~1.6 | 7.0 | 1.4~1.6 | 500 |
| LT-18A | 18.8 | 1.0~1.4 | 7.3 | 1.4~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LCWS-12 | 12.7 | 1.4~1.6 | 0.8~2.0 | 4.8 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-42-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| LCBS-5 | 5.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 1 | 1000 |
| LCBS-6 | 6.35 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 1 | |
| LCBS-10 | 10.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 1 | 500 |
| LCBS-15 | 15.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 5.7 | 1 | |
| LCBS-20 | 20.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 5.7 | 1 | |
| LCBS-25 | 25.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 5.7 | 1 | |
| LCBS-29 | 29.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 2 | |
| LCBS-30 | 30.0 | 1.0~2.0 | 1.0~2.0 | 7.0 | 6.0 | 2 | |
| LCBS-35 | 35.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 1 | |
| LCBS-37KM | 37.7 | 0.8~1.7 | 1.0~2.0 | 7.1 | 6.0 | 2 | |
| LCBS-38 | 38.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 1 | |
| LCBS-45 | 45.0 | 0.8~1.7 | 0.8~1.7 | 7.1 | 6.1 | 1 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-42-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LCBS-20QT | 20.0 | 0.8~1.7 | 1.5~2.5 | 6.7 | 5.7 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|
| LCBS-44 | 43.65 | 0.8~1.7 | 4.0 | 4.0 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT 3-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| LCK-20 | 14.6 | 0.6 | 0.8 ~ 1.0 | 3.4 | 1000 |
| LCK-27 | 21.2 | 0.6 | 1.4 ~ 1.6 | 3.4 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LTBS-6 | 6.35 | 0.8~1.7 | 500 |
| LTBS-10 | 9.4 | 0.8~1.7 | |
| LTBS-12 | 12.7 | 0.8~1.7 | |
| LTBS-15 | 15.9 | 0.8~1.7 | |
| LTBS-19 | 19.1 | 0.8~1.7 | |
| LTBS-21 | 20.5 | 0.8~1.7 | |
| LTBS-22 | 22.2 | 0.8~1.7 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LTQM-22A | 22.5 | 0.8~2.0 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT 3-43-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | T P.C.B. THICKNESS | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LCC-28A | 1.2~1.6 | 0.5~2.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C P.C.B. THICKNESS | T P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LCC-10K | 9.5 | 0.8~2.0 | 1.2~1.6 | 10.2 | 5.6 | 500 |
| LCC-16KF | 15.9 | 0.8~2.0 | 1.2~1.7 | 10.2 | 5.0 | 500 |
| LCC-22TB | 22.2 | 0.8~2.0 | 1.2~1.6 | 10.2 | 5.6 | 1000 |
| LCC-25QT | 25.4 | 0.8~2.0 | 1.2~1.7 | 10.2 | 5.0 | 500 |
| LCC-25A | 25.8 | 0.8~1.6 | 1.2~1.6 | 10.2 | 5.9 | 1000 |
| LCC-28C | 28.6 | 0.8~2.0 | 1.2~1.6 | 10.2 | 5.9 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LCC-5 | 4.8 | 1.2~1.6 | 1.0~2.2 | 10.7 | 5.5 | 500 |
| LCC-6 | 6.35 | 1.2~1.6 | 1.0~2.2 | 10.7 | 5.5 | |
| LCC-10 | 9.6 | 1.2~1.6 | 1.0~2.2 | 10.7 | 5.5 | |
| LCC-12 | 12.7 | 1.2~1.6 | 1.0~2.2 | 10.7 | 5.5 | |
| LCC-15 | 15.9 | 1.2~1.6 | 1.0~2.2 | 10.7 | 5.5 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| CBS-5 | 4.8 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | 1000 |
| CBS-6 | 6.35 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |
| CBS-10 | 9.2 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |
| CBS-12 | 12.7 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |
| CBS-15 | 15.9 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | 500 |
| CBS-19 | 19.0 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |
| CBS-25 | 25.4 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |
| CBS-28 | 28.5 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |
| CBS-35 | 35.0 | 0.8~1.9 | 0.5~2.2 | 6.0 | 5.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C P.C.B. THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| LBB−10 | 9.6 | 0.8~1.7 | 0.8~2.0 | 5.8 | 5.1 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|
| WCB−6 | 1.2~1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D SCREW | PACKAGE |
|---|---|---|---|
| L−16 | 12.0 | M3.0 X 19.0 | 500 |
| L−16S | 5.0 | M3.0 X 12.0 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D SCREW | PACKAGE |
|---|---|---|---|
| L−9A | 9.4 | M3.0X16.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCE-1AL | 1.5 | 1.4~1.6 | 2.0 | 2000 |
| PCE-2L | 2.0 | 1.4~1.6 | 2.0 | |
| PCE-2M | 2.5 | 1.4~1.6 | 2.0 | |
| PCE-3L | 3.0 | 1.4~1.6 | 2.0 | |
| PCE-3M | 3.5 | 1.4~1.6 | 2.0 | |
| PCE-04 | 4.0 | 1.4~1.6 | 2.0 | |
| PCE-4EW | 4.5 | 1.4~1.6 | 2.0 | |
| PCE-5BZ | 5.0 | 1.4~1.6 | 2.0 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCE-4D | 4.0 | 1.4~1.6 | 2.1 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCR-2C | 2.5 | 0.8~1.0 | 2.0 | 2000 |
| PCR-03 | 3.0 | 0.8~1.0 | 2.0 | |
| PCR-3M | 3.5 | 0.8~1.0 | 2.0 | |
| PCR-04 | 4.0 | 0.8~1.0 | 2.0 | |
| PCR-4M | 4.5 | 0.8~1.0 | 2.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

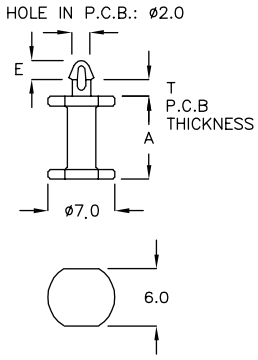


| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCE-8MR | 8.0 | 1.4~1.6 | 2.0 | 2000 |
| PCE-10F | 10.5 | 1.4~1.6 | 2.0 | |
| PCE-11 | 11.0 | 1.4~1.6 | 2.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

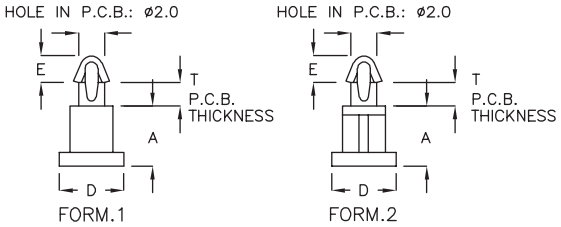


| PART NO | A | D | T P.C.B. THICKNESS | E | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| PCE-1A | 1.5 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-1C | 1.8 | ø4.2 | 1.4~1.6 | 2.0 | 1 | |
| PCE-02 | 2.0 | ø4.2 | 1.4~1.6 | 2.3 | 1 | |
| PCE-2A | 2.5 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-2C | 2.0 | ø4.8 | 1.8~2.0 | 2.0 | 1 | |
| PCE-2D | 2.9 | ø4.2 | 1.4~1.6 | 2.3 | 1 | |
| PCE-2F | 2.0 | ø4.2 | 0.8~1.0 | 2.0 | 1 | |
| PCE-2H | 2.2 | ø4.2 | 1.0~1.2 | 2.0 | 1 | |
| PCE-2K | 1.8 | ø4.2 | 1.0~1.2 | 2.0 | 1 | |
| PCE-2XC | 2.15 | ø4.2 | 1.4~1.6 | 2.0 | 1 | |
| PCE-03 | 3.0 | ø4.2 | 1.4~1.6 | 2.0 | 1 | |
| PCE-3A | 2.6 | ø4.1 | 1.4~1.6 | 2.0 | 1 | |
| PCE-3DF | 3.2 | ø4.8 | 1.4~1.6 | 2.1 | 1 | |
| PCE-3K | 3.5 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-3PW | 3.85 | ø6.0 | 1.4~1.6 | 2.0 | 1 | |
| PCE-3RY | 3.75 | ø4.8 | 1.4~1.6 | 2.0 | 1 | 2000 |
| PCE-4A | 4.0 | ø4.8 | 1.4~1.6 | 2.1 | 1 | |
| PCE-4F | 4.7 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-4M | 4.5 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-05 | 5.0 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-5JD | 5.0 | ø4.8 | 1.0~1.2 | 2.0 | 1 | |
| PCE-5QR | 5.0 | ø6.0 | 1.4~1.6 | 2.0 | 2 | |
| PCE-5TS | 5.3 | ø4.8 | 0.8~1.0 | 2.3 | 1 | |
| PCE-5K | 5.6 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-06 | 6.0 | ø4.8 | 1.4~1.6 | 2.1 | 1 | |
| PCE-6A | 6.5 | ø4.8 | 1.4~1.6 | 2.2 | 1 | |
| PCE-6C | 6.5 | ø4.8 | 1.4~1.6 | 2.0 | 1 | |
| PCE-6NS | 6.5 | ø6.0 | 1.4~1.6 | 2.0 | 2 | |
| PCE-07 | 7.0 | ø4.2 | 1.0~1.2 | 2.0 | 1 | |
| PCE-08 | 8.0 | ø4.8 | 1.4~1.6 | 3.0 | 1 | |
| PCE-09 | 9.0 | ø5.0 | 1.4~1.6 | 2.0 | 1 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCY-06 | 5.9 | 2.2~2.4 | 2.0 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B HOLE IN P.C.B. | D | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| PCA-3 | 3.0 | ø2.0 | ø3.4 | 2.6 | 0.8~1.0 | 2000 |
| PCA-3C | 3.0 | ø2.0 | ø3.4 | 2.6 | 1.0~1.2 | |
| PCA-4 | 4.0 | ø1.5 | ø3.0 | 2.0 | 1.4~1.6 | |
| PCA-4A | 4.0 | ø2.0 | ø3.5 | 2.0 | 1.4~1.6 | |
| PCA-4C | 4.7 | ø2.0 | ø4.8 | 2.6 | 1.4~1.6 | |
| PCA-5 | 5.0 | ø2.0 | ø3.5 | 2.0 | 1.4~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCC-03 | 3.0 | 1.4~1.6 | 2.0 | 2000 |
| PCC-04 | 4.0 | 1.4~1.6 | 2.0 | |
| PCC-05 | 5.0 | 1.4~1.6 | 2.0 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| PHA-2T | 2.95 | 1.4~1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| PCK-4C | 4.1 | ø5.5 | 1.8~2.0 | 2000 |
| PCK-4G | 4.0 | ø4.4 | 0.8~1.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| PCK-1MF | 1.6 | 3.5 | 0.8~1.0 | 2.0 | 2000 |
| PCK-2M | 2.5 | 3.5 | 0.8~1.0 | 2.0 | |
| PCK-3M | 3.5 | 4.4 | 0.8~1.0 | 2.0 | |
| PCK-4M | 4.5 | 4.4 | 0.8~1.0 | 2.0 | |
| PCK-05 | 5.0 | 4.4 | 0.8~1.0 | 2.0 | |
| PCK-5A | 5.6 | 4.4 | 0.8~1.0 | 2.4 | |
| PCK-7A | 7.0 | 4.4 | 1.4~1.6 | 2.4 | |
| PCK-7C | 7.5 | 4.4 | 0.8~1.0 | 2.3 | |
| PCK-8A | 8.0 | 4.4 | 1.4~1.6 | 2.2 | |
| PCK-9A | 8.9 | 4.4 | 1.4~1.6 | 2.2 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D | T CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| PCK-1TF | 1.5 | ø4.5 | 0.8~1.0 | 2.0 | 2000 |
| PCK-1A | 1.5 | ø4.5 | 1.4~1.6 | 2.1 | |
| PCK-2A | 2.5 | ø4.5 | 1.4~1.6 | 2.0 | |
| PCK-2C | 2.7 | ø6.0 | 1.4~1.6 | 2.2 | |
| PCK-2D | 2.8 | ø5.0 | 1.4~1.6 | 2.0 | |
| PCK-2F | 2.8 | ø5.0 | 1.5~1.7 | 2.0 | |
| PCK-2J | 2.95 | ø5.0 | 1.4~1.6 | 2.0 | |
| PCK-3A | 3.5 | ø4.5 | 1.4~1.6 | 2.0 | |
| PCK-04 | 4.0 | ø4.5 | 1.4~1.6 | 1.8 | |
| PCK-4A | 4.5 | ø4.5 | 1.4~1.6 | 2.0 | |
| PCK-4F | 4.0 | ø5.0 | 1.4~1.6 | 2.0 | |
| PCK-5K | 5.0 | ø3.6 | 1.9~2.1 | 2.0 | |
| PCK-5RH | 5.0 | ø4.5 | 1.4~1.6 | 1.6 | |
| PCK-06 | 6.0 | ø4.5 | 1.6~1.8 | 1.5 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| PCK-14 | 14.0 | 1.4~1.6 | 2000 |
| PCK-15 | 15.0 | 1.4~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| PCK-6C | 6.5 | 2.2~2.45 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| PCS-2A | 3.1 | 3.3~3.5 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCJ-3S | 2.9 | 2.6~2.85 | 2.0 | 2000 |
| PCJ-3T | 3.5 | 2.3~2.5 | 2.0 | |
| PCJ-3M | 3.5 | 3.3~3.5 | 2.1 | |
| PCJ-4A | 3.85 | 3.4~3.65 | 2.2 | |
| PCJ-4M | 4.5 | 2.3~2.5 | 2.1 | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCJ-9FQ | 9.5 | 0.8~1.0 | 2.0 | 2000 |
| PCJ-33A | 33.7 | 1.4~1.6 | 2.1 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-50-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| DCBS-2 | 2.0 | 1.2~1.7 | 3.8 | 2000 |
| DCBS-2A | 2.5 | 1.2~1.7 | 3.8 | |
| DCBS-3 | 3.0 | 1.2~1.7 | 3.7 | |
| DCBS-3A | 3.3 | 1.2~1.7 | 3.7 | |
| DCBS-3M | 3.5 | 1.2~1.7 | 3.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-51-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



FORM.1



FORM.2

| PART NO | A | D | T P.C.B. THICKNESS | E | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| DCBS−4 | 4.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | 2000 |
| DCBS−4C | 4.0 | ø6.0 | 1.2~1.6 | 3.7 | 1 | |
| DCBS−4M | 4.5 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−5 | 5.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−5M | 5.5 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−6 | 6.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−7 | 7.0 | ø7.0 | 1.2~1.6 | 3.7 | 1 | |
| DCBS−8 | 8.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−8A | 8.0 | ø6.8 | 1.2~1.6 | 4.3 | 1 | |
| DCBS−8C | 8.0 | ø7.0 | 2.0~2.2 | 3.3 | 1 | |
| DCBS−8M | 8.5 | ø7.0 | 1.2~1.6 | 3.7 | 1 | |
| DCBS−9 | 9.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−10 | 10.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−10A | 10.5 | ø7.0 | 1.2~1.6 | 3.9 | 1 | |
| DCBS−11 | 11.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−12 | 12.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | 1000 |
| DCBS−13 | 13.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−14 | 14.0 | ø4.8 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−15 | 15.0 | ø7.0 | 1.2~1.6 | 3.8 | 1 | |
| DCBS−16KH | 16.0 | ø10.0 | 1.2~1.6 | 3.7 | 2 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-51-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| DCBS−6A | 6.5 | 1.4~1.6 | 2.5 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| ★ DCBS−8KT | 8.0 | 2.4 | 3.3 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | D | PACKAGE |
|---|---|---|---|---|---|
| PCF−2A | 2.5 | 1.4~1.6 | 2.95 | ø5.0 | 2000 |
| PCF−2C | 2.8 | 1.4~1.6 | 2.95 | ø5.0 | |
| PCF−03 | 3.0 | 1.4~1.6 | 3.1 | ø5.0 | |
| PCF−3A | 3.2 | 1.4~1.6 | 3.1 | ø5.0 | |
| PCF−3C | 3.0 | 1.4~1.6 | 2.95 | ø6.0 | |
| PCF−3M | 3.5 | 1.4~1.6 | 3.0 | ø5.0 | |
| PCF−04 | 4.0 | 1.4~1.6 | 3.0 | ø5.0 | |
| PCF−4A | 4.5 | 1.4~1.6 | 2.95 | ø5.0 | |
| PCF−05 | 5.0 | 1.4~1.6 | 3.0 | ø5.0 | |
| PCF−5A | 5.0 | 1.4~1.6 | 3.1 | ø9.0 | |
| PCF−09 | 9.0 | 1.4~1.6 | 2.95 | ø5.0 | |
| PCF−9FK | 9.4 | 1.4~1.6 | 2.9 | ø6.0 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

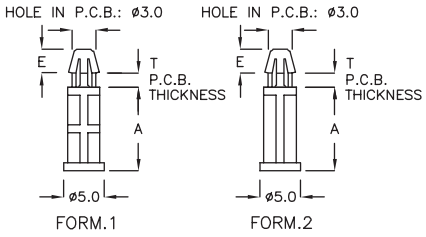


| PART NO | A | T P.C.B. THICKNESS | E | FORM | PACKAGE |
|---|---|---|---|---|---|
| PCF−9A | 9.5 | 1.6 | 2.7 | 2 | 2000 |
| PCF−10 | 10.0 | 1.6 | 2.7 | 1 | |
| PCF−20 | 20.0 | 1.6 | 2.7 | 1 | 1000 |
| PCF−22 | 22.0 | 1.6 | 2.9 | 1 | |
| PCF−25 | 25.0 | 1.6 | 2.9 | 1 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCF−4A | 4.5 | 1.6~1.7 | 3.6 | 2000 |
| TCF−10 | 10.0 | 1.6~1.7 | 3.8 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TAX−12D | 12.0 | 1.55~1.65 | 3.8 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCW−12A | 12.7 | 0.6 | 2.3 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCN−04 | 4.0 | 1.0~1.2 | 2.95 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MFR−15 | 15.0 | 1.2~1.6 | 3.5 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MFD−12 | 12.0 | 1.2~1.6 | 3.0 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-53-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MFRK−11A | 11.0 | 1.4~1.6 | 2.0 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MFC−37KS | 37.5 | 1.4~1.6 | 2.7 | 500 |
| MFC−38C | 38.4 | 1.2~1.6 | 2.7 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2x2 TAPPING SCREW

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| SDF−2C | 2.15 | 1.6 | 2 | 2000 |
| | | 2.6 | | |






## P.C. 板间隔柱 SPACER SUPPORT 3-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCQ−03 | 3.0 | 1.4~1.6 | 4.8 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-54-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2 TAPPING SCREW

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TAK−6A | 6.6 | 1.0~1.2 | 3.5 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-54-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCH−14A | 14.5 | 1.4~1.6 | 2.7 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

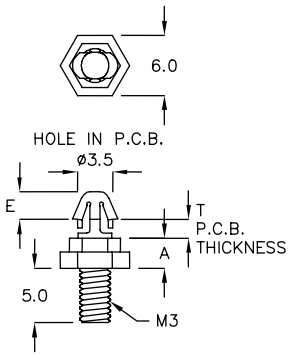


| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SDC−3TH | 3.0 | 2.75 | 1.2~1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | D | PACKAGE |
|---|---|---|---|---|
| SDM−03 | 3.0 | 0.8~1.0 | M3 | 2000 |
| SDM−04 | 4.0 | 0.8~1.0 | M2.5 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | D SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| SDS−05 | 4.9 | 3.0 | 0.8~1.0 | M2.5 | 3.3 | 2000 |
| SDS−05A | 4.9 | 3.0 | 0.8~1.0 | M4 | 3.3 | |
| SDS−3A | 3.4 | 4.0 | 0.8~1.0 | M4 | 3.5 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

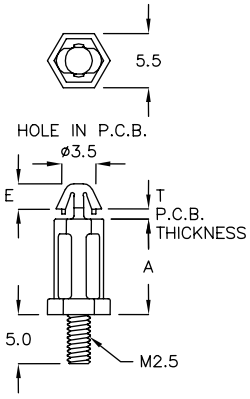


| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SDN−9AG | 9.7 | 2.6 | 0.6~0.8 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | D SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| SDT−10A | 10.4 | 5.0 | 1.4 ~ 1.6 | M3 | 3.25 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | D SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| SSA−13A | 13.0 | 6.0 | 1.4 ~ 1.6 | M3 | 3.9 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | D SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| SSBS−6 | 6.2 | 7.6 | 1.0~1.7 | #6−32 | 10.6 | 1000 |
| SSBS−6M | 6.35 | 5.0 | 1.0~1.7 | #6−32 | 10.6 | |
| SSBS−10 | 9.6 | 7.5 | 1.0~1.7 | #6−32 | 10.6 | |
| SSBS−12A | 12.5 | 5.0 | 1.0~1.7 | #6−32 | 10.1 | 500 |
| SSBS4−6 | 6.3 | 5.0 | 1.0~1.7 | M4 | 10.6 | |
| SSBS4−10 | 10.0 | 7.4 | 1.0~1.7 | M4 | 10.6 | |
| SSBS4−16 | 15.8 | 7.4 | 1.0~1.7 | M4 | 10.6 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MF−04A | 4.55 | 2.5 | 1.6~2.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

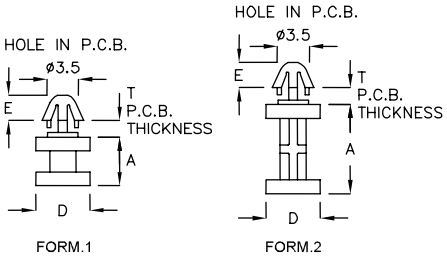


| PART NO | A | D | E | T P.C.B. THICKNESS | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| MF−003 | 3.0 | ø6.0 | 3.0 | 1.3~1.6 | 1 | 2000 |
| MF−03M | 3.5 | ø6.0 | 2.8 | 1.3~1.6 | 1 | |
| MF−004 | 4.0 | ø6.0 | 3.0 | 1.3~1.6 | 1 | |
| MF−005 | 5.0 | ø6.0 | 3.0 | 1.3~1.6 | 1 | |
| MF−05M | 5.5 | ø6.0 | 2.8 | 1.3~1.6 | 1 | |
| MF−08 | 8.0 | ø6.0 | 2.8 | 1.3~1.6 | 1 | |
| MF−10 | 10.0 | ø3.5 | 3.0 | 0.8~1.0 | 1 | |
| MF−10AD | 10.0 | ø6.0 | 2.85 | 1.2~1.4 | 1 | |
| MF−10FH | 10.0 | ø6.0 | 2.8 | 1.3~1.6 | 1 | |
| MF−13 | 13.0 | ø6.0 | 2.9 | 1.0~1.2 | 2 | 1000 |
| MF−19 | 19.0 | ø6.0 | 2.9 | 1.0~1.2 | 2 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MF−26C | 26.0 | 2.5 | 1.4~1.6 | 500 |
| MF−36 | 35.95 | 2.5 | 1.4~1.6 | |
| MF−38A | 38.35 | 2.5 | 1.4~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MFQ−4A | 4.5 | 3.5 | 1.2~1.6 | 1000 |
| MFQ−07 | 7.0 | 3.5 | 1.2~1.6 | |
| MFQ−12 | 12.0 | 3.5 | 1.2~1.6 | |
| MFQ−15 | 15.0 | 3.5 | 1.2~1.6 | |
| MFQ−16 | 16.0 | 3.5 | 1.2~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| DCMS−4M | 4.5 | 3.6 | 1.4~1.7 | 2000 |
| DCMS−6 | 6.35 | 3.6 | 1.4~1.7 | |
| DCMS−11SF | 11.0 | 3.0 | 1.0~1.4 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| TCD-13 | 13.0 | 3.85 | 1.4~1.6 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT — 3-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | D | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TCC-13A | 13.5 | ø9.0 | 5.0 | 1.4~1.6 | 1000 |
| TCC-14 | 14.5 | ø6.0 | 4.0 | 1.4~1.6 | |
| TCC-14A | 14.5 | ø6.0 | 2.7 | 1.4~1.6 | |
| TCC-21SD | 21.0 | ø8.0 | 2.8 | 1.0~1.2 | 500 |
| TCC-22 | 22.0 | ø5.0 | 2.9 | 1.4~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCG-2K | 2.65 | 2.5 | 0.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | D | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MQB-25M | 25.5 | ø5.0 | 2.8 | 1.0~1.2 | 500 |
| MQB-28F | 28.5 | ø5.0 | 2.8 | 1.0~1.2 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-58-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|
| PCQ-03 | 3.0 | ø5.5 | 1.4~1.6 | 3.2 | 2000 |
| PCQ-4A | 4.3 | ø9.5 | 1.4~1.6 | 3.2 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| PCM−07 | 7.0 | 3.2～3.4 | 4.0 | 2000 |

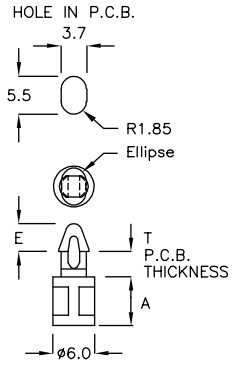

## P.C. 板间隔柱 SPACER SUPPORT 3-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MCC−17S | 16.6 | 1.4～1.6 | 2.0 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCS−15 | 15.0 | 1.4～1.6 | 2.0 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TCN−07 | 7.0 | 1.2～1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-59-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C | E | PACKAGE |
|---|---|---|---|---|---|
| TCK−15 | 15.5 | 1.2～1.4 | 10.9 | 5.0 | 1000 |
| TCK−17 | 17.5 | 1.2～1.4 | 10.9 | 5.0 | 500 |
| TCK−21A | 21.5 | 1.2～1.6 | 8.0 | 3.0 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TCJ−11 | 11.0 | 1.2~1.6 | 1000 |
| TCJ−12A | 12.2 | 1.2~1.6 | |
| TCJ−15 | 15.0 | 1.2~1.6 | |
| TCJ−18 | 18.0 | 1.2~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MFS−11 | 11.0 | 1.2~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C | E | PACKAGE |
|---|---|---|---|---|---|
| TCX−12 | 12.0 | 1.6 ~ 2.0 | ø4.7 | 3.0 | 1000 |
| TCX−19H | 19.6 | 2.6 ~ 3.0 | ø8.0 | 3.0 | |
| TCX−21 | 21.0 | 1.4 ~ 1.8 | ø8.0 | 3.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TAN−29F | 29.4 | 1.4~1.6 | 4.9 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| TCBR-8KF | 8.0 | 7.1 | 1.6~1.7 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C | D TAPPING SCREW | PACKAGE |
|---|---|---|---|---|---|
| MC-5 | 5.0 | 1.2~1.7 | ø4.95 | M2.5 | 2000 |
| MC-6 | 6.35 | 1.2~1.7 | ø4.9 | M2.5 | |
| MC-10 | 9.7 | 1.2~1.7 | ø5.8 | M2.5 | 1000 |
| MC-12 | 12.7 | 1.2~1.7 | ø5.8 | M2.5 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MC-3M | 3.5 | 0.9~1.1 | 3.2 | 2000 |
| MC-4M | 4.5 | 0.9~1.1 | 3.2 | |
| MC-05C | 5.0 | 0.9~1.1 | 4.0 | |
| MC-5M | 5.5 | 0.9~1.1 | 3.2 | |
| MC-6F | 6.0 | 0.9~1.1 | 3.2 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-61-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MC-04F | 4.0 | 1.2~1.6 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



FORM.1



FORM.2

| PART NO | A | T P.C.B. THICKNESS | C | E | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| MC-1AK | 1.5 | 0.6~0.8 | ø5.0 | 3.0 | 1 | 2000 |
| MC-002 | 2.0 | 0.6~0.8 | ø5.0 | 3.6 | 1 | |
| MC-02A | 2.0 | 0.7~0.8 | ø4.8 | 2.5 | 1 | |
| MC-02C | 2.0 | 0.9~1.2 | ø5.0 | 3.8 | 1 | |
| MC-2DP | 2.0 | 0.85~1.15 | ø6.8 | 2.2 | 1 | |
| MC-2M | 2.5 | 1.2~1.6 | ø5.0 | 3.6 | 1 | |
| MC-2NJ | 2.0 | 0.85~1.0 | ø5.0 | 2.2 | 1 | |
| MC-2P | 2.3 | 1.2~1.6 | ø5.0 | 3.5 | 1 | |
| MC-3 | 3.0 | 1.2~1.7 | ø5.1 | 3.4 | 2 | 2000 |
| MC-3A | 3.0 | 1.6~2.0 | ø7.0 | 2.9 | 2 | |
| MC-3K | 3.5 | 1.2~1.6 | ø5.0 | 3.5 | 2 | |
| MC-3QS | 3.2 | 1.2~1.6 | ø5.0 | 3.5 | 2 | |
| MC-4 | 4.0 | 1.2~1.7 | ø5.2 | 3.4 | 2 | |
| MC-4KP | 4.0 | 1.6~1.8 | ø7.0 | 2.9 | 2 | |
| MC-04D | 4.5 | 1.2~1.7 | ø5.0 | 3.3 | 2 | |
| MC-5B | 5.0 | 0.8~1.0 | ø5.1 | 3.4 | 2 | |
| MC-06A | 6.5 | 1.2~1.7 | ø5.0 | 3.3 | 2 | |
| MC-07M | 7.5 | 1.2~1.7 | ø5.0 | 3.3 | 2 | |
| MC-8 | 8.0 | 1.2~1.7 | ø4.9 | 3.6 | 2 | |
| MC-8A | 8.5 | 1.2~1.6 | ø5.1 | 3.3 | 2 | |
| MC-09 | 9.0 | 1.2~1.6 | ø5.1 | 3.3 | 2 | |
| MC-10A | 10.0 | 1.2~1.6 | ø5.1 | 3.3 | 2 | 1000 |
| MC-14 | 14.0 | 1.2~1.6 | ø5.1 | 3.5 | 2 | |
| MC-14C | 14.5 | 1.2~1.6 | ø5.1 | 3.0 | 2 | |
| MC-15C | 15.9 | 1.2~1.6 | ø5.1 | 3.0 | 2 | |
| MC-35 | 35.0 | 1.2~1.6 | ø5.1 | 3.3 | 2 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C | SCREW & THICKNESS | | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| | | | | D TAPPING SCREW | SUITABLE THICKNESS | | |
| BCBS-6 | 6.35 | 1.2~1.7 | 9.0 | M3.5X6 | 1.0 | 10.7 | 500 |
| BCBS-8 | 8.0 | 1.2~1.7 | 8.9 | M3.5X6 | 1.0 | 10.6 | |
| BCBS-10 | 10.0 | 1.2~1.7 | 9.0 | M3.5X6 | 1.0 | 10.1 | |
| BCBS-12 | 12.7 | 1.2~1.7 | 8.9 | M3.5X6 | 1.0 | 10.6 | |
| BCBS-14 | 14.0 | 1.2~1.7 | 9.2 | M3.5X6 | 1.0 | 10.2 | |
| BCBS-15 | 15.9 | 1.2~1.7 | 9.1 | M3.5X6 | 1.0 | 10.1 | |
| BCBS-29A | 29.0 | 1.2~1.7 | 9.2 | M3.5X6 | 1.0 | 10.4 | |
| BCBS-29 | 29.4 | 1.2~1.7 | 9.2 | M3X6 | 1.0 | 10.4 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-63-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C | SCREW & THICKNESS | | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| | | | | D TAPPING SCREW | SUITABLE THICKNESS | | |
| BCMS-6 | 6.35 | 1.2~1.7 | 9.0 | M3X6 | 1.0 | 10.7 | 500 |
| BCMS-6AD | 6.0 | 1.2~1.7 | 8.6 | M3X5 | 1.0 | 10.2 | |
| BCMS-8 | 8.0 | 1.2~1.7 | 8.9 | M3X6 | 1.0 | 10.6 | |
| BCMS-10 | 10.0 | 1.2~1.7 | 9.0 | M3X6 | 1.0 | 10.1 | |
| BCMS-12 | 12.7 | 1.2~1.7 | 8.9 | M3X6 | 1.0 | 10.6 | |
| BCMS-14 | 14.0 | 1.2~1.7 | 9.2 | M3X6 | 1.0 | 10.3 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-63-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TCY-09 | 9.0 | 1.2~1.6 | 1000 |
| TCY-12A | 12.8 | 1.2~1.6 | |
| TCY-16 | 16.0 | 1.2~1.6 | |
| TCY-18 | 18.0 | 1.2~1.6 | |
| TCY-22 | 22.0 | 1.2~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-63-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|---|
| MFKA-5H | 6.4 | 5.5 | 1.57 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-63-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MFW-31A | 31.35 | 0.8~2.0 | 5.0 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-64-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TCYA–12JM | 12.0 | 1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-64-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | SCREW & THICKNESS | | PACKAGE |
|---|---|---|---|---|---|
| | | | D TAPPING SCREW | SUITABLE THICKNESS | |
| TAJ–12 | 12.0 | 1.2~2.1 | M3X8 | 1.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-64-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCA–3F | 3.6 | 1.5~1.8 | 6.8 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-64-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

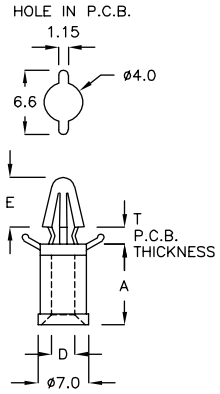


| PART NO | A | T P.C.B. THICKNESS | SCREW & THICKNESS | | E | PACKAGE |
|---|---|---|---|---|---|---|
| | | | D TAPPING SCREW | SUITABLE THICKNESS | | |
| TCA–3K | 3.6 | 1.2~1.7 | M3X3 | 1.0 | 5.0 | 1000 |
| TCA–4A | 4.5 | 1.2~1.7 | M3X4 | 1.0 | 6.8 | 500 |
| TCA–5C | 5.5 | 1.2~1.7 | M3X5 | 1.0 | 4.0 | 1000 |
| TCA–07 | 7.0 | 1.2~1.7 | M3X6 | 1.0 | 6.8 | |
| TCA–7A | 7.7 | 1.2~1.7 | M3X7 | 1.0 | 5.8 | |
| TCA–8A | 8.5 | 1.2~1.7 | M3X7 | 1.0 | 6.8 | |
| TCA–8C | 8.5 | 1.2~1.7 | M3X7 | 1.0 | 5.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-65-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| TCR-3A | 3.6 | 1.2~1.7 | 4.0 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-65-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

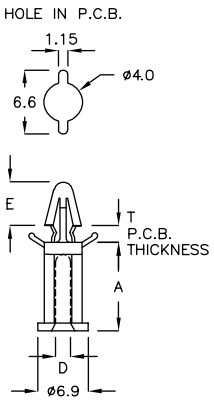


| PART NO | A | T P.C.B. THICKNESS | SCREW & THICKNESS | | E | PACKAGE |
|---|---|---|---|---|---|---|
| | | | D TAPPING SCREW | SUITABLE THICKNESS | | |
| TCA-14 | 14.0 | 1.1~1.7 | M3X10 | 1.0 | 7.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-65-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | E | T P.C.B. THICKNESS | SCREW & THICKNESS | | PACKAGE |
|---|---|---|---|---|---|---|---|
| | | | | | D TAPPING SCREW | SUITABLE THICKNESS | |
| TCBS-5 | 5.0 | ø6.9 | 7.2 | 1.2~1.9 | M3X4.5 | 1.0 | 1000 |
| TCBS-5A | 5.5 | ø6.9 | 7.0 | 1.2~1.9 | M3X4.5 | 1.0 | |
| TCBS-6 | 6.35 | ø8.0 | 6.8 | 1.2~1.9 | M3X5 | 1.0 | |
| TCBS-7 | 7.0 | ø7.8 | 6.8 | 1.2~1.9 | M3X6 | 1.0 | |
| TCBS-10 | 10.0 | ø6.9 | 7.2 | 1.2~1.9 | M3X6 | 1.0 | |
| TCBS-12K | 12.5 | ø6.9 | 6.8 | 1.2~1.9 | M3X8 | 1.0 | |
| TCBS-14 | 14.0 | ø6.8 | 7.1 | 1.2~1.9 | M3X8 | 1.0 | |
| TCBS-15 | 15.1 | ø6.9 | 7.0 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-18 | 18.0 | ø6.9 | 6.7 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-20 | 20.0 | ø6.8 | 7.1 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-25 | 25.0 | ø6.9 | 7.1 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-27A | 27.5 | ø6.9 | 6.8 | 1.2~1.9 | M3X10 | 1.0 | 500 |
| TCBS-29 | 29.3 | ø6.9 | 6.8 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-30 | 30.0 | ø6.9 | 7.2 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-35 | 35.0 | ø6.9 | 6.8 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-38 | 38.0 | ø9.9 | 6.7 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-40 | 40.0 | ø7.0 | 7.0 | 1.2~1.9 | M3X10 | 1.0 | |
| TCBS-49 | 49.0 | ø8.1 | 6.6 | 1.2~1.9 | M3X10 | 1.0 | 200 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | SCREW & THICKNESS | | PACKAGE |
|---|---|---|---|---|---|---|
| | | | | D SCREW | SUITABLE THICKNESS | |
| TCM3−7 | 7.0 | 6.8 | 1.2~1.7 | M3X7 | 1.0 | 1000 |
| TCM3−8M | 8.5 | 6.8 | 1.2~1.7 | M3X6 | 1.0 | |
| TCM3−11 | 11.0 | 6.8 | 1.2~1.7 | M3X8 | 1.0 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-66-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

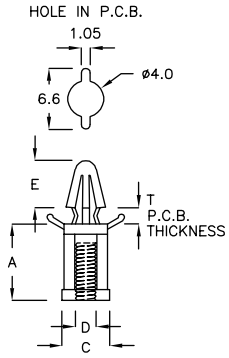


| PART NO | A | T P.C.B. THICKNESS | C | SCREW & THICKNESS | | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| | | | | D SCREW | SUITABLE THICKNESS | | |
| TCM3−8MF | 8.5 | 1.2~1.7 | ø6.9 | M3X7 | 1.0 | 6.9 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | SCREW & THICKNESS | | E | PACKAGE |
|---|---|---|---|---|---|---|
| | | | D TAPPING SCREW | SUITABLE THICKNESS | | |
| TCL−07 | 7.0 | 1.2~1.7 | M3X7 | 1.0 | 6.2 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-66-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MSK−2C | 3.3 | 10.0 | 2000 |
| MSK−2F | 3.3 | 7.0 | |
| MSK−3AF | 3.8 | 10.0 | 1000 |
| MSK−3D | 4.3 | 10.0 | |
| MSK−6K | 6.1 | 10.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-67-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MSR-4Q | 3.95 | 10.0 | 4.5 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-67-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MSK-2A | 3.3 | 10.0 | 2000 |
| MSK-2RY | 2.3 | 10.0 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-67-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MSLQ-2 | 2.35 | 18.0 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-67-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MSZ-3Q | 3.8 | 7.0 | 6.0 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-67-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MSZ-3KS | 3.6 | 7.0 | 6.0 | 2000 |
| MSZ-4ST | 5.1 | 7.0 | 6.0 | |
| MSZ-5RY | 5.75 | 7.0 | 6.0 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-68-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | PACKAGE |
|---|---|---|
| MSA-6A | 7.7 | 500 |
| MSA-10 | 9.8 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-68-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MST-05 | 5.0 | 12.0 | ø6.9 | 500 |
| MST-6C | 6.35 | 12.0 | ø6.9 | |
| MST-07 | 7.0 | 18.1 | ø6.9 | |
| MST-9A | 9.4 | 18.1 | ø6.9 | |
| MST-10FC | 10.8 | 18.0 | ø8.0 | |
| MST-16 | 15.9 | 18.1 | ø6.9 | |
| MST-16SA | 16.4 | 18.1 | ø6.9 | |
| MST-19BH | 19.4 | 18.0 | ø8.0 | |
| MST-20CQ | 20.6 | 18.1 | ø6.9 | |
| MST-22 | 21.8 | 18.0 | ø6.9 | |
| MST-37F | 37.0 | 18.1 | ø6.9 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-68-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

| PART NO | A | PACKAGE |
|---|---|---|
| MSQ-7A | 8.4 | 500 |
| MSQ-7C | 7.5 | |
| MSQ-27K | 27.4 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-68-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- USE M3 TAPPING SCREW

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| MSS-6A | 6.35 | ø7.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-69-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| MSB-6A | 6.3 | 14.0x14.0 | 500 |
| MSB-11A | 12.6 | 14.0x14.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-69-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| MSBA-5TG | 5.2 | 14.0x14.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-69-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| MSP-03 | 2.8 | 14.0x16.0 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-69-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| AAA-01 | 3.0 | 15.0x15.0 | 500 |
| AAA-3A | 4.5 | 15.0x15.0 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-69-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| MSC-20A | 20.3 | 18.0x18.0 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-70-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | E | B ADHESIVE AREA | PACKAGE |
|---|---|---|---|---|
| MSF-13F | 13.8 | 2.9 | 14.5x14.5 | 1000 |
| MSF-25 | 25.1 | 3.85 | 18.0x18.0 | 200 |



## P.C. 板间隔柱 SPACER SUPPORT 3-70-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| SCTMS-5 | 4.8 | 18.2x18.2 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-70-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | ADHESIVE AREA | PACKAGE |
|---|---|---|---|
| MSY-2A | 2.0 | 18.0x18.0 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-70-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | E | B | ADHESIVE AREA | PACKAGE |
|---|---|---|---|---|---|
| MS-6 | 6.25 | 10.2 | 18.0 | 18.0x18.0 | 500 |
| MS-8 | 8.0 | 9.7 | 18.0 | 18.0x18.0 | |
| MS-10 | 9.5 | 10.1 | 18.0 | 18.0x18.0 | |
| MS-11A | 11.5 | 4.9 | 18.0 | 18.0x18.0 | |
| MS-12 | 12.6 | 10.0 | 18.0 | 18.0x18.0 | |
| MS-16A | 16.4 | 10.0 | 19.9 | 19.9x19.9 | |
| MS-19 | 19.3 | 10.2 | 18.0 | 18.0x18.0 | 200 |
| MS-22 | 22.2 | 9.6 | 18.0 | 18.0x18.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-70-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | ADHESIVE AREA | PACKAGE |
|---|---|---|---|---|
| MSH-8RL | 8.0 | 14.0 | 14.0x14.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-71-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | ADHESIVE AREA | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MSD−15 | 14.2 | 18.0x18.0 | 1.2~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-71-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| TCT−10A | 10.8 | ø9.0 | 0.6～0.8 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-71-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSJ−2A | 2.8 | ø5.0 | 0.8~1.4 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-71-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSF−05 | 5.15 | ø4.3 | 3.15 | 0.8~1.6 | 2000 |
| LSF−8KM | 8.25 | ø4.5 | 3.2 | 0.8~2.0 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-71-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSH−2A | 2.7 | ø5.0 | 0.8~1.6 | 1000 |
| LSH−2DH | 1.8 | ø5.0 | 0.8~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-72-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| TCBK-4A | 4.1 | ø6.8 | 1.2~1.6 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT 3-72-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TCG-09 | 9.0 | 1.4~1.6 | 1000 |
| TCG-16 | 16.0 | 1.4~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-72-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TBK-14A | 14.7 | 1.4~1.6 | 500 |
| TBK-16F | 16.0 | 1.4~1.6 | 1000 |
| TBK-20 | 20.0 | 1.4~1.6 | 500 |
| TBK-22 | 22.0 | 1.4~1.6 | |
| TBK-34 | 34.0 | 1.4~1.6 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-72-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSC-3A | 3.8 | ø4.8~5.0 | 2.1 | 1000 |
| LSC-3C | 3.7 | ø4.0 | 2.1 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-72-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| LSC-6 | 6.35 | 2.0 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-73-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | T MAXIMUM THICKNESS | D TAPPING SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| LSC−5 | 4.8 | ø4.8~ø5.0 | 2.0 | M3 | 5.6 | 1000 |
| LSC−10 | 9.4 | ø4.8~ø5.0 | 2.0 | M3 | 5.6 | |
| LSC−12 | 12.7 | ø4.8~ø5.0 | 2.0 | M3 | 5.6 | 500 |
| LSC−15A | 15.9 | ø4.5~ø4.6 | 2.0 | M3 | 5.6 | |
| LSC−19 | 19.1 | ø4.5~ø4.6 | 2.0 | M3 | 5.6 | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-73-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| TBW−36A | 36.2 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-73-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| TCP−08 | 7.9 | 9.5 | 1.3~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-73-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| MA−005 | 5.0 | 2.8~3.0 | 5.1 | 1000 |
| MA−012 | 12.0 | 2.8~3.0 | 5.0 | 500 |
| MA−014 | 14.0 | 2.8~3.0 | 5.0 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-73-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

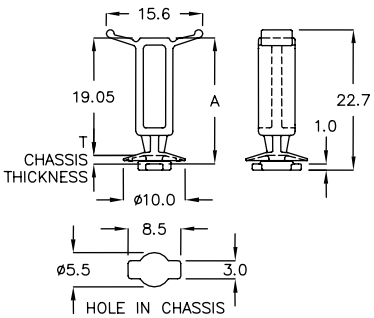


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| KPD−24A | 20.4 | 1.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-74-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MHG-05 | 4.65 | 0.6~0.8 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-74-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

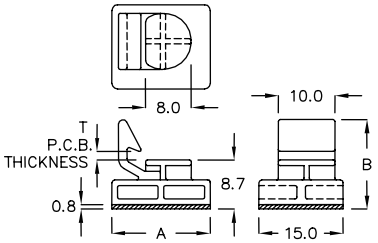


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSS-8K | 17.5 | 15.9 | 1.8 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-74-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | D | PACKAGE |
|---|---|---|---|
| FKD-16Y | 15.0 | 0.8 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-74-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | D | PACKAGE |
|---|---|---|---|
| FKM-27JC | 23.8 | 2.4 | 200 |

## P.C. 板间隔柱 SPACER SUPPORT 3-74-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

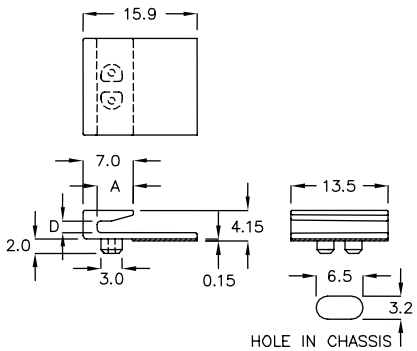


| PART NO | A | D | PACKAGE |
|---|---|---|---|
| MWF-13C | 5.0 | 1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-75-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | D | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| FKC-31AP | 28.7 | 1.7 | 0.5~0.8 | 200 |
| FKC-31Y | 28.7 | 2.5 | 0.6~0.8 | |

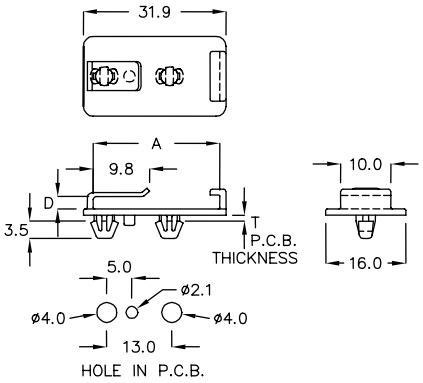




## P.C. 板间隔柱 SPACER SUPPORT 3-75-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | D | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| FKC-28AS | 25.3 | 2.5 | 0.6~0.8 | 200 |

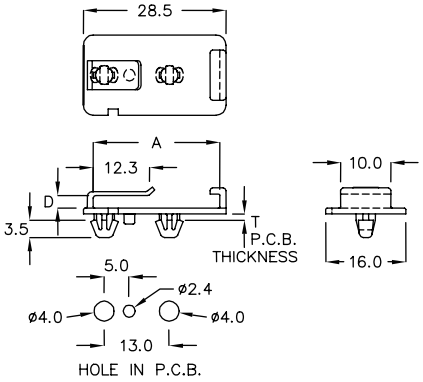




## P.C. 板间隔柱 SPACER SUPPORT 3-75-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | D | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| FKC-28PQ | 25.3 | 2.5 | 0.6~0.8 | 200 |

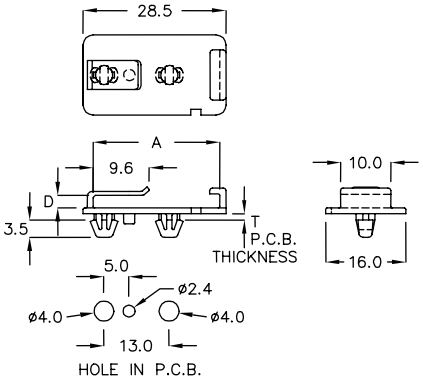

## P.C. 板间隔柱 SPACER SUPPORT 3-75-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| CYF-21 | 21.6 | 0.6~0.8 | 100 |

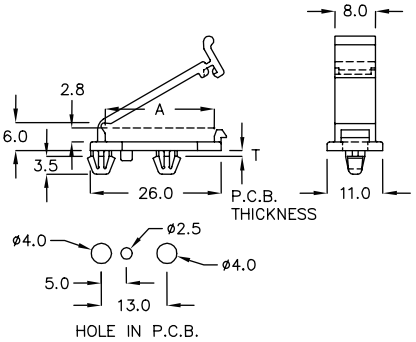

## P.C. 板间隔柱 SPACER SUPPORT — 3-76-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

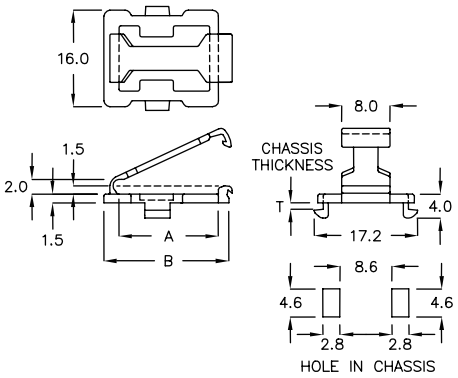


WITH LOCK FEATURE

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYFJ−15T | 15.2 | 21.4 | 0.8~1.0 | 200 |
| CYFJ−16A | 16.5 | 20.7 | 0.8~1.0 | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-76-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

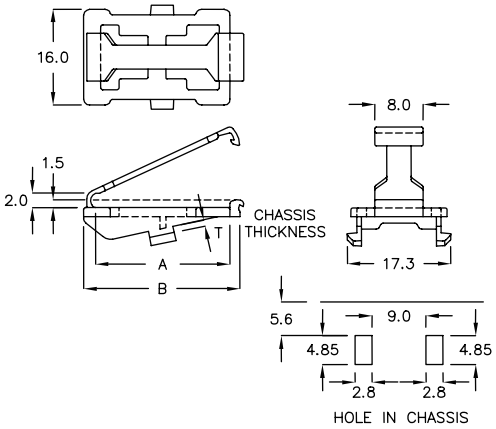


WITH LOCK FEATURE

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYFQ−22 | 22.4 | 26.1 | 0.8~1.0 | 100 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-76-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

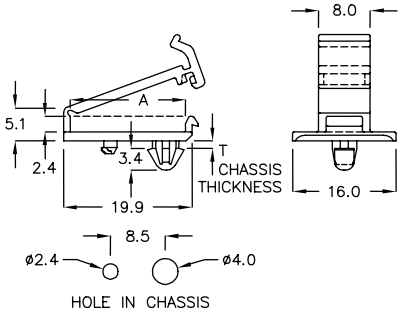


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYFG−17A | 17.9 | 0.6~0.8 | 200 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-76-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

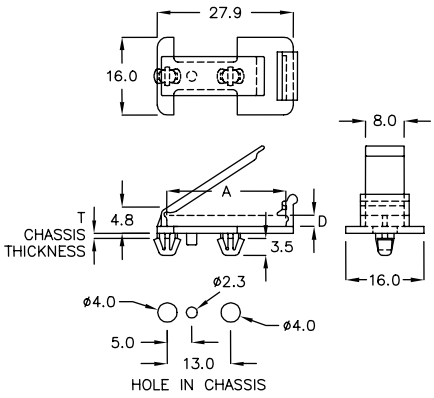


WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYFK−24D | 24.5 | 2.3 | 0.5~0.8 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-77-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

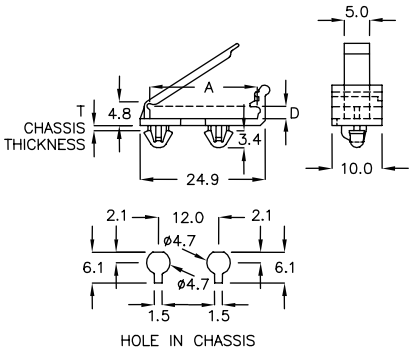





WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYFT-21A | 21.5 | 2.35 | 0.6~0.8 | 100 |

## P.C. 板间隔柱 SPACER SUPPORT 3-77-2



- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK







| | PART NO | A | B | C | D | E | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | FKJ-14S | 16.5 | 14.5 | 1.5 | ø1.8 | 4.0 | 6.0 | 5.1 | 20.0 | 0.7 | |
| | FKJ-15D | 17.0 | 15.0 | 1.2 | ø1.8 | 4.0 | 6.0 | 5.1 | 20.0 | 0.5 | |
| ★ | FKJ-15M | 17.5 | 15.5 | 1.5 | ø1.8 | 4.0 | 11.1 | 5.1 | 20.0 | 0.6~0.7 | |
| | FKJ-15Y | 17.5 | 15.5 | 1.5 | ø1.8 | 4.0 | 11.1 | 5.1 | 20.0 | 0.6~0.7 | |
| ★ | FKJ-15H | 17.5 | 15.5 | 2.4 | ø2.0 | 4.8 | 11.0 | 3.0 | 20.0 | 0.7 | 500 |
| ★ | FKJ-15P | 17.5 | 15.5 | 2.4 | ø2.0 | 4.8 | 11.0 | 3.0 | 28.0 | 0.7 | |
| | FKJ-15A | 17.5 | 15.5 | 1.2 | ø2.0 | 3.4 | 11.1 | 4.8 | 20.0 | 0.8 | |
| | FKJ-15F | 17.5 | 15.5 | 2.4 | ø2.0 | 4.6 | 11.2 | 3.7 | 20.0 | 1.0 | |
| ★ | FKJ-15G | 17.5 | 15.5 | 1.45 | ø2.0 | 3.7 | 11.1 | 5.1 | 20.0 | 1.0 | |
| ★ | FKJ-16N | 18.5 | 16.5 | 1.54 | ø1.8 | 4.7 | 11.2 | 3.3 | 20.0 | 1.0 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-77-3



- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




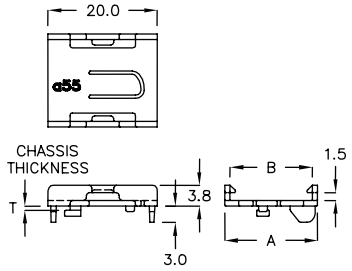


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FKJR-15 | 17.0 | 15.0 | 0.6 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-77-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




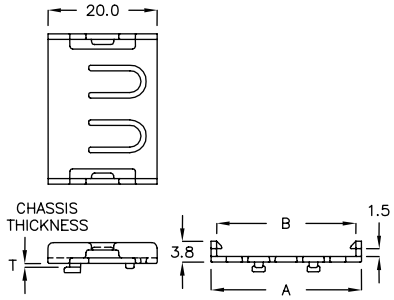


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FKJD-25 | 27.5 | 25.5 | 0.7 | 200 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-78-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| UB-02C | 13.5 | 7.5 | 3.3 | 2.2 | 3.5 | 1.3 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-78-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| UB-05A | 15.0 | 12.8 | 1.8 | 5.5 | 1.6 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-78-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

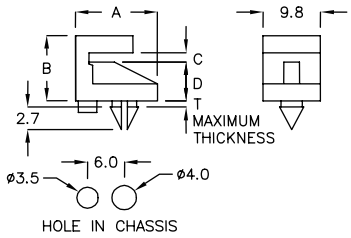


| PART NO | A | B | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| UB-6 | 12.6 | 10.8 | 1.7 | 6.0 | 1.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-78-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| UB-6BT | 17.5 | 12.0 | 1.4 | 6.5 | 6.3 | 1.6 | 500 |
| UB-6CT | 17.5 | 11.8 | 1.6 | 6.35 | 6.0 | 1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-79-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

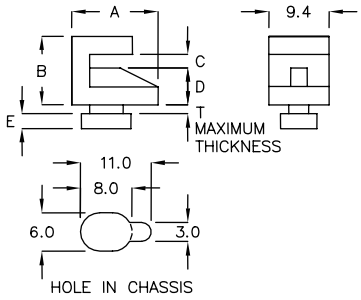


| PART NO | A | B | C | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| UB-6A | 12.5 | 10.9 | 1.9 | 5.9 | 2.6 | 1.2 | 500 |
| UB-6D | 12.3 | 11.6 | 2.3 | 6.4 | 2.5 | 1.2 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-79-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

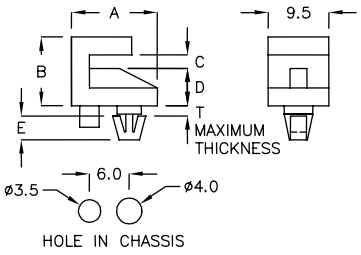


| PART NO | A | B | C | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| UB-6E | 13.5 | 10.8 | 2.4 | 6.4 | 3.5 | 1.3 | 500 |
| UB-6K | 13.4 | 10.8 | 2.1 | 6.0 | 3.7 | 2.1 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-79-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

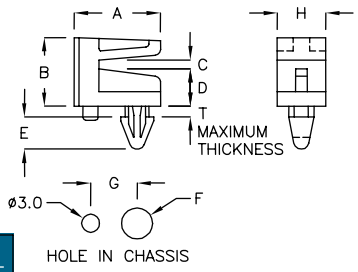


| PART NO | A | B | C | D | E | F | G | H | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| UB-06H | 21.5 | 11.8 | 1.3 | 6.6 | 6.0 | ø4.4 | 8.0 | 9.0 | 1.6 | 500 |
| UB-6T | 14.8 | 11.9 | 1.3 | 6.6 | 5.9 | ø4.4 | 8.0 | 9.0 | 1.7 | |
| UB-06U | 12.0 | 11.8 | 1.3 | 6.6 | 6.0 | ø4.4 | 6.5 | 6.0 | 1.8 | |
| UB-08U | 12.0 | 14.0 | 2.0 | 8.5 | 7.0 | ø4.4 | 6.5 | 6.0 | 0.8 | |
| UB-14T | 15.0 | 19.2 | 1.3 | 14.0 | 5.9 | ø4.4 | 8.0 | 9.0 | 1.8 | 200 |
| UB-18T | 15.5 | 23.6 | 1.6 | 18.3 | 6.0 | ø5.0 | 8.5 | 9.0 | 1.8 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-79-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| UB-7 | 13.3 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-80-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| UB-09K | 13.5 | 13.6 | 1.8 | 8.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-80-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| UB-6F | 15.0 | 11.1 | 2.2 | 6.35 | 500 |
| UB-11F | 15.0 | 15.8 | 2.4 | 10.8 | |
| UB-12F | 15.0 | 16.7 | 2.3 | 11.9 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-80-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| UBC-17 | 27.0 | 16.7 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-80-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| UA-10 | 10.0 | 14.0 | 1.2 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-80-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| UBL-05 | 5.0 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-81-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| UNB−11 | 10.0 | 2.0 | 500 |

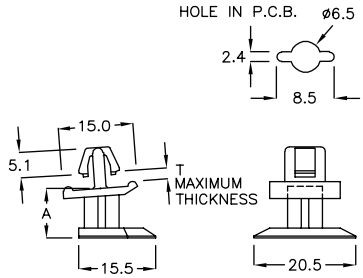

## P.C. 板间隔柱 SPACER SUPPORT 3-81-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | G | PACKAGE |
|---|---|---|---|
| UNC−10A | 9.1 | 8.5° | 500 |

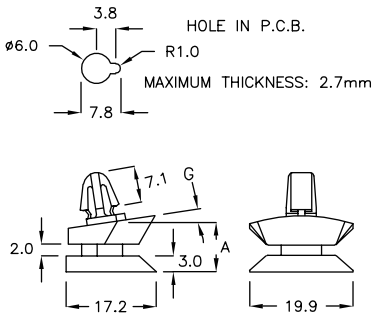




## P.C. 板间隔柱 SPACER SUPPORT 3-81-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| UNG−8 | 8.2 | 500 |

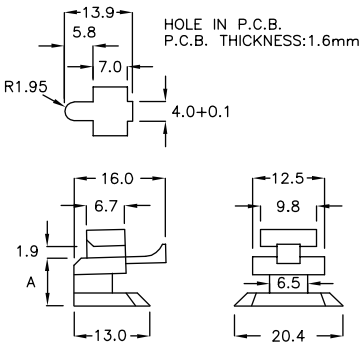




## P.C. 板间隔柱 SPACER SUPPORT 3-81-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH−08F | 8.0 | 2.0 | 500 |
| CH−10K | 10.0 | 1.4 | |






## P.C. 板间隔柱 SPACER SUPPORT 3-81-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH−08K | 8.0 | 2.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-82-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C CHASSIS THICKNESS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MQG-12P | 12.7 | 0.6~0.8 | 4.7 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT 3-82-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSB-3A | 3.2 | 1.4~1.6 | 0.8~1.6 | 1000 |

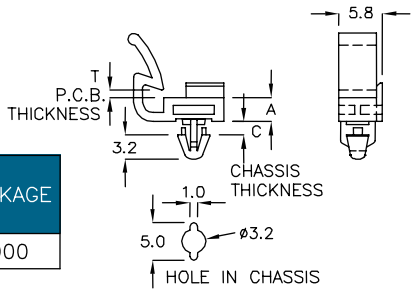




## P.C. 板间隔柱 SPACER SUPPORT 3-82-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTY-5A | 5.4 | 8.4 | 2.2~2.4 | 0.8~1.0 | 500 |

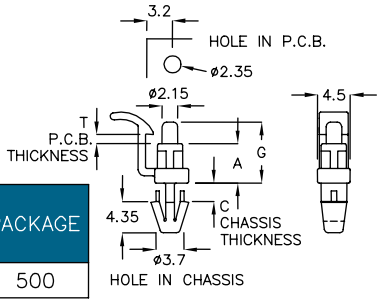




## P.C. 板间隔柱 SPACER SUPPORT 3-82-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | G | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LKB-6PA | 7.0 | 11.7 | 1.4~1.6 | 1000 |

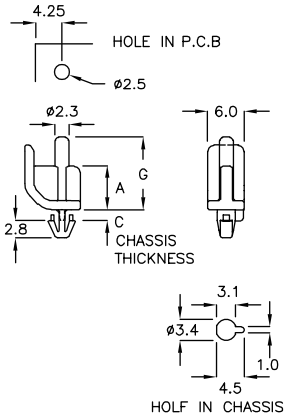

## P.C. 板间隔柱 SPACER SUPPORT 3-82-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | G | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LKB-6FQ | 6.2 | 11.7 | 2.2~2.4 | 1000 |

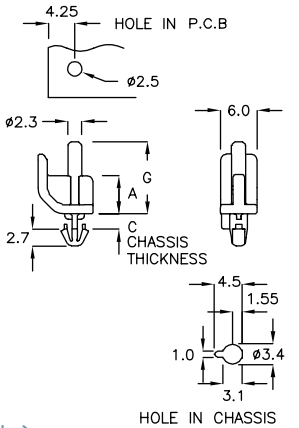




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT 3-83-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | G | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LCZ−8PH | 8.0 | 10.7 | 1.6 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-83-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | G | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LKC−8A | 8.0 | 13.0 | 1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-83-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | G | C P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LKN−5T | 5.0 | 11.0 | 1.6 | 2000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-83-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | G | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LKN−11HR | 11.6 | 16.5 | 2.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-83-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

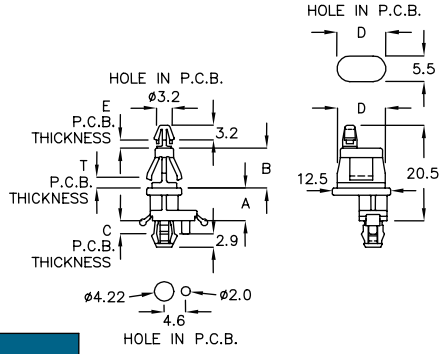


| PART NO | A | B | C P.C.B. THICKNESS | D HOLE IN P.C.B. | E P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| LMWY−26 | 7.0 | 8.6 | 2.36 or 1.92 | 10.5 | 1.6 | 1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-84-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

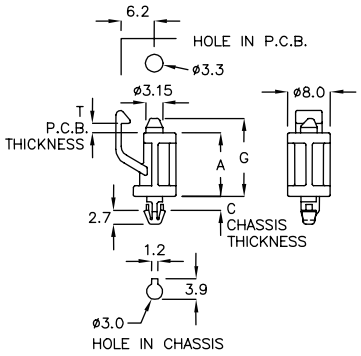


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTZ−12HC | 12.0 | 14.7 | 2.4 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-84-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

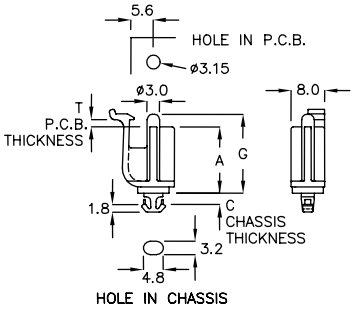


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTKL−16 | 16.0 | 19.0 | 2.5 | 1.4~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-84-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

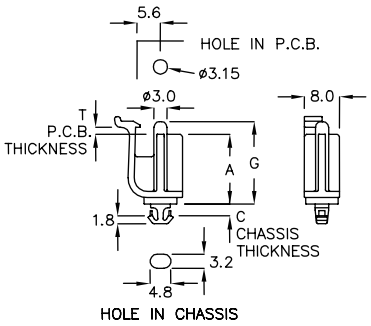


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTKR−16C | 16.0 | 19.0 | 2.5 | 1.4~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-84-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

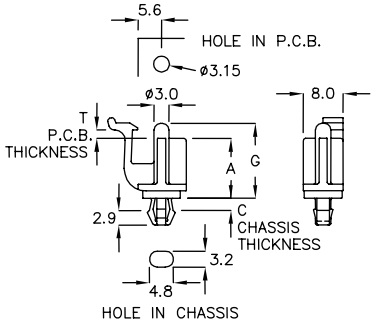


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTEL−12F | 12.0 | 15.0 | 1.8~2.2 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-85-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

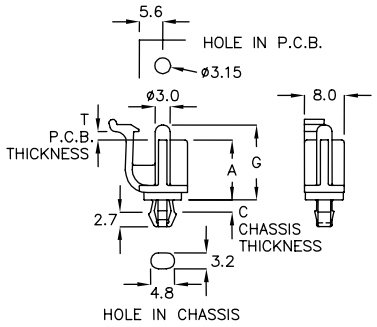


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTER-12G | 12.0 | 15.0 | 1.8~2.2 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-85-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

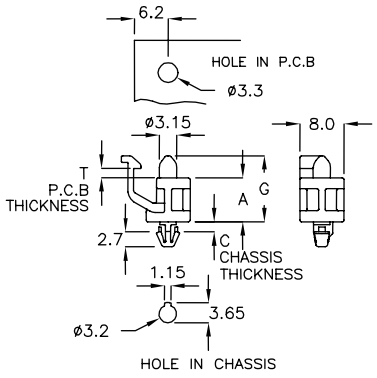


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTN-8G | 8.0 | 12.0 | 1.6 | 1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-85-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

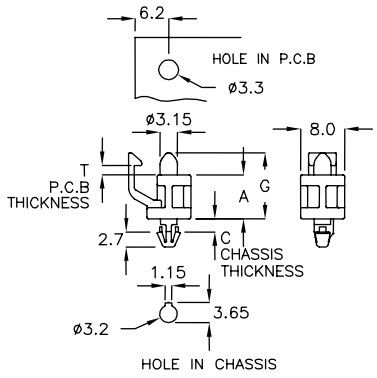


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTN-8CK | 8.0 | 12.0 | 1.6 | 2.2 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-85-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

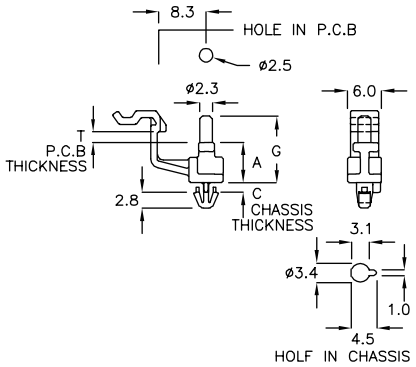


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMM-6DA | 7.0 | 11.7 | 1.4~1.6 | 1.4~1.6 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-86-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACK AGE |
|---|---|---|---|---|
| LMF−2K | 2.8 | 0.8~1.0 | 1.4~1.6 | 1000 |

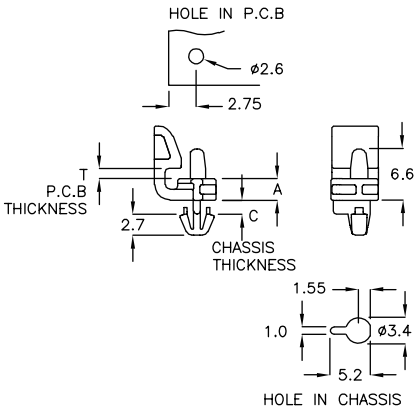




## P.C. 板间隔柱 SPACER SUPPORT 3-86-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LMH−11 | 10.5 | 1.6~1.8 | 1.4~1.6 | 1000 |

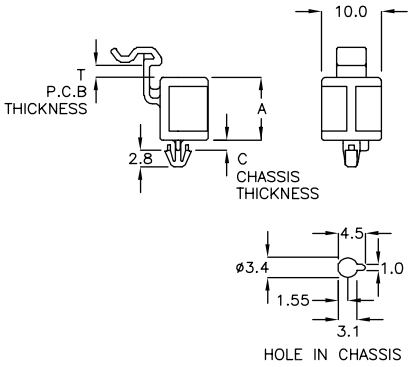




## P.C. 板间隔柱 SPACER SUPPORT 3-86-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LMH−11SA | 10.5 | 1.6~1.8 | 2.2~2.4 | 1000 |

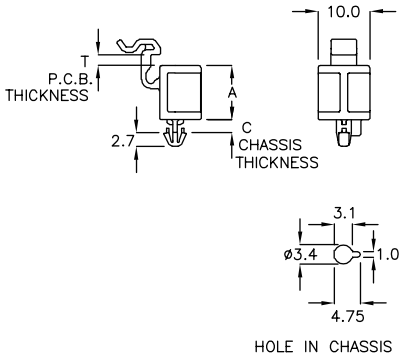

## P.C. 板间隔柱 SPACER SUPPORT 3-86-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LMK−2YW | 2.8 | 0.8~1.0 | 1.4~1.6 | 2000 |

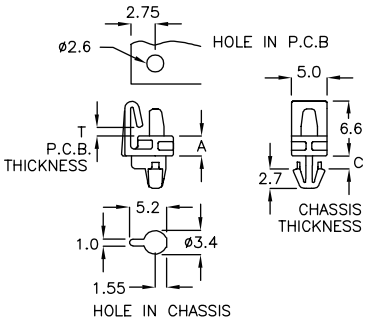




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-87-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

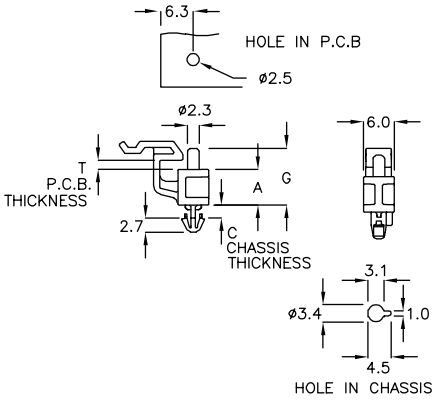


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMM−6CP | 6.9 | 11.0 | 1.4~1.6 | 2.2~2.4 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-87-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

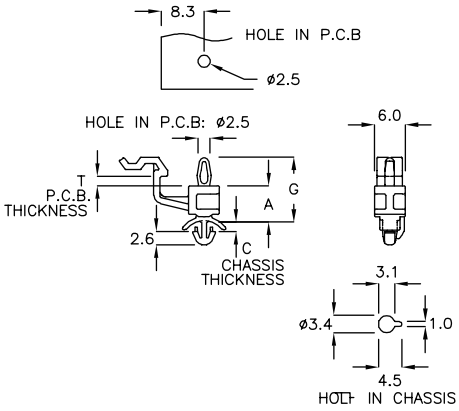


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMJ−7TC | 7.0 | 12.55 | 1.6 | 1.0~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-87-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

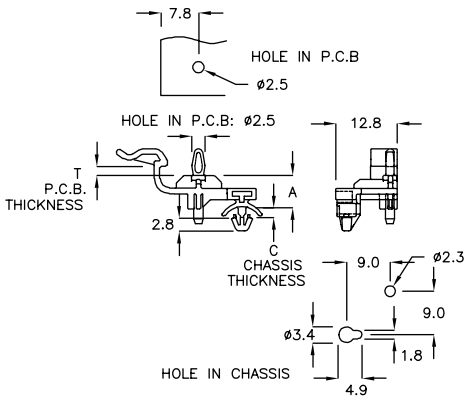


| PART NO | A | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LMX−7BK | 6.7 | 1.6 | 1.0~1.6 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT 3-87-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

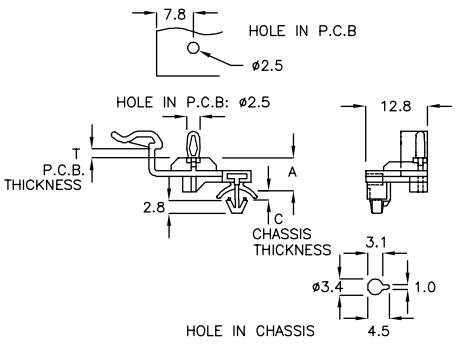


| PART NO | A | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LMX−7YD | 6.7 | 1.6 | 1.0~1.6 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-88-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

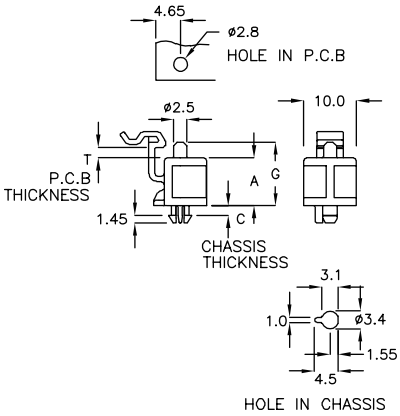


| PART NO | A | G | T P.C.B. THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTH-9PN | 9.0 | 12.0 | 1.6~1.8 | 1.4~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-88-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

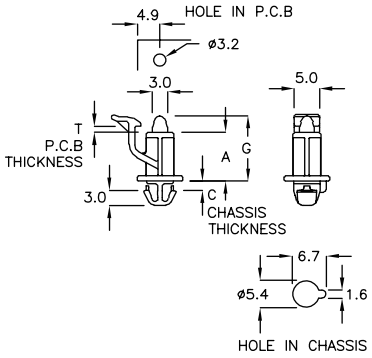


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMP-9RQ | 9.55 | 12.85 | 0.8~1.0 | 1.4~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-88-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

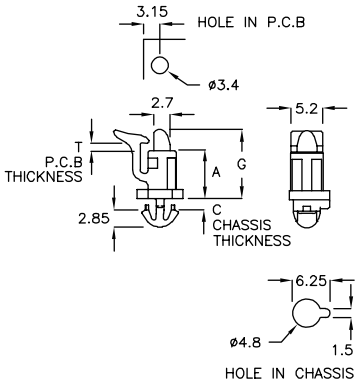


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTN-7C | 7.85 | 11.4 | 1.0~1.2 | 1.4~1.6 | 1000 |
| LTN-7F | 7.85 | 11.4 | 1.0~1.2 | 2.0~2.15 | |
| LTN-9K | 9.0 | 12.6 | 1.2~1.6 | 2.15 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-88-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

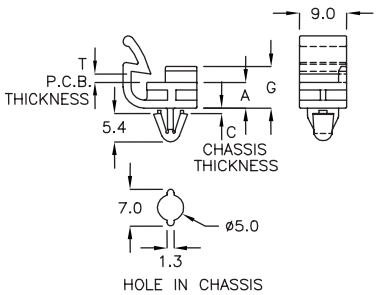


| PART NO | A | G | T P.C.B. THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSK-6P | 4.9 | 7.9 | 1.4~1.6 | 0.6~0.8 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-89-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

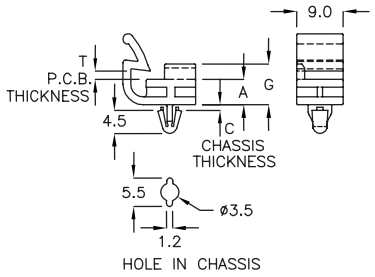


| PART NO | A | G | T P.C.B. THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSK−6Q | 4.9 | 7.9 | 1.4~1.6 | 0.6~0.8 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT 3-89-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

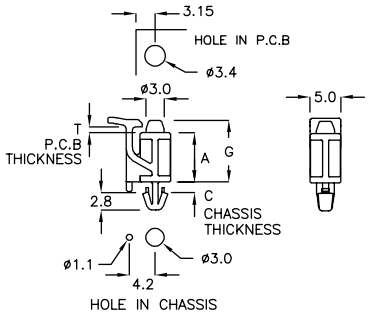


| PART NO | A | G | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMR−08 | 8.0 | 10.0 | 0.6~0.8 | 1.4~1.6 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT 3-89-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

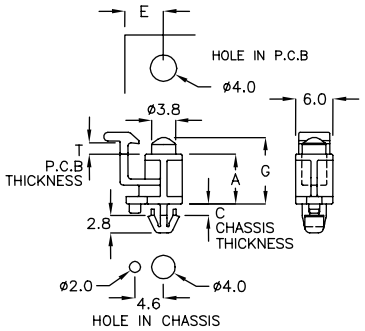


| PART NO | A | G | E | T P.C.B THICKNESS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| LMQ−8HR | 8.0 | 10.7 | 5.3 | 1.6 | 1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT 3-89-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

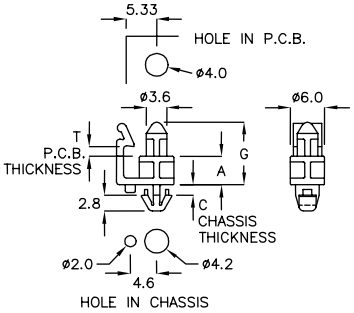


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMG−5FH | 5.0 | 11.0 | 1.6 | 1.6 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-90-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

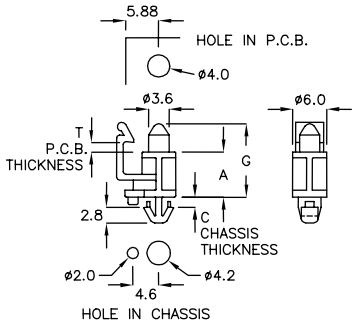


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMG-8AT | 8.0 | 13.0 | 1.6 | 1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-90-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

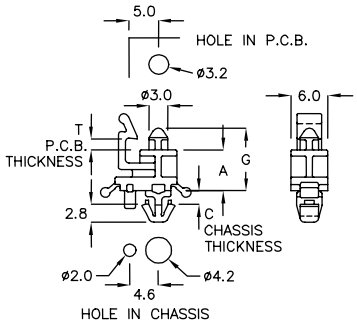


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMB-5AC | 6.6 | 10.1 | 1.7~1.9 | 1.6 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-90-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

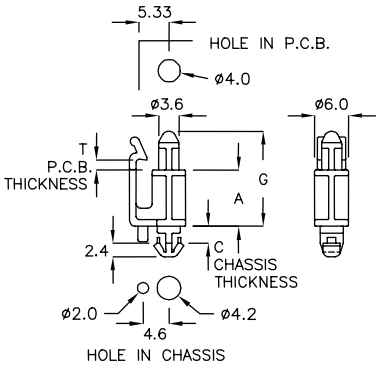


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMG-10JK | 10.0 | 16.9 | 2.6 | 1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-90-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

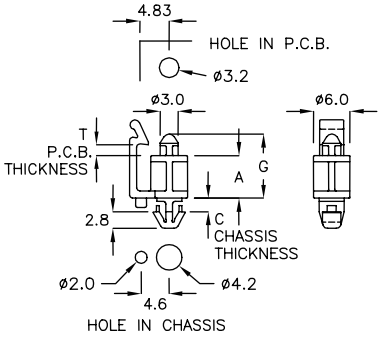


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMG-7JK | 7.0 | 10.5 | 1.93 | 1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-91-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

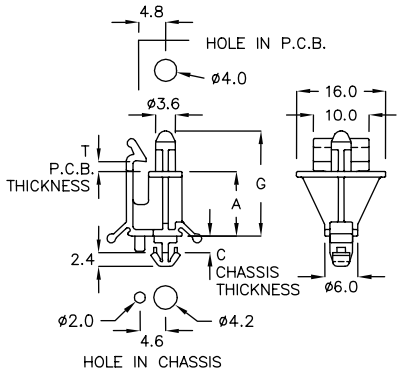


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LMGA−11PS | 11.6 | 18.9 | 2.6 | 1.6 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-91-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

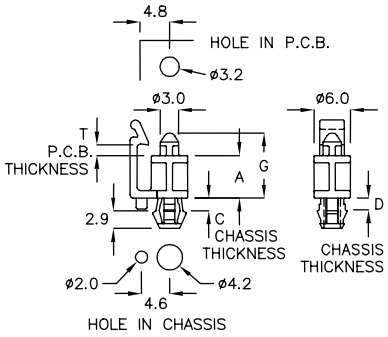


| PART NO | A | G | C CHASSIS THICKNESS | D CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| LMW−07 | 7.0 | 10.7 | 1.9 | 1.7 | 1.6 | 1000 |



## M.2 卡固定扣 SPACER SUPPORT — 3-91-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

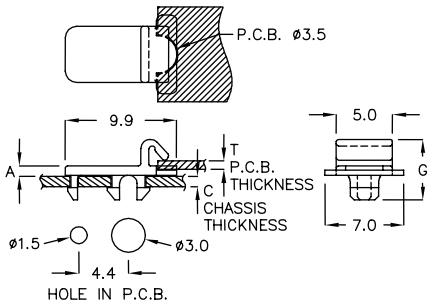


| PART NO | A | G | C P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSNT−04 | 0.85 | 5.4 | 1.0 | 0.8 | 1000 |



## M.2 卡固定扣 SPACER SUPPORT — 3-91-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

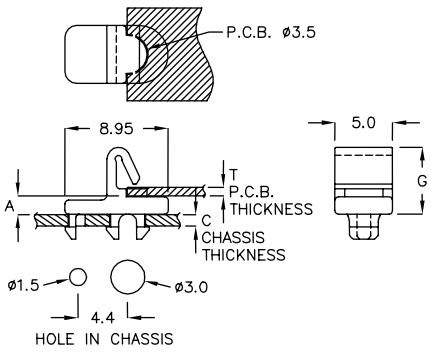


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSN−1A | 1.5 | 5.8 | 1.0 | 0.85 | 2000 |
| LSN−1XR | 1.5 | 5.6 | 1.6 | 0.85 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## M.2 卡固定扣 SPACER SUPPORT — 3-92-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

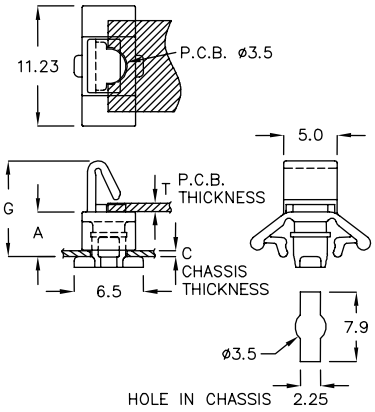


INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSZ-4A | 4.15 | 9.0 | 1.0~1.6 | 0.8 | 1000 |

## M.2 卡固定扣 SPACER SUPPORT — 3-92-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

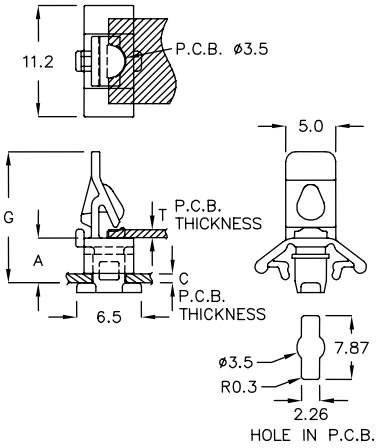


INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

| PART NO | A | G | C P.C.B. THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSZQ-2GF | 4.5 | 13.2 | 1.8~2.2 | 0.8 | 1000 |

## M.2 卡固定扣 SPACER SUPPORT — 3-92-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

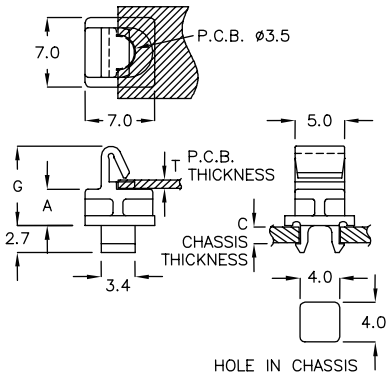


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LSP-3AN | 3.7 | 8.0 | 1.6 | 0.8 | 2000 |

## M.2 卡固定扣 SPACER SUPPORT — 3-92-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

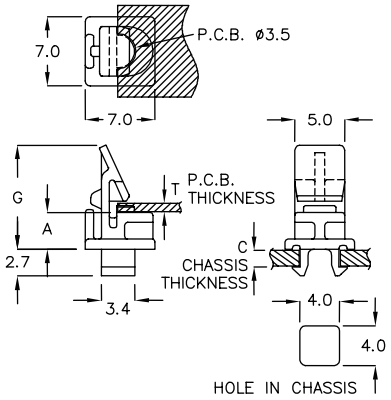


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTQ-2AR | 2.5 | 9.3 | 1.6 | 0.8 | 2000 |
| LTQ-3CP | 3.7 | 10.5 | 1.6 | 0.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-93-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

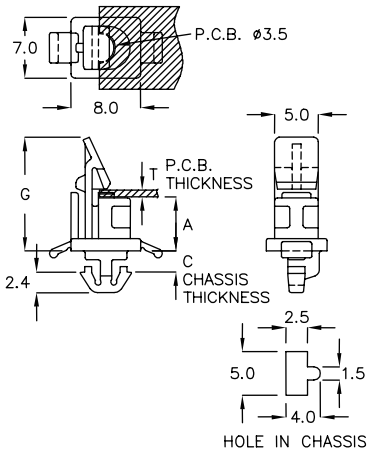


| PART NO | A | G | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTQR−6C | 6.1 | 17.9 | 1.9 | 0.8 | 1000 |

## M.2 卡固定扣 SPACER SUPPORT — 3-93-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

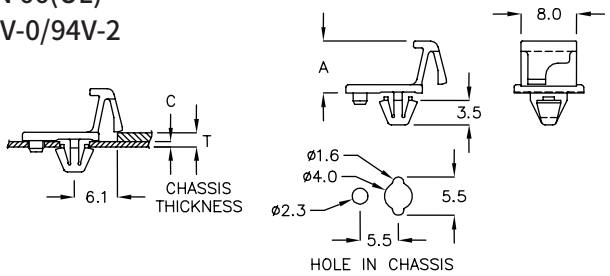


| PART NO | A | C CHASSIS THICKNESS | T TOTAL THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSR−1FM | 7.5 | 0.8 | 2.1 | 2000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-93-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

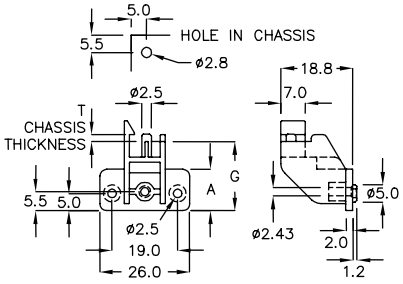


| PART NO | A | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LTRC−18 | 12.0 | 18.0 | 1.8 | 500 |

## M.2 卡固定扣 M.2 CARD SNAP HOLDER — 3-93-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

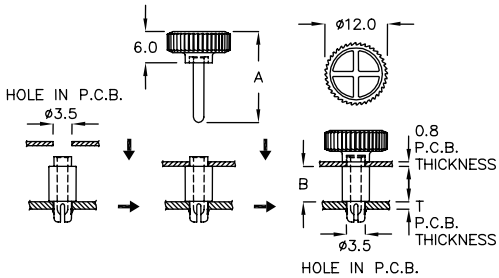


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRTA−3KP | 17.4 | 6.65 | 1.6 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-94-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

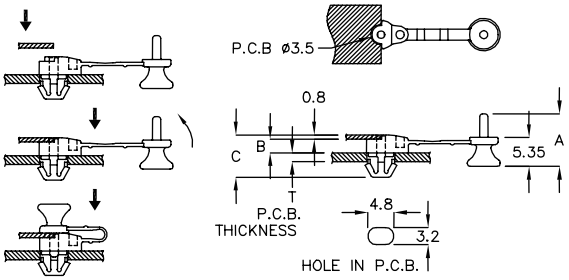


| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRTC-4A | 9.7 | 2.5 | 7.8 | 1.6 | 500 |
| SRTC-4CH | 9.7 | 2.5 | 8.1 | 2.0 | 1000 |
| SRTC-4FD | 10.9 | 2.5 | 9.2 | 3.0 | |

## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-94-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

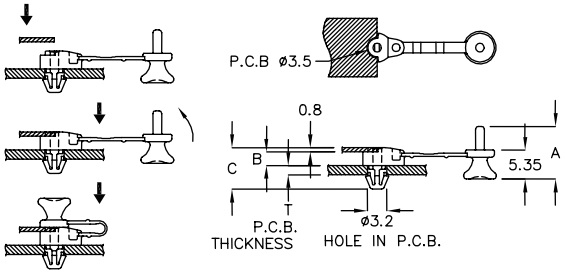


| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRTH-3FG | 9.7 | 2.5 | 7.65 | 1.6 | 500 |

## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-94-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

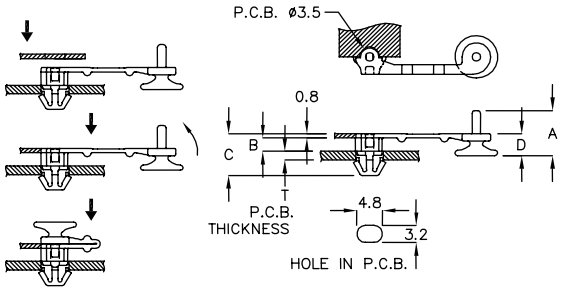


| PART NO | A | B | C | D | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SRTF-4GW | 8.45 | 2.5 | 7.8 | 4.1 | 1.6 | 500 |
| SRTF-4RM | 9.7 | 2.5 | 7.4 | 5.4 | 1.2 | |

## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-94-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

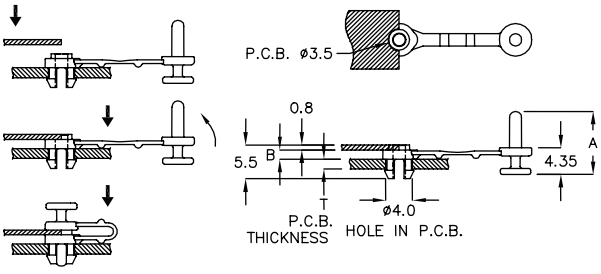


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRTQ-4D | 10.25 | 1.5 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## M.2 卡固定扣 M.2 CARD SNAP CLIP 3-95-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

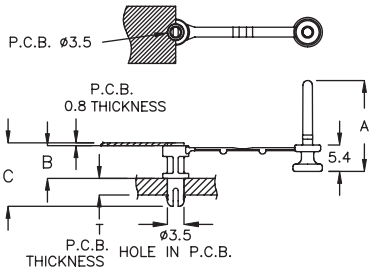


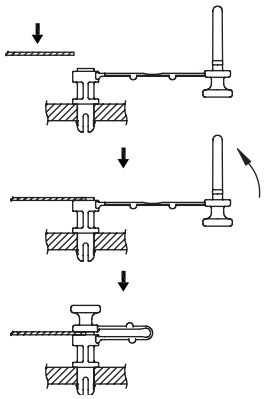

| | PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| | SRTK−3QM | 13.05 | 2.5 | 7.6 | 1.6~2.2 | 1000 |
| | SRTK−3GP | 15.6 | 5.1 | 10.15 | 1.6~2.2 | |
| | SRTK−3RZ | 17.35 | 6.7 | 11.95 | 1.6~2.2 | |
| | SRTK−3FT | 18.15 | 6.7 | 12.8 | 2.3~3.0 | |
| ★ | SRTK−3KC | 18.5 | 6.7 | 13.2 | 2.8~3.4 | |



## M.2 卡固定扣 M.2 CARD SNAP CLIP 3-95-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

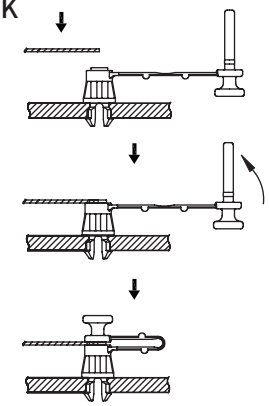

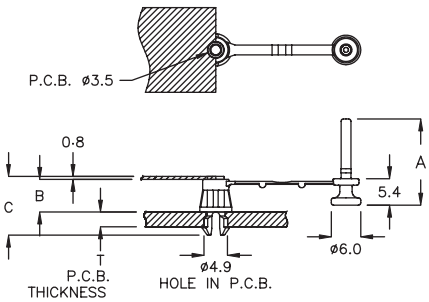


| | PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | SRTR−4A | 17.6 | 6.7 | 12.2 | 2.2~2.8 | 500 |



## M.2 卡固定扣 M.2 CARD SNAP CLIP 3-95-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



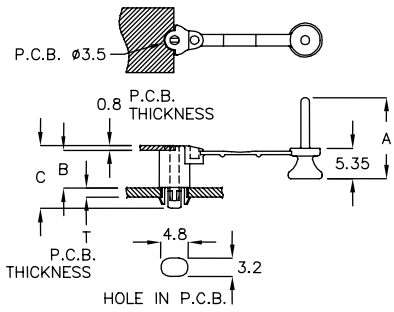


| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRTY−4K | 16.35 | 6.5 | 11.0 | 1.6 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

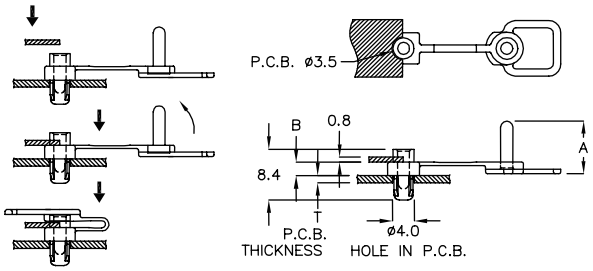


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRTM−4K | 8.8 | 2.3 | 1.2~1.6 | 500 |



## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

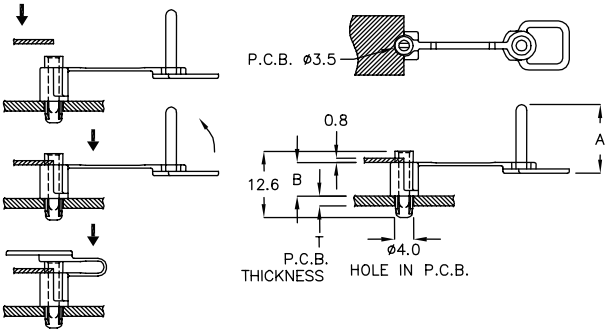


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRTM−4PQ | 13.5 | 6.5 | 1.2~1.6 | 500 |



## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

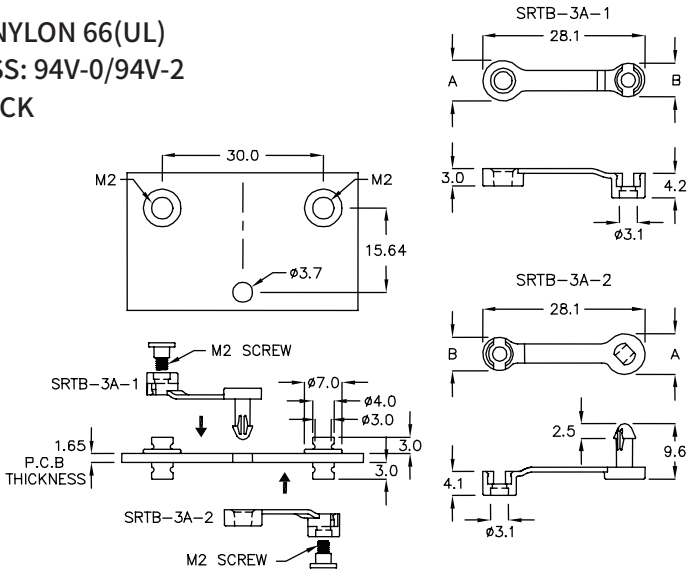


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| SRTB−3A | ø7.0 | ø5.8 | 500 |



## M.2 卡固定扣 M.2 CARD SNAP CLIP —— 3-96-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

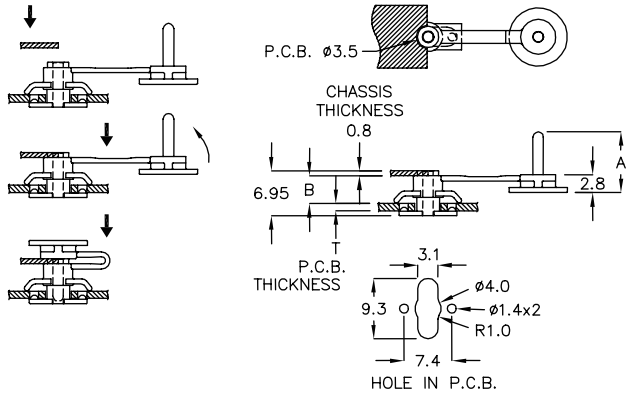


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRTD−4YR | 9.4 | 3.85 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

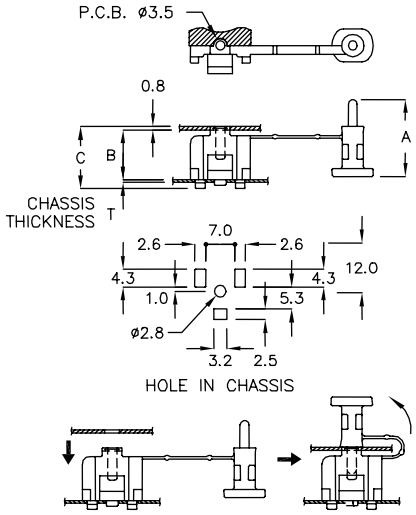


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRTL−12A | 18.5 | 12.0 | 14.9 | 0.6 | 200 |



## M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

NEW

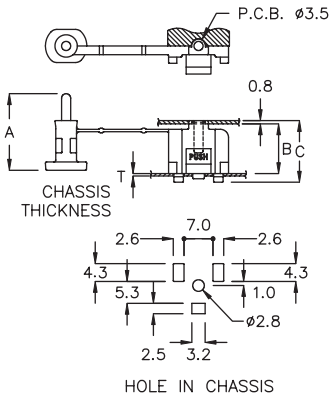


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ★ SRTL−12C | 18.5 | 12.0 | 14.9 | 0.6 | 200 |

## M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

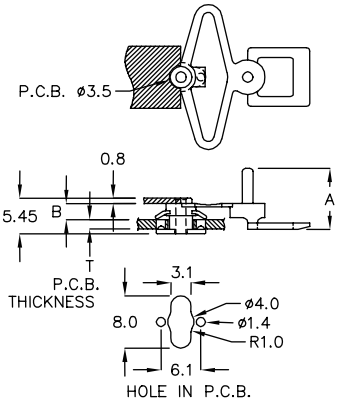


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRTP−4FQ | 9.4 | 2.35 | 1.6 | 500 |



## M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-97-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLUE
- USE M3 SCREW

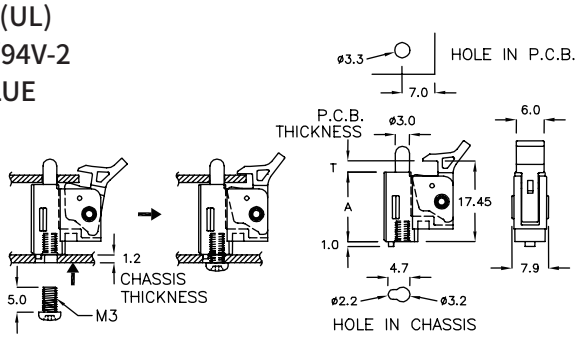


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LXC−21K | 15.1 | 1.6 | 200 |

## M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-98-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

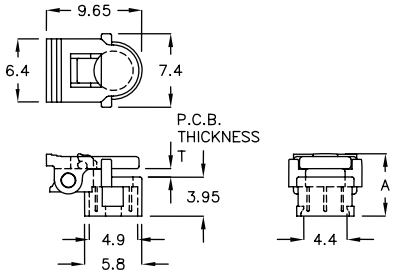


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LXCG−9 | 6.3 | 0.8 | 500 |

## M.2 卡固定扣 M.2 CARD SNAP CLIP — 3-98-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M1.6 SCREW

NEW

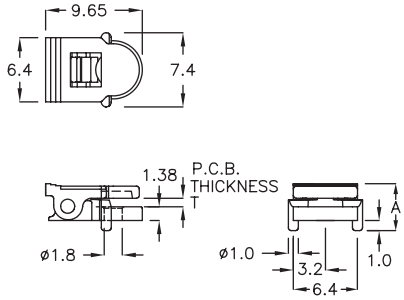


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| ★ LXCG−9CK | 3.6 | 0.8 | 500 |

## M.2 卡固定扣 SPACER SUPPORT — 3-98-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built−In Anti−Spin Function
WITH LOCK FEATURE

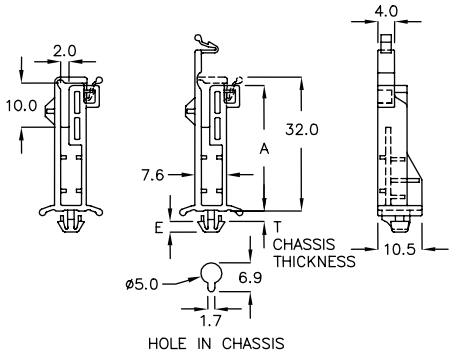


| PART NO | A | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| DAG−28C | 30.0 | 2.5 | 1.8~2.0 | 500 |
| DAG−28TN | 30.0 | 2.5 | 2.0~2.2 | |



## M.2 卡固定扣 SPACER SUPPORT — 3-98-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built−In Anti−Spin Function
WITH LOCK FEATURE

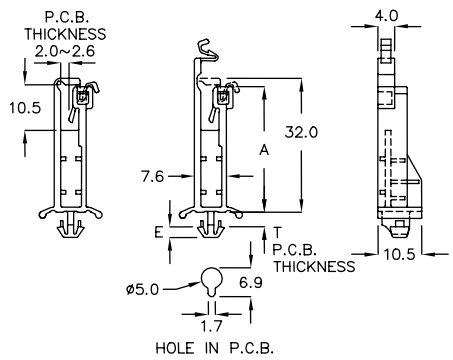


| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| DAGK−28 | 30.0 | 2.5 | 2.2~2.8 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板固定座 P.C.B MOUNT — 3-99-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2 SCREW

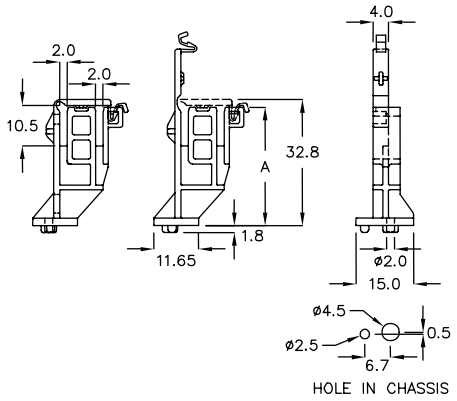


WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| DAGH-30T | 30.8 | 200 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-99-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 TAPPING SCREW

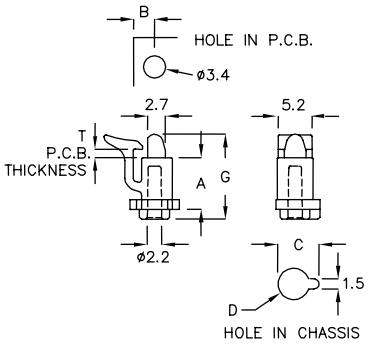


| PART NO | A | B | C | D | G | T P.C.B. THICKNESS | USE TAPPING SCREW | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| LTW-7AK | 7.15 | 5.5 | 6.2 | ø4.7 | 18.65 | 1.7~1.9 | M3x5L | 1000 |
| LTW-7C | 7.85 | 3.15 | 6.3 | ø4.8 | 12.9 | 1.0~1.2 | M3x6L | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-99-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE
- USE M3x8 TAPPING SCREW

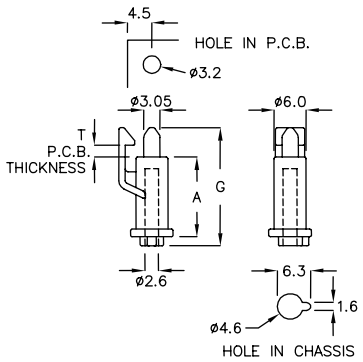


| PART NO | A | G | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LTF-01 | 15.0 | 22.2 | 1.6~1.8 | 500 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-99-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,GREEN
- USE M3x7 TAPPING SCREW

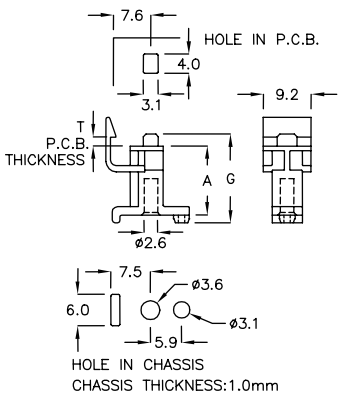


| PART NO | A | G | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LTR-13A | 13.2 | 17.0 | 1.4~1.6 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-100-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3.5x6 TAPPING SCREW

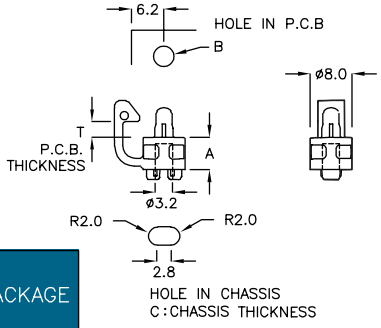


| PART NO | A | B | C CHASSIS THICKNESS | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LTK-6A | 6.2 | ø4.0 | 2.0~2.3 | 2.8~3.0 | 1000 |
| LTK-7C | 7.5 | ø3.3 | 2.5~2.7 | 1.6~1.85 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-100-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

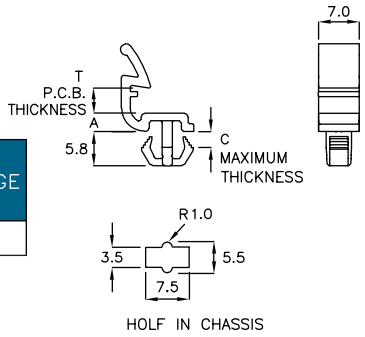


| PART NO | A | T P.C.B. THICKNESS | C MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS-3A | 3.0 | 3.8~4.0 | 2.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-100-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

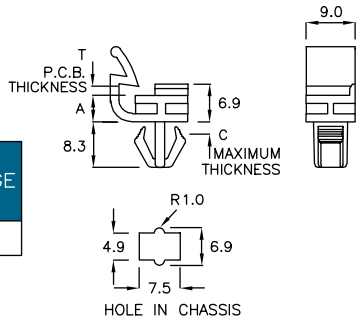


| PART NO | A | T P.C.B. THICKNESS | C MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS-4A | 4.9 | 1.4~1.6 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-100-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

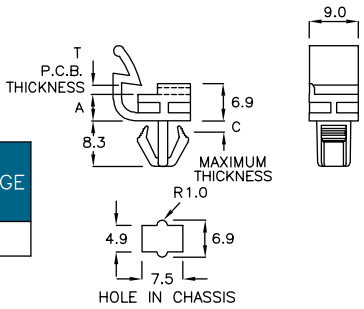


| PART NO | A | T P.C.B. THICKNESS | C MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS-4C | 4.9 | 1.4~1.6 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-100-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

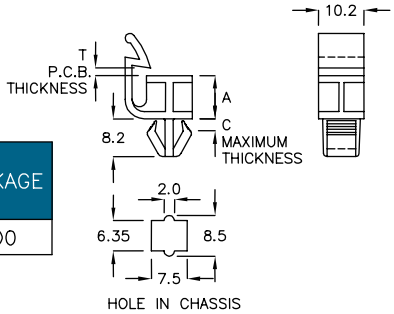


| PART NO | A | C MAXIMUM THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS-9A | 9.0 | 2.0 | 0.8~2.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-101-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

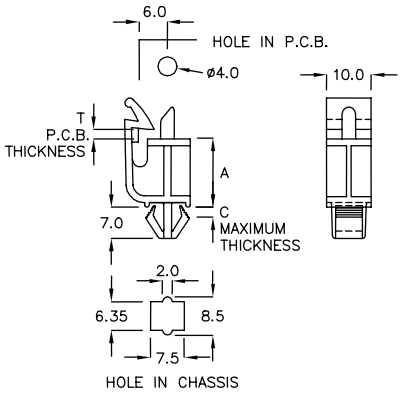


| PART NO | A | C MAXIMUM THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS-15 | 15.2 | 1.6 | 1.4~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-101-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

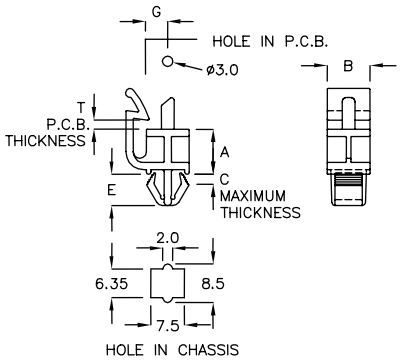


| PART NO | A | B | C MAXIMUM THICKNESS | E | G | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| LS-7 | 7.5 | 10.2 | 1.4 | 7.1 | 6.35 | 0.8~2.2 | 500 |
| LS-10 | 10.0 | 10.1 | 1.4 | 7.1 | 6.35 | 0.8~2.2 | |
| LS-10AN | 10.0 | 9.5 | 1.6 | 6.9 | 5.35 | 0.8~1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-101-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

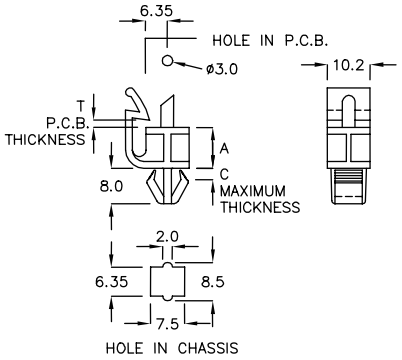


| PART NO | A | C MAXIMUM THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS-9 | 9.0 | 2.0 | 0.8~2.2 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-101-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

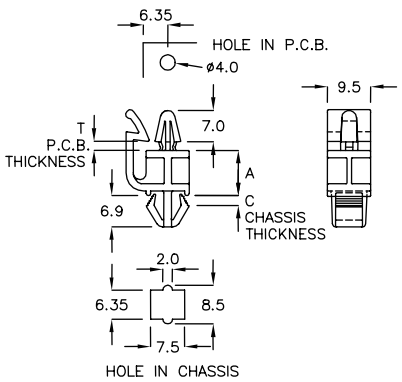


| PART NO | A | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LSQ-10 | 10.0 | 0.8~1.6 | 1.6 | 500 |
| LSQ-15A | 15.0 | 0.8~1.6 | 1.6 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-102-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

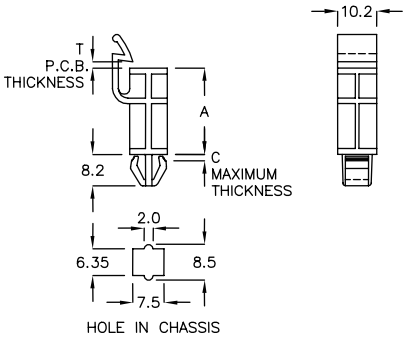


| PART NO | A | C MAXIMUM THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| LS−22A | 22.5 | 0.8 | 1.4~1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-102-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| LTS−7 | 7.5 | 0.8~2.2 | 1.4 | 500 |
| LTS−10 | 10.0 | 0.8~2.2 | 1.4 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-102-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T P.C.B. THICKNESS | C MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| LTS−10A | 10.0 | 1.2~2.2 | 1.6 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-102-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLUE

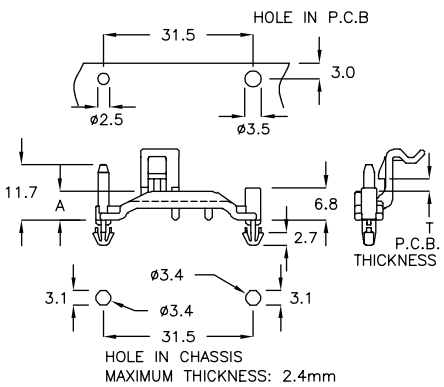


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| FKK−6RC | 6.1 | 1.4~1.6 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-103-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

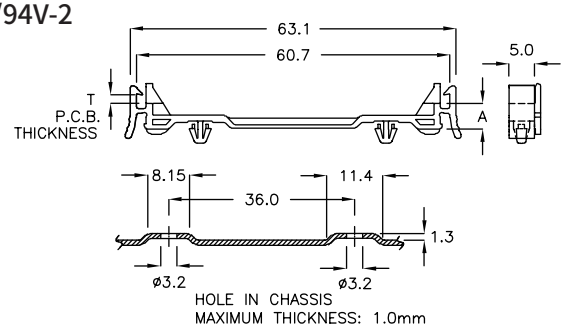


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MTG-65DR | 4.9 | 1.6 | 200 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-103-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2x8 TAPPING SCREW

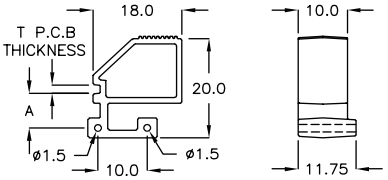


| PART NO | A | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| LSY-07 | 7.0 | 1.4~1.6 | 200 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-103-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

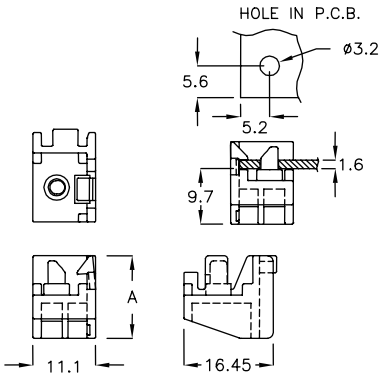


| PART NO | A | PACKAGE |
|---|---|---|
| MTC-14A | 14.65 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-103-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|
| LD-13 | 13.3 | 1.2~1.6 | 3.8 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-104-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | G | H | I | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| LW-10 | 10.6 | 7.1 | 9.4 | 6.3 | 2.65 | 1.8 | 200 |
| LW-012 | 12.7 | 7.1 | 9.2 | 8.2 | 2.75 | 1.8 | |
| LW-013 | 12.5 | 6.4 | 9.1 | 8.2 | 2.5 | 1.4 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-104-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

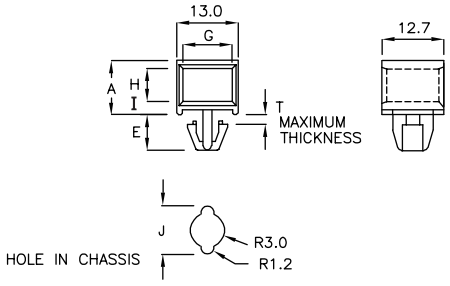


| PART NO | A | E | G | H | I | J | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| LD-10A | 10.6 | 7.2 | 9.5 | 6.1 | 2.5 | 8.4 | 1.6 | 500 |
| LD-12C | 12.6 | 7.1 | 9.1 | 8.2 | 2.65 | 9.4 | 1.6 | |



## P.C. 板间隔柱 SPACER SUPPORT 3-104-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

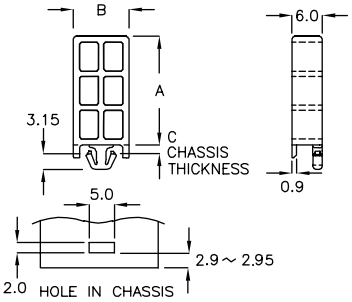


| PART NO | A | B | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| LWC-21A | 21.5 | 11.0 | 1.4~1.6 | 500 |




## P.C. 板间隔柱 SPACER SUPPORT 3-104-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | C P.C.B THICKNESS | PACKAGE |
|---|---|---|---|---|
| LWP-14 | 14.0 | 11.7 | 1.7 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT 3-105-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x8 TAPPING SCREW

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| LSL−15 | 15.0 | 1.8～1.95 | 500 |

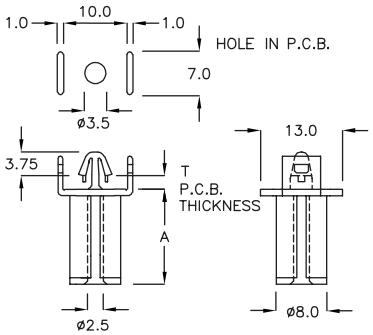




## P.C. 板间隔柱 SPACER SUPPORT 3-105-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE #6-32 UNC TAPPING SCREW

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| TS−18 | 18.8 | 7.0 | 2.2 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT 3-105-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x22 STANDARD TAPPING SCREW

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| TSA−16 | 15.9 | 5.5 | 1.6 | 200 |

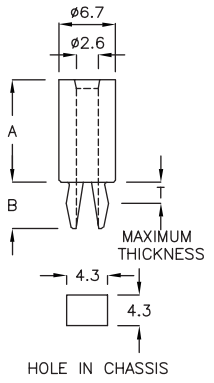




## P.C. 板间隔柱 SPACER SUPPORT 3-105-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE #6-32 UNC STANDARD TAPPING SCREW

| PART NO | A | B | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TB−6A | 1.0 | 7.0 | 9.5 | 2.2 | 1000 |
| TB−6 | 1.3 | 7.0 | 9.5 | 2.2 | |
| TB−7 | 7.6 | 7.1 | 9.4 | 2.2 | 500 |






## P.C. 板间隔柱 SPACER SUPPORT 3-105-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| LWH−3K | 3.7 | 1.0 | 2000 |
| LWH−5C | 5.2 | 1.0 | 500 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-106-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 STANDARD TAPPING SCREW

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| TSC−4A | 4.5 | 5.4 | 2.3 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT — 3-106-2

- MATERIAL: PC(UL)
- COLOR: NATURAL
- USE M3 STANDARD TAPPING SCREW

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| TSC−4DK | 4.5 | 5.4 | 2.3 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT — 3-106-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 STANDARD TAPPING SCREW

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| TSD−6M | 6.4 | 4.9 | 1.6 | 1000 |






## P.C. 板间隔柱 SPACER SUPPORT — 3-106-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M4x10 STANDARD TAPPING SCREW

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| TB−10 | 5.0 | 1.0 | 500 |
| TB−10A | 3.0 | 1.0 | |
| TB−10C | 0.8 | 1.0 | |

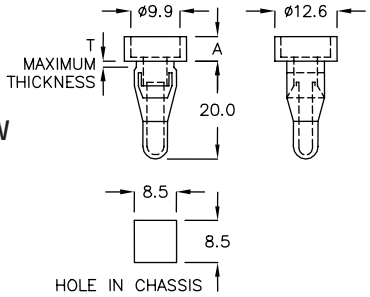




## P.C. 板间隔柱 SPACER SUPPORT — 3-106-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| RMF−22 | 3.8 | 23.6 | 1.3~1.5 | 1000 |

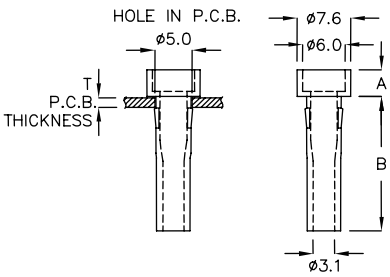




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 固定座 MOUNT 3-107-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| RMF−21A | 21.4 | 23.0 | 500 |
| RMF−25A | 25.9 | 27.5 | |
| RMF−27A | 27.7 | 29.3 | |
| RMF−32A | 32.3 | 34.4 | |



## 固定座 MOUNT 3-107-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| RMT−26A | 26.4 | 29.2 | 6.94 | 500 |



## 固定座 MOUNT 3-107-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| RMG−26C | 26.4 | 29.2 | 9.9 | 500 |



## 固定座 MOUNT 3-107-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| RMJ−7FS | 7.9 | 10.8 | 500 |



## 固定座 MOUNT 3-107-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| RMK−7WR | 7.9 | 10.8 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 圆体间隔柱 SPACER SUPPORT 3-108-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| ★ | 405AC | 2.0 | ø2.4 | ø4.5 | 2000 |






## 圆体间隔柱 SPACER SUPPORT 3-108-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADW-3T | 3.05 | ø1.95 | ø4.0 | 1.6 | 2000 |






## 圆体间隔柱 SPACER SUPPORT 3-108-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| AD-012 | 12.0 | ø3.0 | ø7.0 | 500 |
| AD-12A | 12.5 | ø3.2 | ø7.0 | |



## 圆体间隔柱 SPACER SUPPORT 3-108-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADK-13 | 13.0 | ø2.1 | ø5.6 | 1.6 | 1000 |

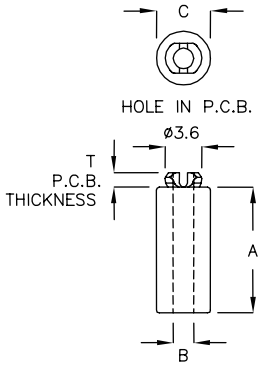

## 圆体间隔柱 SPACER SUPPORT 3-108-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADH-06C | 6.3 | ø3.25 | ø7.4 | 1.4~1.6 | 1000 |
| ADH-17 | 17.1 | ø3.2 | ø7.45 | 1.4~1.6 | 500 |
| ADH-19T | 19.1 | ø3.25 | ø7.4 | 1.4~1.6 | |

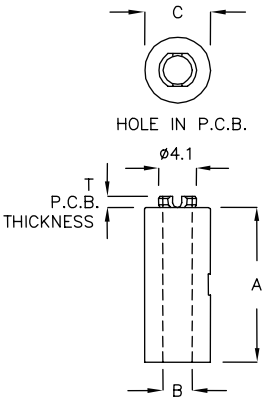




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 圆体间隔柱 SPACER SUPPORT — 3-109-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADP−20A | 20.0 | ø3.2 | ø5.0 | 1.0~1.2 | 500 |






## 圆体间隔柱 SPACER SUPPORT — 3-109-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADQ−05 | 5.0 | ø3.2 | ø5.2 | 1.6~1.8 | 2000 |






## 圆体间隔柱 SPACER SUPPORT — 3-109-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADF−2M | 2.5 | ø3.5 | ø7.0 | 1.6~1.8 | 1000 |
| ADF−03 | 3.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−3M | 3.5 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−04 | 4.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−4M | 4.5 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−05 | 5.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−5M | 5.5 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−06 | 6.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−6M | 6.5 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−07 | 7.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−7M | 7.5 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−08 | 8.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−8M | 8.5 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−09 | 9.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−10 | 10.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−11 | 11.0 | ø3.5 | ø7.0 | 1.6~1.8 | |
| ADF−17RM | 17.5 | ø3.5 | ø7.0 | 1.6~1.8 | 500 |
| ADF−22KC | 22.0 | ø3.5 | ø7.0 | 1.6~1.8 | |






## P.C. 板间隔柱 SPACER SUPPORT — 3-109-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | E | T P.C.B. THICKNESS | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| MCJA−04 | 4.0 | 1.9 | 1.4~1.6 | M2.0x12L | 2000 |
| MCJA−05 | 5.0 | 1.9 | 1.4~1.6 | M2.0x12L | |
| MCJA−06 | 6.0 | 1.9 | 1.4~1.6 | M2.0x14L | |
| MCJA−07 | 7.0 | 1.9 | 1.4~1.6 | M2.0x14L | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-110-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 SCREW




| PART NO | A | E | T P.C.B. THICKNESS | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| MCJ-03A | 3.0 | 2.4 | 1.4~1.6 | M2.5x10L | 2000 |
| MCJ-04A | 4.0 | 2.4 | 1.4~1.6 | M2.5x12L | |
| MCJ-05A | 5.0 | 2.4 | 1.4~1.6 | M2.5x12L | |
| MCJ-06A | 6.0 | 2.4 | 1.4~1.6 | M2.5x14L | |
| MCJ-07 | 7.0 | 2.4 | 1.4~1.6 | M2.5x14L | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-110-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| PCBS-3 | 3.0 | 3.0 | 1.4~1.6 | 2000 |
| PCBS-3M | 3.5 | 3.0 | 1.4~1.6 | |
| PCBS-4 | 4.0 | 3.0 | 1.4~1.6 | |
| PCBS-4M | 4.5 | 3.0 | 1.4~1.6 | |
| PCBS-5 | 5.0 | 3.0 | 1.4~1.6 | |

## P.C. 板间隔柱 SPACER SUPPORT — 3-110-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

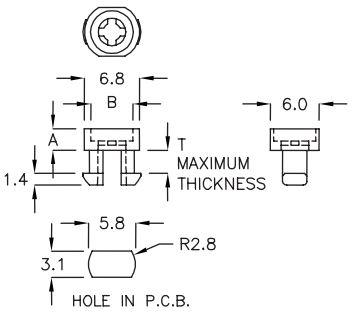


| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| SSR-2A | 2.65 | ø5.2 | 2.6 | 2000 |



## 圆体间隔柱 SPACER SUPPORT — 3-110-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADJ-2CH | 2.9 | 3.9 | ø6.0 | 0.8~1.6 | 2000 |
| ADJ-3FQ | 3.4 | 4.4 | ø6.0 | 0.8~1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板间隔柱 SPACER SUPPORT — 3-111-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D HOLE IN P.C.B. | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SRS2−2C | 2.0 | ø2.1 | ø4.0 | ø3.0 | 1.0 | 1.6 | 2000 |
| SRS2−2A | 2.5 | ø2.1 | ø4.0 | ø3.0 | 1.0 | 1.6 | |
| SRS2−2M | 2.5 | ø2.7 | ø5.5 | ø4.0 | 1.5 | 1.7 | |
| SRS2−3 | 3.0 | ø2.7 | ø5.5 | ø4.0 | 1.55 | 1.7 | |
| SRS2−3GK | 3.5 | ø2.7 | ø5.5 | ø4.0 | 1.4 | 1.7 | |
| SRS2−4 | 4.0 | ø2.7 | ø5.5 | ø4.0 | 1.5 | 1.7 | |
| SRS2−4AC | 4.0 | ø2.1 | ø4.0 | ø3.0 | 1.0 | 1.6 | |
| SRS2−4CB | 4.5 | ø2.7 | ø5.5 | ø4.0 | 1.4 | 1.7 | |
| SRS2−5 | 5.0 | ø2.7 | ø5.5 | ø4.0 | 1.5 | 1.7 | |
| SRS2−5ZM | 5.5 | ø2.7 | ø5.5 | ø4.0 | 1.4 | 1.7 | |
| SRS2−6 | 6.0 | ø2.7 | ø5.5 | ø4.0 | 1.5 | 1.7 | |
| SRS2−6A | 6.35 | ø2.25 | ø4.54 | ø3.55 | 1.0 | 1.1 | |
| SRS2−8 | 8.0 | ø2.7 | ø5.5 | ø4.0 | 1.4 | 1.6 | |
| SRS2−15 | 15.0 | ø3.1 | ø5.5 | ø4.0 | 1.55 | 1.6 | 500 |
| SRS3−2MA | 2.0 | ø3.2 | ø6.4 | ø4.8 | 1.5 | 1.2 | 2000 |
| SRS3−3S | 2.7 | ø3.2 | ø6.5 | ø4.8 | 1.6 | 1.7 | |
| SRS3−3A | 3.0 | ø2.8 | ø5.5 | ø4.0 | 1.4 | 1.6 | |
| SRS3−3M | 3.0 | ø3.2 | ø6.5 | ø4.8 | 1.7 | 1.7 | |
| SRS3−3 | 3.5 | ø3.2 | ø6.4 | ø4.8 | 1.4 | 1.7 | |
| SRS3−4 | 4.0 | ø3.2 | ø6.5 | ø4.8 | 1.65 | 1.7 | |
| SRS3−4A | 4.5 | ø3.4 | ø6.5 | ø4.8 | 1.8 | 1.6 | |
| SRS3−5 | 5.0 | ø3.2 | ø6.5 | ø4.8 | 1.6 | 1.7 | |
| SRS3−6S | 6.1 | ø3.2 | ø6.5 | ø4.8 | 1.6 | 1.7 | 1000 |
| SRS3−6 | 6.5 | ø3.2 | ø6.4 | ø4.8 | 1.6 | 1.7 | |
| SRS3−7S | 7.0 | ø3.2 | ø6.5 | ø4.8 | 1.6 | 1.7 | |
| SRS3−7F | 7.4 | ø3.2 | ø6.5 | ø4.8 | 1.7 | 1.7 | |
| SRS3−7 | 7.7 | ø3.2 | ø6.5 | ø4.8 | 1.7 | 1.7 | |
| SRS3−8 | 8.0 | ø3.2 | ø6.5 | ø4.8 | 1.6 | 1.7 | |
| SRS3−9 | 9.0 | ø3.2 | ø6.5 | ø4.8 | 1.8 | 1.7 | |
| SRS3−10M | 10.5 | ø3.15 | ø6.5 | ø4.8 | 1.6 | 1.7 | |
| SRS3−12A | 12.7 | ø3.2 | ø6.5 | ø4.8 | 1.6 | 1.7 | 500 |
| SRS3−14 | 14.2 | ø3.2 | ø6.5 | ø4.8 | 1.7 | 1.7 | |
| SRS4−6 | 6.4 | ø3.9 | ø6.9 | ø6.0 | 1.6 | 1.7 | 1000 |
| SRS4−12S | 12.0 | ø3.9 | ø6.9 | ø6.0 | 1.6 | 1.7 | 500 |
| SRS4−12 | 12.7 | ø3.9 | ø6.9 | ø6.0 | 1.7 | 1.7 | |



## 圆体间隔柱 SPACER SUPPORT — 3-111-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| AD−35A | 35.4 | 38.4 | ø7.0 | 1.6~1.8 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 圆体间隔柱 SPACER SUPPORT — 3-112-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | D | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADA−15 | 15.0 | ø3.5 | ø4.8 | 2.2~2.4 | 1000 |






## 圆体间隔柱 SPACER SUPPORT — 3-112-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ADHM−14 | 14.0 | ø3.2 | ø6.0 | 1.4~1.6 | 500 |



## 圆体间隔柱 SPACER SUPPORT — 3-112-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B. THICKNESS | E P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| ADM−20A | 20.0 | 1.8~2.0 | 1.0~1.2 | 500 |



## 圆体间隔柱 SPACER SUPPORT — 3-112-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ AG−16 | 16.0 | ø3.1 | 4.8 | 2000 |






## P.C. 板间隔柱 SPACER SUPPORT — 3-112-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| SH−10 | 10.5 | ø8.0 | ø6.5 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C. 板间隔柱 SPACER SUPPORT — 3-113-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ SHB−10AC | 10.0 | ø7.85 | ø12.5 | 1000 |



## 绝缘套 BUSHING — 3-113-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| SH−12A | 12.7 | ø9.0 | 8.7 | ø7.4 | ø4.8 | 1000 |

## P.C. 板间隔柱 SPACER SUPPORT — 3-113-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 SCREW

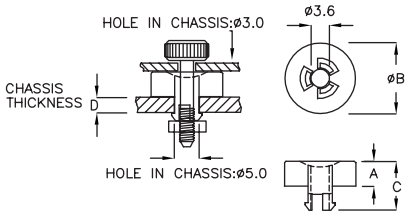


| PART NO | A | B | C | D CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MHT−05 | 5.0 | 14.0 | 10.2 | 3.2~3.4 | 1000 |
| MHT−5A | 5.0 | 14.0 | 9.6 | 2.8~3.0 | |



## P.C. 板间隔柱 SPACER SUPPORT — 3-113-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

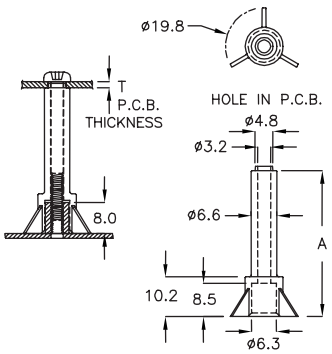


| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| ADGF−38C | 37.5 | 0.8~1.0 | 200 |



## P.C. 板间隔柱 SPACER SUPPORT 3-114-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 SCREW
- P.C.B MAX THICKNESS: 2.4mm

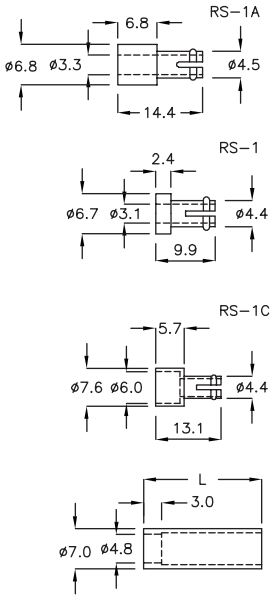


| PART NO | | L | HOLE IN P.C.B | HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| RS-1 | RS-57 | 6.0 | ø5.0 | ø3.5 | 1000 |
| | RS-78 | 7.8 | | | |
| RS-1A | RS-105 | 10.5 | ø5.0 | ø3.5 | |
| | RS-145 | 14.5 | | | |
| | RS-160 | 16.0 | | | |
| | RS-180 | 18.4 | | | |
| RS-1C | RS-215 | 21.5 | ø5.0 | ø3.5 | |
| | RS-280 | 28.2 | ø5.0 | ø3.5 | |

## P.C. 板间隔柱 SPACER SUPPORT 3-114-2

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: NATURAL
- USE M4 SCREW
- P.C.B MAX THICKNESS: 2.0mm




| PART NO | | L | HOLE IN P.C.B | HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| RL-1 | RL-6S | 5.7 | ø7.2 | ø4.5 | 1000 |
| | RL-10 | 10.0 | | | |
| | RL-15 | 15.2 | ø7.2 | ø4.5 | 1000 |
| | RL-20 | 20.2 | | | |
| | RL-25 | 25.2 | | | |



## 圆体间隔柱 SPACER SUPPORT 3-114-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| RS-2 | 5.0 | 1.6 | ø11.0 | 500 |



## 圆体间隔柱 SPACER SUPPORT 3-114-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 505-3L | 5.0 | 8.0 | 5.45 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 圆体间隔柱 SPACER SUPPORT — 3-115-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 403QP | 3.8 | 5.8 | 4.3 | 2000 |
| 6310A | 10.8 | 12.4 | 6.3 | 1000 |



## 圆体间隔柱 SPACER SUPPORT — 3-115-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 509A | 9.0 | 9.5 | 5.1 | 1000 |
| 304K | 4.0 | 5.0 | 3.15 | 2000 |



## 圆体间隔柱 SPACER SUPPORT — 3-115-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 403C | 3.5 | ø8.0 | ø4.9 | 2000 |






## 零件垫片 COMPONENT PAD — 3-115-4

- MATERIAL: CERAMICS
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 103C | 3.0 | ø4.5 | ø1.8 | 2000 |
| 103DC | 3.1 | ø2.5 | ø1.1 | |
| 104C | 4.5 | ø4.5 | ø1.8 | |
| 104MC | 4.5 | ø3.6 | ø1.2 | |
| 115MC | 15.4 | ø4.1 | ø1.9 | |



## 零件垫片 COMPONENT PAD — 3-115-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| KWT−103 | 3.1 | ø2.5 | ø1.0 | 2000 |
| KWT−103GH | 3.1 | ø2.5 | ø1.2 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 零件垫片 COMPONENT PAD — 3-116-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: PBT(UL), ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | MATERIAL | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| 101A | N66 | 1.1 | ø3.0 | ø1.7 | 2000 |
| 101CR | N66 | 1.6 | ø2.2 | ø0.7 | |
| 101DC | N66 | 1.6 | ø3.2 | ø0.8 | |
| 101MT | N66 | 1.6 | ø3.2 | ø1.2 | |
| 102F | N66 | 2.0 | ø3.0 | ø1.5 | |
| 102JK | N66 | 2.4 | ø3.5 | ø1.8 | |
| 102-H | PBT | 2.5 | ø3.2 | ø1.5 | |
| 103AF | N66 | 3.0 | ø2.5 | ø1.5 | |
| 103S | N66/PBT | 3.0 | ø3.5 | ø1.4 | |
| 103K | ABS | 3.1 | ø2.2 | ø0.8 | |
| 103MR | N66 | 3.2 | ø2.2 | ø0.8 | |
| 103TD | N66 | 3.2 | ø3.2 | ø1.2 | |
| 103AG | N66 | 3.25 | ø3.5 | ø1.6 | |
| 103M | N66 | 3.5 | ø4.5 | ø1.6 | |
| 103 | N66 | 3.6 | ø3.5 | ø1.4 | |

| PART NO | MATERIAL | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| 104 | N66 | 4.2 | ø4.5 | ø1.4 | 2000 |
| 104M | N66 | 4.5 | ø4.5 | ø1.6 | |
| 104AD | N66 | 4.8 | ø2.2 | ø0.8 | |
| 104CF | N66 | 4.8 | ø3.2 | ø1.2 | |
| 104A | N66+FRP | 5.0 | ø4.0 | ø1.4 | |
| 105A | N66 | 5.0 | ø3.0 | ø1.4 | |
| 105 | N66 | 5.0 | ø4.5 | ø1.6 | |
| 105M | N66 | 5.5 | ø4.5 | ø1.6 | |
| 106 | N66/PBT | 6.0 | ø4.4 | ø1.6 | |
| 106GK | N66 | 6.4 | ø3.2 | ø1.2 | |
| 106HJ | N66 | 6.4 | ø4.0 | ø1.2 | |
| 107 | N66/PBT | 7.0 | ø4.4 | ø1.6 | |
| 108BH | N66 | 7.9 | ø3.2 | ø1.2 | |
| 108GL | N66 | 7.9 | ø4.0 | ø1.2 | |
| 108A | N66 | 8.0 | ø3.2 | ø1.6 | |
| 108 | N66 | 8.0 | ø4.5 | ø1.4 | |
| 109CM | N66 | 9.5 | ø3.2 | ø1.2 | |
| 112NP | N66 | 12.7 | ø3.2 | ø1.2 | |



## 零件垫片 COMPONENT PAD — 3-116-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| ★ | 106C | 6.0 | ø3.2 | ø1.45 | 2000 |
| | 111C | 11.5 | ø3.2 | ø1.25 | |
| ★ | 111D | 11.5 | ø3.2 | ø1.45 | |

## 圆体间隔柱 SPACER SUPPORT — 3-116-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| KWT-302 | 2.0 | ø5.0 | ø3.3 | M3 | 2000 |
| KWT-305 | 5.0 | ø5.0 | ø3.3 | | |
| KWT-306 | 6.0 | ø5.0 | ø3.3 | | |
| KWT-308 | 8.0 | ø5.0 | ø3.3 | | |
| KWT-310 | 10.0 | ø5.0 | ø3.3 | | |
| KWT-311 | 11.0 | ø5.0 | ø3.3 | | |
| KWT-405 | 5.0 | ø6.5 | ø4.3 | M4 | |
| KWT-406 | 6.0 | ø6.5 | ø4.3 | | |
| KWT-408 | 8.0 | ø6.5 | ø4.3 | | |
| KWT-410 | 10.0 | ø6.5 | ø4.3 | | |
| KWT-412 | 12.0 | ø6.5 | ø4.3 | | |
| KWT-414 | 14.0 | ø6.5 | ø4.3 | | |
| KWT-416 | 16.0 | ø6.5 | ø4.3 | | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



# 圆体间隔柱 SPACER SUPPORT — 3-117-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL






| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 201 | 1.0 | ø3.7 | ø2.2 | |
| 201A | 1.5 | ø3.7 | ø2.2 | |
| 201KG | 1.6 | ø2.2 | ø0.8 | |
| 201JM | 1.6 | ø3.6 | ø2.2 | |
| 201FN | 1.6 | ø4.2 | ø2.7 | |
| 201C | 1.8 | ø3.7 | ø2.2 | |
| 201D | 1.9 | ø3.0 | ø2.0 | |
| 202 | 2.0 | ø4.5 | ø2.5 | |
| 202C | 2.0 | ø3.7 | ø2.2 | |
| 202F | 2.6 | ø4.6 | ø2.7 | 2000 |
| 202A | 2.5 | ø3.7 | ø2.2 | |
| 203 | 3.0 | ø4.5 | ø2.5 | |
| 203A | 3.0 | ø3.5 | ø2.2 | |
| 203C | 3.0 | ø3.7 | ø2.2 | |
| 203EG | 3.2 | ø3.2 | ø2.3 | |
| 203KJ | 3.2 | ø3.6 | ø2.2 | |
| 203BU | 3.2 | ø4.2 | ø2.7 | |
| 203M | 3.5 | ø4.5 | ø2.5 | |
| 203D | 3.7 | ø4.5 | ø2.5 | |
| 204 | 4.0 | ø4.5 | ø2.5 | |
| 204KT | 4.0 | ø4.7 | ø2.7 | |
| 204A | 4.1 | ø3.6 | ø2.2 | |
| 204M | 4.5 | ø4.5 | ø2.5 | |
| 204FP | 4.8 | ø3.2 | ø2.3 | |
| 204GN | 4.8 | ø3.6 | ø2.2 | |
| 204NJ | 4.8 | ø4.2 | ø2.7 | |
| 205 | 5.0 | ø4.5 | ø2.5 | |
| 205C | 5.5 | ø4.5 | ø2.5 | |
| 206 | 6.0 | ø4.5 | ø2.5 | 2000 |
| 206BQ | 6.4 | ø3.2 | ø2.3 | |
| 206AP | 6.4 | ø3.6 | ø2.2 | |
| 206DN | 6.4 | ø4.2 | ø2.7 | |
| 206CH | 6.4 | ø4.8 | ø2.3 | |
| 206M | 6.5 | ø4.5 | ø2.5 | |
| 206F | 6.6 | ø4.8 | ø2.8 | |
| 207 | 7.0 | ø4.8 | ø2.3 | |
| 207A | 7.0 | ø3.7 | ø2.2 | |
| 207C | 7.5 | ø3.7 | ø2 3 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 208FJ | 7.9 | ø3.6 | ø2.2 | |
| 208 | 8.0 | ø4.5 | ø2.5 | |
| 208C | 8.5 | ø4.5 | ø2.5 | |
| 209 | 9.0 | ø4.5 | ø2.5 | |
| 209AQ | 9.5 | ø3.6 | ø2.2 | |
| 209C | 9.5 | ø4.5 | ø2.5 | |
| 210 | 10.0 | ø4.5 | ø2.5 | |
| 211 | 11.0 | ø3.7 | ø2.2 | |
| 301PW | 1.5 | ø5.0 | ø3.1 | |
| 301NL | 1.6 | ø4.8 | ø3.2 | 2000 |
| 301BR | 1.6 | ø6.4 | ø3.2 | |
| 301GS | 1.6 | ø6.4 | ø3.7 | |
| 302A | 2.0 | ø6.0 | ø3.0 | |
| 302C | 2.0 | ø6.5 | ø3.1 | |
| 302B | 2.5 | ø5.0 | ø3.1 | |
| 302DK | 2.0 | ø8.0 | ø3.5 | |
| 302JY | 2.5 | ø8.0 | ø3.2 | |
| 303 | 3.3 | ø5.0 | ø3.1 | |
| 303A | 3.0 | ø6.0 | ø3.1 | |
| 303C | 3.5 | ø5.7 | ø3.1 | |
| 303D | 3.0 | ø5.0 | ø3.1 | |
| 303F | 2.6 | ø8.0 | ø3.5 | |
| 303H | 3.0 | ø6.3 | ø3.2 | |
| 303Q | 2.8 | ø6.3 | ø3.2 | |
| 303DQ | 3.2 | ø4.8 | ø3.2 | |
| 303HP | 3.2 | ø6.4 | ø3.2 | |
| 303YF | 3.2 | ø6.4 | ø3.7 | |
| 303RP | 3.8 | ø5.2 | ø3.7 | |
| 303S | 3.5 | ø4.0 | ø3.0 | 2000 |
| 304A | 4.0 | ø5.0 | ø3.2 | |
| 304 | 4.2 | ø5.0 | ø3.1 | |
| 304C | 4.5 | ø6.0 | ø3.2 | |
| 304PR | 4.8 | ø4.8 | ø3.2 | |
| 304HX | 4.8 | ø6.4 | ø3.2 | |
| 304JS | 4.8 | ø6.4 | ø3.7 | |
| 305 | 5.0 | ø5.0 | ø3.1 | |
| 305A | 5.0 | ø8.0 | ø3.1 | |
| 305C | 5.5 | ø5.0 | ø3.0 | |
| 305DM | 5.9 | ø5.7 | ø3.7 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 306 | 6.1 | ø5.0 | ø3.1 | |
| 306A | 6.3 | ø6.5 | ø3.9 | |
| 306XF | 6.4 | ø4.8 | ø3.2 | |
| 306KY | 6.4 | ø6.4 | ø3.2 | |
| 306QS | 6.4 | ø6.4 | ø3.7 | |
| 306M | 6.5 | ø5.0 | ø3.1 | |
| 306SK | 6.0 | ø8.0 | ø3.3 | |
| 307 | 7.0 | ø5.0 | ø3.1 | |
| 307A | 7.5 | ø5.0 | ø3.1 | |
| 307B | 7.5 | ø3.9 | ø3.1 | |
| 308CW | 7.9 | ø6.4 | ø3.2 | |
| 308FR | 7.9 | ø6.4 | ø3.7 | 2000 |
| 308LT | 7.9 | ø4.8 | ø3.2 | |
| 308 | 8.1 | ø5.0 | ø3.1 | |
| 308C | 8.4 | ø6.5 | ø3.9 | |
| 308M | 8.5 | ø5.0 | ø3.1 | |
| 308A | 8.7 | ø5.0 | ø3.1 | |
| 309A | 9.0 | ø5.0 | ø3.1 | |
| 309 | 9.2 | ø5.0 | ø3.1 | |
| 309MS | 9.5 | ø4.8 | ø3.2 | |
| 309PT | 9.5 | ø6.4 | ø3.7 | |
| 309C | 9.6 | ø7.5 | ø3.5 | |
| 310 | 10.1 | ø5.0 | ø3.1 | |
| 311 | 11.0 | ø5.0 | ø3.1 | |
| 311MH | 11.1 | ø4.8 | ø3.2 | |
| 311BN | 11.1 | ø6.4 | ø3.2 | |
| 312A | 12.0 | ø5.0 | ø3.2 | |
| 312 | 12.3 | ø5.0 | ø3.1 | |
| 313 | 13.0 | ø5.0 | ø3.1 | |
| 314 | 14.0 | ø5.0 | ø3.1 | 1000 |
| 315 | 15.0 | ø5.0 | ø3.1 | |
| 316 | 16.0 | ø5.0 | ø3.1 | |
| 317 | 17.0 | ø5.0 | ø3.1 | |
| 318 | 18.3 | ø5.0 | ø3.1 | |
| 319 | 19.0 | ø5.0 | ø3.1 | |
| 320 | 20.0 | ø5.0 | ø3.1 | |
| 324 | 24.0 | ø5.0 | ø3.1 | |
| 331 | 31.0 | ø5.0 | ø3.1 | 500 |
| 338 | 38.0 | ø5.9 | ø3.1 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



# 圆体间隔柱 SPACER SUPPORT 3-118-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 401AF | 1.6 | ø6.4 | ø4.3 | 2000 |
| 402 | 2.0 | ø6.5 | ø4.0 | |
| 402A | 2.5 | ø6.5 | ø4.0 | |
| 402TK | 2.5 | ø8.0 | ø4.0 | |
| 403 | 3.0 | ø6.5 | ø4.0 | |
| 403DG | 3.2 | ø6.4 | ø4.3 | |
| 403A | 3.5 | ø5.9 | ø4.6 | |
| 403RL | 3.5 | ø8.0 | ø4.5 | |
| 404C | 4.0 | ø6.5 | ø3.5 | |
| 404 | 4.0 | ø6.5 | ø4.0 | |
| 405A | 4.5 | ø10.7 | ø4.3 | 1000 |
| 405MQ | 4.8 | ø6.4 | ø4.3 | 2000 |
| 405 | 5.2 | ø6.5 | ø3.9 | |
| 406 | 6.0 | ø6.5 | ø4.1 | |
| 406B | 6.1 | ø6.5 | ø4.4 | |
| 406SR | 6.4 | ø6.4 | ø4.3 | |
| 406A | 6.4 | ø6.5 | ø4.1 | |
| 406D | 6.4 | ø10.0 | ø4.5 | |
| 407 | 7.2 | ø6.5 | ø4.0 | |
| 407C | 7.5 | ø6.5 | ø4.1 | |
| 408QF | 7.9 | ø6.4 | ø4.3 | |
| 408L | 8.0 | ø7.4 | ø4.5 | |
| 408 | 8.1 | ø6.5 | ø4.0 | |
| 408H | 8.5 | ø6.5 | ø4.1 | |
| 409 | 9.1 | ø6.5 | ø3.9 | |
| 409C | 9.5 | ø6.5 | ø4.1 | |
| 410 | 10.0 | ø6.5 | ø4.1 | |
| 411 | 11.0 | ø6.5 | ø4.1 | 1000 |
| 411TP | 11.1 | ø6.4 | ø4.3 | |
| 412 | 12.0 | ø6.3 | ø4.2 | |
| 413 | 13.0 | ø6.5 | ø4.1 | |
| 414 | 14.0 | ø8.0 | ø4.2 | |
| 415 | 15.0 | ø6.5 | ø4.1 | |
| 416A | 16.8 | ø6.3 | ø4.2 | |
| 417 | 17.1 | ø6.3 | ø4.2 | |
| 420 | 20.0 | ø8.0 | ø4.2 | |
| 421 | 21.0 | ø8.0 | ø4.0 | |
| 422A | 22.23 | ø8.0 | ø4.93 | 500 |
| 425A | 25.4 | ø6.3 | ø4.3 | |
| 427A | 27.5 | ø6.5 | ø4.1 | |
| 428 | 28.0 | ø6.5 | ø4.1 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 428A | 28.7 | ø6.5 | ø4.1 | 500 |
| 433A | 33.5 | ø8.0 | ø4.3 | |
| 503 | 3.0 | ø7.0 | ø5.0 | 2000 |
| 503A | 3.2 | ø9.5 | ø4.9 | |
| 505 | 5.0 | ø8.0 | ø5.3 | |
| 506 | 6.0 | ø7.0 | ø5.3 | |
| 507 | 7.0 | ø7.95 | ø4.95 | 1000 |
| 508 | 7.9 | ø7.0 | ø5.4 | |
| 508A | 8.0 | ø10.0 | ø5.6 | |
| 509 | 9.0 | ø7.0 | ø5.3 | |
| 510A | 9.35 | ø10.0 | ø5.4 | |
| 509M | 9.6 | ø8.0 | ø5.0 | |
| 510 | 10.0 | ø7.0 | ø5.3 | |
| 516 | 16.0 | ø7.0 | ø5.3 | |
| 525 | 25.0 | ø8.0 | ø5.1 | 500 |
| 527A | 27.5 | ø7.0 | ø5.5 | |
| 530 | 30.0 | ø8.0 | ø5.1 | |
| 612 | 12.6 | ø6.5 | ø3.8 | 1000 |
| 614 | 14.2 | ø6.5 | ø3.7 | |
| 617 | 17.0 | ø10.0 | ø6.2 | |
| 622 | 22.0 | ø7.1 | ø5.8 | |
| 6305 | 5.0 | ø8.5 | ø6.3 | |
| 6305A | 5.5 | ø7.3 | ø6.3 | |
| 6305PH | 5.0 | ø11.0 | ø6.3 | |
| 6315CX | 15.0 | ø11.0 | ø6.3 | |
| 7732FC | 32.0 | ø11.3 | ø7.7 | 200 |
| 803H | 3.2 | ø10.2 | ø8.2 | 1000 |
| 804H | 4.7 | ø10.2 | ø8.2 | |
| 8305RT | 5.0 | ø13.0 | ø8.3 | |
| 8315DK | 15.0 | ø13.0 | ø8.3 | |
| 8507 | 6.9 | ø10.5 | ø8.5 | |
| 903 | 3.2 | ø11.6 | ø9.1 | |
| 904 | 4.7 | ø11.6 | ø9.1 | |
| 9634C | 33.3 | ø18.7 | ø9.3 | 200 |
| 51–080 | 8.0 | ø8.0 | ø5.1 | 1000 |
| 57–065 | 6.5 | ø13.0 | ø5.7 | |
| 64–072 | 7.2 | ø7.65 | ø6.4 | |
| 65–100 | 10.0 | ø10.0 | ø6.5 | |
| 70–080 | 8.0 | ø10.0 | ø7.0 | |
| 70–110 | 11.0 | ø10.0 | ø7.0 | |
| 75–130 | 13.0 | ø10.5 | ø7.5 | |
| 82–080 | 8.0 | ø10.6 | ø8.2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 导电板间隔柱 CONDUCTIVE SUPPORT —— 3-119-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- MATERIAL: PHOSPHOR BRONZE
- PLATING: NICKEL

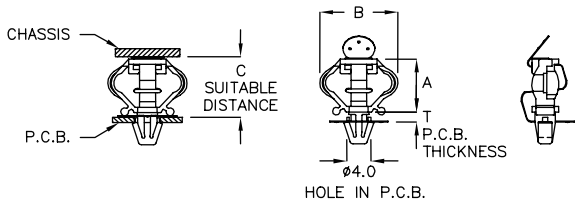


| PART NO | A | B | T P.C.B. THICKNESS | C SUITABLE DISTANCE | PACKAGE |
|---|---|---|---|---|---|
| CQA-10 | 10.0 | 14.8 | 1.2~1.6 | 7.0~9.0 | 1000 |



## 导电板间隔柱 CONDUCTIVE SUPPORT —— 3-119-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- MATERIAL: PHOSPHOR BRONZE
- PLATING: NICKEL

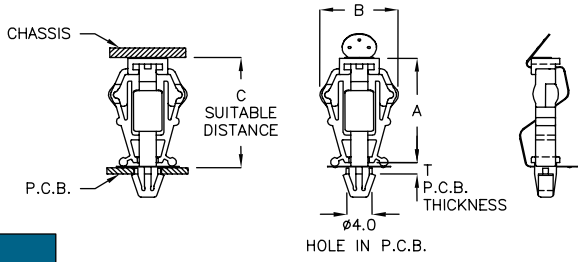


| PART NO | A | B | T P.C.B. THICKNESS | C SUITABLE DISTANCE | PACKAGE |
|---|---|---|---|---|---|
| CQA-14DS | 14.5 | 13.7 | 1.2~1.4 | 13.0~14.3 | 1000 |
| CQA-18K | 18.25 | 13.7 | 1.2~1.4 | 18.0~18.3 | |



## P.C. 板间隔柱 SPACER SUPPORT —— 3-119-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 TAPPING SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| SQ-10A | 7.0 | 6.0 | 6.3 | M3 | 1000 |



## P.C. 板间隔柱 SPACER SUPPORT —— 3-119-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TAH-05 | 4.7 | 6.0 | 6.0 | M3 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 六角型间隔柱 SPACER SUPPORT — 3-120-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2 TAPPING SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HHB-06D | 7.95 | 4.15 | ø1.6 | 1000 |

## 六角型间隔柱 SPACER SUPPORT — 3-120-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2x5.5 SCREW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HHJ-8KC | 7.95 | 5.0 | 1000 |

## 六角型间隔柱 SPACER SUPPORT — 3-120-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HWH-04 | 4.0 | 5.5 | ø2.5 | 1000 |
| HWH-10 | 10.0 | 4.5 | ø2.45 | |
| HWH-20 | 20.0 | 5.5 | ø2.5 | 500 |

## 六角型间隔柱 SPACER SUPPORT — 3-120-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| H-57 | 57.8 | 5.9 | 2.5 | 10.0 | 200 |
| H-65 | 65.5 | 5.6 | 2.6 | 14.9 | |
| H-105 | 105 | 9.9 | 2.6 | 14.6 | 100 |
| H-140 | 139.5 | 9.9 | 2.6 | 14.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 六角型间隔柱 SPACER SUPPORT — 3-121-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| H−32 | 32.0 | 5.5 | 14.0 | ø2.6 | 500 |
| H−49 | 49.0 | 5.5 | 15.0 | | 200 |

## 六角型间隔柱 SPACER SUPPORT — 3-121-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- OPTIONAL MATERIAL: POM (94HB FLAMMABILITY)




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| H2M−6 | 6.0 | 4.9 | M2.6 | 1000 |
| H−5KC | 5.0 | 5.4 | M3 | 2000 |
| H−6S | 6.0 | 5.5 | M3 | 1000 |
| H−6 | 6.45 | 5.5 | | |
| H−7 | 7.0 | 5.5 | | |
| H−8 | 8.0 | 5.5 | | |
| H−9 | 9.1 | 5.5 | | |
| H−10S | 10.0 | 5.5 | | |
| H−10 | 10.6 | 5.5 | | |
| H−11 | 11.2 | 5.5 | | |
| H−12 | 12.2 | 5.5 | | |
| H−13 | 12.8 | 5.5 | | |
| H−14 | 14.2 | 5.5 | | |

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| H−15 | 15.0 | 5.5 | M3 | 1000 |
| H−16 | 16.0 | 5.5 | | |
| H−17 | 17.1 | 5.5 | | |
| H−18 | 18.2 | 5.5 | | |
| H−20 | 20.0 | 5.5 | | |
| H−22 | 22.3 | 5.5 | | |
| H−24 | 24.0 | 5.5 | M3 | 500 |
| H−25 | 25.1 | 5.5 | | |
| H−26 | 26.0 | 5.5 | | |
| H−28 | 27.8 | 5.5 | | |
| H−30 | 30.0 | 5.5 | | |
| H4−36 | 36.0 | 8.0 | M4 | |



## 六角型间隔柱 SPACER SUPPORT — 3-121-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | F | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| HU4−406A | 6.35 | 4.75 | #4−40 | | 1 | 1000 |
| HU4−409A | 9.53 | 4.75 | #4−40 | | 1 | |
| HU4−412A | 12.7 | 4.75 | #4−40 | | 1 | |
| HU4−415A | 15.9 | 4.75 | #4−40 | 6.0 | 2 | |
| HU4−419A | 19.05 | 4.75 | #4−40 | 8.0 | 2 | |
| HU4−606C | 6.35 | 6.35 | #4−40 | | 1 | |
| HU4−609C | 9.53 | 6.35 | #4−40 | | 1 | |
| HU4−611C | 11.1 | 6.35 | #4−40 | | 1 | |
| HU4−612C | 12.7 | 6.35 | #4−40 | | 1 | |
| HU4−615C | 15.9 | 6.35 | #4−40 | 6.0 | 2 | |
| HU4−619C | 19.05 | 6.35 | #4−40 | 8.0 | 2 | |
| HU4−625C | 25.4 | 6.35 | #4−40 | 8.0 | 2 | |

| PART NO | A | B | D | F | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| HU6−406D | 6.35 | 4.75 | #6−32 | | 1 | 1000 |
| HU6−409D | 9.53 | 4.75 | #6−32 | | 1 | |
| HU6−412D | 12.7 | 4.75 | #6−32 | | 1 | |
| HU6−415D | 15.9 | 4.75 | #6−32 | 6.0 | 2 | |
| HU6−419D | 19.05 | 4.75 | #6−32 | 8.0 | 2 | |
| HU6−606H | 6.35 | 6.35 | #6−32 | | 1 | |
| HU6−609H | 9.53 | 6.35 | #6−32 | | 1 | |
| HU6−612H | 12.7 | 6.35 | #6−32 | | 1 | |
| HU6−615H | 15.9 | 6.35 | #6−32 | 6.0 | 2 | |
| HU6−619H | 19.05 | 6.35 | #6−32 | 8.0 | 2 | |
| HU6−625H | 25.4 | 6.35 | #6−32 | 8.0 | 2 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 六角型间隔柱 SPACER SUPPORT —— 3-122-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| THU4-406C | 6.4 | 4.8 | 4.8 | #4-40 | 4.75 | 1000 |
| THU4-409C | 9.53 | | | | | |
| THU4-412C | 12.7 | | | | | |
| THU4-415C | 15.9 | | | | | |
| THU4-419C | 19.05 | 4.8 | 4.8 | #4-40 | 4.75 | 500 |
| THU4-425C | 25.4 | | | | | |
| THU4-606A | 6.35 | 6.4 | 4.8 | #4-40 | 4.75 | 1000 |
| THU4-609A | 9.53 | | | | | |
| THU4-612A | 12.7 | | | | | |
| THU4-615A | 15.9 | | | | | |
| THU4-619A | 19.05 | 6.4 | 4.8 | #4-40 | 4.75 | 500 |
| THU4-625A | 25.4 | | | | | |

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| THU6-406H | 6.35 | 4.8 | 6.4 | #6-32 | 4.75 | 1000 |
| THU6-409H | 9.53 | 4.8 | 6.4 | #6-32 | 6.35 | |
| THU6-412H | 12.7 | | | | | |
| THU6-415H | 15.9 | | | | | |
| THU6-419H | 19.05 | 4.8 | 6.4 | #6-32 | 6.35 | 500 |
| THU6-425H | 25.4 | | | | | |
| THU6-606D | 6.35 | 6.4 | 6.4 | #6-32 | 4.75 | 1000 |
| THU6-609D | 9.5 | 6.4 | 6.4 | #6-32 | 6.35 | |
| THU6-612D | 12.7 | | | | | |
| THU6-615D | 15.9 | | | | | |
| THU6-619D | 19.05 | 6.4 | 6.4 | #6-32 | 6.35 | 500 |
| THU6-625D | 25.4 | | | | | |

## 六角型间隔柱 SPACER SUPPORT —— 3-122-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- D: SCREW
- OPTIONAL MATERIAL: POM (94HB FLAMMABILITY)




| PART NO | A | B | C | D1 SCREW | D2 SCREW | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| TH2F-6C | 6.0 | 5.0 | 8.0 | M3 | M2.5 | 5.0 | 1000 |
| TH2M-6 | 6.0 | 4.9 | 5.0 | M2.6 | M2.6 | 5.0 | |
| TH-5 | 5.0 | 6.0 | 4.8 | M3 | M3 | 4.0 | |
| TH-6 | 6.35 | 6.0 | 4.8 | | | | |
| TH-7 | 7.0 | 6.0 | 6.3 | M3 | M3 | 6.0 | |
| TH-8 | 8.0 | 6.0 | 6.3 | | | | |
| TH-9 | 9.0 | 6.0 | 6.0 | | | | |
| TH-10 | 10.0 | 6.0 | 6.0 | M3 | M3 | 8.0 | |
| TH-11 | 11.0 | 6.0 | 6.1 | | | | |
| TH-12 | 12.7 | 6.0 | 6.4 | M3 | M3 | 10.0 | |
| TH-12A | 12.0 | 4.7 | 6.4 | | | | |
| TH-14 | 14.0 | 6.0 | 6.0 | | | | |
| TH-14C | 14.0 | 4.75 | 4.0 | | | | |
| TH-15 | 15.0 | 6.0 | 6.0 | | | | |
| TH-16 | 16.0 | 6.0 | 6.1 | | | | |
| TH-17.5 | 17.5 | 6.0 | 6.0 | | | | |
| TH-17.5A | 17.5 | 4.75 | 6.0 | | | | |

| PART NO | A | B | C | D1 SCREW | D2 SCREW | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| TH-18A | 18.4 | 6.0 | 6.1 | M3 | M3 | 10.0 | 1000 |
| TH-20 | 20.0 | 6.0 | 6.1 | M3 | M3 | 10.0 | 500 |
| TH-21 | 21.0 | 6.0 | 6.0 | M3 | M3 | 10.5 | 1000 |
| TH-22 | 22.0 | 6.0 | 6.4 | M3 | M3 | 10.0 | 500 |
| TH-25 | 25.2 | 6.0 | 6.5 | | | | |
| TH-30 | 30.0 | 6.0 | 6.5 | M3 | M3 | 10.5 | |
| TH4-10 | 10.1 | 6.1 | 6.1 | M4 | M3 | 8.0 | 1000 |
| TH4-12C | 12.7 | 6.0 | 6.0 | M4 | M4 | 8.0 | |
| TH4-13 | 13.1 | 6.1 | 6.0 | M4 | M4 | 10.5 | |
| TH4-15 | 15.0 | 6.0 | 6.0 | M4 | M4 | 10.0 | |
| TH4-17C | 17.5 | 8.0 | 5.5 | M4 | M4 | 8.0 | |
| TH4-19 | 19.1 | 8.0 | 5.5 | M4 | M4 | 8.0 | 500 |
| TH4-25 | 25.1 | 6.1 | 6.5 | M4 | M4 | 10.3 | |
| TH4-30 | 30.2 | 6.1 | 6.4 | M4 | M4 | 10.0 | |
| TH4-37 | 37.0 | 8.0 | 5.5 | M4 | M4 | 8.0 | 200 |
| TH4-45 | 45.3 | 6.0 | 6.4 | M4 | M4 | 10.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 六角型间隔柱 SPACER SUPPORT — 3-123-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE TAPPING SCREW




| PART NO | A | B | C | D SCREW | E | F | USE TAPPING SCREW | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TH2−4 | 4.0 | 5.0 | 2.8 | M2 | ø1.6 | 2.8 | M2 | 2000 |
| TH−15A | 15.0 | 5.0 | 5.0 | #6−32 | ø2.8 | 10.0 | #6−32 | 1000 |

## 六角型间隔柱 SPACER SUPPORT — 3-123-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| THK−35 | 35.0 | 6.0 | 6.0 | M3 | 1000 |
| THK−36M | 36.0 | 6.0 | 6.0 | | |
| THK−37M | 37.0 | 6.0 | 6.0 | | |

## 六角型间隔柱 SPACER SUPPORT — 3-123-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| THB−29 | 29.2 | ø8.0 | 5.0 | #6−32 | 1000 |

## 六角型间隔柱 SPACER SUPPORT — 3-123-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| ★ THM−5 | 5.0 | 8.0 | 6.0 | M5 | 2000 |
| THM−17 | 17.0 | 5.0 | 5.0 | #6−32 | 1000 |



## 六角型间隔柱 SPACER SUPPORT — 3-123-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| THC−13 | 13.0 | 5.0 | 5.0 | #6−32 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 六角型间隔柱 SPACER SUPPORT — 3-124-1

- MATERIAL: NYLON 66(UL), PPS(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- SCREW MATERIAL: BRASS




| | PART NO | MATERIAL | A | B | C | D SCREW | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| | TH3F-6R | N66 | 6.0 | 6.0 | 3.5 | M3 | 2.9 | 500 |
| | TH3F-712G | PPS | 12.0 | 7.0 | 6.0 | M3 | 4.0 | |
| ★ | TH3F-653A | PPS | 53.5 | 6.4 | 6.0 | M3 | 7.0 | 200 |
| ★ | TH4F-818 | N66 | 18.0 | 8.0 | 6.0 | M4 | 6.0 | 500 |
| | THU6-712F | PPS | 12.0 | 7.0 | 6.0 | #6-32 | 4.5 | |



## 六角型间隔柱 SPACER SUPPORT — 3-124-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- SCREW MATERIAL: BRASS




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| THT-6U12 | 12.0 | 6.5 | 6.0 | #6-32 | 500 |

## 六角型间隔柱 SPACER SUPPORT — 3-124-3

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- SCREW MATERIAL: BRASS




| | PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | HTH-22A | 22.0 | 6.4 | 5.0 | M3 | 200 |
| | HTH-77K | 77.5 | 6.4 | 7.0 | M3 | 100 |
| | HTH-81C | 81.5 | 6.4 | 7.0 | M3 | |



## P.C.B 板支撑柱 P.C.B SUPPORT — 3-124-4

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| | DPX-02 | 2.3 | ø2.0 | ø3.0 | 2000 |
| ★ | DPX-5 | 2.8 | ø1.6 | ø5.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 间隔柱 SPACER SUPPORT — 3-125-1

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CBD-10SA | 10.0 | 14.65 | ø8.0 | ø4.6 | 1.2 | 1000 |



## 间隔柱 SPACER SUPPORT — 3-125-2

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CBD-21HR | 21.3 | 24.85 | ø12.0 | ø3.8 | 0.6~0.8 | 500 |
| CBD-28AP | 28.5 | 32.05 | ø10.0 | ø3.8 | 0.6~0.8 | |
| CBD-28PQ | 28.8 | 32.6 | ø10.0 | ø3.8 | 0.9~1.0 | |
| CBD-29M | 29.5 | 33.05 | ø10.0 | ø3.8 | 0.6~0.8 | |
| CBD-31MA | 31.5 | 35.05 | ø10.0 | ø3.8 | 0.6~0.8 | |

## 间隔柱 SPACER SUPPORT — 3-125-3

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CBD-25A | 25.4 | 29.9 | ø13.3 | ø4.5 | 0.6~0.8 | 500 |
| CBD-27F | 27.2 | 31.1 | ø15.0 | ø4.8 | 0.8~1.0 | |
| CBD-33AC | 33.1 | 36.75 | ø13.4 | ø4.6 | 0.5~0.6 | |
| CBD-33P | 33.0 | 36.9 | ø13.3 | ø4.6 | 0.5~0.8 | |

## 间隔柱 SPACER SUPPORT — 3-125-4

- MATERIAL: PC(UL)
- COLOR: CLEAR

Built-In Anti-Spin Function

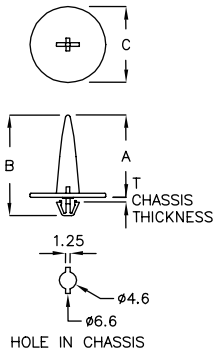


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| KFD-21A | 21.75 | 26.65 | ø20.0 | 0.6 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 间隔柱 SPACER SUPPORT 3-126-1

- MATERIAL: PC(UL)
- COLOR: CLEAR

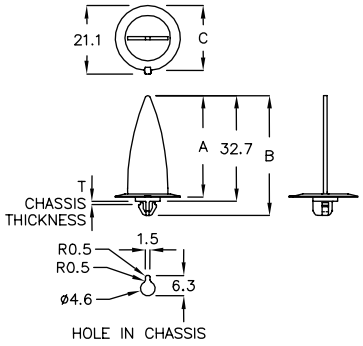


Built-In Anti-Spin Function

| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| KFL-31FD | 31.4 | 37.0 | ø20.0 | 0.6~0.8 | 500 |

## 间隔柱 SPACER SUPPORT 3-126-2

- MATERIAL: PC(UL)
- COLOR: CLEAR

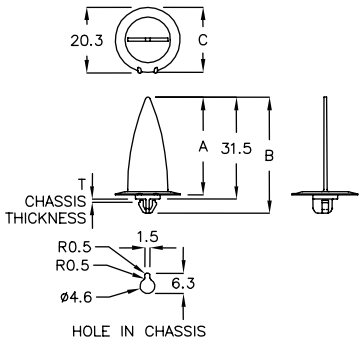


Built-In Anti-Spin Function

| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| KFJ-30G | 30.2 | 35.8 | ø20.0 | 0.8 | 500 |

## 间隔柱 SPACER SUPPORT 3-126-3

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CBL-42CY | 42.6 | 47.1 | ø15.0 | ø5.0 | 1.2~1.3 | 500 |

## 间隔柱 SPACER SUPPORT 3-126-4



- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CBLA-18JL | 18.5 | 22.8 | ø18.0 | ø4.6 | 0.8 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 间隔柱 SPACER SUPPORT 3-127-1

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CBL-42MK | 40.0 | 44.1 | ø15.0 | ø5.2 | 1.0~1.3 | 500 |

## 间隔柱 SPACER SUPPORT 3-127-2

- MATERIAL: PC(UL)
- COLOR: WHITE, CLEAR

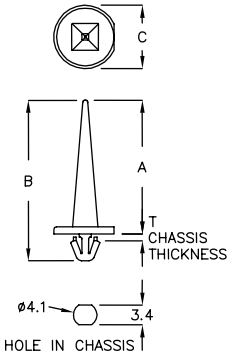


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| FXA-30Y | 30.5 | 35.1 | ø11.0 | 0.8~1.0 | 500 |
| FXA-35PC | 35.8 | 40.4 | ø11.0 | 1.05 | |
| FXA-39A | 39.4 | 44.0 | ø11.0 | 1.05 | |

## 间隔柱 SPACER SUPPORT 3-127-3

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | B | C | H HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SUP-23A | 24.0 | 28.9 | ø20.0 | ø5.0 | 0.6~0.8 | 500 |
| SUP-34D | 34.0 | 38.9 | ø20.0 | ø5.0 | 0.6~0.8 | |

## 间隔柱 SPACER SUPPORT 3-127-4

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | C | D | E | PACKAGE |
|---|---|---|---|---|---|
| FJW-18PQ | 18.8 | 10.0 | ø4.0 | ø6.5 | 500 |
| FJW-25T | 25.2 | 10.0 | ø4.0 | ø6.5 | |
| FJW-27AK | 27.2 | 10.0 | ø4.0 | ø6.5 | |
| FJW-27HM | 27.2 | 10.0 | ø4.3 | ø8.5 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 间隔柱 SPACER SUPPORT 3-128-1

- MATERIAL: PC(UL)
- COLOR: WHITE




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CBPA-18C | 18.2 | ø18.0 | 200 |

## 间隔柱 SPACER SUPPORT 3-128-2

- MATERIAL: PC(UL)
- COLOR: WHITE
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FZA-12TC | 13.05 | 20.0 | 20.0 | 500 |
| FZA-26FD | 26.15 | 20.0 | 20.0 | |
| FZA-30PJ | 30.15 | 20.0 | 25.0 | |

## 间隔柱 SPACER SUPPORT 3-128-3

- MATERIAL: PC(UL)
- COLOR: CLEAR

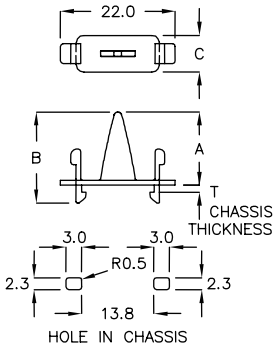


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| DCRJ-14MK | 14.0 | 17.4 | 7.0 | 1.0~1.2 | 500 |



## 间隔柱 SPACER SUPPORT 3-128-4

- MATERIAL: PC(UL)
- COLOR: WHITE

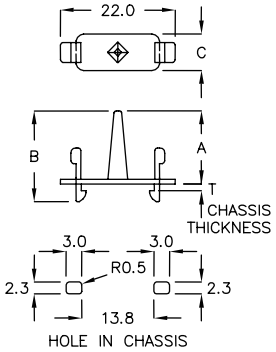


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| DCR-14H | 14.0 | 17.4 | 7.0 | 1.0~1.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 间隔柱 SPACER SUPPORT 3-129-1

- MATERIAL: PC(UL)
- COLOR: CLEAR
- ADHESIVE TAPE: GENERAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FJH-12YK | 12.55 | 20.0 | 20.0 | 500 |
| FJH-19CY | 19.25 | 20.0 | 20.0 | |



## 间隔柱 SPACER SUPPORT 3-129-2

- MATERIAL: PC(UL)
- COLOR: CLEAR
- ADHESIVE TAPE: GENERAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FJH-29K | 29.65 | 20.0 | 20.0 | 500 |
| FJH-30 | 30.15 | 20.0 | 20.0 | |
| FJH-33M | 33.72 | 20.0 | 20.0 | |



## 间隔柱 SPACER SUPPORT 3-129-3

- MATERIAL: PC(UL)
- COLOR: CLEAR
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FJH-14CR | 14.35 | 22.0 | 27.0 | 500 |
| FJH-19KT | 19.9 | 22.0 | 27.0 | |
| FJH-20MA | 20.7 | 30.0 | 25.0 | |
| FJH-21DP | 21.85 | 20.0 | 20.0 | |
| FJH-21GK | 21.65 | 22.0 | 27.0 | |
| FJH-21MD | 21.65 | 22.0 | 27.0 | |

## 间隔柱 SPACER SUPPORT 3-129-4

- MATERIAL: PC(UL)
- COLOR: CLEAR




此产品亦可贴背胶
OPTIONAL WITH ADHESIVE TAPE ON BASE

| PART NO | A | D | E | PACKAGE |
|---|---|---|---|---|
| FMY-22C | 22.0 | ø4.2 | ø3.7 | 500 |

## 间隔柱 SPACER SUPPORT 3-130-1

- MATERIAL: PC(UL)
- COLOR: CLEAR




此产品亦可贴背胶
OPTIONAL WITH ADHESIVE TAPE ON BASE

| PART NO | A | D | E | PACKAGE |
|---|---|---|---|---|
| FMY-21TC | 21.5 | ø4.2 | ø3.7 | 200 |
| FMY-22KP | 22.0 | ø4.2 | ø3.7 | |

## 间隔柱 SPACER SUPPORT 3-130-2

- MATERIAL: PC(UL)
- COLOR: CLEAR




此产品亦可贴背胶
OPTIONAL WITH ADHESIVE TAPE ON BASE

| PART NO | A | D | E | PACKAGE |
|---|---|---|---|---|
| FMG-19LH | 19.9 | ø5.5 | ø3.9 | 500 |

## 间隔柱 SPACER SUPPORT 3-130-3

- MATERIAL: PC(UL)
- COLOR: CLEAR




此产品亦可贴背胶
OPTIONAL WITH ADHESIVE TAPE ON BASE

| PART NO | A | D | E | PACKAGE |
|---|---|---|---|---|
| FMQ-21MC | 21.5 | ø4.2 | ø3.5 | 500 |

## 间隔柱 SPACER SUPPORT 3-130-4

- MATERIAL: PC(UL)
- COLOR: CLEAR

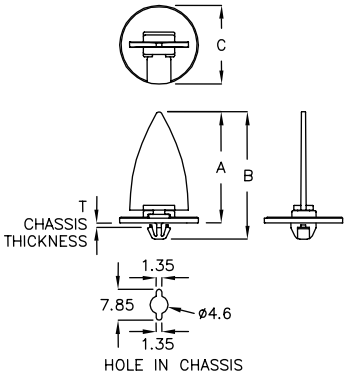


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| KFDX-28M | 28.3 | 32.4 | ø20.0 | 0.8 | 500 |


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 04

## LED座
## LED HOUSING

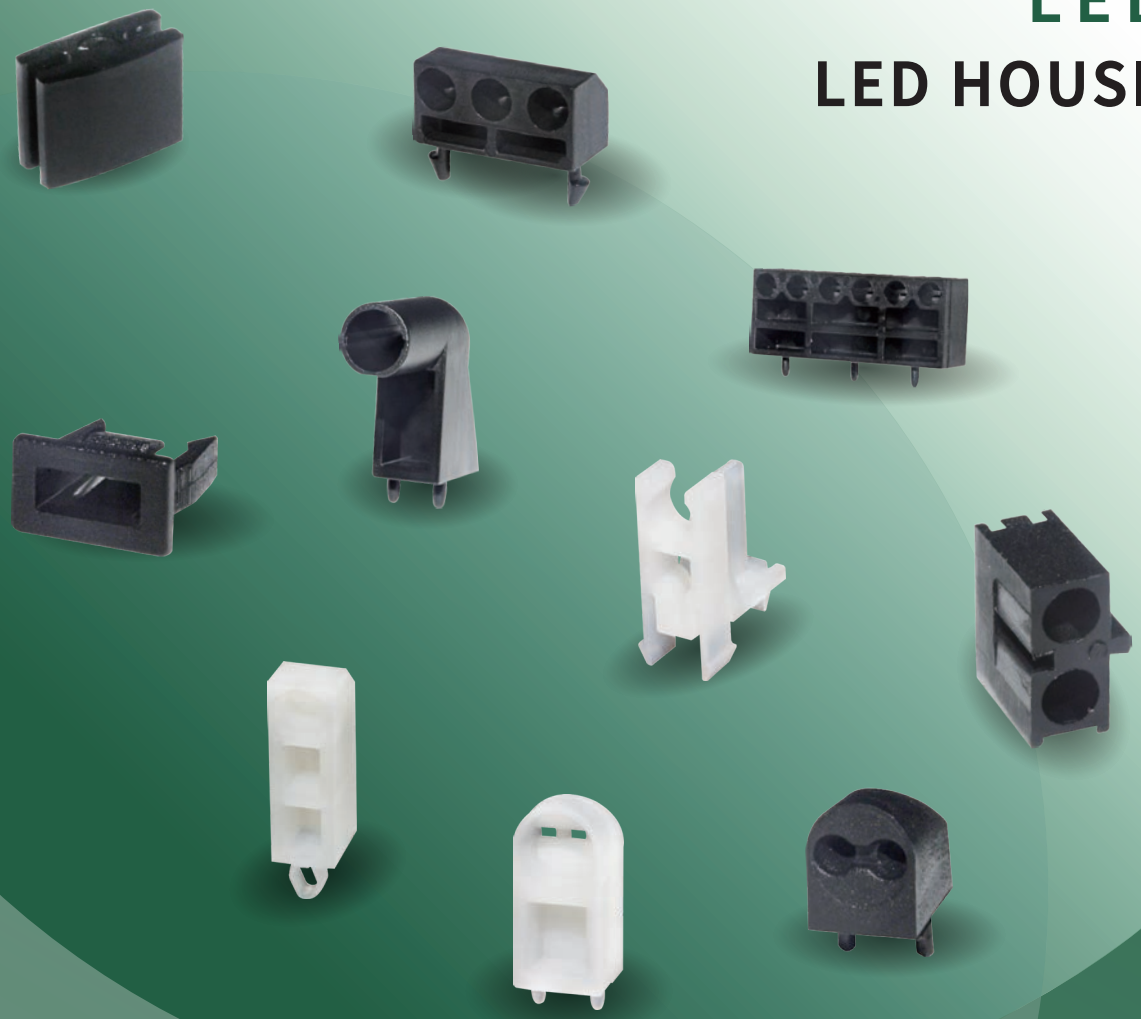

## LED套
## LED HOLDER

## LED套 LED HOLDER 4-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEQ-9 | 6.6 | 2000 |



## LED套 LED HOLDER 4-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEQ-1 | 2.6 | 2000 |



## LED套 LED HOLDER 4-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

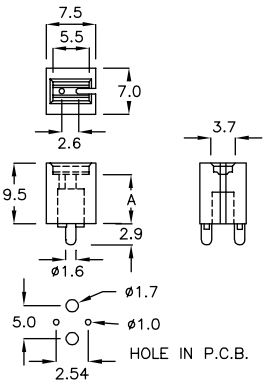


| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED-2x10 | 7.8 | 1000 |

## LED套 LED HOLDER 4-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEQ-3T | 3.0 | 6.5 | 2000 |
| LEQ-4T | 4.0 | 7.5 | |

## LED套 LED HOLDER 4-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED-13.5 | 13.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEJ-3 | 3.3 | 2000 |

## LED 座 LED HOUSING 4-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

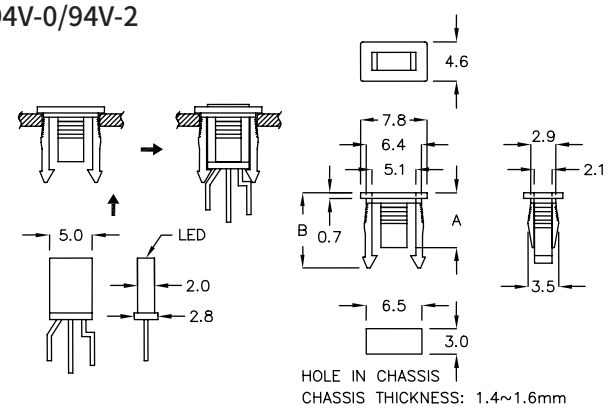


| FOR QUADRATE 2PIN,3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| SLED-1 | 5.2 | 7.8 | 2000 |
| SLED-2M | 6.2 | 8.6 | |

## LED 座 LED HOUSING 4-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

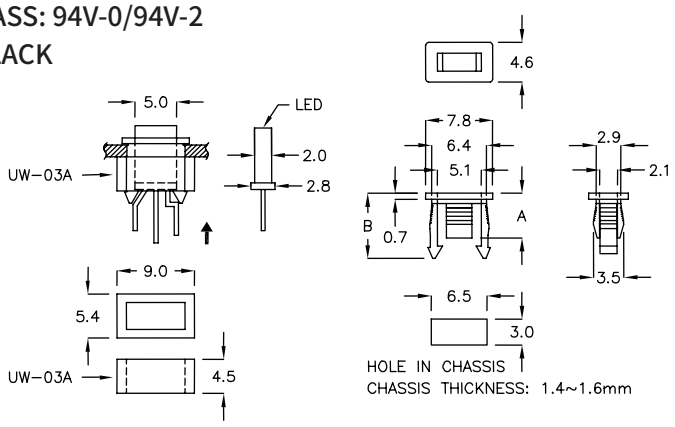


| FOR QUADRATE 2PIN,3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| SLED-2 | 5.2 | 7.6 | 2000 |

ALSO CAN ASSEMBLE WITH UW-03A



## LED 套 LED HOLDER 4-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR QUADRATE 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDH-04 | 4.0 | 5.1 | 2000 |
| EDH-4A | 4.5 | 5.1 | |
| EDH-9CF | 9.5 | 5.1 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED-3x3 | 3.2 | 2000 |
| LED3x4 | 4.0 | |

## LED 套 LED HOLDER 4-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function




| FOR QUADRATE 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED-3x2KQ | 2.1 | 2000 |



## LED 套 LED HOLDER 4-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| QLG-4S | 3.8 | 7.6 | 3.5 | 2000 |

## LED 套 LED HOLDER 4-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | D | E | PACKAGE |
| QLE-1MH | 1.5 | ø1.4 | 3.7 | 2000 |
| QLE-12C | 12.0 | ø1.45 | 3.9 | 1000 |

## LED 套 LED HOLDER 4-4-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | D | PACKAGE |
| QLE-3 | 3.0 | ø1.1 | 2000 |
| QLE-4B | 3.8 | | |
| QLE-5B | 5.1 | | |
| QLE-5M | 5.5 | | |
| QLE-7B | 7.0 | | |
| QLE-8B | 8.0 | | |
| QLE-10 | 10.0 | ø1.1 | 1000 |
| QLE-12 | 12.0 | ø1.45 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | D | PACKAGE |
| QLE-4 | 4.0 | ø1.1 | 2000 |
| QLE-5 | 5.0 | | |
| QLE-6 | 6.0 | | |
| QLE-7 | 7.0 | | |
| QLE-8 | 8.0 | | |
| QLE-9 | 9.0 | ø1.1 | 1000 |
| QLE-10A | 10.0 | ø1.45 | |
| QLE-11 | 11.0 | | |
| QLE-12A | 12.0 | ø1.1 | |
| QLE-13 | 13.0 | | |
| QLE-14 | 14.0 | | |
| QLE-15 | 15.0 | | |

## LED 套 LED HOLDER 4-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR QUADRATE 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | D | PACKAGE |
| QLEH-4A | 4.5 | ø1.1 | 2000 |

## LED 套 LED HOLDER 4-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function




| FOR QUADRATE 3PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | F | PACKAGE |
| QLE-02 | 2.0 | 3.5 | 7.3 | 1.0 | 1.2 | 2000 |
| QLE-3HA | 3.0 | 3.0 | 6.5 | 1.0 | 2.2 | |

## LED 套 LED HOLDER 4-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

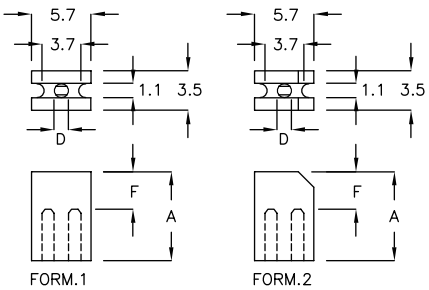


Built-In Clamp Function

| FOR QUADRATE 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | F | D | FORM | PACKAGE |
| QLE-8LR | 8.5 | 3.5 | ø1.1 | 2 | 1000 |
| QLE-9AK | 9.0 | 4.0 | ø1.1 | 1 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 套 LED HOLDER 4-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| QLK-5M | 5.4 | 2000 |
| QLK-6 | 6.0 | |
| QLK-7 | 6.9 | |
| QLK-8 | 8.0 | |
| QLK-9 | 9.0 | 1000 |
| QLK-10 | 10.0 | |
| QLK-11 | 11.0 | |
| QLK-12 | 12.0 | |
| QLK-13 | 13.0 | |
| QLK-14 | 14.0 | |
| QLK-15 | 14.9 | |
| QLK-16 | 15.9 | |
| QLK-17 | 17.0 | |
| QLK-18 | 18.0 | |
| QLK-18A | 18.5 | |
| QLK-19 | 19.0 | |



## LED 套 LED HOLDER 4-6-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

| FOR QUADRATE LED 3PIN | | | |
|---|---|---|---|
| PART NO | A | D | PACKAGE |
| QLB-9NC | 9.0 | ø1.1 | 1000 |

## LED 套 LED HOLDER 4-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR QUADRATE 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLQ-6 | 6.0 | 8.0 | 2000 |



## LED 套 LED HOLDER 4-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

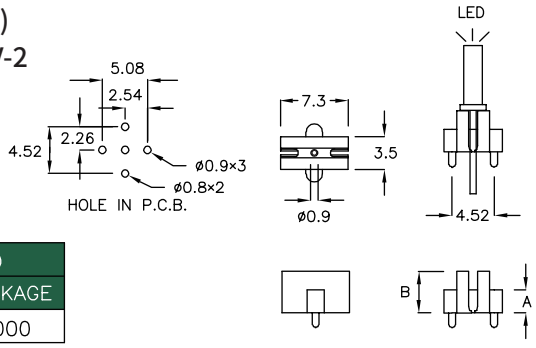


Built-In Clamp Function

| FOR QUADRATE 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLK-4T | 2.5 | 4.5 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø5 4PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EDE—3A | 3.5 | 3.0 | 5.8 | 2000 |
| EDE—04 | 4.0 | 3.0 | 5.8 | |
| EDE—4A | 4.5 | 3.0 | 5.8 | |
| EDE—05 | 5.0 | 3.0 | 5.8 | |
| EDE—5A | 5.5 | 3.0 | 5.8 | |

Built—In Clamp Function

| FOR ø5 4PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EDE—06 | 6.0 | 3.0 | 5.8 | 2000 |
| EDE—6A | 6.5 | 3.0 | 5.8 | |
| EDE—07 | 7.0 | 3.0 | 5.8 | |
| EDE—7A | 7.5 | 3.0 | 5.8 | |
| EDE—08 | 8.0 | 3.0 | 5.8 | |
| EDE—8A | 8.5 | 3.0 | 5.8 | |
| EDE—09 | 9.0 | 3.0 | 5.8 | |
| EDE—10A | 10.5 | 3.0 | 5.8 | |
| EDE—11 | 11.0 | 3.0 | 5.8 | |
| EDE—11A | 11.5 | 3.0 | 5.8 | |
| EDE—12A | 12.5 | 3.0 | 5.8 | |
| EDE—15 | 15.0 | 3.0 | 5.8 | |



## LED 套 LED HOLDER 4-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

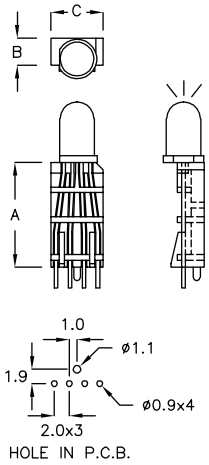


| FOR ø5 4PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EES—15 | 15.0 | 3.9 | 7.5 | 2000 |

## LED 座 LED HOUSING 4-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR QUADRATE 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDF—09 | 9.0 | 11.7 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| FOR QUADRATE 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EKL-01 | 4.4 | 1.27 | 1000 |

## LED 座 LED HOUSING 4-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

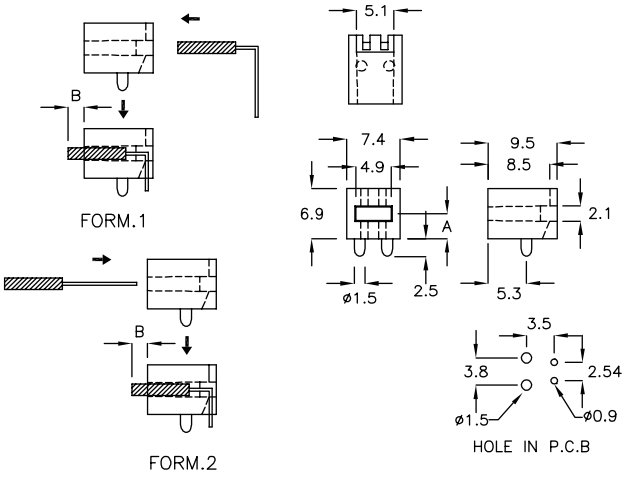


| FOR QUADRATE 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | FORM | PACKAGE |
| LEA-5 | 3.45 | 0 | 1 | 500 |
| LEA-5A | 3.45 | 4.3 | 2 | |
| LEA-5C | 3.45 | 2.8 | 2 | |



## LED 座 LED HOUSING 4-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

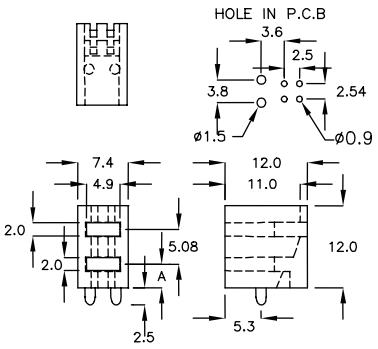


| FOR QUADRATE 2 PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 2LEA-5 | 3.45 | 500 |



Built-In Clamp Function

## LED 座 LED HOUSING 4-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

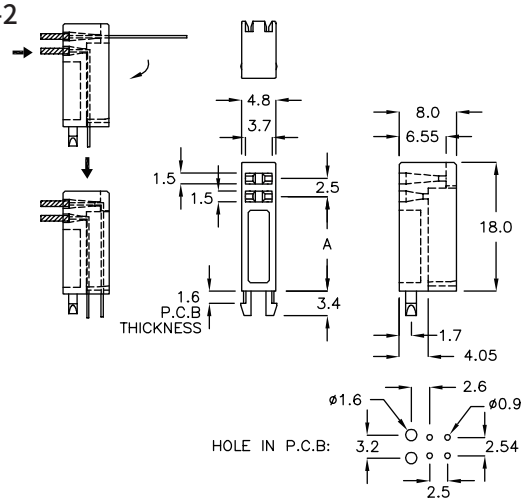


| FOR QUADRATE 2 PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 2LEA-3AK | 13.25 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDR—4A | 4.5 | 8.2 | 1000 |

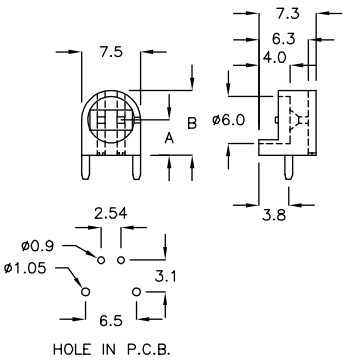

## LED 座 LED HOUSING 4-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEL—4TQ | 4.0 | 7.8 | 1000 |

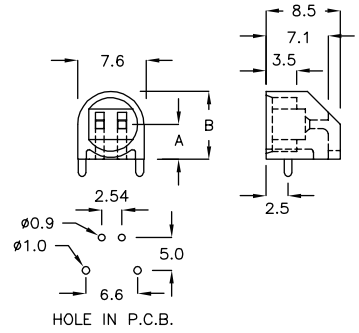

## LED 座 LED HOUSING 4-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

Built—In Clamp Function

| FOR ø5 , ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | PACKAGE |
| LED—2F | 3.0 | 5.6 | ø5.0 | ø4.1 | 2.0 | 3.5 | 1000 |



## LED 座 LED HOUSING 4-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | F | PACKAGE |
| LED—3F | 3.0 | 4.8 | ø5.0 | 4.2 | 1000 |






## LED 座 LED HOUSING 4-9-5

- MATERIAL: NYLON 66(UL)+GREEN LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2 PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | PACKAGE |
| LED—3F—10 | 3.0 | 5.6 | 3.5 | 4.2 | 4.9 | 500 |

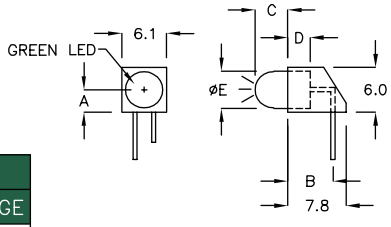


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 座 LED HOUSING 4-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED—5F | 4.3 | 8.4 | 8.6 | 1000 |



## LED 座 LED HOUSING 4-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLC—3F | 3.9 | 7.0 | 2000 |



## LED 座 LED HOUSING 4-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| FOR ø5 2 PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEH5—4.5 | 4.5 | 1000 |
| LEH5—6 | 6.0 | |
| LEH5—7 | 7.0 | |
| LEH5—8 | 8.0 | |
| LEH5—9 | 9.0 | |
| LEH5—10 | 10.0 | |



## LED 座 LED HOUSING 4-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LEH5—3T | 3.0 | 2.5 | ø1.0 | 1000 |
| LEH5—4.5T | 4.5 | 2.5 | ø1.1 | |
| LEH5—6T | 6.0 | 2.5 | ø1.0 | |
| LEH5—7T | 7.0 | | | |
| LEH5—8T | 8.0 | 2.9 | ø1.0 | |
| LEH5—9T | 9.0 | | | |
| LEH5—10T | 10.0 | | | |
| LEH5—12.5T | 12.5 | | | |
| LEH5—16T | 16.0 | | | |

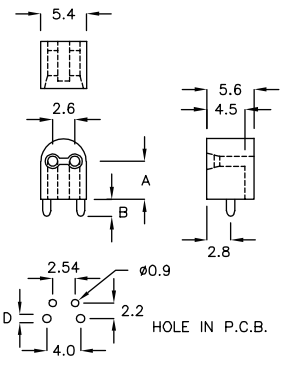




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

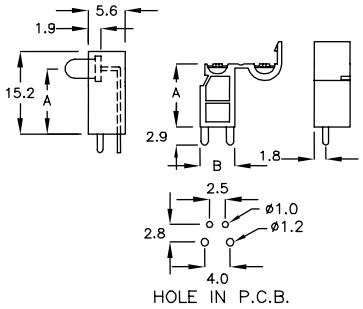


Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LJA—12A | 12.5 | 5.4 | 500 |

## LED 座 LED HOUSING 4-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

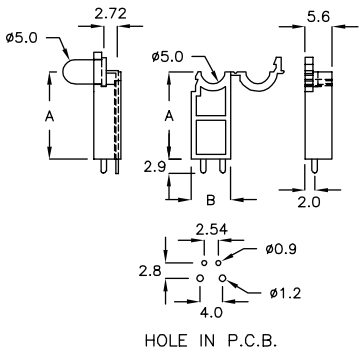


Built—In Clamp Function

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLJ—18 | 18.0 | 8.1 | 500 |

## LED 座 LED HOUSING 4-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

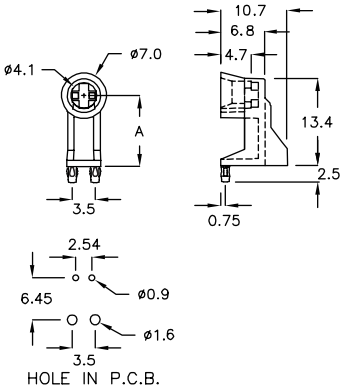


Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| QQD—10A | 10.9 | 500 |



## LED 座 LED HOUSING 4-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

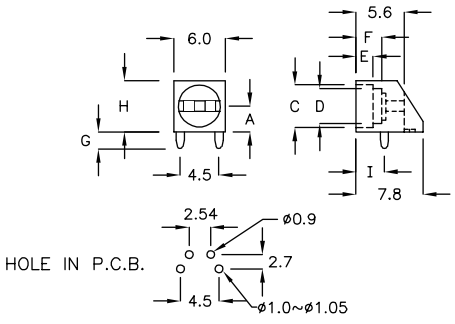


Built—In Clamp Function

| FOR ø5 , ø3 2PIN LED | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | C | D | E | F | G | H | I | PACKAGE |
| LED—2C | 3.0 | ø5.0 | ø4.1 | 2.7 | 4.2 | 3.2 | 6.0 | 3.3 | 1000 |
| LED—2Y | 3.0 | ø5.0 | ø4.1 | 2.0 | 3.0 | 3.2 | 6.0 | 3.4 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 座 LED HOUSING 4-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

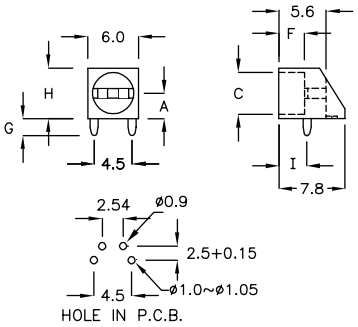


Built—In Clamp Function

| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | C | F | G | H | I | PACKAGE |
| LED—3Y | 4.0 | ø4.1 | 1.4 | 2.5 | 7.0 | 3.3 | 1000 |
| LED—3YK | 4.0 | ø3.3 | 1.4 | 2.5 | 7.0 | 3.3 | |
| LED—4Y | 3.0 | ø4.1 | 1.4 | 1.5 | 6.0 | 3.3 | |

## LED 座 LED HOUSING 4-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED—5Y | 3.0 | 500 |



## LED 座 LED HOUSING 4-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

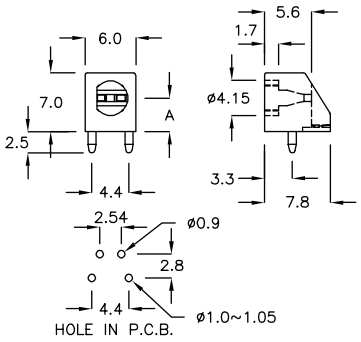


Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED—4WK | 4.0 | 1000 |



## LED 座 LED HOUSING 4-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| ELA—01 | 3.0 | 500 |

## LED 座 LED HOUSING 4-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED—10Y | 10.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEF5-5 | 5.1 | 1000 |



## LED 座 LED HOUSING 4-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEF-16HF | 16.6 | 500 |



## LED 座 LED HOUSING 4-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LMD-5A | 5.1 | 7.3 | 1000 |



## LED 座 LED HOUSING 4-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| EEW-6A | 6.35 | 1000 |

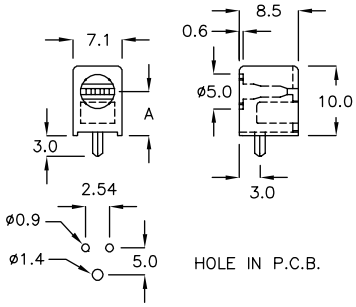




## LED 座 LED HOUSING 4-13-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET3-4AK | 4.0 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 座 LED HOUSING 4-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET5-3T | 3.3 | 1000 |



## LED 座 LED HOUSING 4-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET5-4.5T | 3.8 | 1000 |

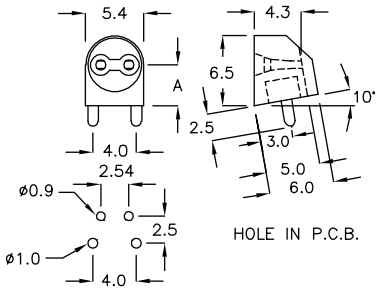

## LED 座 LED HOUSING 4-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET5-5A | 6.4 | 1000 |

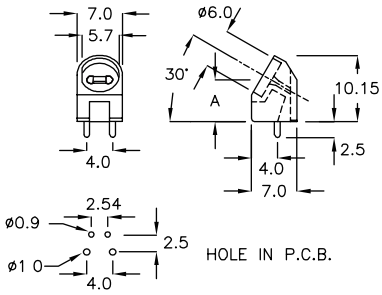

## LED 座 LED HOUSING 4-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET5-06 | 5.0 | 1000 |



## LED 座 LED HOUSING 4-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET5-2C | 2.0 | 2000 |

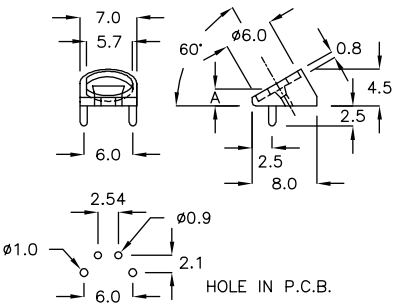




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 座 LED HOUSING 4-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LET5—4CK | 4.0 | 1000 |

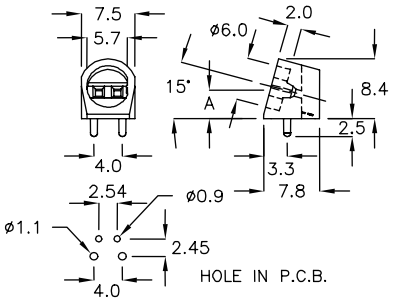

## LED 座 LED HOUSING 4-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | PACKAGE |
| LET5—2DF | 2.0 | 2.0 | 5.0 | 2.3 | 8.65 | 2.65 | 75° | 1000 |
| LET5—3MQ | 3.0 | 2.0 | 7.25 | 3.35 | 8.85 | 3.9 | 45° | |

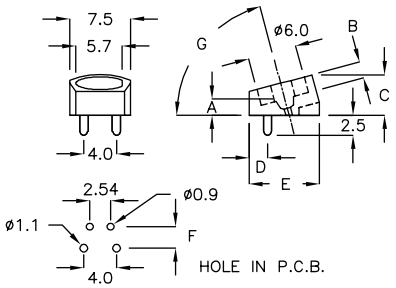

## LED 座 LED HOUSING 4-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLC—3A | 3.4 | 3.5 | 2000 |

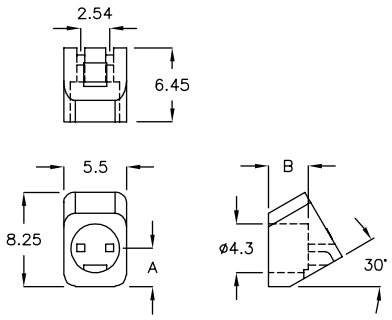




## LED 座 LED HOUSING 4-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLX—3K | 3.4 | 3.5 | 1000 |

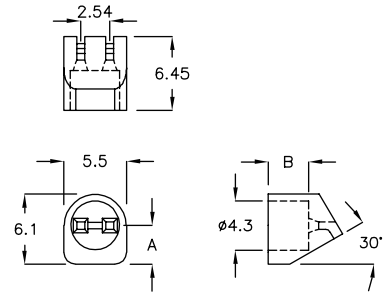




## LED 座 LED HOUSING 4-15-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EKF—1A | 1.8 | 6.0 | 2000 |

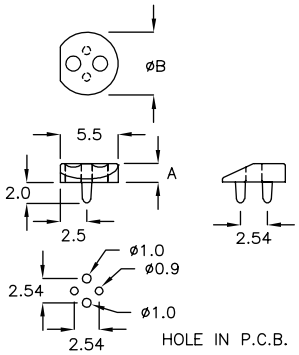


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEN—3A | 4.3 | 5.5 | 1000 |

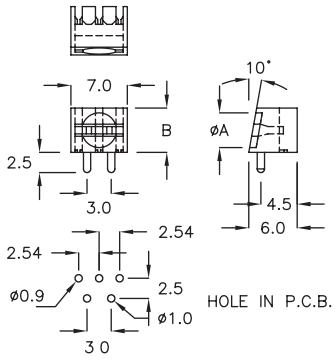




## LED 座 LED HOUSING 4-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QLA—05 | 4.1 | 3.45 | 2000 |






## LED 座 LED HOUSING 4-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEH5—4MT | 4.5 | 500 |



## LED 座 LED HOUSING 4-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| EDT—7A | 9.5 | 1000 |

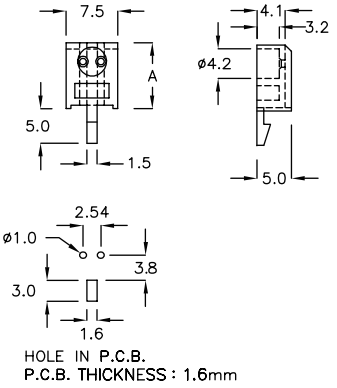

## LED 座 LED HOUSING 4-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | PACKAGE |
| LEM3—16 | 16.0 | 18.5 | ø4.1 | 5.0 | 5.6 | 3.0 | 500 |
| LEM4—16 | 16.0 | 18.6 | ø4.2 | 5.1 | 5.7 | 2.0 | |

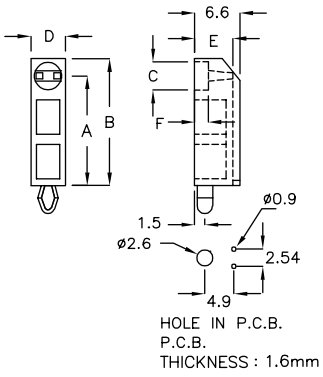




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## LED 座 LED HOUSING 4-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEM4—20A | 20.5 | 23.0 | 500 |






## LED 座 LED HOUSING 4-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EKC—20A | 20.5 | 23.0 | 500 |

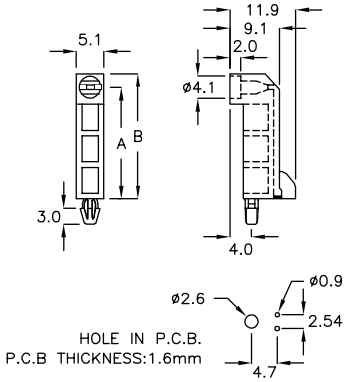




## LED 座 LED HOUSING 4-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR QUADRATE 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDW—10 | 10.0 | 12.0 | 1000 |

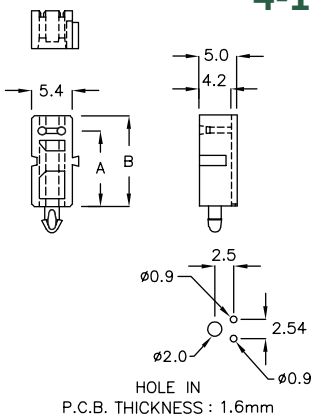

## LED 座 LED HOUSING 4-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEX—18T | 18.0 | 500 |

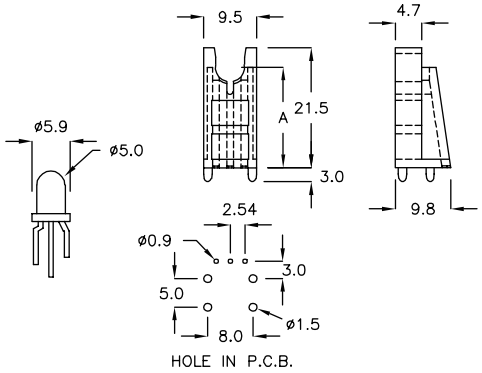

## LED 座 LED HOUSING 4-17-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | C | PACKAGE |
| LEW—18T | 18.0 | 0.5 | 500 |
| LEI—18T | 18.0 | 0.3 | |

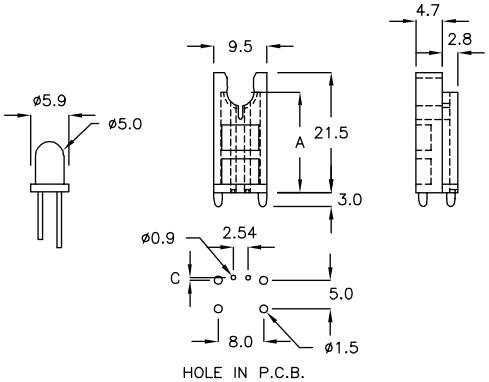


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

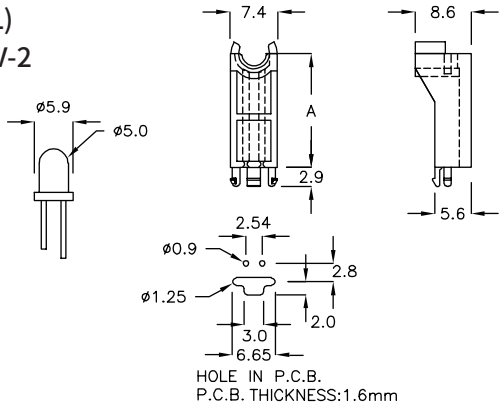


Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LJD—18 | 17.5 | 500 |

## LED 座 LED HOUSING 4-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

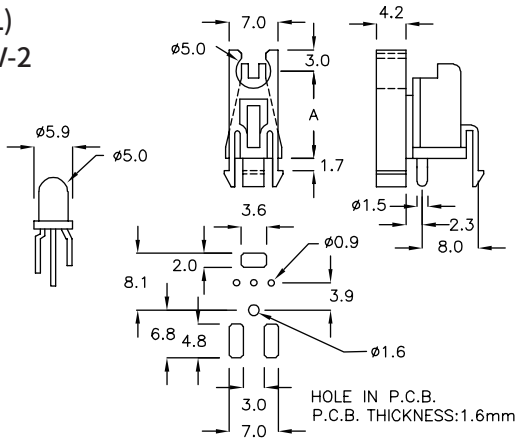


| FOR ø5 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED—5AT | 12.5 | 500 |

## LED 座 LED HOUSING 4-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

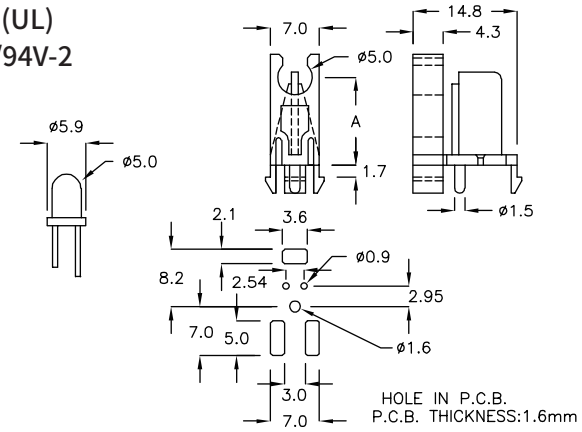


| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED—5BT | 12.5 | 500 |



## LED 座 LED HOUSING 4-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

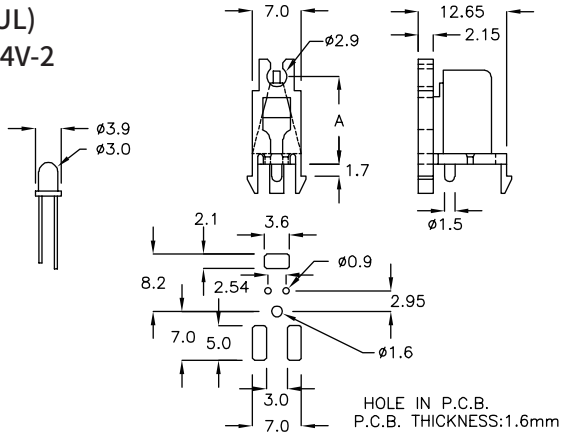


| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LED—3BT | 12.5 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

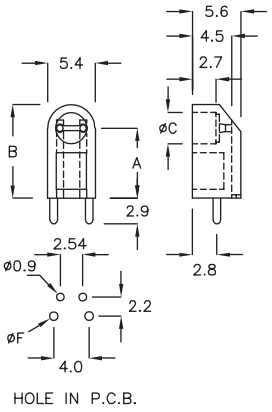


Built—In Clamp Function

| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | F | PACKAGE |
| LEG3—6A | 6.5 | 9.2 | ø3.6 | 1.1 | 1000 |
| LEG3—8T | 8.0 | 10.7 | ø3.6 | 1.0 | |
| LEG3—10F | 10.6 | 13.3 | ø4.1 | 1.0 | 500 |
| LEG3—11C | 11.6 | 14.3 | ø4.1 | 1.0 | 2000 |

## LED 座 LED HOUSING 4-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

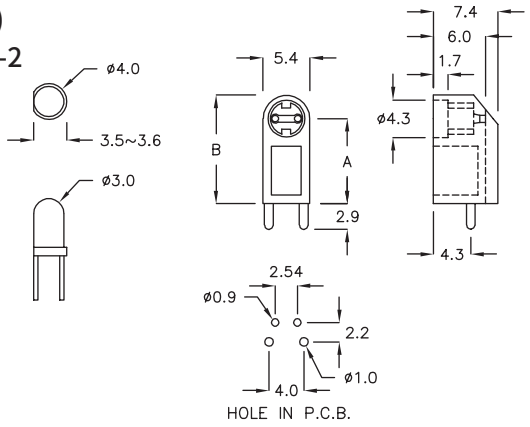


Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEG3—9JQ | 9.7 | 12.4 | 500 |

## LED 座 LED HOUSING 4-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

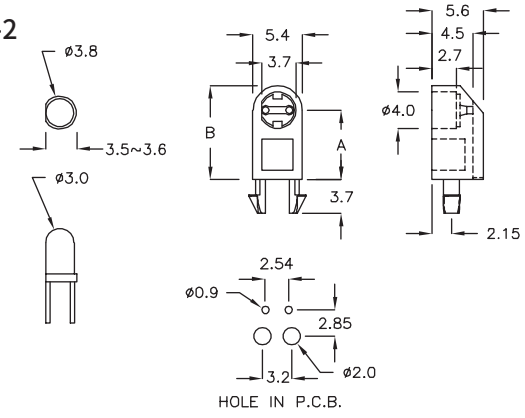


Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEG3—7ML | 7.5 | 10.2 | 1000 |

## LED 座 LED HOUSING 4-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

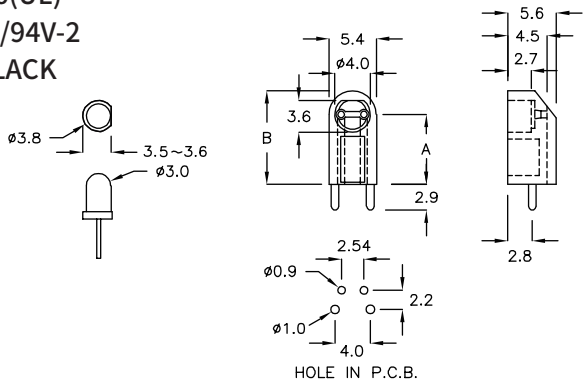


Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEG3—10NQ | 10.6 | 13.3 | 500 |

## LED 座 LED HOUSING 4-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDJ—12 | 12.0 | 15.8 | 500 |

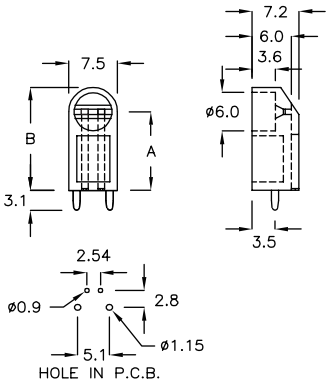




## LED 座 LED HOUSING 4-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEM—14A | 14.5 | 17.75 | 500 |



## LED 座 LED HOUSING 4-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| EEH—9A | 10.0 | 2000 |



## LED 座 LED HOUSING 4-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEH5—19K | 19.0 | 21.7 | 1000 |

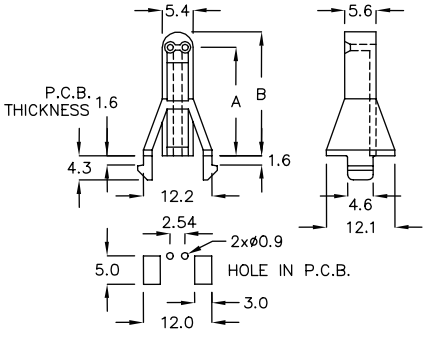




## LED 座 LED HOUSING 4-20-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEC—03 | 3.05 | 5.6 | 1000 |

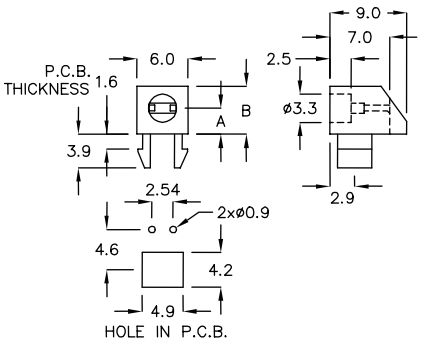




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EEK—6A | 6.1 | 9.1 | 5.2 | 1000 |

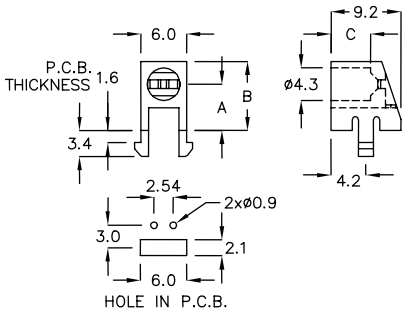

## LED 座 LED HOUSING 4-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built—In Clamp Function

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDL—03 | 3.0 | 7.0 | 1000 |

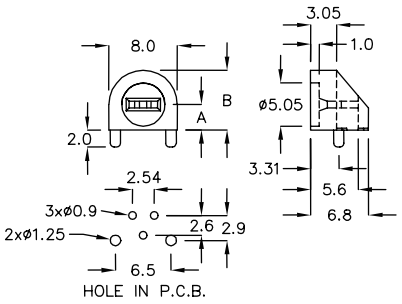

## LED 座 LED HOUSING 4-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EKN—05A | 3.0 | 10.0 | 2.0 | 500 |

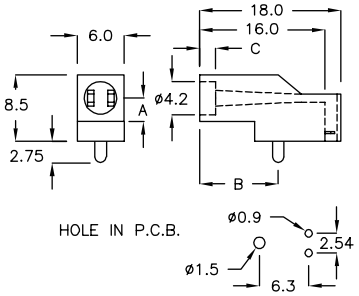

## LED 座 LED HOUSING 4-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| QQR—7A | 7.0 | 500 |

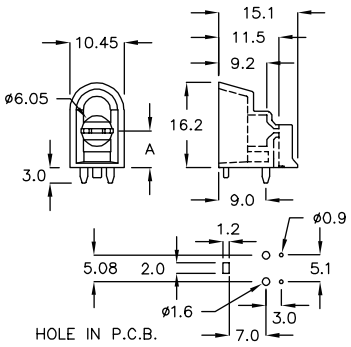




## LED 座 LED HOUSING 4-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDC—05 | 5.0 | 8.2 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EKT-4C | 4.0 | 6.3 | 2000 |



## LED 座 LED HOUSING 4-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EKB-04 | 4.0 | 6.6 | 1000 |



## LED 座 LED HOUSING 4-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LER-4 | 4.0 | 8.0 | 1000 |

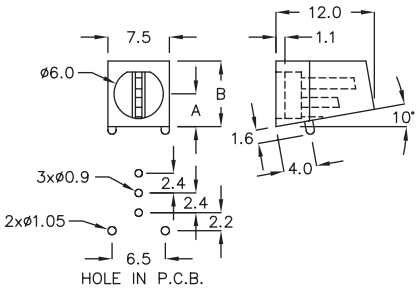

## LED 座 LED HOUSING 4-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEKC-5A | 4.0 | 7.6 | 500 |

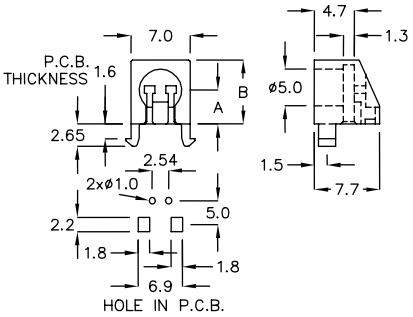

## LED 座 LED HOUSING 4-22-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEK5-5TX | 4.6 | 8.1 | 500 |

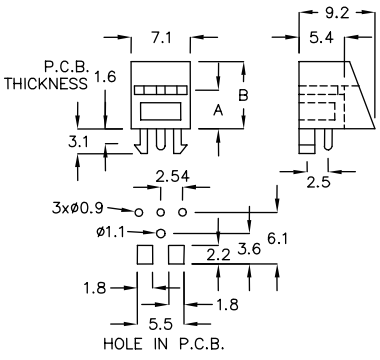




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDA-11 | 16.0 | 20.0 | 500 |



## LED 座 LED HOUSING 4-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDM-05 | 5.0 | 8.2 | 1000 |

## LED 座 LED HOUSING 4-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

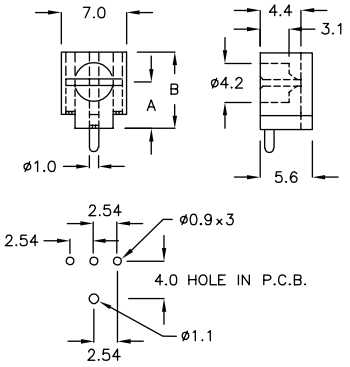


Built-In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDM-5C | 5.0 | 8.2 | 1000 |

## LED 座 LED HOUSING 4-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

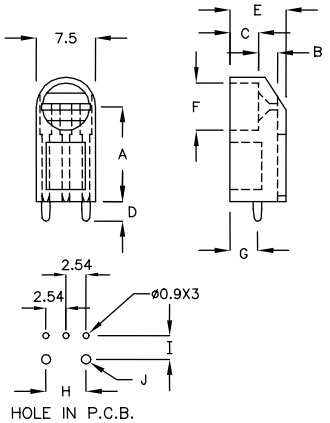


Built-In Clamp Function

| FOR ø5 3PIN LED | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | H | I | J | PACKAGE |
| LEE-12 | 12.0 | 2.5 | 3.6 | 3.1 | 7.1 | ø6.0 | 3.5 | 5.08 | 3.0 | ø1.2 | |
| LEK2-10T | 9.5 | 2.0 | 4.0 | 3.0 | 7.1 | ø6.1 | 3.5 | 5.08 | 3.0 | ø1.2 | |
| LEK2-12T | 12.0 | 2.5 | 3.6 | 2.5 | 7.1 | ø6.0 | 3.5 | 5.08 | 3.0 | ø1.2 | 500 |
| LEK2-13T | 13.5 | 2.1 | 3.9 | 2.5 | 7.1 | ø6.0 | 3.8 | 6.5 | 2.7 | ø1.05 | |
| LEK2-18T | 17.5 | 2.4 | 3.6 | 3.0 | 7.0 | ø6.0 | 3.5 | 5.08 | 3.0 | ø1.2 | |
| LEK4-4T | 4.0 | 4.6 | 1.0 | 3.0 | 6.6 | ø6.2 | 3.8 | 6.5 | 2.5 | ø1.05 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

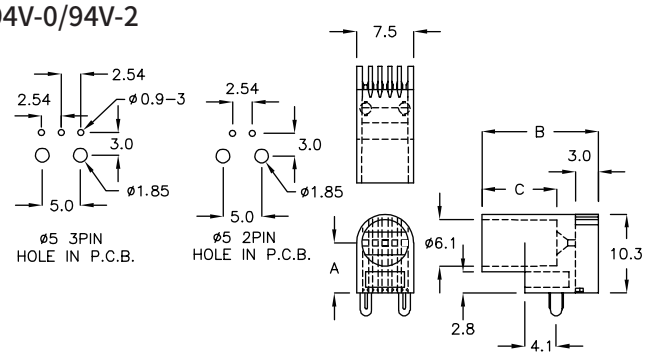


Built–In Clamp Function

| FOR ø5 2PIN & ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| QLT–6A | 6.55 | 14.0 | 8.6 | 500 |
| QLT–6C | 6.55 | 14.0 | 6.1 | |

## LED 座 LED HOUSING 4-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

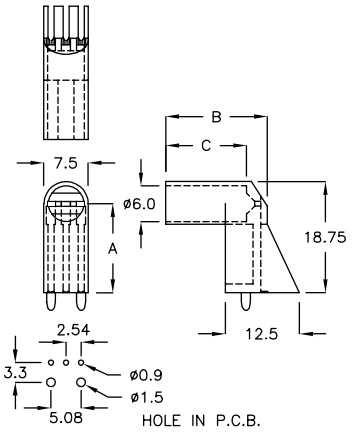


Built–In Clamp Function

| FOR ø5 3PIN LED LAMP | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| QLU–15 | 15.0 | 17.1 | 13.6 | 500 |

## LED 座 LED HOUSING 4-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

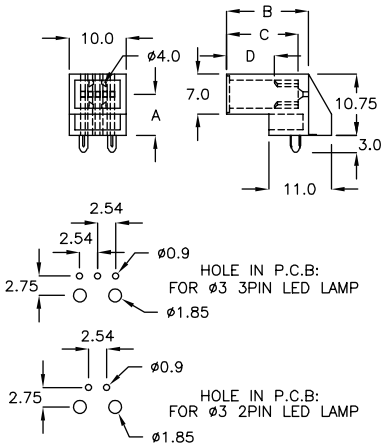


Built–In Clamp Function

| FOR ø3 3PIN, 2PIN LED LAMP | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| QBT–7A | 7.25 | 14.4 | 12.6 | 8.4 | 500 |
| QBT–7C | 7.25 | 14.4 | 7.6 | 3.4 | |
| QBT–7D | 7.25 | 14.4 | 6.6 | 2.4 | |
| QBT–7F | 7.25 | 8.4 | 6.6 | 2.4 | |
| QBT–7K | 7.25 | 13.4 | 11.6 | 7.4 | |

## LED 座 LED HOUSING 4-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR ø5 3PIN, 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LEA–01 | 10.0 | ø7.4 | ø6.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR ø5 3PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | PACKAGE |
| LEK2-4.5T | 4.5 | 2.1 | 4.0 | 7.1 | 3.2 | 2.8 | 1000 |
| LEK4-4.5T | 4.5 | 4.5 | 1.0 | 6.5 | 2.0 | 2.0 | |

## LED 座 LED HOUSING 4-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

| FOR ø5 3PIN LED | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | PACKAGE |
| LEU-06 | 6.0 | 10.0 | ø1.0 | 4.3 | 2.6 | 6.0 | ø6.2 | 500 |
| LEU-09 | 9.0 | 13.0 | ø1.2 | 3.5 | 2.5 | 5.5 | ø6.0 | |
| LEU-10 | 10.0 | 14.0 | ø1.0 | 4.0 | 2.6 | 5.5 | ø6.0 | |

## LED 座 LED HOUSING 4-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| FOR ø5 3PIN LED | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | F | G | H | J | PACKAGE |
| LEK4-3T | 3.0 | 4.0 | 1.0 | 5.0 | 3.0 | 3.0 | ø1.2 | 6.0 | 1000 |
| LEY-03 | 3.5 | 4.0 | 1.0 | 5.0 | 3.0 | 2.7 | ø1.2 | 6.5 | |

## LED 座 LED HOUSING 4-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

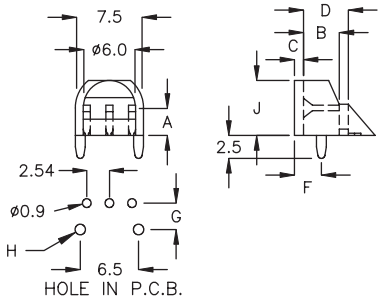


Built-In Clamp Function

| FOR ø5 3PIN LED | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | F | G | H | J | PACKAGE |
| LEK4-3TW | 3.0 | 4.0 | 1.0 | 5.0 | 3.0 | 3.0 | ø1.2 | 6.0 | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 3PIN LED | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | H | PACKAGE |
| EKM—05 | 5.0 | 3.8 | 4.0 | 7.3 | 4.0 | 6.1 | 3.1 | 7.0 | 1000 |

## LED 座 LED HOUSING 4-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEK4—2T | 3.0 | 4.0 | 1000 |



## LED 座 LED HOUSING 4-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEC—01 | 9.2 | 13.5 | 1000 |

## LED 座 LED HOUSING 4-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEB—09 | 9.0 | 12.0 | 500 |

## LED 座 LED HOUSING 4-26-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEB—10 | 10.0 | 13.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø5 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| EDQ-07 | 7.0 | 1000 |



## LED 座 LED HOUSING 4-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| EEJ-09 | 9.0 | 500 |

## LED 座 LED HOUSING 4-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

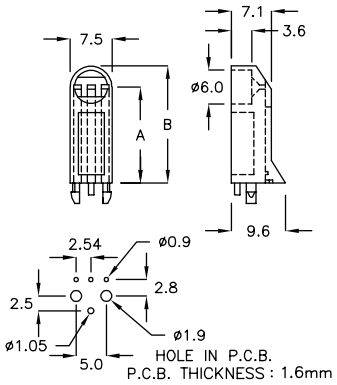


Built-In Clamp Function

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEF-17 | 17.0 | 20.9 | 500 |

## LED 座 LED HOUSING 4-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

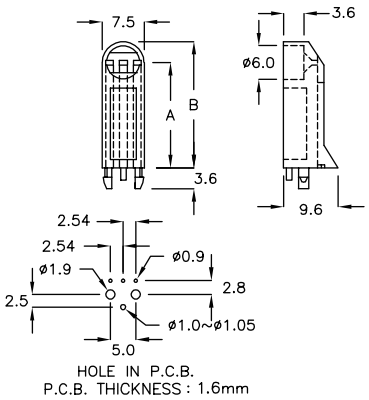


Built-In Clamp Function

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EEF-18A | 18.7 | 22.4 | 500 |
| EEF-18C | 18.4 | 22.1 | |

## LED 座 LED HOUSING 4-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| LEK2-7TX | 7.0 | 10.8 | ø6.2 | 9.5 | 500 |
| LEK2-10TX | 10.0 | 13.8 | ø6.0 | 12.1 | |
| LEK2-13TX | 13.5 | 17.3 | ø6.0 | 12.1 | |

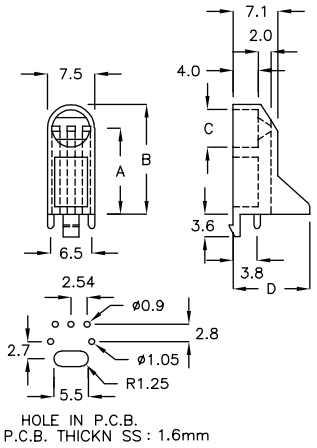

HOLE IN P.C.B.
P.C.B. THICKN SS : 1.6mm

## LED 座 LED HOUSING 4-28-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

| FOR ø5 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| LEK2-5TW | 5.0 | 8.75 | ø1.5 ~ ø1.6 | 3.0 | 1000 |
| LEK2-6TW | 6.0 | 9.95 | | | |
| LEK2-7TW | 7.0 | 10.75 | | 3.0 | 500 |
| LEK2-8TW | 8.0 | 11.75 | | | |
| LEK2-9TW | 9.0 | 12.75 | | | |
| LEK2-11TW | 11.0 | 14.75 | | | |
| LEK2-14TW | 14.0 | 17.75 | | | |
| LEK2-15TW | 15.0 | 18.75 | | | |
| LEK2-16TW | 16.0 | 19.75 | | | |
| LEK2-17TW | 17.0 | 20.75 | | | |
| LEK2-18TW | 17.5 | 21.25 | ø1.2 | 3.0 | |
| LEK2-18LTW | 18.0 | 21.75 | ø1.5 ~ ø1.6 | 3.0 | 500 |
| LEK2-19TW | 19.0 | 22.75 | | | |
| LEK2-20TW | 20.0 | 23.75 | | | |
| LEK2-11MTW | 11.5 | 15.45 | ø1.2 | 2.5 | |
| LEN-05 | 5.0 | 8.75 | ø1.0 | 3.0 | 1000 |

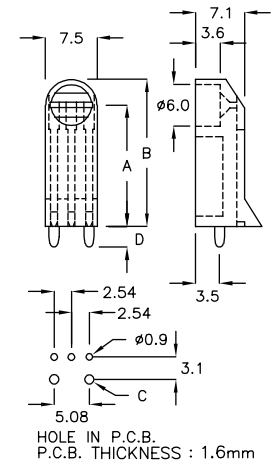

HOLE IN P.C.B.
P.C.B. THICKNESS : 1.6mm

## LED 座 LED HOUSING 4-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEK2-17TP | 17.0 | 20.75 | 500 |

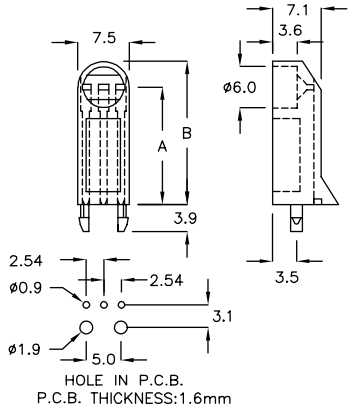

HOLE IN P.C.B.
P.C.B. THICKNESS:1.6mm


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

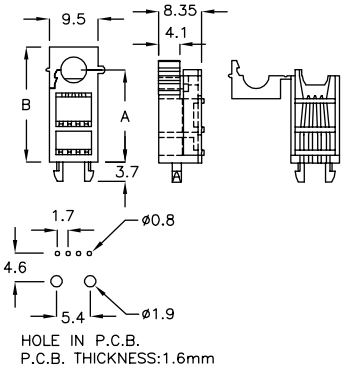


Built—In Clamp Function

| FOR ø5 4PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEW—17D | 17.0 | 21.5 | 500 |
| LEW—18A | 18.0 | 22.5 | |

## LED 座 LED HOUSING 4-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

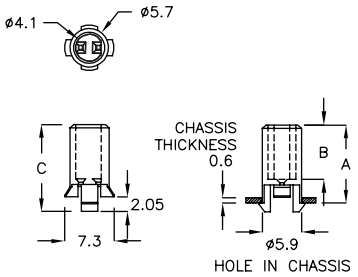


| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| QLY—2A | 11.45 | 8.0 | 12.8 | 500 |
| QLY—7K | 9.95 | 6.5 | 11.3 | 1000 |




## LED 座 LED HOUSING 4-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

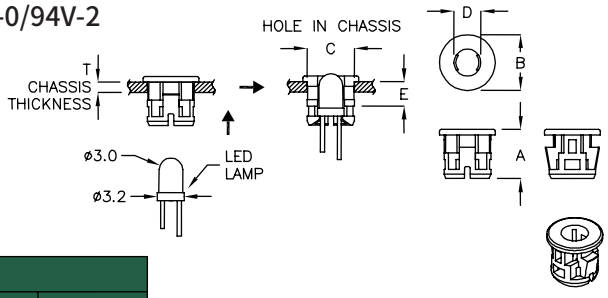


| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLED—3S | 5.3 | ø6.0 | ø5.2 | ø2.9 | 2.75 | 1.2 | 2000 |




## LED 座 LED HOUSING 4-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

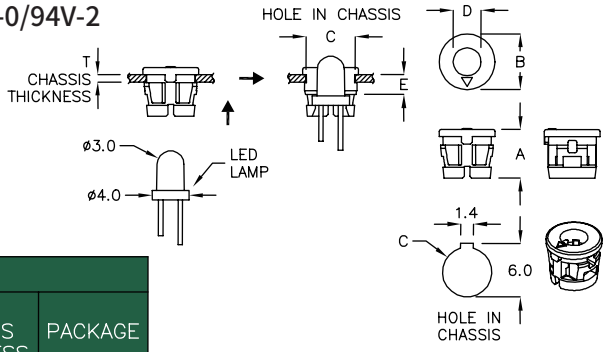


| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| KLED—3FM | 5.4 | ø6.2 | ø5.5 | ø3.1 | 2.2 | 0.8 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




## LED 座 LED HOUSING 4-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

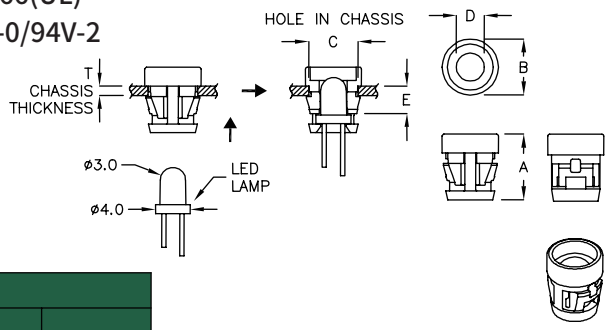


| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| KLED-3DQ | 6.7 | ø5.6 | ø4.95 | ø3.1 | 2.2 | 0.8 | 2000 |




## LED 座 LED HOUSING 4-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

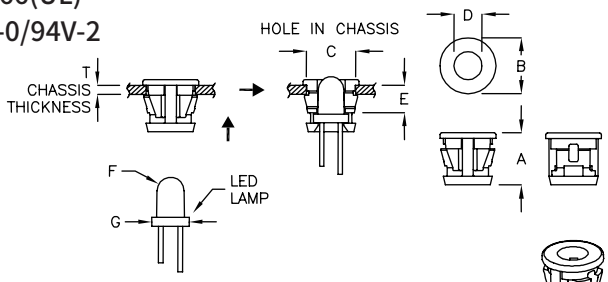

| FOR ø3 2PIN or 3PIN LED | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | F | G | T CHASSIS THICKNESS | FORM | ø3 LED | PACKAGE |
| KLED-3JL | 5.0 | ø5.5 | ø5.0 | ø2.87 | 1.9 | ø2.9 | ø3.2 | 0.8 | 1 | 2 PIN | 2000 |
| KLED-3TU | 5.1 | ø5.5 | ø5.0 | ø2.87 | 1.9 | ø2.9 | ø3.2 | 0.8 | 3 | 2 PIN | |
| KLED-3PH | 5.2 | ø5.6 | ø4.95 | ø3.1 | 2.2 | ø3.0 | ø4.0 | 0.8 | 1 | 2 PIN | |
| KLED-3HS | 5.2 | ø6.0 | ø5.3 | ø2.95 | 2.55 | ø3.0 | ø3.2 | 0.9 | 1 | 2 PIN | |
| KLED-3YM | 5.2 | ø6.0 | ø5.3 | ø2.95 | 1.45 | ø3.0 | ø3.2 | 0.9 | 1 | 2 PIN | |
| KLED-3CF | 5.6 | ø5.6 | ø5.0 | ø3.1 | 2.6 | ø3.0 | ø4.0 | 1.0 | 1 | 2 PIN | |
| KLED-3RG | 5.6 | ø6.0 | ø5.2 | ø3.0 | 2.85 | ø3.0 | ø4.0 | 0.8 | 2 | 3 PIN | |
| KLED-3BN | 5.6 | ø6.0 | ø5.2 | ø3.0 | 2.85 | ø3.0 | ø4.0 | 0.8 | 2 | 3 PIN | |
| KLED-3A | 5.6 | ø6.0 | ø5.3 | ø3.0 | 2.95 | ø3.0 | ø4.0 | 1.0 | 1 | 2 PIN | |
| KLED-3MK | 5.6 | ø6.0 | ø5.3 | ø3.0 | 2.95 | ø3.0 | ø4.0 | 0.9 | 1 | 2 PIN | |
| KLED-3TB | 5.7 | ø6.0 | ø5.2 | ø3.0 | 2.6 | ø3.0 | ø4.0 | 1.0 | 1 | 2 PIN | |
| KLED-3WT | 5.7 | ø6.0 | ø5.2 | ø3.0 | 2.8 | ø3.0 | ø4.0 | 1.0 | 1 | 2 PIN | |




## LED 座 LED HOUSING 4-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

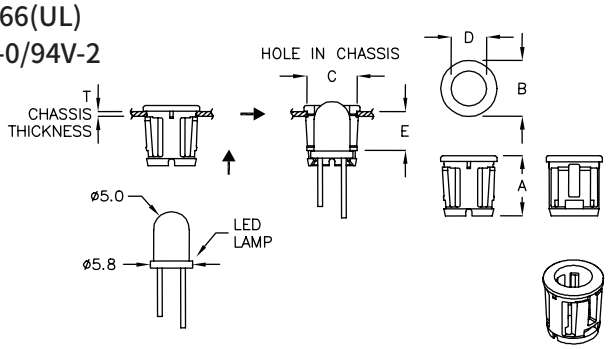


| FOR ø5 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| KLED-5MS | 8.4 | ø7.8 | ø7.0 | ø4.9 | 5.35 | 0.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




## LED 座 LED HOUSING 4-31-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

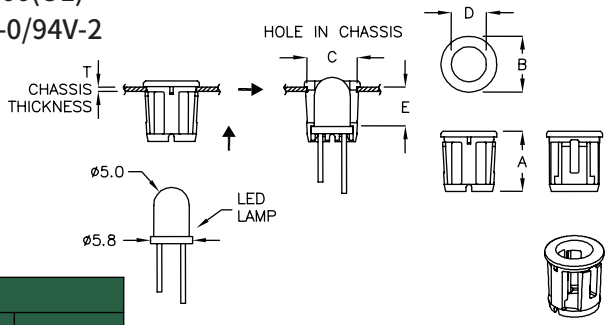


| FOR ø5 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | T CHASSIS THICKNESS | PACKAGE |
| HLED-5RC | 8.4 | ø7.8 | ø7.0 | ø4.9 | 5.45 | 0.6 | 2000 |




## LED 座 LED HOUSING 4-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

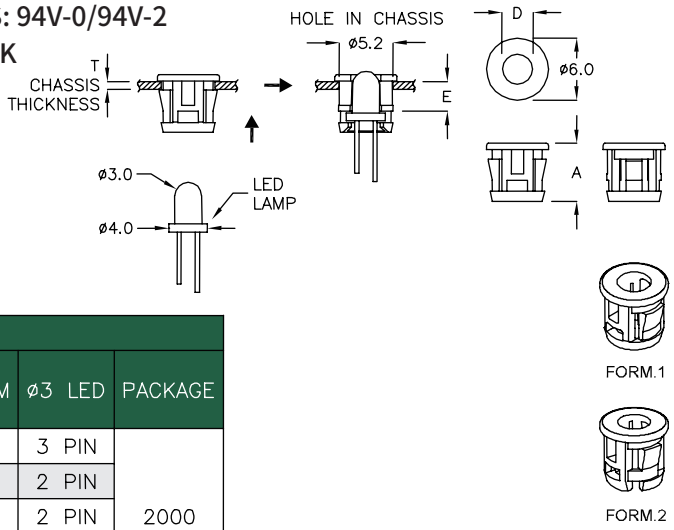


| FOR ø3 2PIN or 3PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | D | E | T CHASSIS THICKNESS | FORM | ø3 LED | PACKAGE |
| CLED-3K | 5.6 | ø2.9 | 3.0 | 0.8 | 2 | 3 PIN | 2000 |
| CLED-3C | 5.6 | ø3.0 | 2.95 | 0.8 | 1 | 2 PIN | |
| CLED-3RY | 5.6 | ø3.0 | 2.95 | 1.0 | 1 | 2 PIN | |
| CLED-3H | 5.8 | ø3.0 | 2.9 | 0.9 | 1 | 2 PIN | |
| CLED-3TN | 5.7 | ø3.1 | 3.15 | 1.0 | 2 | 3 PIN | |

## LED 座 LED HOUSING 4-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

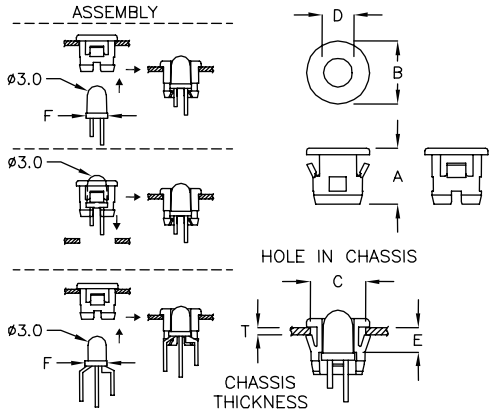


| FOR ø3 2PIN or 3PIN LED | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | F | T CHASSIS THICKNESS | PACKAGE |
| MLED-3A | 5.3 | ø6.0 | ø5.2 | ø3.0 | 2.4 | ø3.2 | 0.6 | 2000 |
| MLED-3GS | 6.0 | ø6.7 | ø5.3 | ø3.05 | 3.0 | ø3.8 | 0.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




## LED 座 LED HOUSING 4-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

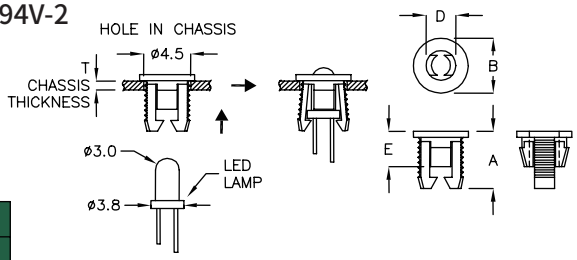


| FOR ø3 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-1J | 5.7 | ø5.5 | ø3.0 | 3.5 | 0.8 | 2000 |
| CLED-1K | 5.7 | ø5.5 | ø3.0 | 3.5 | 1.2 | |
| CLED-1N | 5.7 | ø5.5 | ø3.0 | 3.6 | 1.6 | |
| CLED-3D | 5.9 | ø5.5 | ø3.0 | 3.45 | 1.0 | |
| CLED-6A | 5.7 | ø5.5 | ø3.1 | 3.4 | 0.8 | |

## LED 座 LED HOUSING 4-32-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

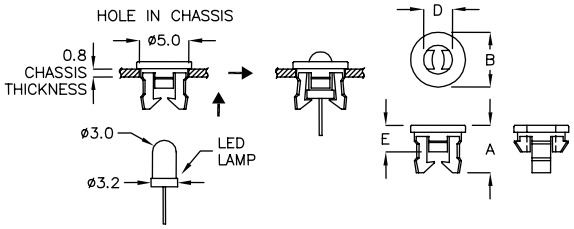


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| CLED-3NX | 4.8 | ø5.6 | ø2.95 | 2.7 | 2000 |




## LED 座 LED HOUSING 4-32-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

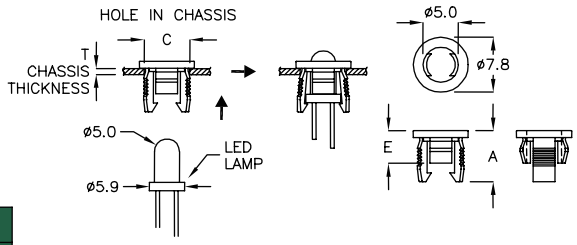


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | E | C HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
| CLED-1AQ | 7.25 | 4.65 | ø6.3 | 0.8~1.0 | 2000 |
| | | | ø6.5 | 1.2~1.5 | |

## LED 座 LED HOUSING 4-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

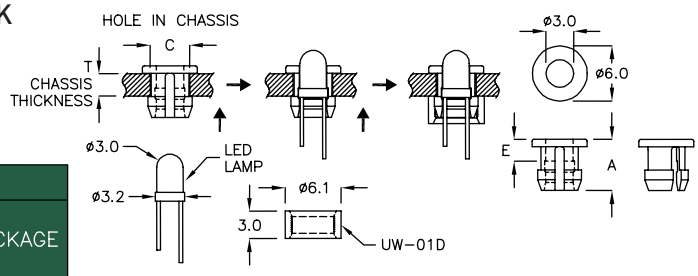


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-4A | 5.5 | ø4.15 | 0.7 | 0.8 | 2000 |
| CLED-4D | 5.6 | ø4.2 | 2.4 | 0.8~2.5 | |

ALSO CAN ASSEMBLE WITH UW-01D



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

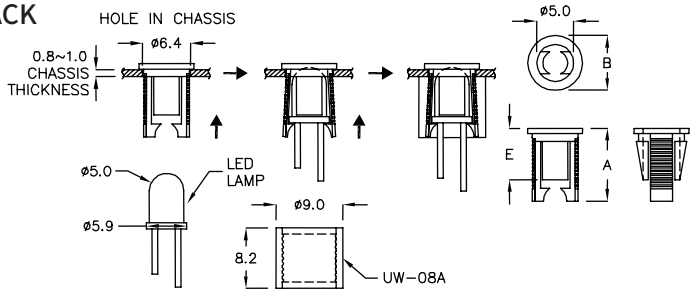


| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | E | PACKAGE |
| CLED-2K | 9.9 | ø7.4 | 6.95 | 2000 |
| CLED-2QT | 11.4 | ø7.4 | 8.45 | |

ALSO CAN ASSEMBLE WITH UW-08A




## LED 座 LED HOUSING 4-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

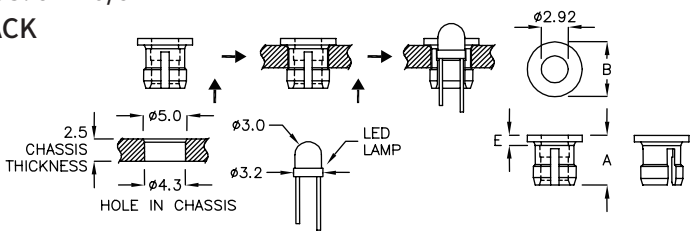


| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | E | PACKAGE |
| CLED-4 | 5.46 | ø6.0 | 1.12 | 2000 |

## LED 座 LED HOUSING 4-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

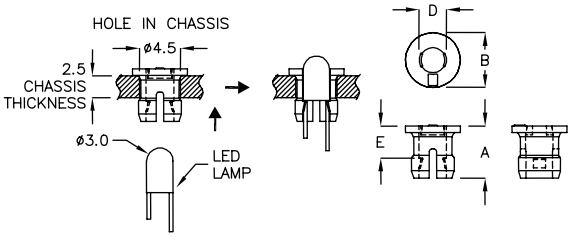


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| CLED-4FM | 5.7 | ø6.0 | ø3.0 | 3.5 | 2000 |




## LED 座 LED HOUSING 4-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

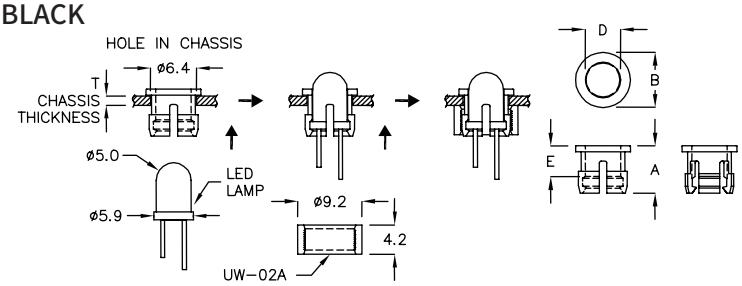


| FOR ø5 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-5 | 6.8 | ø7.9 | ø5.1 | 4.45 | 0.8~2.6 | 2000 |
| CLED-5A | 6.8 | ø7.9 | ø5.1 | 4.45 | 2.8 | |

"CLED-5" ALSO CAN ASSEMBLE WITH UW-02A

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

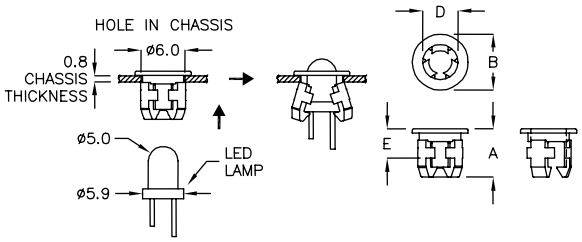


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| YLED-5GK | 6.9 | ø8.0 | ø5.05 | 4.2 | 2000 |

## LED 座 LED HOUSING 4-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

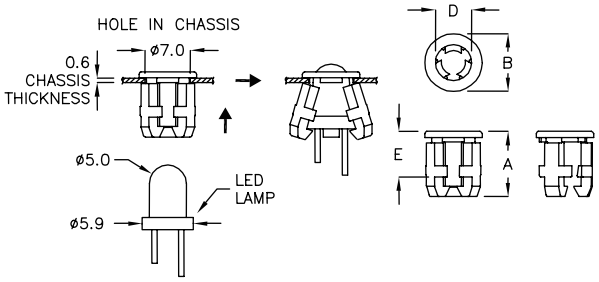


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| GLED-5TC | 8.85 | ø7.8 | ø4.9 | 6.2 | 2000 |

## LED 座 LED HOUSING 4-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

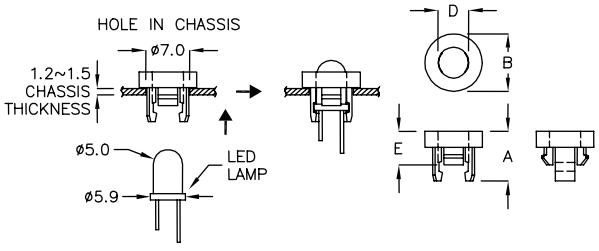


| FOR ø5 2PIN or 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| CLED-1L | 8.2 | ø9.5 | ø5.1 | 5.55 | 2000 |




## LED 座 LED HOUSING 4-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

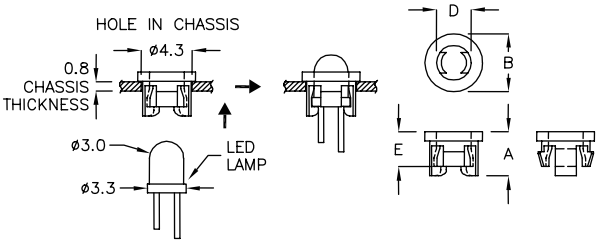


| FOR ø3 2PIN or 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| CLED-2M | 3.8 | ø5.0 | ø3.0 | 3.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




## LED 座 LED HOUSING — 4-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

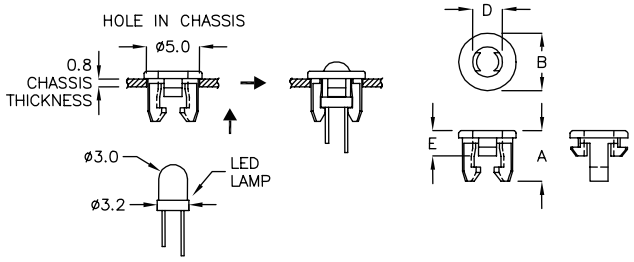


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| CLED-2AJ | 4.9 | ø5.6 | ø2.95 | 2.45 | 2000 |

## LED 座 LED HOUSING — 4-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

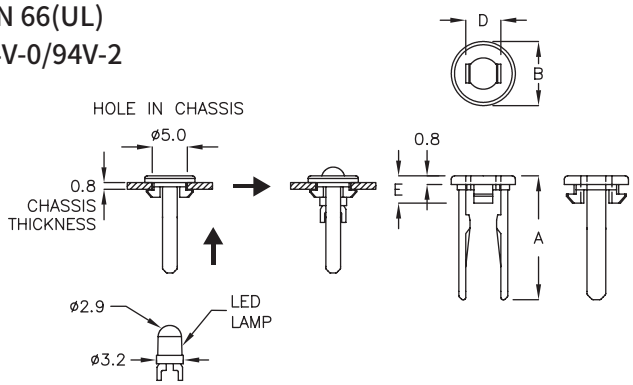


| FOR ø3.0 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | D | E | PACKAGE |
| ★ CLED-2BK | 11.6 | ø6.0 | 3.3 | 2.55 | 1000 |




## LED 座 LED HOUSING — 4-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

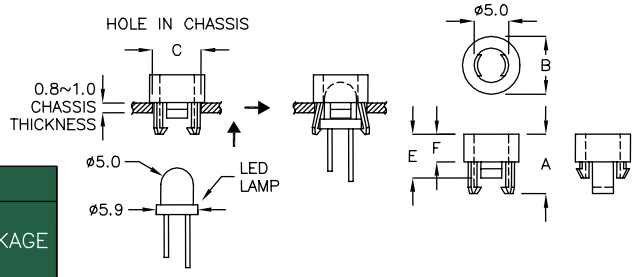


| FOR ø5 2PIN or 3PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | E | F | PACKAGE |
| CLED-1M | 8.5 | ø7.9 | ø6.6 | 6.3 | 4.0 | 2000 |
| CLED-1FC | 9.2 | ø7.9 | ø6.5 | 7.3 | 5.0 | |
| CLED-1Q | 10.3 | ø7.9 | ø6.5 | 8.4 | 6.1 | |
| CLED-1R | 13.8 | ø7.9 | ø6.5 | 11.9 | 9.6 | |



## LED 座 LED HOUSING — 4-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

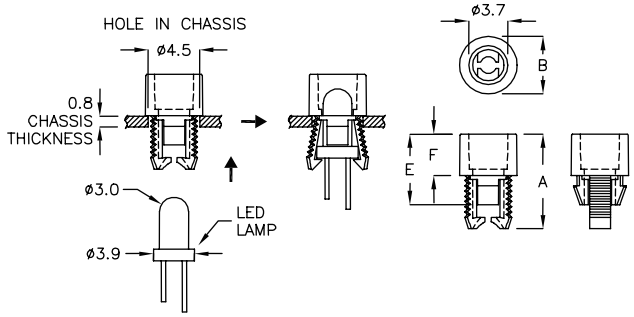


| FOR ø3 2PIN or 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E | F | PACKAGE |
| CLED-1GK | 9.05 | ø5.5 | 6.75 | 3.95 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




## LED 座 LED HOUSING 4-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

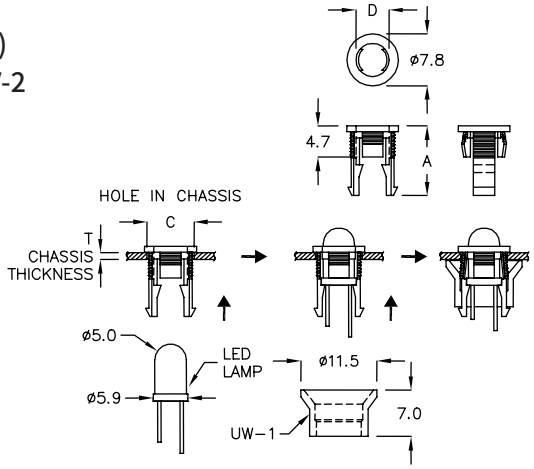


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | T CHASSIS THICKNESS | PACKAGE |
| CLED-2 | 10.5 | ø6.5 | ø5.0 | 1.0 | 2000 |
| CLED-10YS | 10.5 | ø6.2 | ø5.1 | 0.7~1.0 | |

ALSO CAN ASSEMBLE WITH UW-1




## LED 座 LED HOUSING 4-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

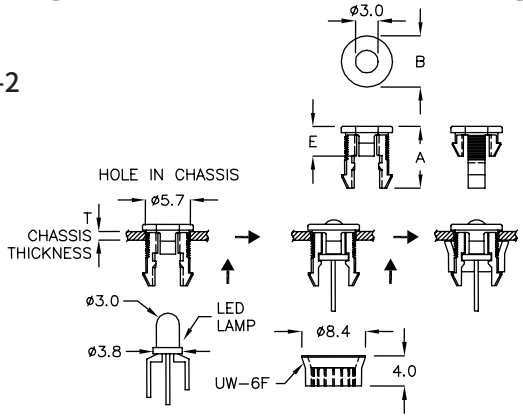


| FOR ø3 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-6D | 8.1 | ø6.7 | 3.9 | 1.2 | 2000 |
| CLED-6F | 7.7 | ø6.7 | 3.5 | 0.8 | |

ALSO CAN ASSEMBLE WITH UW-6F

## LED 座 LED HOUSING 4-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

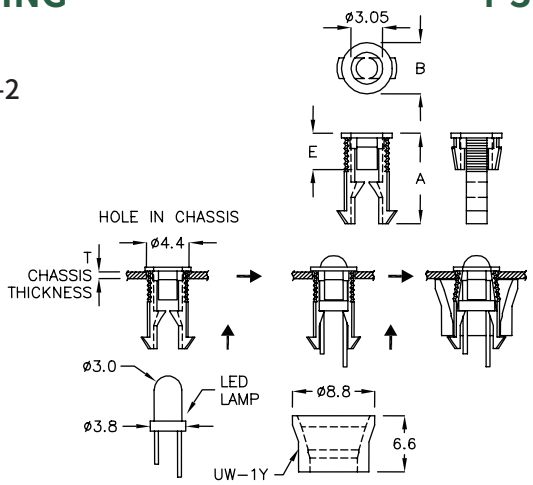


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-2P | 9.35 | ø4.9 | 3.5 | 0.8 | 2000 |

ALSO CAN ASSEMBLE WITH UW-1Y

## LED 座 LED HOUSING 4-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

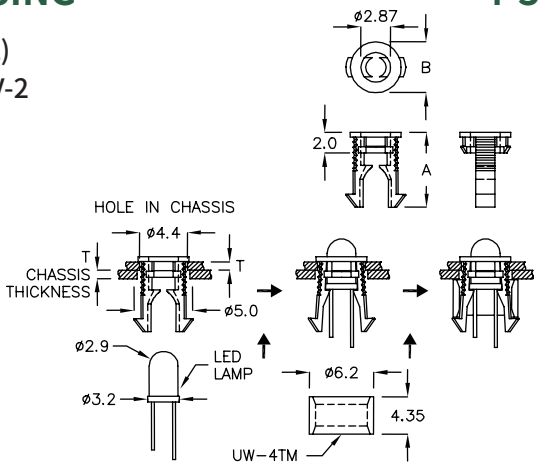


| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
| CLED-7WP | 7.85 | ø4.9 | 0.8 | 2000 |

ALSO CAN ASSEMBLE WITH UW-4TM



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

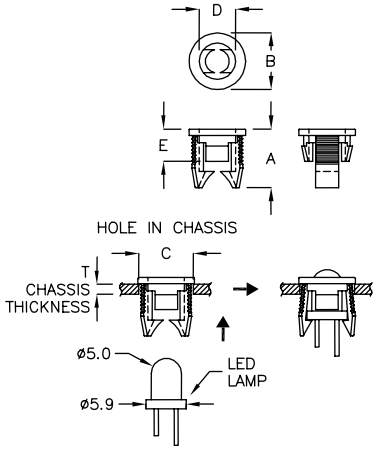


| FOR ø5 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-1D | 8.05 | ø7.8 | ø6.5 | ø5.0 | 4.45 | 0.8~1.1 | 2000 |
| CLED-4C | 6.3 | ø7.8 | ø6.0 | ø5.0 | 3.9 | 0.8~1.1 | |
| CLED-6 | 8.0 | ø7.8 | ø7.0 | ø5.1 | 4.6 | 0.8~0.9 | |

## LED 座 LED HOUSING 4-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

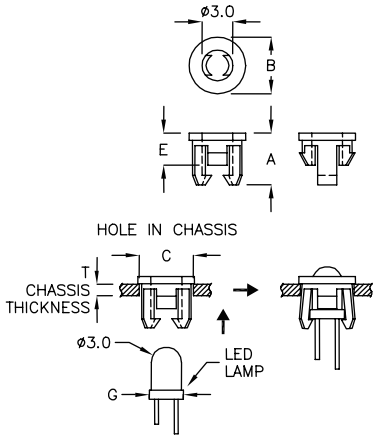


| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | E | T CHASSIS THICKNESS | G LED LAMP | PACKAGE |
| CLED-1H | 5.0 | ø5.5 | ø5.0 | 3.15 | 1.0~1.1 | ø3.9 | 2000 |
| CLED-3F | 6.4 | ø5.5 | ø4.5 | 4.2 | 0.8 | ø3.9 | |
| CLED-3GX | 8.15 | ø5.5 | ø4.5 | 5.95 | 4.0 | ø3.3~ø3.5 | |
| CLED-3Q | 4.8 | ø5.6 | ø5.0 | 2.7 | 0.7~0.9 | ø3.3~ø3.5 | |
| CLED-2D | 5.2 | ø5.6 | ø5.0 | 3.1 | 0.8 | ø3.9 | |
| CLED-1W | 5.5 | ø5.8 | ø4.7 | 3.0 | 1.2~1.3 | ø3.9 | |



## LED 座 LED HOUSING 4-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

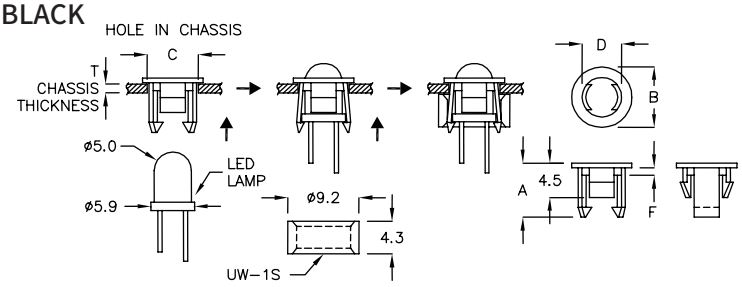


| FOR ø5 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | F | T CHASSIS THICKNESS | PACKAGE |
| CLED-1S | 7.0 | ø7.8 | ø6.2 | ø5.1 | 1.0 | 1.0~1.6 | 2000 |
| CLED-1T | 6.9 | ø7.8 | ø6.2 | ø5.1 | 1.9 | 1.0~1.6 | |
| CLED-1U | 7.0 | ø7.8 | ø6.2 | ø5.1 | 0.2 | 1.0 | |

"CLED-1S" ALSO CAN ASSEMBLE WITH UW-1S

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.




## LED座 LED HOUSING 4-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

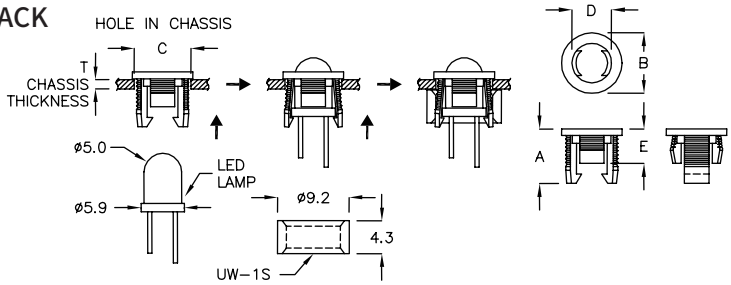


| FOR ø5 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLED-1 | 7.15 | ø7.8 | ø6.5 | ø5.0 | 4.4 | 0.8~1.6 | 2000 |
| CLED-1A | 7.05 | ø7.8 | ø6.2 | ø5.0 | 4.45 | 1.0~1.6 | |

ALSO CAN ASSEMBLE WITH UW-1S

## LED座 LED HOUSING 4-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

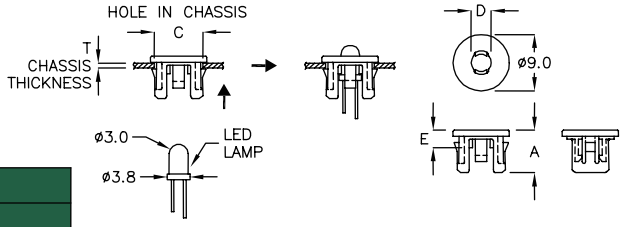


| FOR ø3 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| QLED-3AK | 6.8 | ø7.6 | ø3.2 | 2.8 | 0.6~0.8 | 2000 |




## LED座 LED HOUSING 4-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

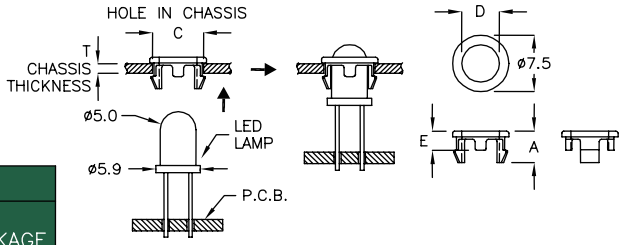


| FOR ø5 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| FLED-5C | 4.2 | ø6.5 | ø5.0 | 2.6 | 1.5 | 2000 |




## LED座 LED HOUSING 4-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

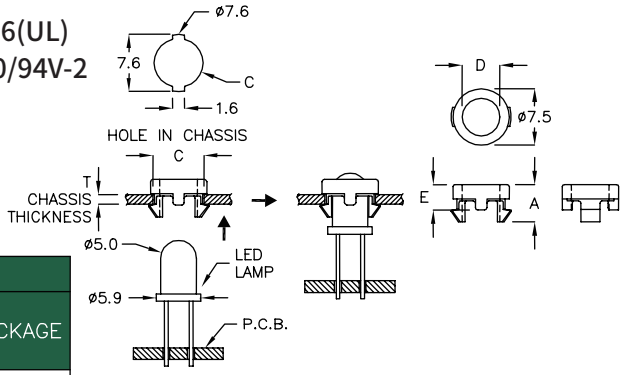


| FOR ø5 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| FLED-5HK | 5.0 | ø6.5 | ø5.0 | 3.4 | 1.2 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

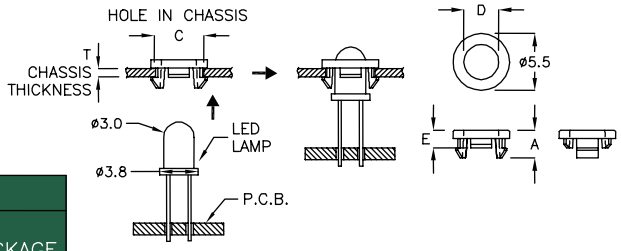


| FOR ø3 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLA-3FM | 2.5 | ø4.7 | ø3.0 | 2.0 | 0.6 | 2000 |
| CLA-03 | 2.7 | ø4.7 | ø3.0 | 1.7 | 0.8 | |
| CLA-3BK | 3.4 | ø4.7 | ø3.05 | 2.4 | 1.5 | |




## LED 套 LED HOLDER 4-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

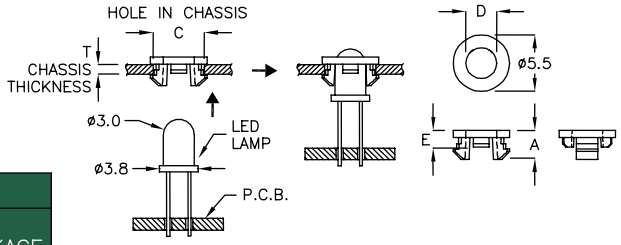


| FOR ø3 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| CLA-3AR | 2.8 | ø4.9 | ø3.0 | 1.6 | 1.0 | 2000 |




## LED 座 LED HOUSING 4-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

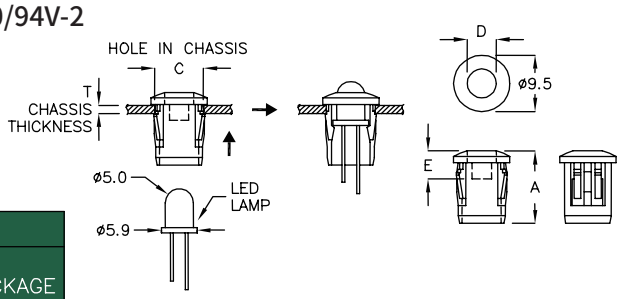


| FOR ø5 2PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | C HOLE IN CHASSIS | D | E | T CHASSIS THICKNESS | PACKAGE |
| EEA-1C | 12.2 | ø8.0 | ø4.9 | 4.7 | 0.8~1.5 | 2000 |
| EEA-12D | 12.2 | ø8.0 | ø4.9 | 4.7 | 2.0 | |

## LED 座 LED HOUSING 4-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

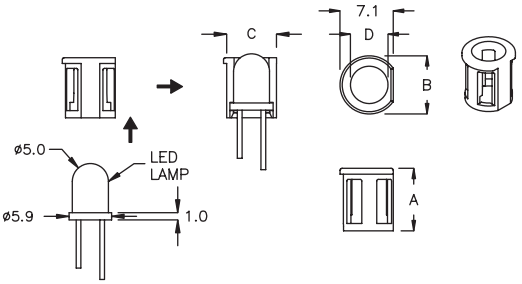


| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| JLED-5A | 8.4 | ø7.8 | ø6.65 | ø5.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LES-02 | 2.0 | 2000 |

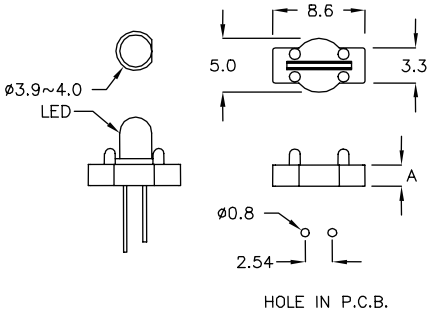

## LED 套 LED HOLDER 4-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LES-5 | 5.0 | 2000 |



## LED 套 LED HOLDER 4-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| LEZ-7 | 7.0 | 2000 |



## LED 套 LED HOLDER 4-40-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| EQC-09 | 9.0 | 500 |



## LED 套 LED HOLDER 4-40-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LEDX-3 | 3.0 | 5.0 | 2000 |
| LEDX-4 | 4.0 | | |
| LEDX-5 | 5.0 | | |
| LEDX-6 | 6.0 | | |
| LEDX-7 | 7.0 | | |
| LEDX-8 | 8.0 | | |
| LEDX-9 | 9.0 | 5.0 | 1000 |
| LEDX-10 | 10.0 | | |
| LEDX-11 | 11.0 | | |
| LEDX-12 | 12.0 | | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| QBF-15 | 15.0 | 5.0 | 3.4 | 1000 |



## LED 套 LED HOLDER 4-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Clamp Function

| FOR ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | C | PACKAGE |
| LED-18 | 16.0 | 18.0 | 1000 |



## LED 套 LED HOLDER 4-41-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED3-1TF | 1.0 | ø5.0 | 2.54 | 2000 |



## LED 套 LED HOLDER 4-41-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED-4T | 4.0 | ø5.0 | 4.0 | 2000 |
| LED-4DT | 4.0 | ø4.2 | 3.0 | |
| LED-6T | 6.0 | ø5.0 | 4.0 | |
| LED-7T | 7.0 | ø5.0 | 4.0 | 1000 |
| LED-8T | 8.0 | ø5.0 | 4.0 | |
| LED-10T | 10.0 | ø5.0 | 4.0 | |
| LED-11T | 11.0 | ø5.0 | 4.0 | |
| LED-12T | 12.0 | ø5.1 | 4.0 | |
| LED-12AT | 12.5 | ø5.0 | 4.0 | |
| LED-13T | 13.0 | ø5.0 | 4.0 | |
| LED-14T | 14.0 | ø5.0 | 4.0 | |
| LED-14FT | 14.5 | ø5.0 | 4.0 | |
| LED-15T | 15.0 | ø5.0 | 4.0 | |
| LED-17T | 17.1 | ø5.6 | 4.6 | |
| LED-18T | 18.3 | ø5.0 | 4.0 | |
| LED-19T | 19.0 | ø5.0 | 4.0 | |
| LED-20T | 20.0 | ø5.0 | 4.0 | |
| LED-24T | 24.0 | ø5.0 | 4.0 | 500 |
| LED-28T | 28.0 | ø5.0 | 4.0 | |

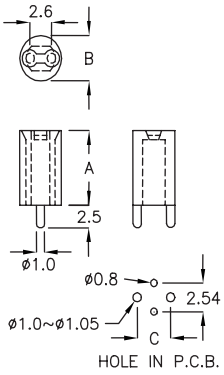


提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

＊ LED HOLDER WITH CONCAVE
＊表示 LED 套开凹槽

LED 套无开槽




＊LED 套开凹槽




| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED−2 | 2.2 | ø5.6 | ø3.8 | 2000 |
| LED−2.5 | 2.6 | ø5.9 | ø3.8 | |
| LED−3 | 3.2 | ø5.6 | ø3.8 | |
| ＊LED−3.6 | 3.6 | ø5.6 | ø3.8 | |
| LED−4 | 4.1 | ø5.6 | ø3.8 | |
| ＊LED−4.5 | 4.5 | ø5.6 | ø3.8 | |
| ＊LED−5 | 5.0 | ø5.6 | ø3.8 | |
| ＊LED−6 | 6.0 | ø5.6 | ø3.8 | |
| ＊LED−6S | 6.1 | ø5.7 | ø3.8 | |
| ＊LED−6.8 | 6.8 | ø5.6 | ø3.8 | |
| LED−7.5 | 7.5 | ø5.6 | ø3.8 | |
| ＊LED−8 | 8.0 | ø5.6 | ø3.8 | |
| LED−8.8 | 8.8 | ø5.6 | ø3.8 | |
| LED−9.8 | 9.8 | ø5.6 | ø3.8 | |
| ＊LED−10A | 10.0 | ø5.9 | ø3.9 | |
| ＊LED−11A | 11.2 | ø5.8 | ø3.9 | 1000 |
| LED−12 | 12.0 | ø5.8 | ø3.9 | |
| LED−15 | 15.1 | ø5.6 | ø3.9 | |
| ＊LED−17 | 17.1 | ø5.6 | ø3.9 | |
| LED−18.5 | 18.5 | ø5.7 | ø3.9 | |
| LED−24 | 24.1 | ø5.8 | ø3.9 | 500 |
| LED−37 | 37.5 | ø5.8 | ø3.9 | |

| FOR ø5 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| ＊LED−2A | 2.0 | ø5.0 | ø3.7 | 2000 |
| ＊LED−2.5A | 2.5 | ø5.0 | ø3.7 | |
| ＊LED−3A | 3.1 | ø5.0 | ø3.7 | |
| ＊LED−3.5 | 3.5 | ø5.0 | ø3.6 | |
| ＊LED−4C | 4.0 | ø5.0 | ø3.6 | |
| ＊LED−4.5A | 4.5 | ø5.0 | ø3.6 | |
| ＊LED−5A | 5.0 | ø5.0 | ø3.6 | |
| ＊LED−5.5 | 5.5 | ø5.0 | ø3.6 | |
| ＊LED−6A | 6.0 | ø5.0 | ø3.6 | |
| ＊LED−6.5A | 6.5 | ø5.0 | ø3.5 | |
| ＊LED−7 | 7.0 | ø5.0 | ø3.6 | |
| ＊LED−7.5A | 7.5 | ø5.1 | ø3.6 | |
| ＊LED−7.9 | 7.9 | ø5.0 | ø3.6 | |
| ＊LED−8.5A | 8.5 | ø5.0 | ø3.6 | |
| ＊LED−9 | 9.0 | ø5.1 | ø3.6 | |
| LED−9.5 | 9.5 | ø5.0 | ø3.6 | |
| ＊LED−10 | 10.0 | ø5.0 | ø3.5 | |
| ＊LED−10.6 | 10.7 | ø5.1 | ø3.6 | 1000 |
| LED−11 | 11.0 | ø5.0 | ø3.8 | |
| ＊LED−12A | 12.0 | ø5.0 | ø3.2 | |
| ＊LED−13 | 13.0 | ø5.0 | ø3.6 | |
| ＊LED−13.8 | 13.8 | ø5.0 | ø3.7 | |
| LED−14 | 14.0 | ø5.0 | ø3.6 | |
| ＊LED−14A | 14.0 | ø5.0 | ø3.7 | |
| ＊LED−15KM | 15.0 | ø5.0 | ø3.5 | |
| ＊LED−15A | 15.2 | ø5.0 | ø3.7 | |
| ＊LED−16 | 16.0 | ø5.0 | ø3.7 | |
| ＊LED−16A | 16.4 | ø5.0 | ø3.7 | |
| LED−18B | 18.3 | ø5.1 | ø3.6 | |
| LED−19 | 19.1 | ø5.0 | ø3.9 | |
| ＊LED−20 | 20.2 | ø5.0 | ø3.8 | |
| LED−21 | 21.0 | ø5.0 | ø3.8 | |
| ＊LED−22 | 22.0 | ø5.1 | ø3.9 | |
| ＊LED−23 | 23.0 | ø5.1 | ø3.8 | 500 |

## LED座 LED HOUSING 4-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built−in Clamp Function

| FOR ø3 2PIN or 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EQA−07 | 7.0 | ø5.4 | 12.0 | 1000 |
| EQA−11 | 11.0 | ø5.4 | 12.0 | |



HOLE IN P.C.B.
FOR ø3 2PIN LED

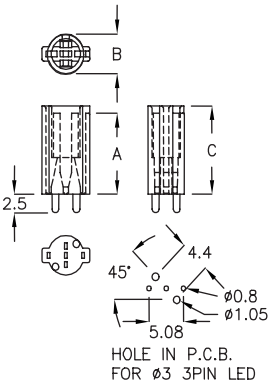

HOLE IN P.C.B.
FOR ø3 3PIN LED



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

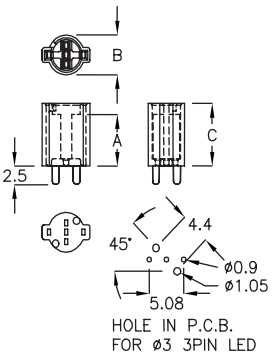


Built-in Clamp Function

| FOR ø3 2PIN or 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EQA-7PQ | 7.0 | ø5.4 | 8.5 | 1000 |

## LED 座 LED HOUSING 4-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

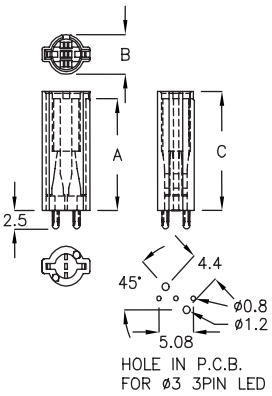


Built-In Clamp Function

| FOR ø3 2PIN or 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| EQF-19 | 19.0 | ø5.4 | 20.0 | 1000 |

## LED 座 LED HOUSING 4-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

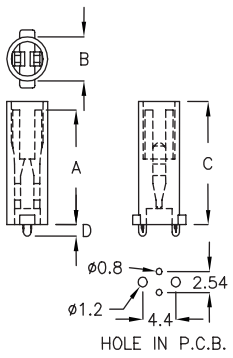


| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| EQH-14 | 14.0 | ø5.4 | 15.0 | 1.4 | 1000 |
| EQH-17 | 17.0 | ø5.4 | 18.0 | 1.8 | |
| EQH-21 | 21.0 | ø5.4 | 22.0 | 1.8 | |

## LED 套 LED HOLDER 4-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED3-2A | 2.0 | ø4.2 | 2.54 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built—In Clamp Function

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED3—1SQ | 1.5 | 4.5 | 2.54 | 2000 |

## LED 套 LED HOLDER 4-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK




| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| LED3—1D | 1.5 | ø4.2 | 0.5 | 3.0 | 2000 |
| LED3—5GW | 5.0 | ø4.2 | 0.5 | 3.0 | |
| LED3—9K | 9.0 | ø4.2 | 0.5 | 3.0 | |

## LED 套 LED HOLDER 4-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK




| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| LED3—1A | 1.5 | ø4.2 | 0.8 | 3.0 | 2000 |
| LED3—1B | 1.6 | ø4.0 | 0.7 | 3.05 | |
| LED3—1C | 0.8 | ø4.2 | 1.0 | 3.0 | |
| LED3—2B | 2.3 | ø4.2 | 1.1 | 3.05 | |
| LED3—2.5 | 2.5 | ø4.1 | 1.25 | 3.05 | |
| LED3—3B | 3.3 | ø4.2 | 1.0 | 3.05 | |

## LED 套 LED HOLDER 4-44-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED3—4M | 4.6 | ø4.2 | ø3.4 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED3−4DK | 4.0 | ø4.0 | ø3.5 | 2000 |
| LED3−6DC | 6.0 | ø4.0 | ø3.2 | |
| LED3−7K | 7.5 | ø4.0 | ø3.3 | |

## LED 套 LED HOLDER 4-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED−3.8 | 3.8 | 4.1 | 3.1 | 2000 |
| LED−4A | 4.1 | 4.1 | 3.1 | |

## LED 套 LED HOLDER 4-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




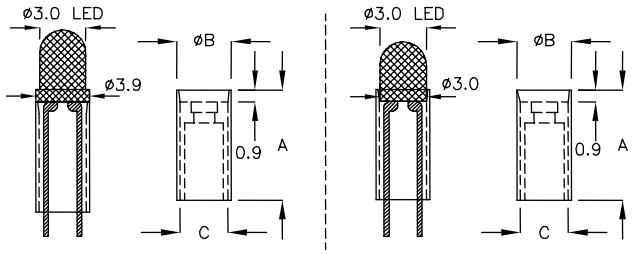


打＊表 LED 套 H: 打椭圆孔

＊ LED HOLDER WITH AN OVAL HOLE "H"

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED3−3S | 2.8 | 4.2 | 3.5 | 2000 |
| LED3−3 | 3.0 | 4.2 | 3.5 | |
| LED3−3A | 3.5 | 4.2 | 3.5 | |
| ＊LED3−4 | 4.0 | 4.2 | 3.5 | |
| LED3−4A | 4.5 | 4.2 | 3.5 | |
| LED3−5 | 5.0 | 4.2 | 3.5 | |
| LED3−5B | 5.5 | 4.2 | 3.5 | |
| LED3−6 | 6.1 | 4.2 | 3.5 | |
| ＊LED3−6B | 6.5 | 4.2 | 3.5 | |
| LED3−7 | 7.0 | 4.2 | 3.5 | |
| LED3−7B | 7.6 | 4.2 | 3.5 | |
| LED3−8 | 8.0 | 4.2 | 3.6 | |
| LED3−8B | 8.5 | 4.2 | 3.6 | |
| LED3−9 | 9.0 | 4.2 | 3.6 | |
| LED3−9A | 9.2 | 4.2 | 3.6 | |
| LED3−9B | 9.5 | 4.2 | 3.6 | |
| LED3−10 | 10.0 | 4.2 | 3.6 | |

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED3−11 | 11.1 | 4.2 | 3.5 | 2000 |
| LED3−12 | 12.0 | 4.2 | 3.5 | |
| ＊LED3−12B | 12.5 | 4.2 | 3.6 | |
| LED3−13 | 13.0 | 4.2 | 3.5 | |
| LED3−14 | 14.0 | 4.2 | 3.6 | |
| ＊LED3−15 | 15.0 | 4.2 | 3.5 | 1000 |
| LED3−15A | 15.0 | 4.1 | 3.6 | |
| LED3−16 | 16.0 | 4.2 | 3.5 | |
| ＊LED3−17 | 17.0 | 4.2 | 3.5 | |
| LED3−18 | 18.0 | 4.2 | 3.5 | |
| ＊LED3−18B | 18.5 | 4.2 | 3.5 | |
| LED3−19 | 19.0 | 4.2 | 3.5 | |
| ＊LED3−20 | 20.0 | 4.2 | 3.5 | |
| ＊LED3−21 | 21.0 | 4.2 | 3.5 | |
| ＊LED3−22 | 22.0 | 4.2 | 3.5 | |
| LED3−23 | 23.0 | 4.2 | 3.5 | |
| LED3−25 | 25.0 | 4.4 | 3.5 | |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED3-8F | 8.5 | ø4.2 | ø3.6 | 2000 |

## LED 套 LED HOLDER 4-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED3-17K | 17.1 | ø4.0 | ø3.5 | 1000 |

## LED 套 LED HOLDER 4-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| LED3-21F | 21.0 | ø4.2 | 1000 |

## LED 套 LED HOLDER 4-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EET-10 | 10.0 | ø4.25 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 & ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDG—10 | 10.0 | ø5.2 | 2000 |

## LED 套 LED HOLDER 4-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 or ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDP—02 | 2.0 | ø4.25 | 2000 |
| EDP—2M | 2.5 | ø4.25 | |
| EDP—3M | 3.5 | ø4.25 | |
| EDP—04 | 4.0 | ø4.25 | |
| EDP—4A | 4.5 | ø4.25 | |
| EDP—05 | 5.0 | ø4.25 | |
| EDP—5A | 5.5 | ø4.25 | |
| EDP—06 | 6.0 | ø4.25 | |

Built—In Clamp Function

| FOR ø3 or ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDP—6A | 6.5 | ø4.25 | 2000 |
| EDP—07 | 7.0 | ø4.25 | |
| EDP—7A | 7.5 | ø4.25 | |
| EDP—08 | 8.0 | ø4.25 | |
| EDP—8A | 8.5 | ø4.25 | |
| EDP—09 | 9.0 | ø4.25 | |
| EDP—9A | 9.5 | ø4.25 | |
| EDP—10 | 10.0 | ø4.25 | |
| EDP—10A | 10.5 | ø4.25 | |
| EDP—11 | 11.0 | ø4.25 | |
| EDP—11A | 11.5 | ø4.25 | |
| EDP—12 | 12.0 | ø4.25 | |
| EDP—12A | 12.5 | ø4.25 | |
| EDP—17 | 17.0 | ø4.25 | |

## LED 套 LED HOLDER 4-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 & ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDP—23 | 23.0 | ø4.25 | 1000 |



## LED 套 LED HOLDER 4-47-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 & ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDD—4FQ | 4.0 | ø5.2 | 2000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 or ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDG—02 | 2.0 | ø5.2 | 2000 |
| EDG—2M | 2.5 | ø5.2 | |
| EDG—3M | 3.5 | ø5.2 | |
| EDG—04 | 4.0 | ø5.2 | |
| EDG—4A | 4.5 | ø5.2 | |
| EDG—05 | 5.0 | ø5.2 | |
| EDG—5A | 5.5 | ø5.2 | |

Built—In Clamp Function

| FOR ø3 or ø5 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| EDG—06 | 6.0 | ø5.2 | 2000 |
| EDG—6A | 6.5 | ø5.2 | |
| EDG—07 | 7.0 | ø5.2 | |
| EDG—7A | 7.5 | ø5.2 | |
| EDG—08 | 8.0 | ø5.2 | |
| EDG—8A | 8.5 | ø5.2 | |
| EDG—09 | 9.0 | ø5.2 | |
| EDG—9A | 9.5 | ø5.2 | |
| EDG—10A | 10.0 | ø5.2 | |
| EDG—10C | 10.5 | ø5.2 | |
| EDG—11 | 11.0 | ø5.2 | |
| EDG—11A | 11.5 | ø5.2 | |
| EDG—12 | 12.0 | ø5.2 | |
| EDG—12A | 12.5 | ø5.2 | |

## LED 套 LED HOLDER 4-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built—In Clamp Function

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| ECW—06 | 7.0 | ø5.4 | 2000 |

## LED 套 LED HOLDER 4-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| FOR ø3 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| EEP—15 | 15.0 | ø5.4 | 16.0 | 2000 |

## LED 套 LED HOLDER 4-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

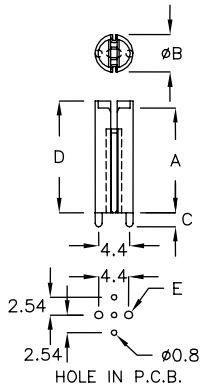


| FOR ø3 3PIN LED | | | | | | |
|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | PACKAGE |
| EEG—08 | 7.0 | ø5.4 | 1.5 | 8.0 | ø1.05 | 2000 |
| EEG—15 | 15.0 | ø5.4 | 2.0 | 16.0 | ø1.10 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| QLW-02 | 2.0 | ø5.0 | ø4.1 | 7.9 | 2000 |
| QLW-2A | 2.0 | ø5.0 | ø4.1 | 6.6 | |
| QLW-03 | 4.5 | ø5.0 | ø4.1 | 10.0 | |



## LED 套 LED HOLDER 4-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| QQA-3AD | 1.1 | ø5.8 | ø4.1 | 2000 |



## LED 套 LED HOLDER 4-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| QLS-1A | 1.0 | ø7.4 | ø5.9 | 8.0 | 2000 |



## LED 套 LED HOLDER 4-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| QLS-05 | 5.0 | ø7.4 | ø6.0 | 12.0 | 2000 |



## LED 套 LED HOLDER 4-49-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QBU-03 | 3.1 | ø5.4 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER — 4-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| QLH-01 | 1.35 | ø6.6 | 6.0 | 2000 |



## LED 套 LED HOLDER — 4-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| QLH-2A | 1.35 | ø8.0 | 7.5 | 2000 |



## LED 套 LED HOLDER — 4-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| QLM-3AF | 1.3 | ø8.0 | ø5.6 | 7.7 | 2000 |
| QLM-3CP | 1.3 | ø6.6 | ø5.2 | 6.0 | |



## LED 座 LED HOUSING — 4-50-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 3PIN LED | | | | | |
|---|---|---|---|---|---|
| PART NO | A | B | C | D | PACKAGE |
| QLP-3CA | 1.3 | ø8.0 | 8.4 | 7.7 | 2000 |
| QLP-3FG | 1.3 | ø6.6 | 7.8 | 7.0 | |



## LED 座 LED HOUSING — 4-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| QLR-3KH | 2.35 | 11.5 | 10.2 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-51-1

- MATERIAL: TPE
- COLOR: BLACK

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| MTD-13HK | 10.5 | ø8.1 | 1000 |



## LED 套 LED HOLDER 4-51-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED-1x3A | 1.6 | ø7.4 | 0.5 | 2000 |



## LED 套 LED HOLDER 4-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø3 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| LED-3x3A | 3.0 | 5.0 | 1.0 | 2000 |
| LED-4x3A | 4.0 | 5.0 | 1.0 | |
| LED-5x3A | 5.0 | 5.0 | 1.5 | |
| LED-5Cx3A | 5.5 | 5.0 | 1.5 | |
| LED-14x3A | 14.0 | 5.0 | 9.0 | 1000 |



## LED 套 LED HOLDER 4-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| QLF-3A | 2.8 | ø7.1 | 6.6 | 2000 |



## LED 套 LED HOLDER 4-51-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED-2Mx3 | 2.6 | ø7.4 | 6.6 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED-5Sx3 | 5.0 | 7.4 | 6.0 | 2000 |
| LED-4Sx3 | 4.4 | 7.4 | 6.0 | |
| LED-5x3 | 5.5 | 7.4 | 6.5 | 1000 |
| LED-5Kx3 | 5.0 | 7.4 | 7.7 | |
| LED-7x3 | 7.0 | 7.5 | 8.1 | |
| LED-8x3 | 8.0 | 7.4 | 9.0 | |
| LED-8Mx3 | 8.5 | 7.4 | 9.5 | |
| LED-10x3 | 10.5 | 7.4 | 11.5 | |
| LED-16x3 | 13.8 | 7.2 | 16.0 | 500 |

## LED 套 LED HOLDER 4-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED-14X3 | 12.0 | ø7.0 | 14.0 | 500 |

## LED 套 LED HOLDER 4-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

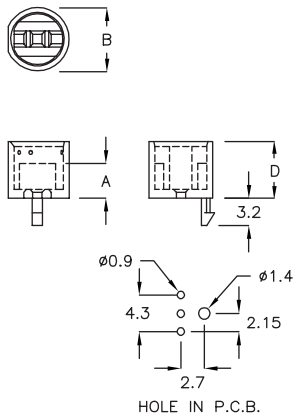


| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| LED-1Tx3 | 2.6 | ø7.4 | 6.6 | 1000 |
| LED-4Tx3 | 4.0 | ø7.4 | 6.7 | |

## LED 套 LED HOLDER 4-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

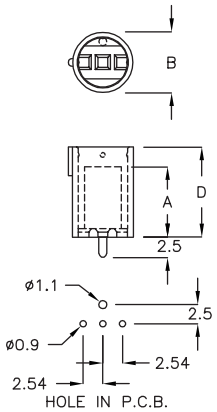


| FOR ø5 3PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | D | PACKAGE |
| QBE-8M | 8.5 | ø7.5 | 10.9 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 套 LED HOLDER 4-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

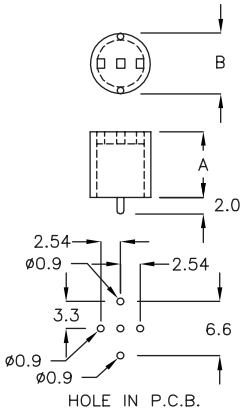


| FOR ø5 3PIN LED | | | |
|---|---|---|---|
| PART NO | A | B | PACKAGE |
| QBK-08 | 8.0 | ø7.4 | 2000 |

## 固定座 MOUNT 4-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

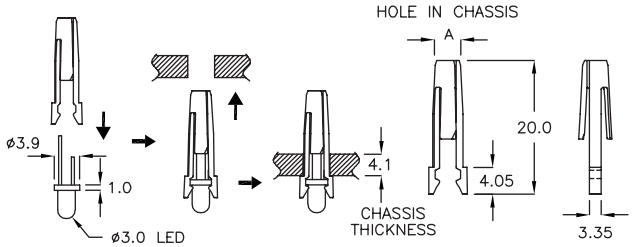


| PART NO | A HOLE IN CHASSIS | PACKAGE |
|---|---|---|
| MTX-4JQ | ø4.5 | 1000 |

## LED 座 LED HOUSING 4-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



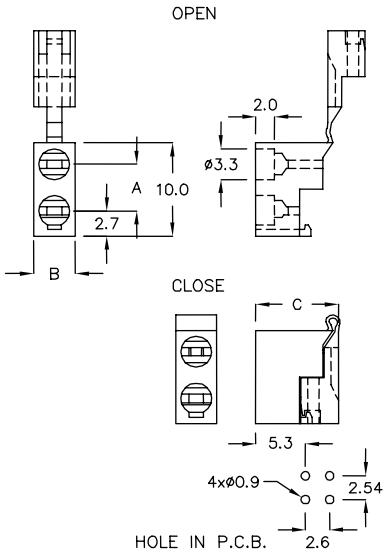


| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| 2LED-3Q | 5.0 | 4.5 | 8.9 | 1000 |

## LED 座 LED HOUSING 4-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | F | H | I | K | SUITABLE LED | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2LED-3 | 5.0 | 5.1 | 10.1 | 10.0 | ø3.9 | 7.1 | 1.3 | 2.5 | 2.6 | ø3 2PIN | 1000 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | F | H | I | K | SUITABLE LED | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2LED-3A | 5.0 | 4.4 | 8.8 | 9.7 | ø3.2 | 5.2 | 2.0 | 2.7 | 2.5 | ø3 2PIN | 1000 |
| 2LED-3B | 5.0 | 5.0 | 8.9 | 9.8 | ø3.2 | 5.2 | 3.0 | 2.7 | 2.5 | ø3 2PIN | |
| 2LED-3C | 5.0 | 5.0 | 10.1 | 9.6 | ø3.2 | 7.1 | 1.3 | 2.5 | 2.6 | ø3 2PIN | |
| 2LED-3D | 5.0 | 4.4 | 9.0 | 9.8 | ø3.4 | 5.45 | 1.5 | 2.6 | 2.55 | ø3 2PIN | |
| 2LED-3E | 5.0 | 4.4 | 9.0 | 9.8 | ø3.4 | 5.45 | 2.0 | 2.6 | 2.55 | ø3 2PIN | |
| 2LED-3P | 6.0 | 4.4 | 9.7 | 13.5 | ø3.3 | 6.2 | 2.0 | 5.0 | 2.55 | ø3 2PIN | |

## LED 座 LED HOUSING 4-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

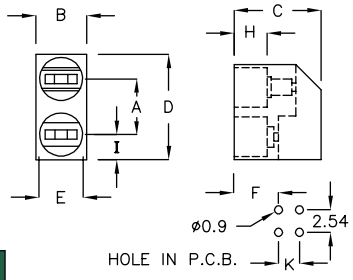


| PART NO | A | B | C | D | E | F | K | H | I | SUITABLE LED | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2LED-5 | 6.2 | 5.9 | 11.0 | 12.0 | ø5.0 | 6.1 | 2.4 | 4.2 | 2.85 | ø5 2PIN | 500 |

## LED 座 LED HOUSING 4-54-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

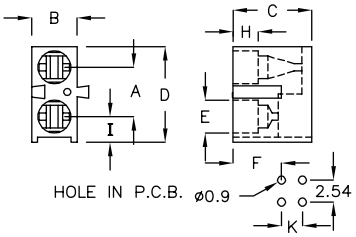


| FOR ø3 2PIN LED | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | H | I | K | PACKAGE |
| 2LED-3F | 5.0 | 4.6 | 8.0 | 9.7 | ø3.3 | 5.1 | 2.6 | 2.6 | 2.4 | 1000 |
| 2LED-3H | 5.1 | 4.3 | 8.1 | 12.6 | ø3.2 | 4.8 | 2.0 | 4.6 | 2.6 | |
| 2LED-3J | 5.0 | 4.4 | 9.0 | 9.7 | ø3.35 | 5.3 | 1.5 | 2.6 | 2.5 | |

## LED 座 LED HOUSING 4-54-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

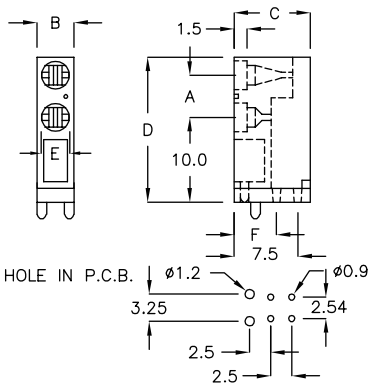


| FOR ø3 2PIN LED | | | | | | | |
|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | PACKAGE |
| 2LED-3K | 5.0 | 4.4 | 9.0 | 17.1 | ø3.4 | 5.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

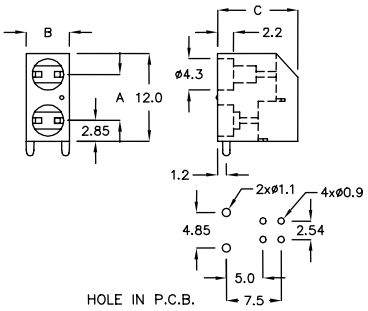


Built—In Clamp Function

| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| 2LED—3N | 6.3 | 5.9 | 11.0 | 500 |

## LED 座 LED HOUSING 4-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

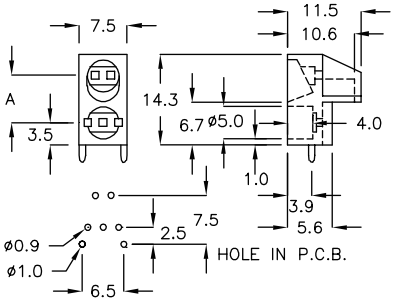


| FOR ø5 2 PIN LED<br>ø5 3 PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 2LED—5A | 7.45 | 500 |

## LED 座 LED HOUSING 4-55-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

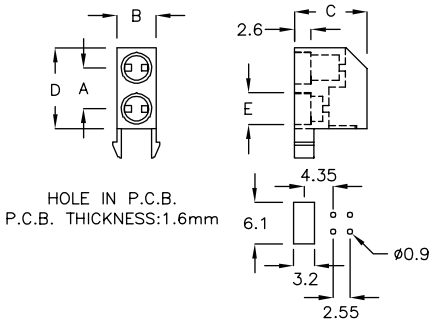


Built—In Clamp Function

| PART NO | A | B | C | D | E | SUITABLE LED | PACKAGE |
|---|---|---|---|---|---|---|---|
| 2LED—5C | 6.3 | 6.0 | 11.2 | 12.5 | ø4.9 | ø5 2PIN | 500 |

## LED 座 LED HOUSING 4-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

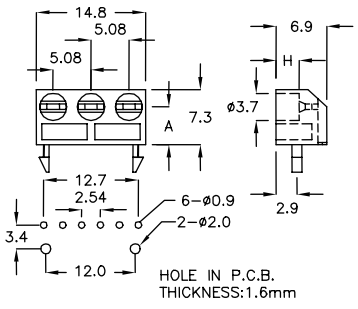


Built—In Clamp Function

| FOR ø3 2PIN LED | | | |
|---|---|---|---|
| PART NO | A | H | PACKAGE |
| 3LED—3AT | 5.1 | 3.2 | 500 |
| 3LED—3BT | 5.1 | 2.0 | |

## LED 座 LED HOUSING 4-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LED—3C | 5.1 | 500 |

## LED 座 LED HOUSING 4-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

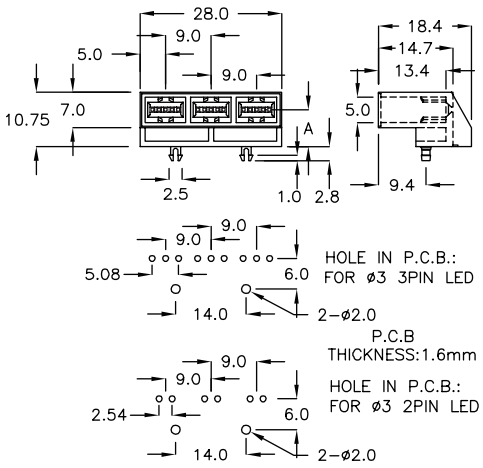


Built—In Clamp Function

| FOR ø3 2PIN/3PIN LED<br>FOR QUADRATE 2PIN/3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LED—3H | 7.25 | 500 |

## LED 座 LED HOUSING 4-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

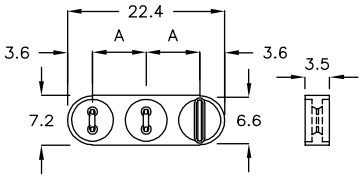


Built—In Clamp Function

| FOR ø5 3PIN LED x1<br>ø5 2PIN LED x2 | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LED—7 | 7.6 | 1000 |

## LED 座 LED HOUSING 4-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK







Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LED—5 | 3.1 | 500 |

## LED 座 LED HOUSING 4-56-5

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK






Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LED—5—R | 3.1 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built—In Clamp Function

| FOR ø3 2PIN LED | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| PART NO | A | B | C | D | E | F | G | PACKAGE |
| 3LED—3 | 5.08 | 15.25 | 3.9 | 6.45 | 9.0 | 11.45 | 2.50 | 500 |
| 3LED—3E | 6.0 | 17.0 | 5.7 | 8.25 | 10.8 | 12.5 | 2.70 | |

## LED 座 LED HOUSING 4-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

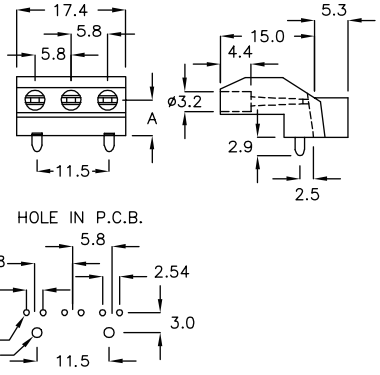


Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LEL—6 | 5.5 | 200 |

## LED 座 LED HOUSING 4-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

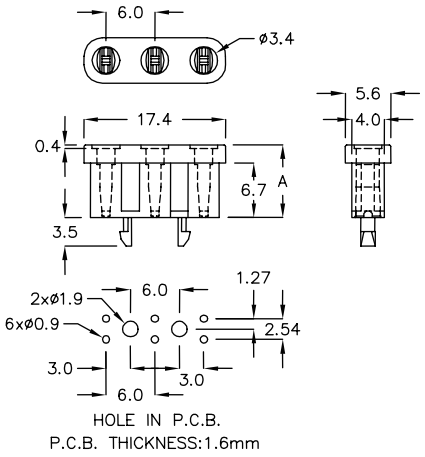


Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 3LED—3M | 8.9 | 500 |

## LED 座 LED HOUSING 4-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

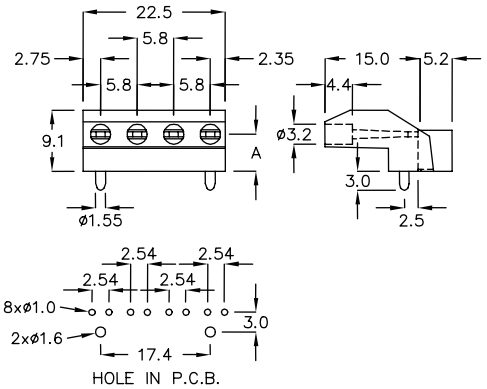


Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LEL—6 | 5.6 | 200 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LED-3 | 5.0 | 500 |

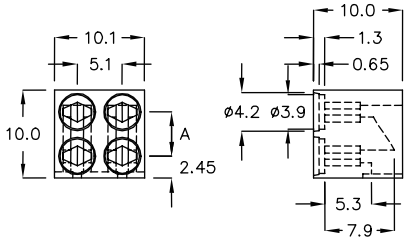

## LED 座 LED HOUSING 4-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | E | PACKAGE |
| 4LEL-6A | 7.0 | 200 |

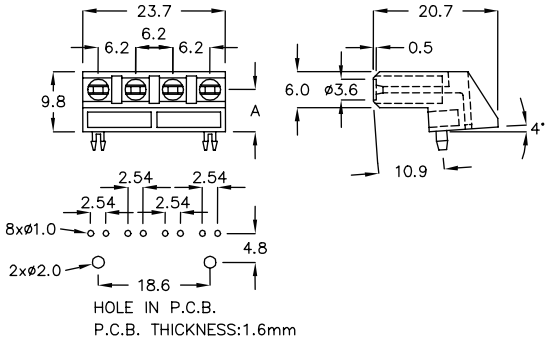

## LED 座 LED HOUSING 4-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LEL-6C | 5.25 | 200 |

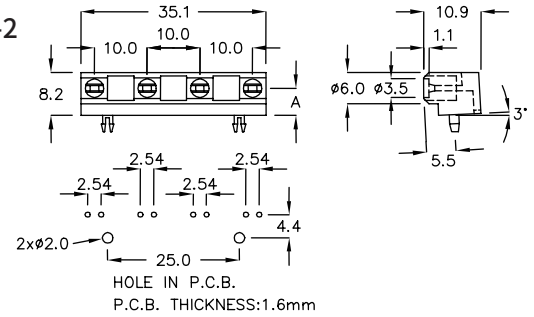

## LED 座 LED HOUSING 4-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LEL-6D | 9.0 | 200 |

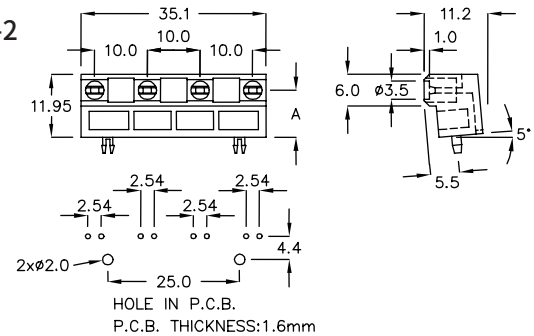

## LED 座 LED HOUSING 4-58-5

- MATERIAL: NYLON 66(UL)+30%FRP
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR ø5 2PIN ø5 3PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LED-1A | 14.0 | 500 |

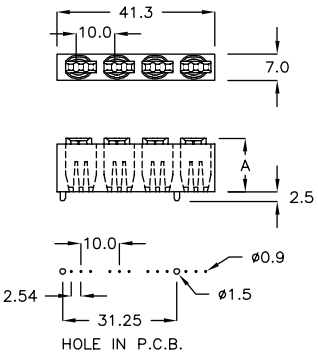




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

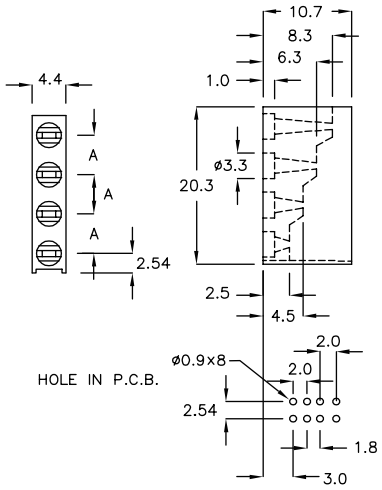


| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LED-3C | 5.08 | 500 |

## LED 座 LED HOUSING 4-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

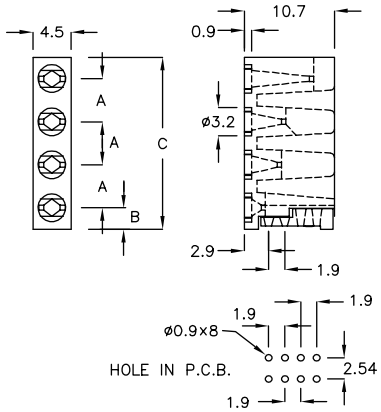


| FOR ø3 2PIN LED | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| 4LED-3D | 5.1 | 2.54 | 20.3 | 500 |
| 4LED-3K | 5.1 | 4.75 | 22.5 | |



## LED 座 LED HOUSING 4-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

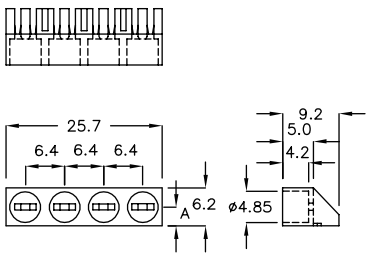


Built-In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LED-5 | 3.1 | 500 |



## LED 座 LED HOUSING 4-59-4

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

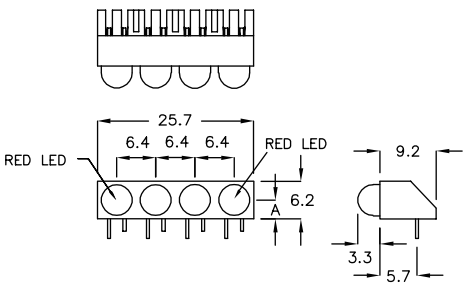


Built-In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 4LED-5-R | 3.1 | 500 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 5LED—3 | 5.08 | 500 |

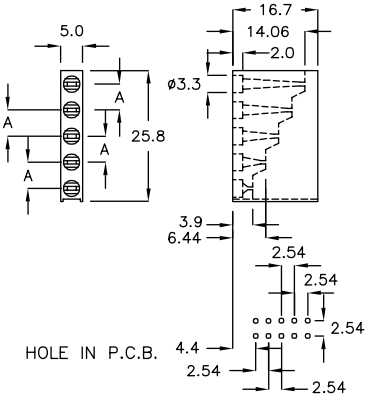

## LED 座 LED HOUSING 4-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED x 3<br>FOR ø5 3PIN LED x 2 | | |
|---|---|---|
| PART NO | A | PACKAGE |
| QLD—44 | 9.0 | 1000 |

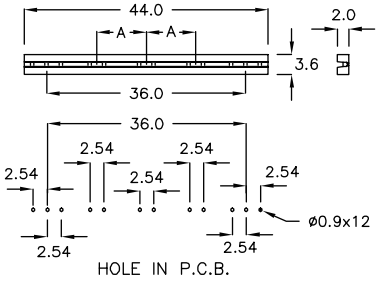

## LED 座 LED HOUSING 4-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 5LED—5 | 3.1 | 500 |

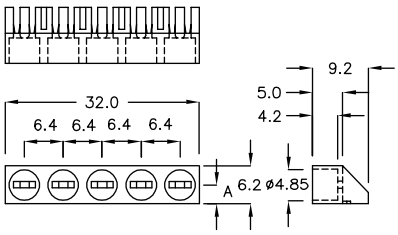

## LED 座 LED HOUSING 4-60-4

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 5LED—5—R | 3.1 | 500 |

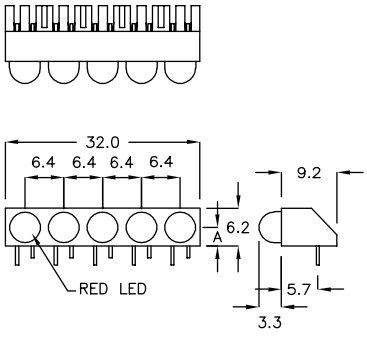

## LED 座 LED HOUSING 4-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built—In Clamp Function

| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 5LEL—6 | 5.8 | 200 |

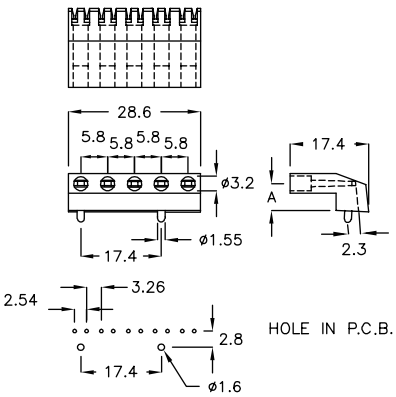




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

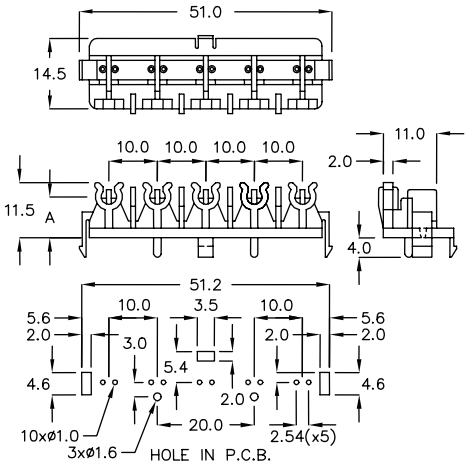


| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 5LED-3AT | 8.5 | 200 |

## LED 座 LED HOUSING 4-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

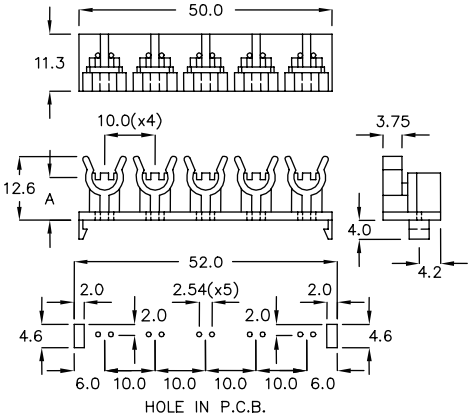


| FOR ø5 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 5LED-5BT | 8.5 | 200 |



## LED 座 LED HOUSING 4-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

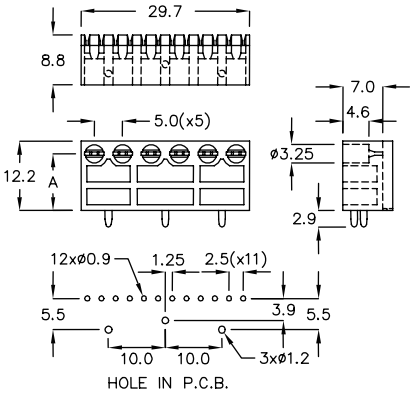


| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 6LED-3A | 10.0 | 200 |

## LED 座 LED HOUSING 4-61-4

- MATERIAL: NYLON 66(UL)+RED LED
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

Built-In Clamp Function

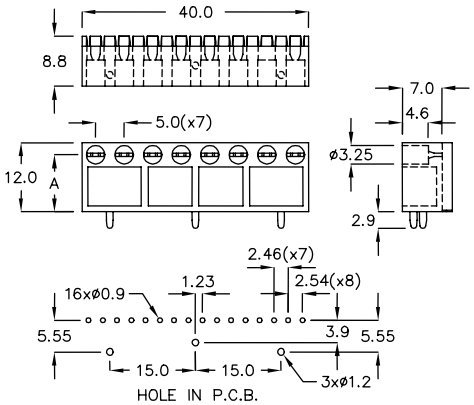


| FOR ø3 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 8LED-3 | 10.0 | 200 |

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## LED 座 LED HOUSING 4-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 10LED-1 | 7.0 | 200 |

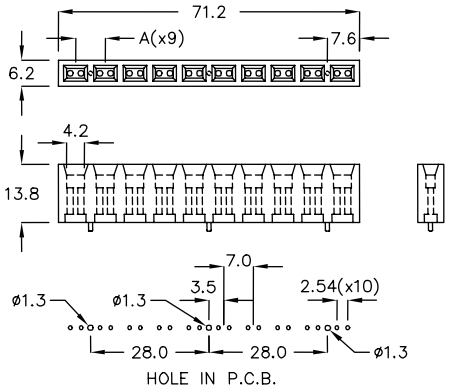

## LED 座 LED HOUSING 4-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| FOR QUADRATE 2PIN LED | | |
|---|---|---|
| PART NO | A | PACKAGE |
| 15LED-1 | 4.5 | 100 |

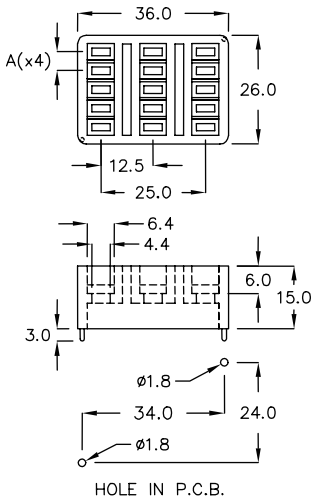




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 05

## 风扇铆钉
## FAN SNAP RIVET

## 扣具，铆钉
## FASTENER, SNAP RIVET

## 螺丝，螺帽
## SCREW, SCREW NUT

## 缓冲垫片 SILICONE BUMPER 5-2-1

- MATERIAL: SILICONE
- COLOR: BLACK

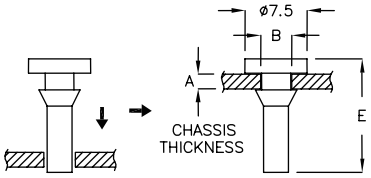


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | E | PACKAGE |
|---|---|---|---|---|
| SRJ-3NS | 2.3 | ø3.5 | 13.7 | 2000 |
| SRJ-3TG | 4.8~5.0 | ø3.5 | 16.2 | |

## 缓冲垫片 SILICONE BUMPER 5-2-2

- MATERIAL: SILICONE
- COLOR: BLACK

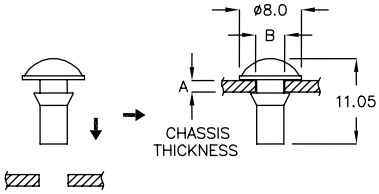


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|
| SRF-3A | 1.9 | ø3.5 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-2-3

- MATERIAL: TPE
- COLOR: BLACK

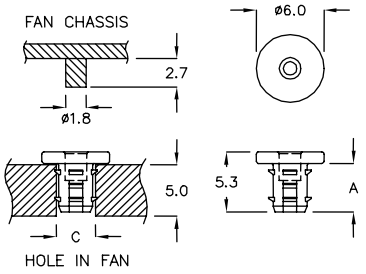


| PART NO | A | C HOLE IN FAN | PACKAGE |
|---|---|---|---|
| SRQB-5A | 4.3 | ø3.5 | 2000 |
| SRQB-5C | 4.3 | ø4.5 | |

## 风扇铆钉 FAN SNAP RIVET 5-2-4

- MATERIAL: TPE
- COLOR: BLACK

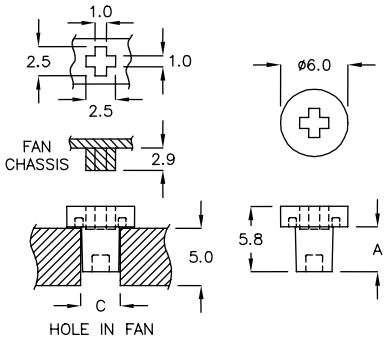


| PART NO | A | C HOLE IN FAN | PACKAGE |
|---|---|---|---|
| SRQF-3AT | 4.0 | ø3.5 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-2-5

- MATERIAL: TPE
- COLOR: BLACK

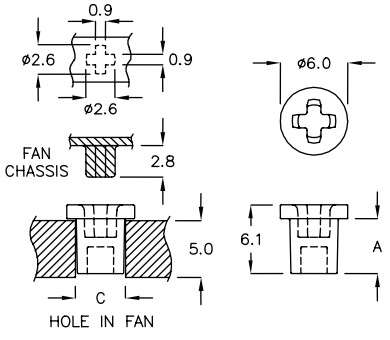


| PART NO | A | C HOLE IN FAN | PACKAGE |
|---|---|---|---|
| SRQA-4HC | 4.85 | ø4.5 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 风扇铆钉 FAN SNAP RIVET 5-3-1

- COLOR: BLACK

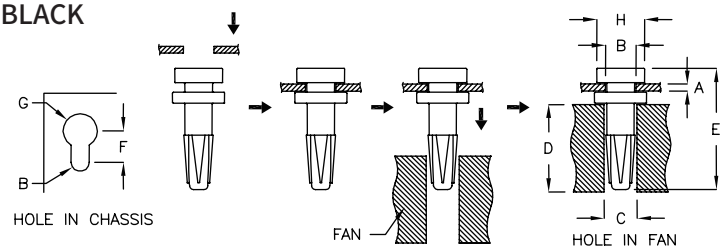


| PART NO | MATERIAL | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | F | G | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| SRYC−3HT | SILICONE | 0.8~1.2 | ø4.0 | ø3.5 | 5.0 | 16.8 | 8.0 | ø8.5 | ø7.8 | 2000 |
| SRYC−3XZ | TPE | 1.0 | ø3.5 | ø3.6 | >11.0 | 15.5 | 6.0 | ø6.5 | ø6.0 | |

## 风扇铆钉 FAN SNAP RIVET 5-3-2

- MATERIAL: TPE
- COLOR: BLACK

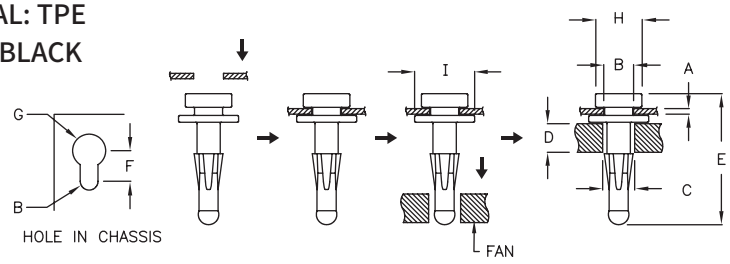


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | F | G | H | I | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| SRYK−3AC | 0.8 | ø4.1 | ø3.5 | 5.0 | 19.2 | 8.0 | ø8.0 | ø6.8 | ø8.8 | 2000 |
| ★ SRYK−3BF | 1.0 | ø2.8 | ø3.5 | 5.0 | 19.6 | 2.5 | ø3.1 | ø5.8 | ø7.5 | |

## 风扇铆钉 FAN SNAP RIVET 5-3-3

- MATERIAL: TPE
- COLOR: BLACK

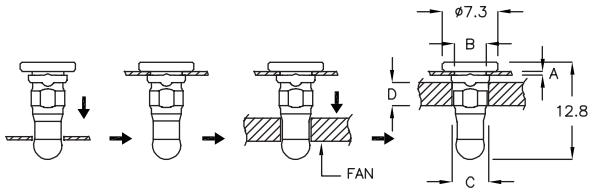


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN CHASSIS | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRCQ−4MT | 0.5 | ø4.3 | ø4.5 | 4.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-3-4

- MATERIAL: TPE
- COLOR: BLACK

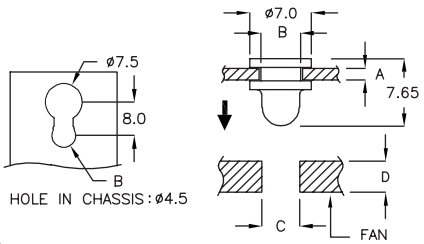


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRY−4XR | 1.5 | ø4.5 | ø4.5 | 4.5 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-4-1

- MATERIAL: TPE
- COLOR: BLACK

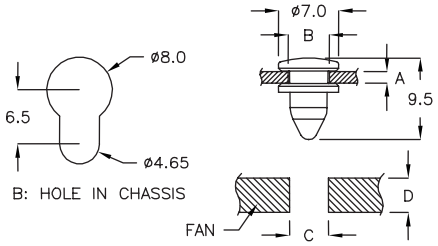


| PART NO | A CHASSIS THICKNESS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRYD-4TC | 1.3 | ø4.5 | 4.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-4-2

- MATERIAL: TPE
- COLOR: BLACK

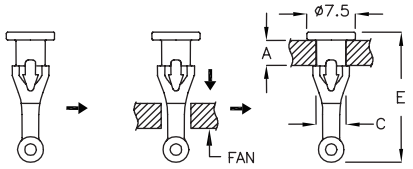


| PART NO | A FAN CHASSIS THICKNESS | C HOLE IN FAN | E | PACKAGE |
|---|---|---|---|---|
| SRZ-4AT | 4.0 | ø4.5 | 20.1 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-4-3

- MATERIAL: SILICONE
- COLOR: BLACK

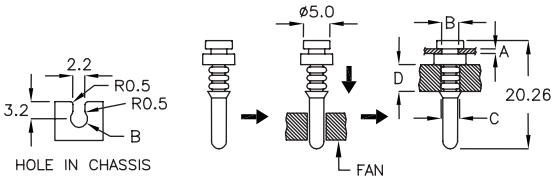


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRDM-20K | 0.8 | ø3.2 | ø3.5 | 5.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-4-4

- MATERIAL: TPE
- COLOR: BLACK

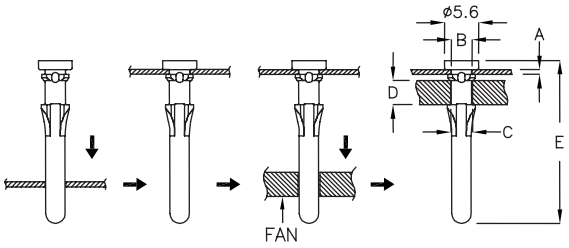


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRM-24NK | 0.8 | ø3.5 | ø3.5 | 4.0 | 26.9 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-5-1

- MATERIAL: TPE
- COLOR: BLACK

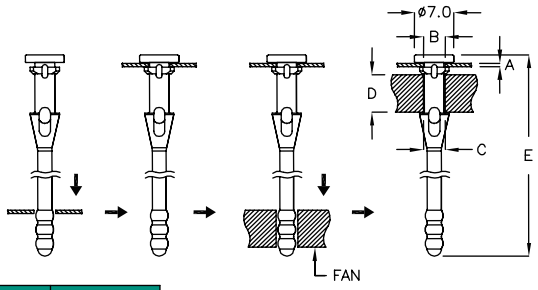


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD−3GT | 0.8 | ø3.5 | ø3.5 | 28.0 | 73.0 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-5-2

- MATERIAL: SILICONE
- COLOR: BLACK

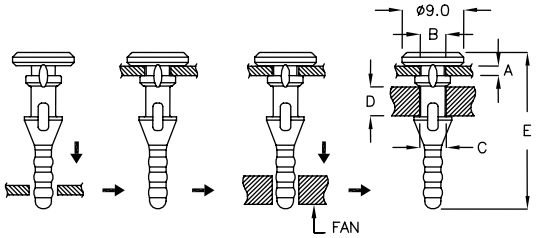


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD−4WY | 1.5 | ø3.5 | ø3.5 | 5.0 | 23.0 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-5-3

- MATERIAL: TPE
- COLOR: BLACK

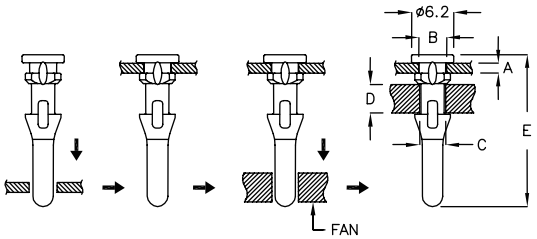


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRDK−22A | 1.5 | ø4.0 | ø3.5 | 5.0 | 22.2 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-5-4

- MATERIAL: SILICONE
- COLOR: BLACK

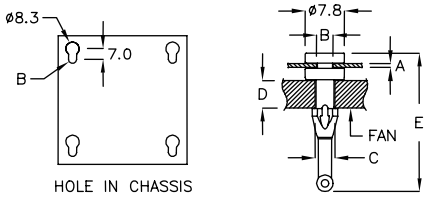


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SR−17KM | 1.0 | ø3.0 | ø3.5 | 6.5 | 27.6 | 2000 |
| SR−20RQ | 1.0 | ø4.0 | ø3.5 | 5.0 | 25.45 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-6-1

- MATERIAL: SILICONE
- COLOR: BLACK

NEW

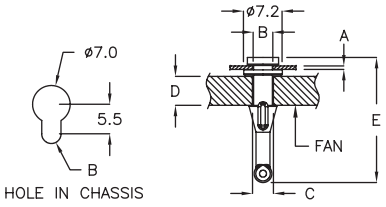


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| ★ SRD−3BK | 1.0 | ø3.6 | ø3.5 | 6.0~6.4 | 23.3 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-6-2

- COLOR: BLACK

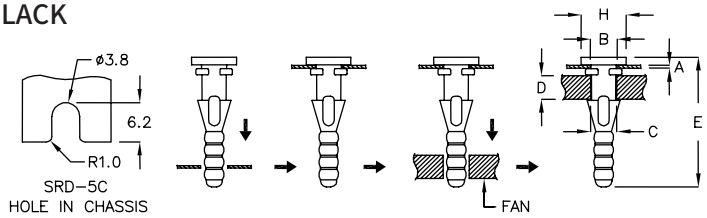


| PART NO | MATERIAL | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRD−3C | SILICONE | 1.0 | ø3.6 | ø3.5 | 5.0 | 20.0 | ø5.8 | 2000 |
| SRD−3MF | TPE | 0.8 | ø3.5 | ø3.5 | 4.0 | 20.0 | ø5.8 | |
| SRD−5C | SILICONE | 0.8 | | ø4.3 | 5.0 | 23.8 | ø8.0 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-6-3

- MATERIAL: SILICONE
- COLOR: BLACK

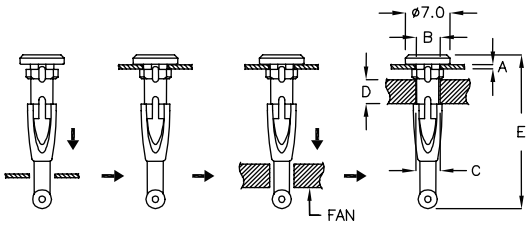


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRG−3A | 0.8 | ø3.7 | ø3.5 | 5.0 | 24.3 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-6-4

- MATERIAL: SILICONE
- COLOR: BLACK

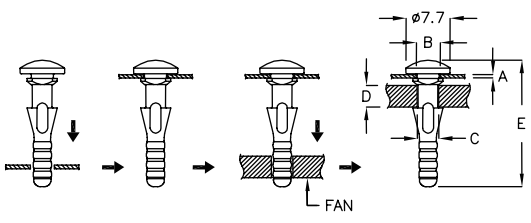


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRCK−3HR | 1.0 | ø4.0 | ø3.5 | 5.0 | 22.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-7-1

- MATERIAL: SILICONE
- COLOR: BLACK

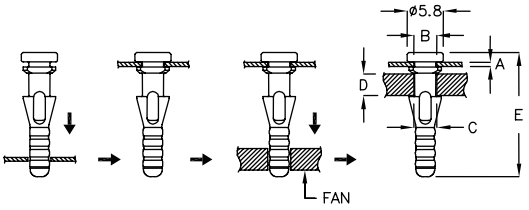


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD-3FC | 1.0 | ø3.5 | ø3.5 | 4.0 | 20.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-7-2

- MATERIAL: TPE
- COLOR: BLACK

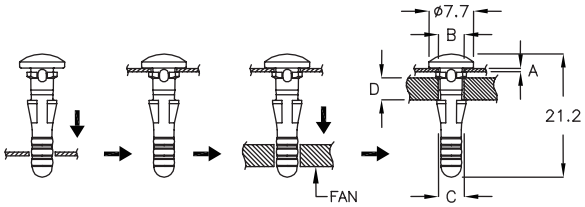


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRCK-4HT | 1.0 | ø4.0 | ø4.0 | 4.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-7-3

- MATERIAL: SILICONE
- COLOR: BLACK

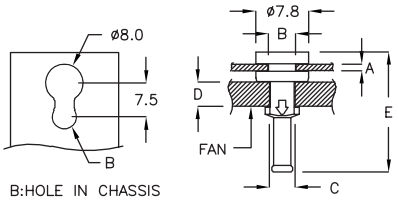


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRH-3M | 1.0 | ø4.0 | ø3.5 | 4.0 | 17.7 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-7-4

- MATERIAL: TPE
- COLOR: BLACK

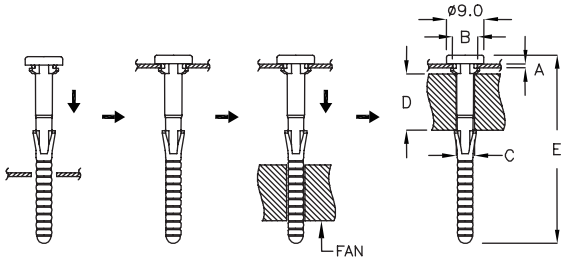


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD-3TF | 2.0 | ø4.0 | ø3.5 | 5.0 | 25.0 | 2000 |
| SRD-4GM | 0.8 | ø6.0 | ø4.3 | 15.0 | 44.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-8-1

- MATERIAL: SILICONE
- COLOR: BLACK

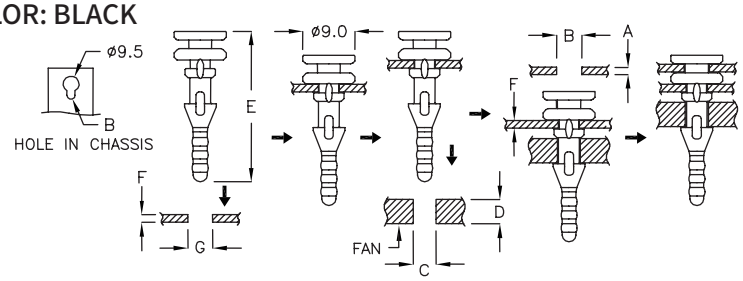


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | F CHASSIS THICKNESS | G HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRD−4PW | 1.5 | ø4.2 | ø3.5 | 5.0 | 26.0 | 1.5 | ø3.5 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-8-2

- MATERIAL: SILICONE
- COLOR: BLACK

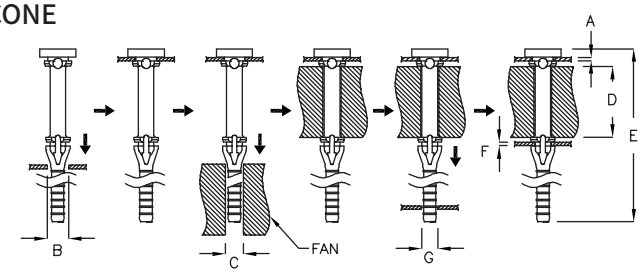


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | F CHASSIS THICKNESS | G HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRD−3QW | 0.8 | ø4.5 | ø3.5 | 28.0 | 72.7 | 0.8 | ø3.5 | 500 |

## 风扇铆钉 FAN SNAP RIVET 5-8-3

- MATERIAL: SILICONE
- COLOR: BLACK

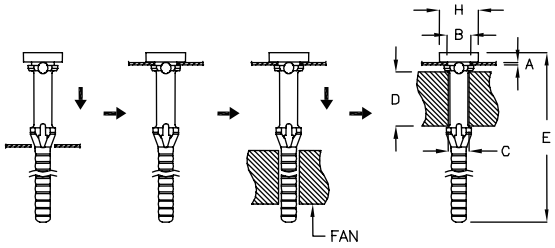


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| SRD−3A | 0.8 | ø4.5 | ø3.5 | 28.0 | 70.7 | ø7.8 | 500 |
| SRD−3R | 0.8 | ø3.5 | ø3.5 | 28.0 | 70.7 | ø6.8 | |
| SRD−3DQ | 0.8 | ø3.5 | ø3.5 | 28.0 | 70.7 | ø5.5 | |
| SRD−3JK | 0.8 | ø4.5 | ø3.5 | 20.0 | 54.7 | ø7.8 | |
| SRD−3WP | 1.0 | ø3.5 | ø3.5 | 28.0 | 70.9 | ø6.8 | |

## 风扇铆钉 FAN SNAP RIVET 5-8-4

- MATERIAL: SILICONE
- COLOR: BLACK

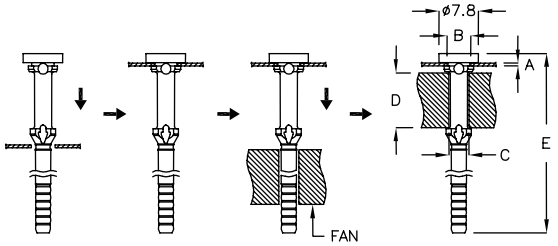


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD−3AT | 0.8 | ø4.5 | ø3.5 | 28.0 | 70.7 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 风扇铆钉 FAN SNAP RIVET 5-9-1

- MATERIAL: TPR
- COLOR: BLACK







| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SR−17Y | 1.6 | ø4.1 | ø3.6 | 6.5 | 27.65 | 2000 |
| SR−20Y | 1.6 | ø4.1 | ø3.6 | 5.5 | 25.0 | |

## 风扇铆钉 FAN SNAP RIVET 5-9-2

- MATERIAL: SILICONE
- COLOR: BLACK







| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SR−41Y | 1.0 | ø4.0 | ø4.0 | 4.0 | 25.5 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-9-3

- MATERIAL: TPE
- COLOR: BLACK







| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SR−20MK | 1.6 | ø4.1 | ø3.6 | 5.5 | 25.7 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-9-4

- MATERIAL: SILICONE
- COLOR: BLACK

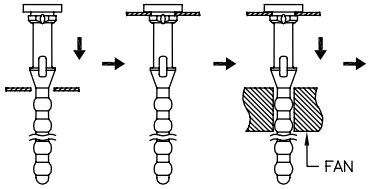





| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD−4A | 1.0 | ø4.4 | ø4.0 | 25.4 | 65.8 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-10-1

- MATERIAL: SILICONE
- COLOR: BLACK

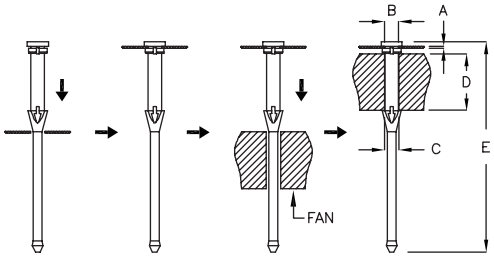


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD-5H | 0.8 | ø4.2 | ø4.2 | 20.0 | 69.3 | 500 |

## 风扇铆钉 FAN SNAP RIVET 5-10-2

- MATERIAL: TPE
- COLOR: BLACK

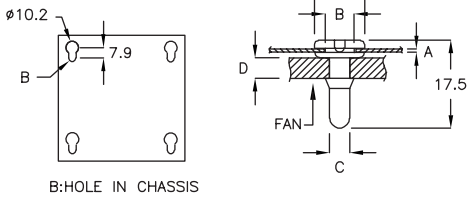


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-15C | 0.8 | ø5.9 | ø4.2 | 4.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-10-3

- COLOR: BLACK

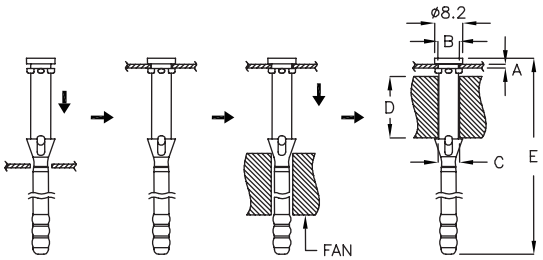


| PART NO | MATERIAL | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| SRD-4BN | SILICONE | 1.0 | ø4.3 | ø4.3 | 10.0 | 41.5 | 1000 |
| SRD-4KH | TPE | 1.0 | ø4.3 | ø4.3 | 15.0 | 46.5 | |

## 风扇铆钉 FAN SNAP RIVET 5-10-4

- MATERIAL: SILICONE
- COLOR: BLACK

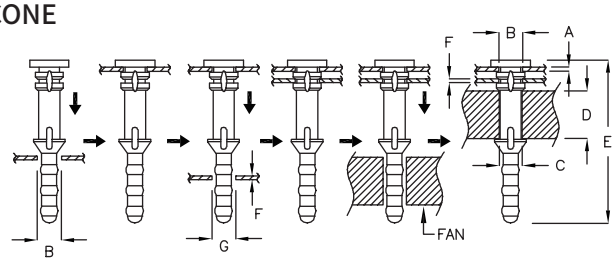


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | F CHASSIS THICKNESS | G HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRD-4D | 1.0~1.2 | ø4.3 | ø4.3 | 38.0 | 81.2 | 0.8~1.0 | ø4.3 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-11-1

- MATERIAL: TPE
- COLOR: BLACK

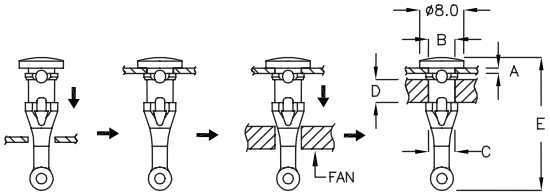


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SR-22GS | 1.0 | ø4.3 | ø4.3 | 4.0 | 23.2 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-11-2

- MATERIAL: SILICONE,TPE,TPR
- COLOR: BLACK

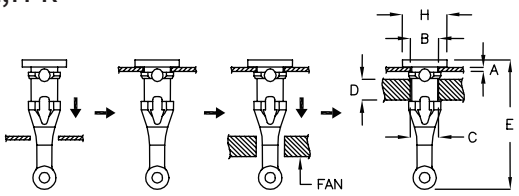


| PART NO | MATERIAL | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR-16Y | TPE | 0.9 | ø4.6 | ø4.6 | 4.0 | 22.2 | ø7.6 | 2000 |
| SR-22A | TPE | 1.0 | ø4.5 | ø4.5 | 4.0 | 22.2 | ø7.6 | |
| SR-22C | TPE | 1.0 | ø4.5 | ø4.5 | 3.0 | 22.2 | ø7.6 | |
| SR-22D | TPE | 0.8 | ø4.5 | ø4.5 | 4.0 | 22.2 | ø7.6 | |
| SR-22F | TPE | 0.8 | ø4.5 | ø4.5 | 3.0 | 22.2 | ø7.6 | |
| SR-22H | SILICONE | 1.0 | ø4.3 | ø4.3 | 4.0 | 22.2 | ø7.6 | |
| SR-22J | TPE | 1.0 | ø4.3 | ø4.3 | 3.0 | 22.2 | ø7.6 | |
| SR-22K | TPE | 0.8 | ø4.3 | ø4.3 | 4.0 | 22.2 | ø7.6 | |
| SR-22L | TPE | 0.8 | ø4.3 | ø4.3 | 3.0 | 22.2 | ø7.6 | |
| SR-22XW | SILICONE | 1.2 | ø4.6 | ø4.5 | 4.0 | 22.7 | ø9.3 | |

## 风扇铆钉 FAN SNAP RIVET 5-11-3

- MATERIAL: TPE
- COLOR: BLACK

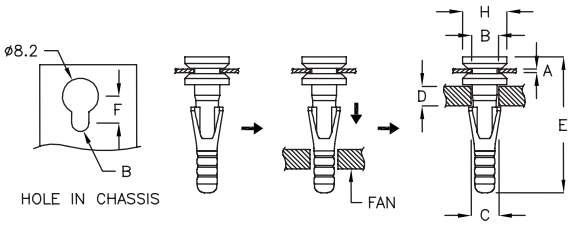


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | F | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRD-7AK | 0.8 | ø4.4 | ø4.3 | 4.0 | 23.9 | 5.7 | ø7.8 | 1000 |
| SRD-21Y | 1.0 | ø4.5 | ø4.5 | 4.0 | 22.6 | 6.2 | ø8.0 | 2000 |
| SRD-23C | 1.0 | ø4.5 | ø4.5 | 4.8 | 23.3 | 6.2 | ø8.0 | 1000 |
| SRD-25GW | 1.0 | ø4.5 | ø4.3 | 5.4 | 25.7 | 6.2 | ø7.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-12-1

- MATERIAL: TPE
- COLOR: BLACK

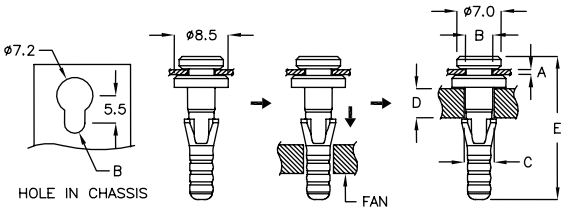


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD−22MK | 1.0 | ø4.1 | ø4.5 | 5.0 | 22.6 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-12-2

- MATERIAL: TPE
- COLOR: BLACK

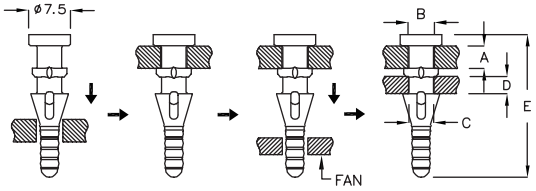


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRD−4NH | 4.0 | ø4.65 | ø4.3 | 4.0 | 25.4 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-12-3

- MATERIAL: SILICONE
- COLOR: BLACK

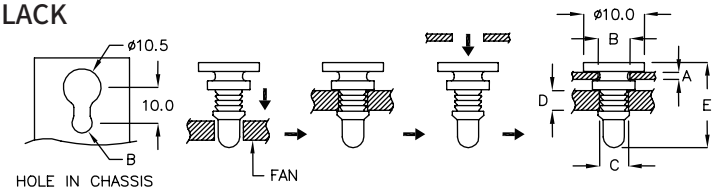


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRCM−5JG | 1.3 | ø5.6 | ø4.3 | 4.0 | 13.85 | 2000 |
| SRCM−5K | 1.6 | ø5.6 | ø4.3 | 4.0 | 14.05 | |

## 风扇铆钉 FAN SNAP RIVET 5-12-4

- MATERIAL: SILICONE
- COLOR: BLACK

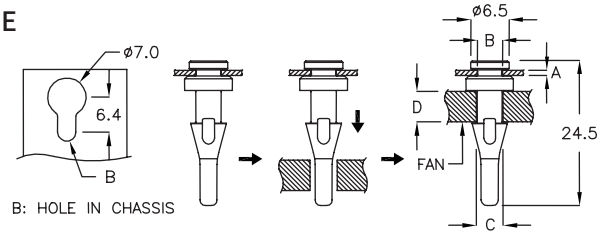


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRL−24JK | 0.9 | ø4.1 | ø4.4 | 5.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-13-1

- MATERIAL: TPE
- COLOR: BLACK

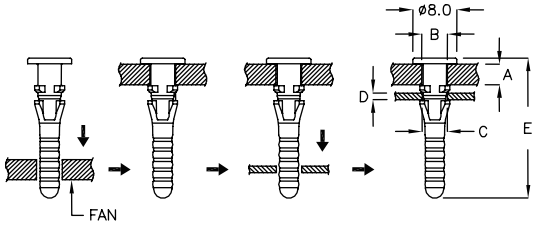


| PART NO | A FAN CHASSIS THICKNESS | B HOLE IN FAN | C HOLE IN CHASSIS | D CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SRCK−4FA | 4.0 | ø4.4 | ø4.4 | 1.5 | 25.4 | 2000 |



## 风扇铆钉 FAN SNAP RIVET 5-13-2

- MATERIAL: TPE
- COLOR: BLACK







| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | PACKAGE |
|---|---|---|---|---|---|---|
| SR−26Y | 1.0 | ø4.1 | ø4.5 | 4.0 | 22.6 | 1000 |

## 风扇铆钉 FAN SNAP RIVET 5-13-3

- MATERIAL: TPR
- COLOR: BLACK







| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR−21RK | 1.0 | ø4.5 | ø4.5 | 4.0 | 2000 |



## 风扇铆钉 FAN SNAP RIVET 5-13-4

- MATERIAL: TPR
- COLOR: BLACK







| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR−21Y | 1.0 | ø4.5 | ø4.5 | 4.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-14-1

- MATERIAL: TPE
- COLOR: BLACK

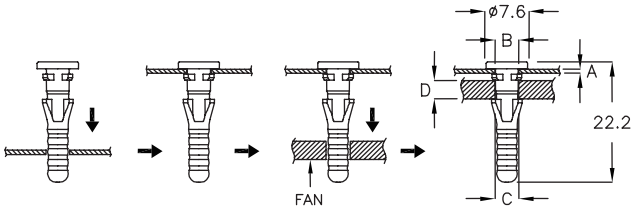


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRD−22AT | 1.0 | ø4.5 | ø4.5 | 4.0 | 2000 |





## 风扇铆钉 FAN SNAP RIVET 5-14-2

- MATERIAL: TPE
- COLOR: BLACK

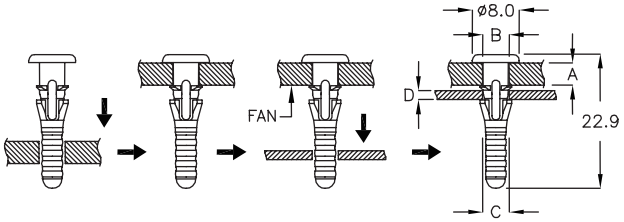


| PART NO | A FAN THICKNESS | B HOLE IN FAN | C HOLE IN CHASSIS | D CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRBK−4TK | 4.0 | ø4.5 | ø4.5 | 2.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-14-3

- MATERIAL: TPE
- COLOR: BLACK

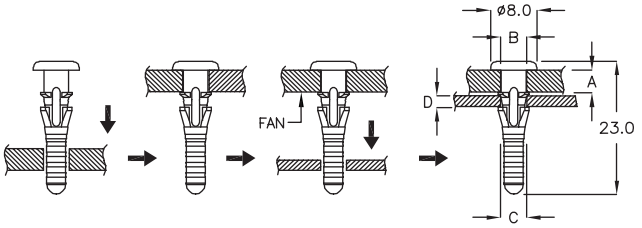


| PART NO | A FAN THICKNESS | B HOLE IN FAN | C HOLE IN CHASSIS | D CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRCK−4JL | 4.0 | ø4.5 | ø4.5 | 2.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-15-1

- MATERIAL: TPE
- COLOR: BLACK

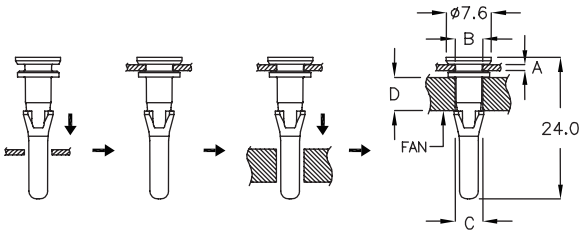


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRD-24D | 1.0 | ø4.5 | ø4.5 | 6.0 | 2000 |



## 风扇铆钉 FAN SNAP RIVET 5-15-2

- MATERIAL: SILICONE
- COLOR: BLACK

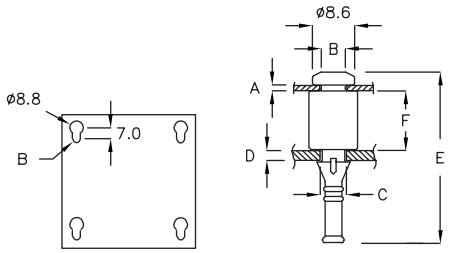


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN CHASSIS | D FAN CHASSIS THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-33Y | 1.2 | ø5.0 | ø4.6 | 2.5 | 34.3 | 11.4 | 500 |
| SR-36Y | 1.2 | ø5.0 | ø4.6 | 2.5 | 34.9 | 12.0 | |

## 风扇铆钉 FAN SNAP RIVET 5-15-3

- MATERIAL: TPE
- COLOR: BLACK

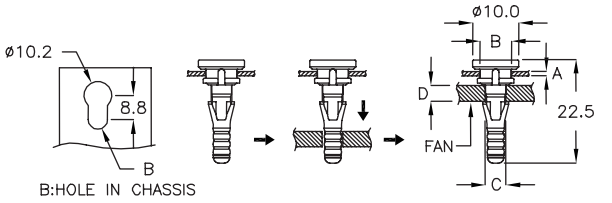


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRD-21SA | 1.0 | ø7.1 | ø4.5 | 4.0 | 2000 |

## 风扇固定扣 FAN SNAP RIVET 5-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

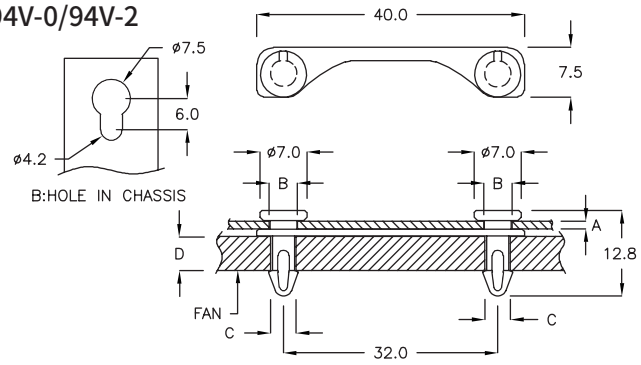


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| LHK-40 | 1.2 | ø4.2 | ø3.5 | 5.0 | 200 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇固定扣 FAN SNAP RIVET 5-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

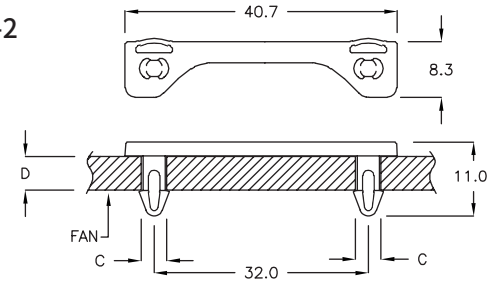


| PART NO | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| LHQ-40M | ø3.5 | 5.0 | 200 |

## 风扇固定扣 FAN SNAP RIVET 5-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

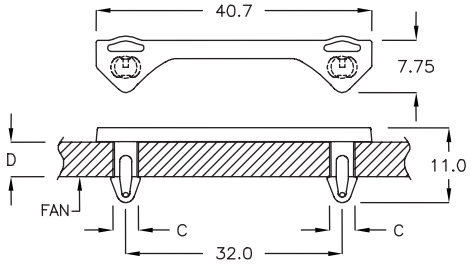


| PART NO | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| LHQ-40KP | ø3.5 | 5.0 | 200 |

## 铆钉 MOUNTING BUTTON 5-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

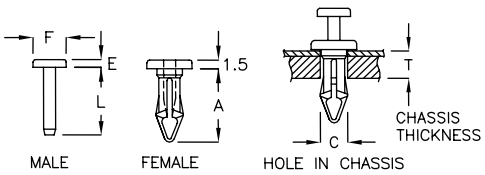


| PART NO | A | C HOLE IN CHASSIS | E | F | L | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-02Y | 8.9 | ø3.1 | 1.3 | ø3.2 | 7.65 | 2.5~3.2 | 2000 |
| SR-03Y | 10.0 | ø3.2 | 1.0 | ø3.1 | 9.0 | 4.2~4.5 | |
| SR-4Y | 12.1 | ø4.3 | 1.3 | ø5.5 | 11.2 | 5.6~6.4 | |
| SR-06C | 10.7 | ø4.5 | 1.55 | ø7.3 | 9.55 | 5.6~6.0 | |
| SR-06Y | 10.8 | ø4.6 | 1.5 | ø7.3 | 9.6 | 5.6~6.0 | |
| SR-08Y | 10.7 | ø4.65 | 1.53 | ø4.75 | 9.4 | 5.2~5.7 | |

## 尼龙铆钉 SNAP RIVET 5-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

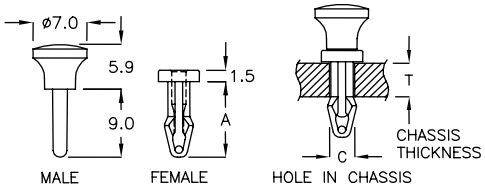


| PART NO | A | C HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRXM-3Y | 10.0 | ø3.0 | 4.8 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-17-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

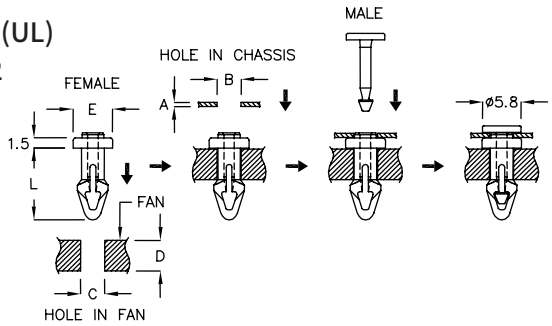


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | L | PACKAGE |
|---|---|---|---|---|---|---|---|
| SQR-3KM | 0.8 | ø3.5 | ø3.5 | 4.0 | ø6.8 | 9.95 | 2000 |
| SQR-3GF | 1.0 | ø3.5 | ø3.5 | 4.0 | ø6.8 | 9.95 | |
| SQR-3AK | 0.8 | ø3.5 | ø3.5 | 5.0 | ø6.0 | 10.85 | |
| SQR-3DP | 1.0 | ø3.5 | ø3.5 | 5.0 | ø6.0 | 10.85 | |

## 风扇铆钉 FAN SNAP RIVET 5-17-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

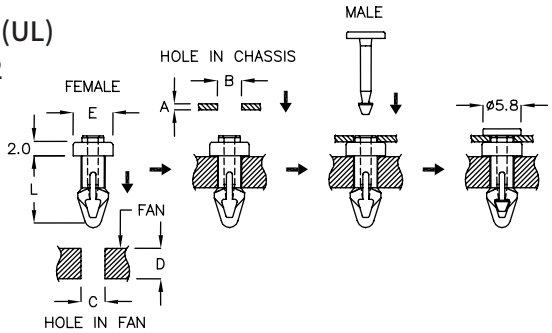


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | L | PACKAGE |
|---|---|---|---|---|---|---|---|
| SQRC-3TC | 1.0 | ø3.5 | ø3.5 | 5.0 | ø6.0 | 10.85 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-17-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

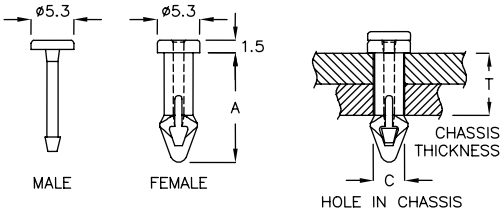


| PART NO | A | C HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-14Y | 13.6 | ø3.6 | 8.1~8.3 | 2000 |



## 风扇铆钉 FAN SNAP RIVET 5-17-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK

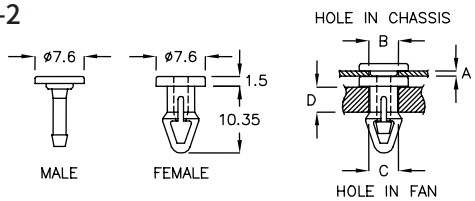


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-11Y | 0.8 | ø4.6 | ø4.45 | 4.3~4.5 | 2000 |
| SR-12Y | 0.8 | ø4.6 | ø4.45 | 4.5~5.7 | |
| SR-45Y | 0.8 | ø4.6 | ø4.3 | 3.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-18-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

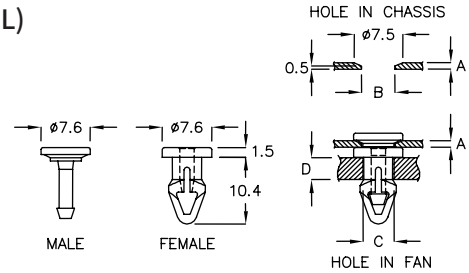


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-13Y | 1.0 | ø5.15 | ø4.45 | 4.0~4.2 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-18-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK,BLUE

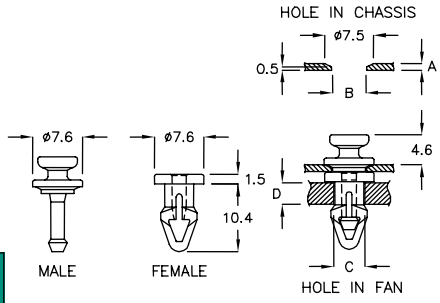


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-13YH | 1.0 | ø5.15 | ø4.45 | 4.0~4.2 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-18-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

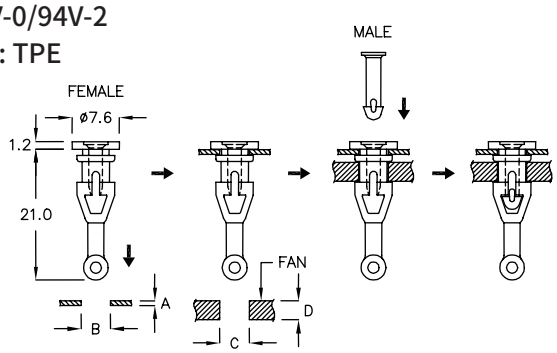


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-15Y | 1.0 | ø4.6 | ø4.6 | 3.8~4.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-18-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK,BLUE

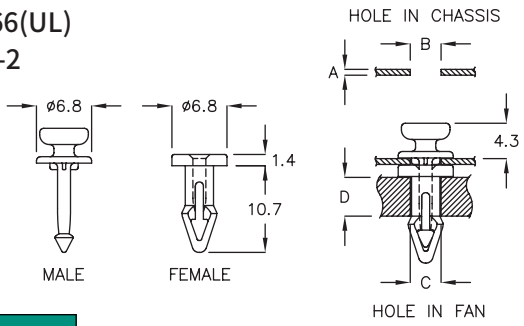


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-51Y | 0.8 | ø3.6 | ø3.5 | 5.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-19-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK,BLUE

NEW

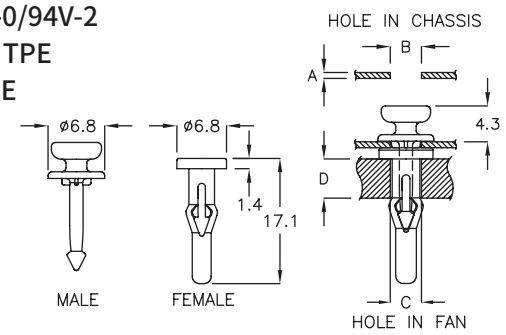


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ★ SR−52Y | 0.8 | ø3.6 | ø3.5 | 5.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-19-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

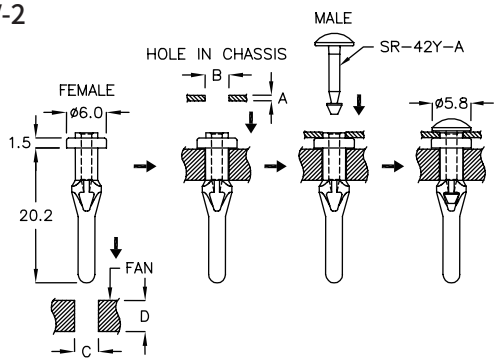


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRNT−3FY | 0.8~1.0 | ø3.5 | ø3.5 | 5.0 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-19-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

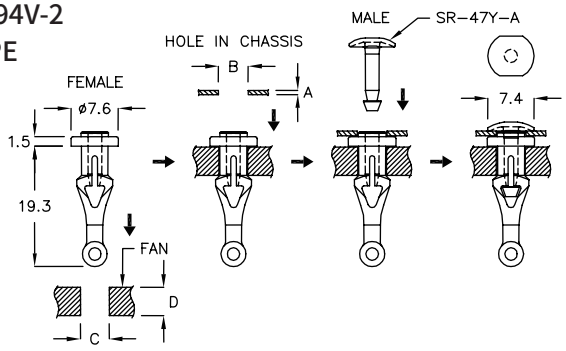


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRN−4YB | 0.8 | ø4.5 | ø4.3 | 4.8~5.0 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-20-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

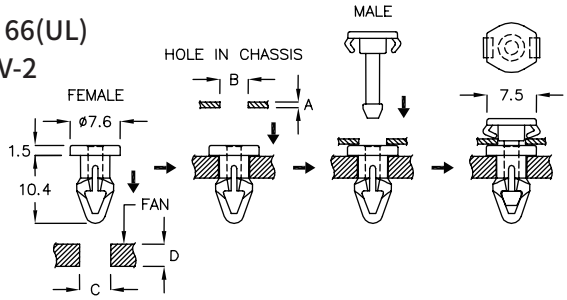


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-19Y | 0.8 | ø4.1 | ø4.45 | 4.0~4.2 | 2000 |

## 风扇铆钉 FAN SNAP RIVET 5-20-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

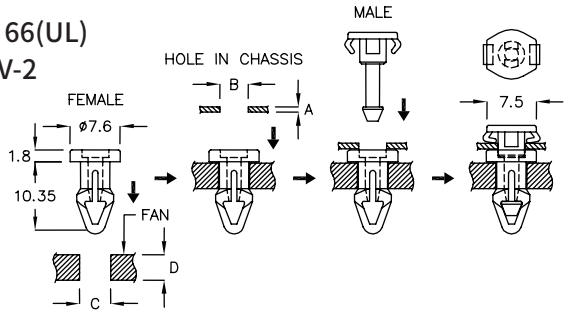


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SR-23Y | 1.2 | ø4.1 | ø4.45 | 4.0~4.2 | 2000 |
| SR-24Y | 0.8 | ø4.1 | ø4.45 | 4.0~4.2 | |

## 风扇铆钉 FAN SNAP RIVET 5-20-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

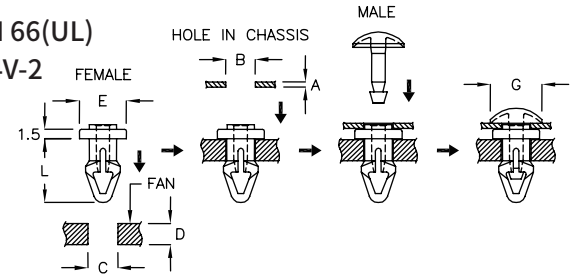


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | E | G | L | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR-38Y | 0.8~1.2 | ø4.5 | ø4.45 | 4.0 | ø7.6 | ø8.3 | 10.35 | 2000 |
| SR-42Y | 0.8~1.0 | ø3.5 | ø3.5 | 5.0 | ø6.0 | ø5.8 | 11.3 | |

## 风扇铆钉 FAN SNAP RIVET 5-20-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

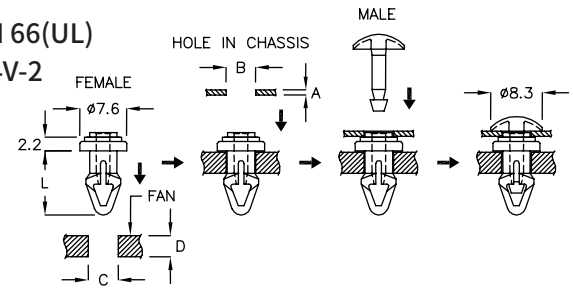


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | L | PACKAGE |
|---|---|---|---|---|---|---|
| SR-39Y | 0.8~1.2 | ø4.5 | ø4.45 | 4.0 | 10.35 | 2000 |
| SR-43Y | 0.8~1.2 | ø4.5 | ø4.3 | 3.5 | 9.95 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇铆钉 FAN SNAP RIVET 5-21-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

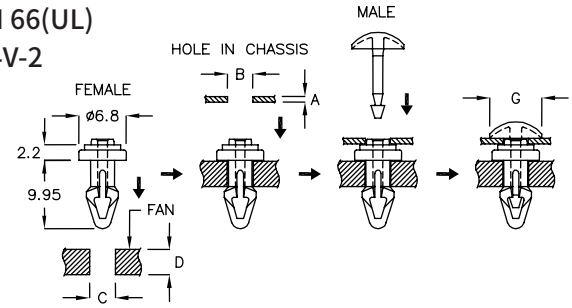


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | G | PACKAGE |
|---|---|---|---|---|---|---|
| SR−44Y | 0.8 | ø3.5 | ø3.5 | 4.0 | ø7.5 | 2000 |
| SR−48Y | 1.0 | ø3.5 | ø3.5 | 4.0 | ø5.8 | |

## 风扇铆钉 FAN SNAP RIVET 5-21-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

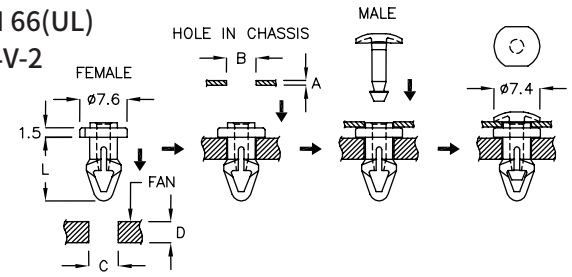


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | L | PACKAGE |
|---|---|---|---|---|---|---|
| SR−46Y | 1.0~1.2 | ø4.5 | ø4.45 | 4.0 | 10.35 | 2000 |
| SR−47Y | 0.8 | ø4.5 | ø4.3 | 5.0 | 11.35 | |

## 风扇铆钉 FAN SNAP RIVET 5-21-3

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: TPE
- COLOR: BLACK

NEW

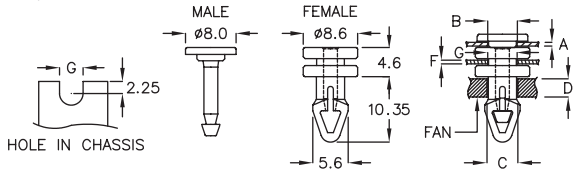


| PART NO | A CHASSIS THICKNESS | B HOLE IN CHASSIS | C HOLE IN FAN | D FAN CHASSIS THICKNESS | G HOLE IN CHASSIS | F CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ SQRD−4H | 1.0 | ø4.5 | ø4.5 | 4.0 | 4.5 | 1.0 | 2000 |



## 尼龙铆钉 SNAP RIVET 5-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

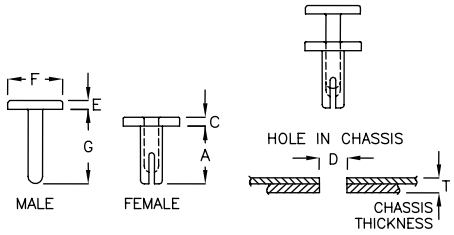


| PART NO | A | C | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR−2MC | 3.2 | 0.6 | ø2.0 | 0.5 | ø3.5 | 4.0 | 1.3~2.0 | 2000 |
| SR−2QH | 4.0 | 0.8 | ø2.0 | 0.5 | ø3.5 | 4.85 | 2.0~3.0 | |
| SR−2TK | 5.0 | 0.8 | ø2.0 | 0.75 | ø4.8 | 6.5 | 2.8~3.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

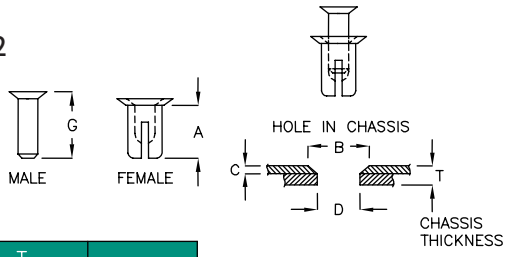


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | D HOLE IN CHASSIS | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-3P | 8.0 | ø6.5 | 1.25 | ø3.0 | 8.65 | 5.1~5.3 | 2000 |
| SR-3RY | 3.0 | ø5.9 | 0.8 | ø3.4 | 3.7 | 2.7~2.95 | |
| SR-4B | 6.35 | ø6.5 | 0.7 | ø4.0 | 7.8 | 3.5~3.9 | |
| SR-4CA | 6.2 | ø6.5 | 0.8 | ø4.0 | 7.5 | 3.5~4.9 | |
| SR-4P | 8.5 | ø6.5 | 0.8 | ø4.0 | 9.85 | 4.3~5.6 | |
| SR-4PF | 7.25 | ø5.8 | 0.9 | ø4.0 | 9.3 | 5.7~6.0 | |
| SR-4PL | 10.4 | ø6.5 | 0.8 | ø4.0 | 12.8 | 6.8~8.8 | |
| SR-4PJ | 15.0 | ø6.5 | 1.5 | ø3.9 | 17.45 | 12.0~13.0 | |

## 尼龙铆钉 SNAP RIVET 5-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

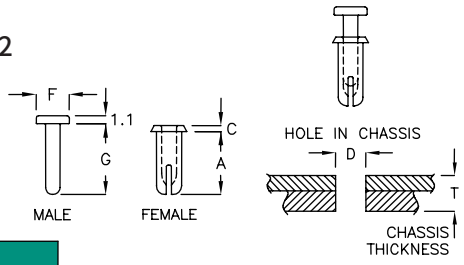


| PART NO | A | C | D HOLE IN CHASSIS | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-3DM | 8.6 | 0.8 | ø3.5 | ø4.5 | 9.65 | 5.5~6.5 | 2000 |
| SR-4LM | 11.3 | 0.9 | ø4.5 | ø5.8 | 13.4 | 8.0~9.0 | |

## 尼龙铆钉 SNAP RIVET 5-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

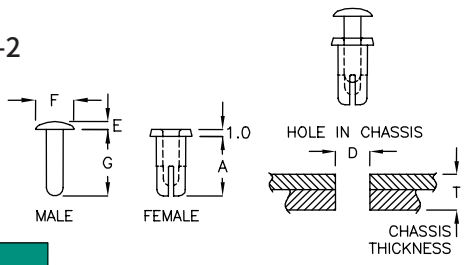


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-4DR | 9.0 | ø4.5 | 1.2 | ø5.8 | 10.5 | 5.2~6.0 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

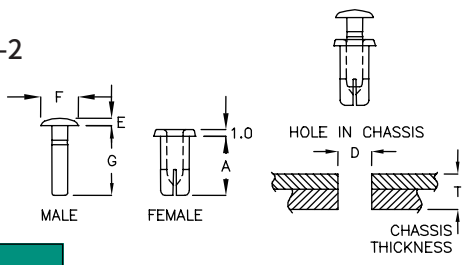


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-4DX | 9.0 | ø4.5 | 1.15 | ø5.7 | 10.6 | 5.2 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

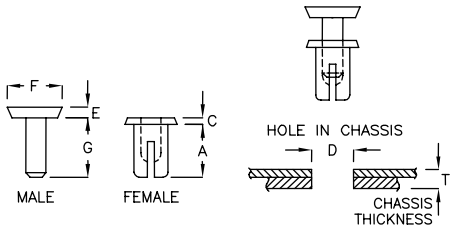


| PART NO | A | C | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR−3XK | 7.5 | 0.8 | ø3.0 | 1.3 | ø5.5 | 8.3 | 3.5~4.6 | 2000 |
| SR−3T | 7.5 | 0.8 | ø3.0 | 1.25 | ø6.9 | 9.4 | 3.5~4.6 | |
| SR−3TW | 11.7 | 1.0 | ø3.1 | 1.2 | ø5.5 | 12.7 | 8.7~9.7 | |
| SR−4T | 8.0 | 1.0 | ø4.0 | 1.3 | ø7.0 | 11.0 | 3.7~5.2 | |
| SR−4YT | 8.3 | 1.0 | ø4.3 | 1.7 | ø5.5 | 11.3 | 4.0~6.0 | |
| SR−4K | 8.3 | 1.0 | ø4.3 | 1.5 | ø7.9 | 11.4 | 4.0~6.0 | |
| SR−4LQ | 10.5 | 0.9 | ø4.5 | 1.25 | ø5.85 | 12.3 | 6.0~7.2 | |

## 尼龙铆钉 SNAP RIVET 5-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

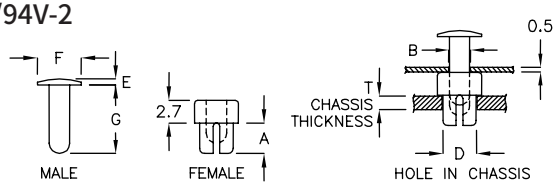


| PART NO | A | B HOLE IN CHASSIS | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR−4FH | 3.6 | ø2.6 | ø4.0 | 0.7 | ø5.2 | 7.9 | 1.6 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

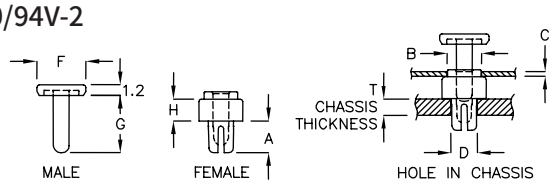


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | D HOLE IN CHASSIS | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| SRMR−2H | 3.6 | ø3.0 | 0.25 | ø2.0 | ø4.6 | 6.4 | 2.5 | 1.6 | 2000 |
| SRMR−2CF | 3.0 | ø3.0 | 0.6~0.8 | ø2.0 | ø4.6 | 6.4 | 2.5 | 1.6 | |
| SRMR−3D | 3.6 | ø4.0 | 0.4 | ø3.0 | ø5.6 | 6.5 | 2.5 | 1.6 | |
| SRMR−3SC | 3.6 | ø4.0 | 1.6 | ø3.0 | ø5.6 | 10.2 | 5.0 | 1.6 | |

## 尼龙铆钉 SNAP RIVET 5-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

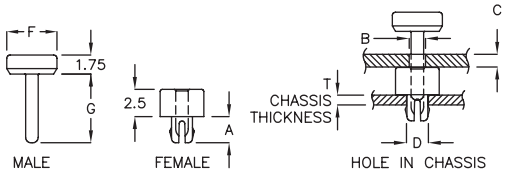


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | D HOLE IN CHASSIS | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRMS−2N | 2.4 | ø1.5 | 1.2 | ø2.0 | ø4.6 | 6.3 | 0.9~1.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 尼龙铆钉 SNAP RIVET 5-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

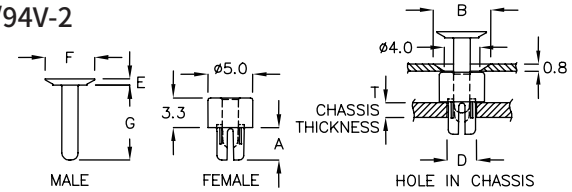


| PART NO | A | B HOLE IN CHASSIS | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRMT-3C | 3.6 | ø6.4 | ø3.18 | 0.7 | ø5.5 | 8.3 | 1.6 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

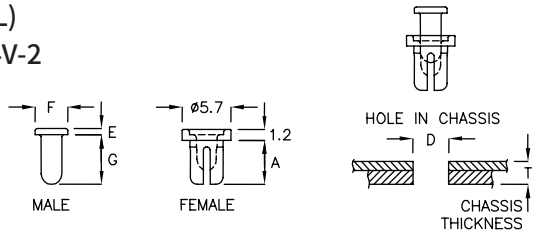


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SRMF-4C | 5.0 | ø4.0 | 0.7 | ø3.8 | 5.6 | 2.6 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

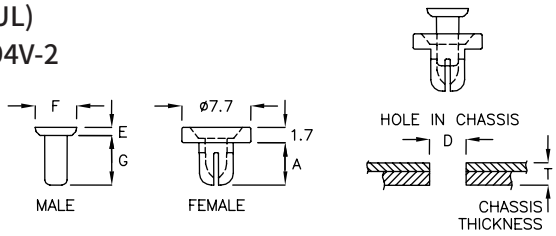


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-4XT | 4.7 | ø4.0 | 0.9 | ø4.65 | 5.5 | 1.8~2.5 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

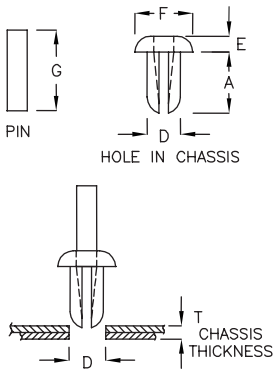


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| MAA-3C | 5.8 | ø3.2 | 1.5 | ø5.55 | 7.7 | 2.5~3.0 | 2000 |
| MAA-4C | 13.7 | ø4.7 | 2.75 | ø8.15 | 16.0 | 8.4~9.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

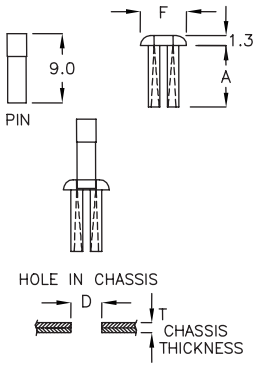


| PART NO | A | D HOLE IN CHASSIS | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MAB−3A | 8.0 | ø4.0 | ø6.0 | 0.8~1.2 | 2000 |

## 铆钉 SNAP RIVET 5-25-2

- MATERIAL: POM
- COLOR: NATURAL

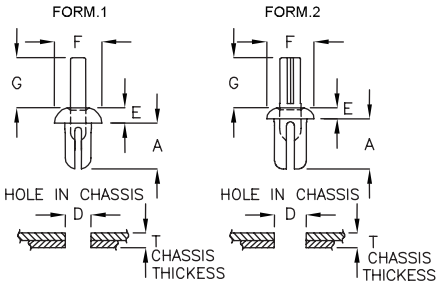


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRX−3DF | 7.0 | ø3.0 | 2.0 | ø5.6 | 8.8 | 2.0~3.0 | 1 | 2000 |
| SRX−3A | 7.05 | ø3.6 | 2.0 | ø6.2 | 8.8 | 2.0~5.0 | 1 | |
| SRX−4P | 7.0 | ø4.0 | 2.0 | ø6.6 | 8.8 | 2.0~5.0 | 1 | |
| SRX−5M | 7.1 | ø5.0 | 2.0 | ø7.6 | 8.8 | 2.0~5.0 | 2 | |
| SRX−6K | 7.1 | ø6.0 | 2.0 | ø8.6 | 8.8 | 2.0~5.0 | 2 | |

## 铆钉 SNAP RIVET 5-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | D HOLE IN CHASSIS | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRXD−3A | 3.0 | ø3.4 | ø5.2 | 2.95 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

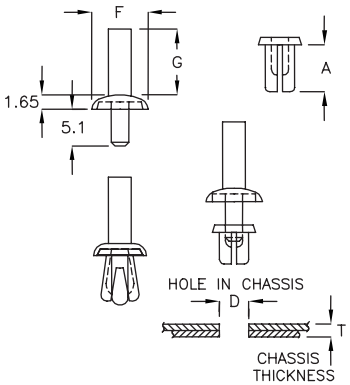


| PART NO | A | D HOLE IN CHASSIS | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| SR−3FK | 3.5 | ø3.5 | ø8.0 | 10.0 | 1.0~1.5 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

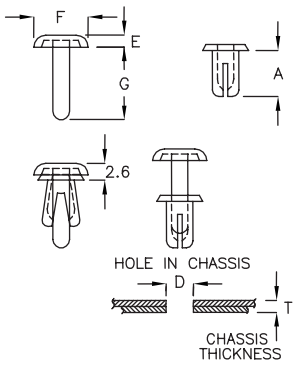


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-4RK | 7.0 | ø4.0 | 1.8 | ø8.2 | 11.0 | 4.5~5.4 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

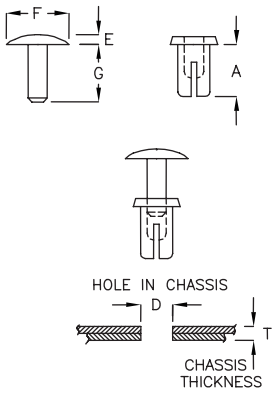


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-04C | 8.0 | ø4.2 | 0.75 | ø7.0 | 10.75 | 3.8~5.6 | 2000 |
| SR-4CK | 8.0 | ø4.05 | 1.0 | ø7.0 | 11.0 | 2.4~5.9 | |
| SR-4LC | 12.4 | ø4.0 | 0.9 | ø5.4 | 14.7 | 7.5~8.5 | |

## 尼龙铆钉 SNAP RIVET 5-26-3

- MALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: WHITE
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| SRMQ-3BW | 4.0 | 5.6 | ø3.5 | 1.9~2.3 | 1000 |

## 铆钉 SNAP RIVET 5-26-4

- SR-3SP MALE COLOR: WHITE
- SR-3SP FEMALE COLOR: NATURAL
- SR-3PF COLOR: BLACK




| PART NO | MATERIAL | | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| SR-3SP | MALE | PC V0 | 4.3 | ø3.0 | 1.75 | ø9.4 | 4.7 | 1.2~2.0 | 2000 |
| | FEMALE | N66 V0 | | | | | | | |
| SR-3PF | N66 V2 | | 3.65 | ø3.2 | 1.6 | ø8.5 | 5.0 | 1.5~1.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-27-1

- MALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: WHITE
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

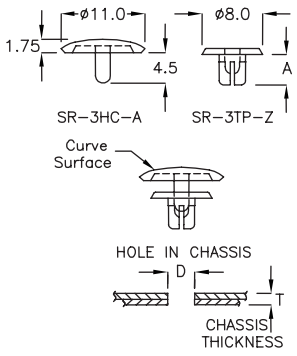


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-3HC-A | 4.0 | ø3.5 | 1.9~2.3 | 2000 |
| SR-3TP-Z | | | | |

## 尼龙铆钉 SNAP RIVET 5-27-2

- MALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: WHITE
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-3KD-A | 4.0 | ø3.5 | 1.9~2.3 | 2000 |
| SR-3TP-Z | | | | |

## 尼龙铆钉 SNAP RIVET 5-27-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

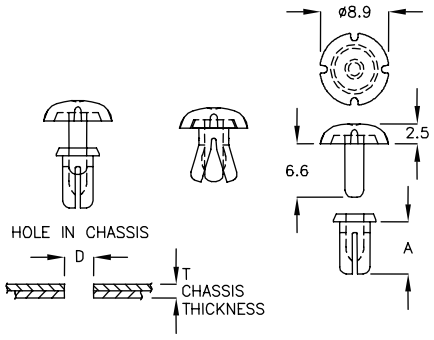


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-4AH | 6.4 | ø4.0 | 3.5~4.5 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

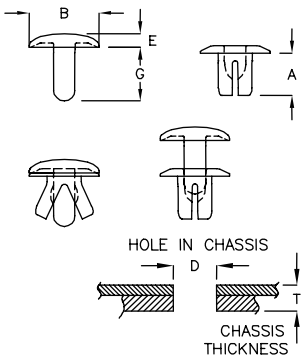


| PART NO | A | B | D HOLE IN CHASSIS | E | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SR-3RU | 7.0 | ø6.2 | ø3.5 | 1.6 | 7.5 | 4.5~5.5 | 2000 |
| SR-4ZT | 5.5 | ø9.0 | ø4.5 | 1.8 | 6.9 | 1.5~3.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 尼龙铆钉 SNAP RIVET 5-28-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

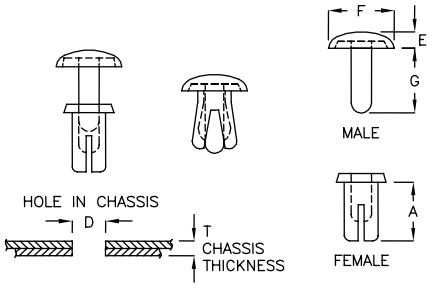


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | E | F | G | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR-1FM | 3.5 | ø1.5 | 2.0~2.5 | 1.2 | ø4.0 | 3.3 | N66 | 2000 |
| SR-2CW | 3.3 | ø1.9 | 1.6~2.0 | 1.2 | ø4.3 | 3.6 | | |
| SR-2XC | 3.25 | ø2.0 | 1.0~1.7 | 1.2 | ø4.3 | 4.2 | | |
| SR-2 | 3.3 | ø2.0 | 1.0~1.7 | 1.2 | ø4.3 | 4.2 | | |
| SR-2AF | 3.6 | ø2.0 | 1.5~2.0 | 1.2 | ø4.3 | 3.6 | | |
| SR-2BT | 4.0 | ø2.0 | 1.8~2.5 | 1.2 | ø4.3 | 4.5 | | |
| SR-2DS | 4.5 | ø2.0 | 2.2~3.0 | 1.2 | ø4.3 | 5.0 | | |
| SR-2FR | 5.5 | ø2.0 | 2.5~3.5 | 1.2 | ø4.3 | 5.8 | | |
| SR-2K | 6.1 | ø2.0 | 3.5~4.5 | 1.2 | ø4.3 | 6.2 | | |
| SR-2F | 2.8 | ø2.1 | 0.6~1.2 | 1.2 | ø4.3 | 3.6 | | |
| SR-2H | 4.4 | ø2.1 | 1.7~2.8 | 1.2 | ø4.3 | 5.2 | | |
| SR-2J | 5.2 | ø2.1 | 2.8~3.6 | 1.2 | ø4.3 | 6.5 | | |
| SR-2RC | 4.7 | ø2.2 | 2.8~3.3 | 1.2 | ø4.3 | 5.5 | | |
| SR-2GQ | 3.5 | ø2.5 | 0.5~1.0 | 1.5 | ø5.0 | 3.5 | | |
| SR-2HY | 4.0 | ø2.5 | 0.8~1.6 | 1.5 | ø5.0 | 4.3 | | |
| SR-2.5S | 4.5 | ø2.5 | 0.8~2.5 | 1.5 | ø5.0 | 4.5 | | |
| SR-2JB | 5.0 | ø2.5 | 2.0~3.0 | 1.5 | ø5.0 | 5.5 | | |
| SR-2KY | 5.5 | ø2.5 | 2.5~3.5 | 1.5 | ø5.0 | 6.0 | | |
| SR-2NT | 6.0 | ø2.5 | 3.0~4.0 | 1.5 | ø5.0 | 6.5 | | |
| SR-2GF | 4.2 | ø2.6 | 2.0~3.0 | 1.45 | ø5.0 | 4.75 | | |
| SR-2.5 | 4.4 | ø2.6 | 2.0~2.8 | 1.5 | ø5.0 | 4.5 | | |
| SR-2PD | 4.8 | ø2.6 | 2.5~3.4 | 1.4 | ø5.0 | 4.85 | | |
| SR-2.7F | 3.6 | ø2.7 | 1.0~2.0 | 1.5 | ø5.0 | 4.0 | | |
| SR-2.7H | 5.2 | ø2.7 | 2.7~3.6 | 1.5 | ø5.0 | 5.6 | | |
| SR-2.7J | 5.9 | ø2.7 | 3.4~4.3 | 1.5 | ø5.0 | 6.3 | | |
| SR-3AQ | 3.5 | ø3.0 | 0.8~1.5 | 1.65 | ø6.2 | 3.8 | | |
| SR-3YK | 3.65 | ø3.0 | 1.0~2.0 | 1.65 | ø6.2 | 5.0 | | |
| SR-3S | 3.9 | ø3.05 | 1.2~2.2 | 1.8 | ø6.4 | 5.5 | | |
| SR-3GC | 4.5 | ø3.0 | 1.0~2.0 | 1.8 | ø6.0 | 5.5 | | |
| SR-3HG | 4.5 | ø3.0 | 2.0~3.0 | 1.6 | ø6.4 | 6.1 | N46 | |
| SR-3TY | 4.5 | ø3.0 | 2.0~3.0 | 1.65 | ø6.2 | 6.25 | N66 | |
| SR-3MK | 5.5 | ø3.0 | 2.0~3.0 | 1.6 | ø6.3 | 7.05 | | |
| SR-3MC | 5.5 | ø3.0 | 2.5~3.3 | 1.6 | ø6.3 | 6.2 | | |
| SR-3JW | 5.6 | ø3.0 | 3.0~4.0 | 1.55 | ø6.2 | 6.2 | | |
| SR-3M | 5.7 | ø3.0 | 2.2~3.5 | 1.8 | ø6.4 | 5.9 | | |
| SR-3Q | 5.8 | ø3.0 | 1.6~3.3 | 2.0 | ø6.4 | 6.5 | | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 尼龙铆钉 SNAP RIVET



- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL),NYLON 6(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

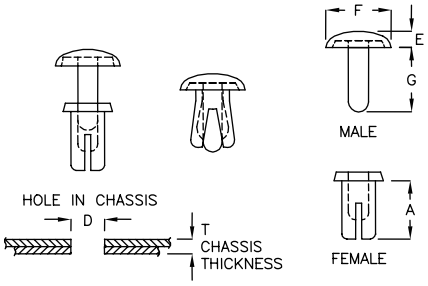


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | E | F | G | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR-3LK | 5.8 | ø3.0 | 3.5~4.0 | 1.7 | ø5.86 | 6.1 | N66 | 2000 |
| SR-3L | 6.15 | ø3.0 | 1.5~3.5 | 2.0 | ø6.4 | 6.4 | | |
| SR-3XL | 6.5 | ø3.05 | 4.0~5.0 | 1.7 | ø6.3 | 7.5 | | |
| SR-3BR | 7.0 | ø3.0 | 4.5~5.5 | 1.7 | ø6.2 | 7.5 | | |
| SR-3B | 7.5 | ø3.0 | 3.5~4.6 | 1.7 | ø6.2 | 8.5 | | |
| SR-3C | 8.0 | ø3.0 | 3.5~5.5 | 1.6 | ø6.2 | 9.1 | | |
| SR-3V | 8.3 | ø3.0 | 5.0~6.3 | 1.6 | ø6.2 | 8.6 | | |
| SR-3LC | 9.3 | ø3.0 | 6.3~7.3 | 1.6 | ø6.2 | 9.6 | | |
| SR-3MP | 10.3 | ø3.0 | 7.3~8.3 | 1.6 | ø6.2 | 10.6 | | |
| SR-3MQ | 11.3 | ø3.0 | 8.3~9.3 | 1.6 | ø6.2 | 11.6 | N66 or N46 | |
| SR-3LQ | 12.3 | ø3.0 | 9.3~10.3 | 1.6 | ø6.2 | 12.6 | N66 | |
| SR-3QF | 13.3 | ø3.0 | 10.3~11.3 | 1.6 | ø6.2 | 13.6 | | |
| SR-3NR | 4.5 | ø3.1 | 2.0~3.0 | 1.6 | ø6.4 | 6.1 | N66 or N6 | |
| SR-3FY | 4.5 | ø3.1 | 2.0~3.0 | 1.6 | ø6.4 | 6.1 | N6 | |
| SR-3WK | 5.5 | ø3.1 | 3.0~4.0 | 1.6 | ø6.4 | 6.2 | | |
| SR-03K | 10.5 | ø3.1 | 8.0~8.5 | 1.2 | ø5.9 | 11.6 | N66 | |
| SR-03D | 15.6 | ø3.1 | 11.5~12.8 | 1.7 | ø6.3 | 15.9 | | |
| SR-03U | 4.5 | ø3.2 | 1.5~3.0 | 1.8 | ø6.2 | 5.7 | | |
| SR-3W | 13.0 | ø3.3 | 9.0~10.5 | 1.7 | ø5.3 | 13.3 | | |
| SR-3CL | 4.5 | ø3.5 | 2.0~2.5 | 1.6 | ø6.4 | 6.1 | | |
| SR-3 | 5.7 | ø3.5 | 2.5~4.0 | 1.8 | ø6.7 | 6.6 | | |
| SR-3DX | 6.0 | ø3.5 | 3.5~4.5 | 1.6 | ø6.2 | 6.5 | | |
| SR-3FL | 6.5 | ø3.5 | 4.5~5.5 | 1.6 | ø6.2 | 7.0 | | |
| SR-3GR | 7.0 | ø3.5 | 4.5~5.5 | 1.6 | ø6.2 | 7.5 | | |
| SR-3HA | 7.5 | ø3.5 | 5.0~6.0 | 1.6 | ø6.2 | 8.0 | | |
| SR-3NB | 8.0 | ø3.5 | 5.5~6.5 | 1.6 | ø6.2 | 8.5 | | |
| SR-3SD | 8.5 | ø3.5 | 5.2~6.3 | 1.8 | ø6.7 | 9.9 | | |
| SR-3AC | 8.6 | ø3.5 | 5.5~6.5 | 1.6 | ø6.2 | 8.9 | | |
| SR-3MF | 9.6 | ø3.5 | 6.5~7.5 | 1.6 | ø6.2 | 9.9 | | |
| SR-3CK | 4.5 | ø3.6 | 2.0~2.8 | 1.6 | ø6.4 | 5.0 | | |
| SR-3CF | 4.7 | ø3.6 | 2.0~2.8 | 1.6 | ø6.4 | 5.0 | | |
| SR-3DR | 5.1 | ø3.6 | 2.7~3.6 | 1.65 | ø6.3 | 6.25 | N6 | |
| SR-3DK | 7.0 | ø3.6 | 4.3~5.3 | 1.6 | ø6.4 | 7.5 | N66 | |
| SR-3WJ | 9.3 | ø3.8 | 5.0~6.5 | 1.7 | ø6.7 | 11.3 | | |
| SR-3KF | 6.0 | ø3.6 | 3.7~4.6 | 1.6 | 6.4 | 7.1 | N6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-30-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

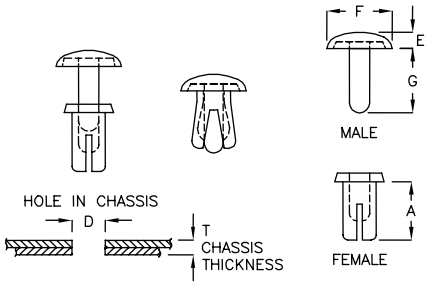


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | E | F | G | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR-4GS | 4.4 | ø4.0 | 1.0~2.2 | 2.1 | ø7.9 | 4.55 | N66 | 2000 |
| SR-4Q | 5.0 | ø4.0 | 1.1~3.1 | 2.1 | ø7.9 | 6.0 | | |
| SR-4QR | 5.3 | ø4.0 | 3.0~3.5 | 1.8 | ø7.0 | 5.35 | | |
| SR-4FM | 5.5 | ø4.0 | 2.2~2.8 | 2.1 | ø7.9 | 6.0 | N66 or N46 | |
| SR-4TF | 5.0 | ø4.0 | 2.5~3.5 | 1.9 | ø7.8 | 6.2 | N66 | |
| SR-4KC | 6.0 | ø4.0 | 2.5~3.5 | 1.9 | ø7.7 | 7.0 | | |
| SR-4 | 6.2 | ø4.0 | 2.0~4.5 | 1.9 | ø7.9 | 7.3 | | |
| SR-4WA | 6.2 | ø4.0 | 2.7~4.0 | 2.0 | ø7.9 | 6.5 | N66 or N46 | |
| SR-4HP | 6.2 | ø4.0 | 3.5~4.0 | 1.9 | ø7.7 | 7.2 | N66 | |
| SR-4BR | 6.5 | ø4.0 | 3.2~3.8 | 2.1 | ø7.9 | 6.8 | | |
| SR-04F | 7.0 | ø4.0 | 3.8~4.6 | 2.0 | ø8.0 | 9.0 | | |
| SR-4RW | 7.1 | ø4.0 | 4.5~5.0 | 2.0 | ø8.0 | 8.1 | | |
| SR-4LF | 7.5 | ø4.0 | 5.0~5.5 | 1.9 | ø7.7 | 8.5 | | |
| SR-4N | 7.8 | ø4.0 | 5.4~6.0 | 1.8 | ø8.1 | 8.8 | | |
| SR-4S | 8.0 | ø4.0 | 3.5~5.0 | 1.7 | ø7.0 | 8.8 | | |
| SR-4GB | 8.1 | ø4.0 | 5.5~6.5 | 2.0 | ø8.0 | 9.0 | | |
| SR-4YH | 8.5 | ø4.0 | 5.2~5.8 | 2.1 | ø7.9 | 8.8 | | |
| SR-4PW | 9.0 | ø4.0 | 6.5~7.5 | 2.0 | ø8.0 | 10.2 | | |
| SR-4M | 9.7 | ø4.0 | 6.0~7.0 | 1.7 | ø7.0 | 11.1 | | |
| SR-4J | 10.0 | ø4.0 | 5.5~7.6 | 1.8 | ø8.2 | 11.0 | | |
| SR-4QP | 10.0 | ø4.0 | 7.5~8.5 | 2.0 | ø8.0 | 10.5 | | |
| SR-4FQ | 11.4 | ø4.0 | 8.5~9.5 | 1.95 | ø8.0 | 11.9 | N66 or N46 | |
| SR-4L | 12.4 | ø4.0 | 7.5~8.5 | 1.7 | ø7.9 | 14.1 | N66 | |
| SR-4XN | 12.4 | ø4.0 | 7.8~8.5 | 1.7 | ø5.5 | 14.1 | | |
| SR-4MK | 12.4 | ø4.0 | 9.5~10.5 | 1.95 | ø8.0 | 12.9 | | |
| SR-4QJ | 13.4 | ø4.0 | 10.5~11.5 | 1.95 | ø8.0 | 13.9 | | |
| SR-04D | 15.6 | ø4.0 | 11.2~12.5 | 1.7 | ø6.7 | 15.9 | | |
| SR-4PT | 20.0 | ø4.0 | 15.0~17.5 | 1.9 | ø8.0 | 20.3 | | |

## 尼龙铆钉 SNAP RIVET 5-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

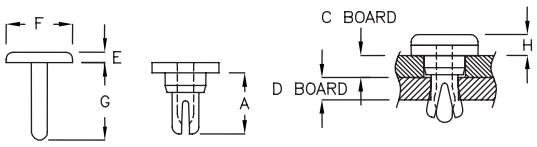


| PART NO | A | C BOARD HOLE DIA | D BOARD HOLE DIA | C BOARD THICKNESS | D BOARD THICKNESS | E | F | G | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| SRFK-2H | 3.3 | ø2.4 | ø1.8 | 1.1 | 1.0~1.2 | 0.5 | ø3.5 | 4.3 | 1.0 | 2000 |
| SRFK-2D | 4.4 | ø3.0 | ø2.0 | 1.6 | 0.8~1.6 | 0.75 | ø4.8 | 5.6 | 1.5 | |
| SRFK-2C | 5.4 | ø3.0 | ø2.0 | 2.6 | 0.8~1.6 | 0.75 | ø4.8 | 6.6 | 1.5 | |
| SRFK-2F | 6.4 | ø3.0 | ø2.0 | 3.6 | 0.8~1.6 | 0.75 | ø4.8 | 7.6 | 1.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-31-1

- MATERIAL: NYLON 66(UL)
- MATERIAL: NYLON 46(UL), NYLON 6(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK









| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | E | F | G | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SR-4PK | 20.0 | ø4.0 | 17.5~18.0 | 1.7 | ø6.8 | 20.3 | | |
| SR-4PH | 21.0 | ø4.0 | 18.0~18.5 | 1.7 | ø6.8 | 21.3 | | |
| SR-4HK | 5.1 | ø4.1 | 2.0~3.2 | 1.8 | ø8.15 | 6.3 | | |
| SR-4LK | 6.1 | ø4.1 | 3.5~4.2 | 1.8 | ø8.15 | 7.1 | N66 | |
| SR-4FK | 7.0 | ø4.1 | 4.5~5.4 | 1.8 | ø8.0 | 7.5 | | |
| SR-4JK | 8.9 | ø4.1 | 5.6~6.6 | 1.8 | ø8.1 | 10.9 | | |
| SR-4JM | 9.9 | ø4.1 | 7.5~8.3 | 1.8 | ø8.1 | 10.9 | | |
| SR-4TQ | 11.4 | ø4.1 | 8.5~9.5 | 2.0 | ø7.9 | 11.9 | N46 | |
| SR-4KS | 8.3 | ø4.3 | 4.0~6.0 | 1.7 | ø7.6 | 10.2 | | |
| SR-4KT | 8.3 | ø4.3 | 4.0~6.0 | 1.7 | ø9.6 | 10.2 | | |
| SR-04I | 10.5 | ø4.3 | 7.1~8.1 | 2.0 | ø7.9 | 12.5 | | |
| SR-4SF | 12.3 | ø4.3 | 8.0~9.0 | 1.2 | ø5.9 | 13.8 | | |
| ★ SR-4LD | 10.2 | ø4.5 | 7.0~8.0 | 1.7 | ø7.9 | 11.1 | | |
| SR-4LT | 10.2 | ø4.5 | 5.0~6.0 | 1.7 | ø7.9 | 12.1 | | 2000 |
| SR-4LA | 12.3 | ø4.5 | 7.8~9.0 | 1.7 | ø7.9 | 14.1 | | |
| SR-5S | 4.6 | ø5.0 | 1.0~2.0 | 2.1 | ø8.9 | 6.7 | | |
| SR-5YN | 5.5 | ø5.0 | 2.0~3.0 | 2.2 | ø8.3 | 5.7 | | |
| SR-5TC | 5.5 | ø5.0 | 2.5~3.5 | 2.2 | ø8.9 | 6.0 | N66 | |
| SR-5 | 7.7 | ø5.0 | 3.8~5.0 | 2.2 | ø8.9 | 8.3 | | |
| SR-05F | 4.7 | ø5.1 | 1.5~2.5 | 2.2 | ø9.0 | 5.5 | | |
| SR-05M | 5.5 | ø5.1 | 2.5~3.2 | 2.2 | ø9.0 | 6.0 | | |
| SR-05D | 6.5 | ø5.1 | 3.5~4.3 | 2.2 | ø9.0 | 7.0 | | |
| SR-05H | 7.7 | ø5.1 | 4.5~5.5 | 2.2 | ø9.0 | 8.5 | | |
| SR-05J | 8.7 | ø5.1 | 5.5~6.5 | 2.3 | ø9.1 | 9.5 | | |
| SR-05K | 9.7 | ø5.1 | 6.5~7.5 | 2.3 | ø9.1 | 10.6 | | |
| SR-05L | 10.7 | ø5.1 | 7.5~8.5 | 2.2 | ø9.0 | 11.5 | | |
| SR-6MD | 6.2 | ø6.0 | 2.5~4.0 | 2.5 | ø12.0 | 8.9 | N66 | |
| SR-6VP | 17.2 | ø6.0 | 13.0~14.5 | 2.5 | ø12.0 | 18.0 | N66 | 1000 |
| SR-6NT | 6.2 | ø6.1 | 2.5~4.0 | 2.5 | ø12.0 | 8.9 | N6 | |
| SR-07C | 11.2 | ø7.0 | 8.0~9.0 | 1.8 | ø12.0 | 12.0 | N66 | 2000 |

## 尼龙铆钉 SNAP RIVET 5-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







| PART NO | A | E | H | C BOARD HOLE DIA | D BOARD HOLE DIA | C BOARD THICKNESS | D BOARD THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SRFK-2RT | 5.0 | 0.75 | 1.5 | ø3.0 | ø2.0 | 2.1 | 0.8~1.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

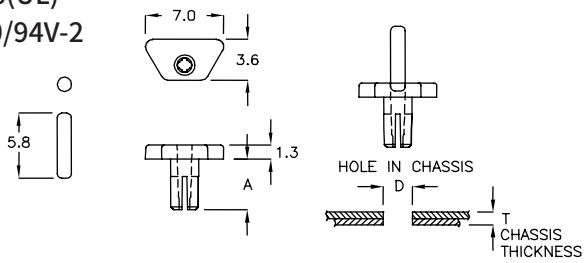


| PART NO | HOLE D | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| STR−4C | ø2.7 | 4.5 | 3.0~3.1 | 2000 |

## 固定扣 NIFLATCH 5-32-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

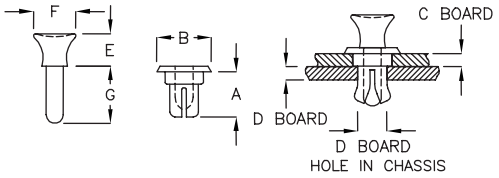


| PART NO | A | B | C BOARD HOLE DIA | D BOARD HOLE DIA | C BOARD THICKNESS | D BOARD THICKNESS | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| SRDW−2H | 3.3 | ø4.8 | ø2.4 | ø1.8 | 1.1 | 1.0~1.2 | 3.0 | ø4.0 | 4.3 | 2000 |
| SRDW−2D | 4.4 | ø4.8 | ø3.0 | ø2.0 | 1.6 | 0.8~1.6 | 3.5 | ø4.5 | 5.6 | |
| SRDW−2C | 5.4 | ø4.8 | ø3.0 | ø2.0 | 2.6 | 0.8~1.6 | 3.5 | ø4.5 | 6.6 | |
| SRDW−2F | 6.4 | ø4.8 | ø3.0 | ø2.0 | 3.6 | 0.8~1.6 | 3.5 | ø4.5 | 7.6 | |
| SR−4KK | 7.0 | ø8.5 | ø6.0 | ø4.5 | 2.0 | 2.0 | 5.0 | ø6.6 | 8.9 | |

## 尼龙铆钉 SNAP RIVET 5-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

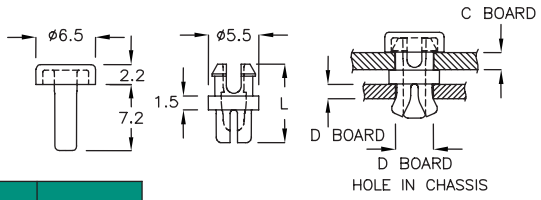


| PART NO | C BOARD HOLE DIA | D BOARD HOLE DIA | C BOARD THICKNESS | D BOARD THICKNESS | L | PACKAGE |
|---|---|---|---|---|---|---|
| SRQM−4C | ø4.2 | ø4.0 | 2.0 | 1.6 | 8.6 | 500 |

## 尼龙铆钉 SNAP RIVET 5-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

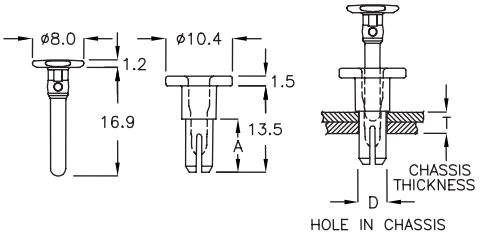


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRMD−4Q | 8.3 | ø4.5 | 4.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 尼龙铆钉 SNAP RIVET 5-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

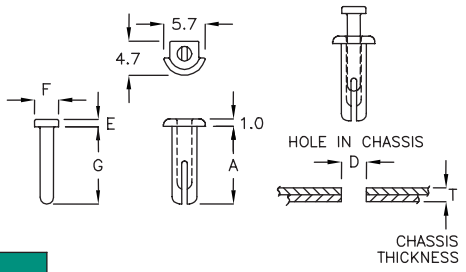


| PART NO | A | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| SRQ-3AH | 10.5 | ø3.5 | 1.0 | ø3.4 | 11.0 | 8.0 | 2000 |
| SRQ-3PT | 12.0 | ø3.5 | 1.0 | ø3.4 | 13.0 | 8.0 | |

## 尼龙铆钉 SNAP RIVET 5-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

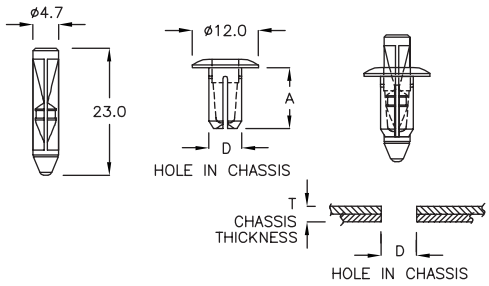


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-12A | 11.0 | ø6.1 | 7.7~8.3 | 2000 |

## 铆钉 CANOE CLIP 5-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-05F | 5.6 | ø3.3 | 5.4 | 2000 |



## 铆钉 CANOE CLIP 5-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBL-4HW | 5.05 | 5.2 | ø2.1 | 2.5 | 2000 |
| MBL-5FQ | 5.65 | 5.2 | ø2.1 | 3.1 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 CANOE CLIP 5-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBL-4JC | 8.55 | ø4.5 | ø2.1 | 2.5 | 2000 |



## 铆钉 CANOE CLIP 5-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D HOLE IN CHASSIS | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| MB-01F | 7.4 | ø4.8 | ø2.37 | 0.9 | 2.4~2.7 | 2000 |
| MB-04C | 15.4 | ø9.0 | ø4.5 | 1.6 | 4.3~4.8 | 1000 |
| MB-05A | 14.6 | ø12.0 | ø5.0 | 2.1 | 0.7~1.2 | |
| MB-05D | 15.3 | ø12.0 | ø5.0 | 2.8 | 0.7~1.0 | |
| ★ MB-9C | 9.4 | ø8.0 | ø3.3 | 1.5 | 3.5 | 2000 |

## 铆钉 CANOE CLIP 5-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| MB-1 | 9.7 | ø7.4 | 2.0~3.5 | ø3.0~ø3.2 | 2000 |
| MB-1A | 9.7 | ø6.8 | 1.1~1.7 | ø3.1~ø3.2 | |
| MB-1C | 6.2 | ø6.9 | 1.6~2.0 | ø2.95~ø3.0 | |
| MB-1D | 6.8 | ø7.0 | 1.6~1.9 | ø3.15~ø3.2 | |
| MB-1S | 7.2 | ø7.0 | 1.5~2.1 | ø3.1~ø3.2 | |
| MB-01H | 10.3 | ø7.7 | 3.0~3.2 | ø3.3~ø3.4 | |
| MB-2 | 10.3 | ø7.9 | 3.5~4.0 | ø3.5~ø3.7 | |
| MB-2S | 10.3 | ø7.8 | 2.8~3.8 | ø3.2~ø3.4 | |
| MB-3 | 12.4 | ø7.7 | 3.2~5.0 | ø3.7~ø3.8 | |
| MB-3FC | 7.5 | ø5.6 | 2.4~2.7 | ø2.95~3.05 | |
| MB-3KA | 7.5 | ø6.0 | 2.4~2.7 | ø3.45~3.55 | |
| MB-4 | 12.9 | ø10.0 | 2.1~3.7 | ø3.9~ø4.05 | |
| MB-04Q | 9.0 | ø6.0 | 2.5~3.5 | ø3.8~ø4.0 | |
| MB-5S | 10.9 | ø10.0 | 1.6~2.1 | ø3.2~ø3.25 | 1000 |
| MB-05C | 13.2 | ø12.7 | 2.5~3.5 | ø4.0~ø4.05 | |
| MB-11A | 12.6 | ø9.5 | 2.5~4.0 | ø4.65~ø4.8 | |
| MB-12 | 12.0 | ø7.4 | 1.6~2.1 | ø3.3~ø3.4 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 铆钉 CANOE CLIP 5-35-1

- MATERIAL: POM
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBE-12A | 19.0 | ø12.0 | 1.5~6.5 | 1000 |

## 铆钉 CANOE CLIP 5-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| MB-2K | 8.6 | ø5.8 | 2.8~3.0 | ø3.2~ø3.3 | 2000 |

## 铆钉 MOUNTING BUTTON 5-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| MB-08K | 13.8 | ø5.1 | 10.1 | ø2.54 | 2000 |
| MB-15GH | 15.3 | ø5.1 | 11.8 | ø2.5 | |



## 铆钉 MOUNTING BUTTON 5-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-2GC | 6.2 | ø4.0 | 2.7 | 2000 |
| MB-08R | 11.7 | ø5.1 | 8.2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 CANOE CLIP 5-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-08M | 6.6 | ø5.5 | 2.2 | 2000 |
| MB-8AC | 7.9 | ø5.5 | 3.5 | |
| MB-8DK | 8.5 | ø5.5 | 4.1 | |



## 铆钉 CANOE CLIP 5-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-08P | 7.2 | ø6.4 | 3.2 | 2000 |

## 铆钉 MOUNTING BUTTON 5-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | E | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| MB-8A | 7.5 | ø5.1 | ø3.0 | 1.8 | 3.4 | 7.3 | 2000 |
| MB-08C | 3.5 | ø6.2 | ø3.0 | 1.9 | 3.8 | 3.4 | |
| MB-08D | 4.7 | ø6.0 | ø3.5 | 1.5 | 4.1 | 4.5 | |

## 铆钉 MOUNTING BUTTON 5-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | E | F | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| MB-08G | 3.55 | ø6.2 | ø3.0 | 1.9 | 1.4 | 3.4 | 2000 |
| MB-08H | 8.25 | ø5.1 | ø3.3 | 1.4 | 2.2 | 8.1 | |
| MB-015 | 8.8 | ø5.1 | ø3.0 | 1.7 | 2.2 | 8.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 CANOE CLIP 5-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

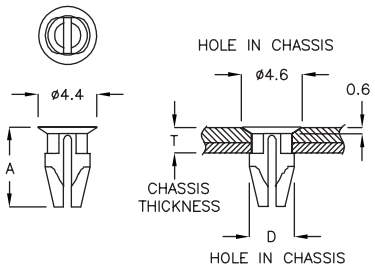


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-06 | 6.0 | ø3.0 | 1.9 | 2000 |



## 铆钉 CANOE CLIP 5-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBS-3A | 7.95 | ø6.4 | 3.2~3.6 | 1000 |

## 铆钉 MOUNTING BUTTON 5-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBB-01 | 10.9 | ø5.8 | 7.9 | 1000 |

## 铆钉 MOUNTING BUTTON 5-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MHG-3A | 8.0 | ø9.5 | 2.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 MOUNTING BUTTON 5-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-08F | 10.7 | ø6.0 | 4.5 | 2000 |



## 铆钉 CANOE CLIP 5-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | E | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBM-1MY | 5.6 | 2.2 | 2.85 | 0.6~0.8 | 2000 |
| MBM-1A | 5.95 | 1.9 | 2.85 | 1.4~1.7 | |
| MBM-2D | 6.15 | 2.2 | 2.85 | 1.2~1.4 | |
| MBM-2SA | 6.65 | 2.2 | 2.85 | 1.7~1.9 | |
| MBM-3PY | 5.7 | 2.2 | 2.5 | 0.9~1.1 | |



## 铆钉 CANOE CLIP 5-38-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBR-3SQ | 5.45 | ø12.0 | 2.65 | 1.1 | 2000 |
| MBR-3AC | 6.05 | ø20.0 | 3.4 | 1.0 | |

## 铆钉 CANOE CLIP 5-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MB-07A | 7.5 | ø7.0 | 3.5 | 2.2 | 2000 |
| MB-7AK | 8.3 | ø7.0 | 3.1 | 3.5 | |
| MB-7DF | 9.0 | ø7.0 | 3.1 | 4.2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 铆钉 CANOE CLIP 5-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D HOLE IN CHASSIS | E | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| MBQ−1A | 6.7 | ø8.0 | ø4.1 | 1.3 | 3.5 | 1.85 | 2000 |
| MBQ−1DC | 6.9 | ø7.0 | ø4.0 | 1.5 | 3.1 | 2.2 | |
| MBQ−1PM | 6.5 | ø7.0 | ø4.0 | 1.5 | 3.1 | 1.8 | |
| MBQ−1FH | 5.8 | ø7.0 | ø4.0 | 1.5 | 3.1 | 1.0 | |

## 铆钉 CANOE CLIP 5-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBK−4A | 6.5 | ø7.0 | 2.4~2.6 | 2000 |

## 铆钉 CANOE CLIP 5-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBQ−1RF | 6.5 | ø7.0 | 1.6~1.9 | 2000 |



## 铆钉 MOUNTING BUTTON 5-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|
| MB−10 | 2.5~3.2 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 MOUNTING BUTTON 5-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBC−04 | 6.9 | ø7.0 | 1.5 | 3.3 | 2000 |
| MBC−4AK | 5.8 | ø7.0 | 1.5 | 2.2 | |
| MBC−4DF | 7.1 | ø7.0 | 1.5 | 3.5 | |
| MBC−4KM | 8.1 | ø7.0 | 2.0 | 4.5 | |

## 铆钉 RIVET 5-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ACK−1A | 7.0 | ø6.5 | 6.8 | 2000 |

## 铆钉 MOUNTING BUTTON 5-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | B | T CHASSIS THICKNESS | D HOLE IN CHASSIS | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| MB−9S | ø11.7 | 2.0 | ø5.54 | 4.0 | 1.3 | 1000 |
| MB−9 | ø11.7 | 3.0 | ø5.54 | 4.1 | 1.3 | |
| MB−9K | ø15.1 | 4.3 | ø7.4 | 4.7 | 1.3 | |
| MB−09A | ø11.7 | 5.7 | ø5.3 | 3.9 | 1.3 | |
| MB−09M | ø8.0 | 2.6 | ø5.0 | 3.3 | 0.5 | |

## 铆钉 CANOE CLIP 5-40-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ MBU−3AD | 10.7 | ø8.0 | 4.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 铆钉 CANOE CLIP 5-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

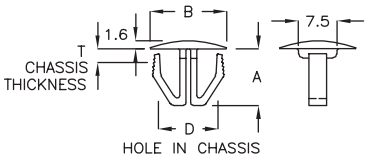


| PART NO | A | B | T CHASSIS THICKNESS | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| MBSK−10A | 11.0 | ø15.0 | 0.8~3.2 | ø8.5~ø10.0 | 1000 |

## 铆钉 MOUNTING BUTTON 5-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBP−3JQ | 2.0 | 12.5 | 1.8 | 2000 |

## 铆钉 MOUNTING BUTTON 5-41-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | C | F | PACKAGE |
|---|---|---|---|---|---|
| MB−08Y | 8.3 | ø5.0 | 12.55 | 1.75 | 2000 |
| MB−15Y | 14.6 | ø6.4 | 19.85 | 2.75 | |

## 铆钉 MOUNTING BUTTON 5-41-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MB−21A | 22.0 | ø6.6 | 25.6 | 1000 |

## 铆钉 MOUNTING BUTTON 5-41-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MB−22 | 22.1 | ø6.6 | 25.4 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 MOUNTING BUTTON 5-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MB-25A | 7.6 | ø6.6 | 25.4 | 1000 |

## 铆钉 MOUNTING BUTTON 5-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

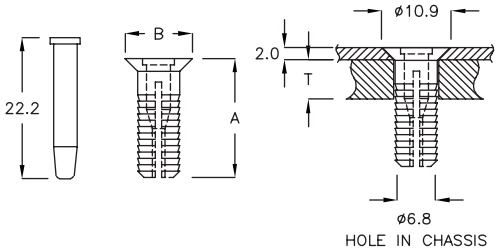


| PART NO | A | T CHASSIS THICKNESS | B | PACKAGE |
|---|---|---|---|---|
| MEK-01 | 16.7 | 6.5~7.5 | ø10.6 | 2000 |

## 散热片铆钉 MOUNTING BUTTON 5-42-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

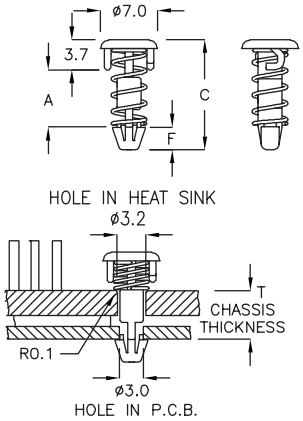


| PART NO | A | C | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MB-05Y | 4.2 | 10.7 | 2.8 | 3.0~4.2 | 2000 |
| MB-07Y | 7.0 | 13.5 | 2.8 | 4.5~6.0 | |
| MB-07YA | 9.0 | 15.2 | 2.5 | 4.5~7.0 | |

## 散热片铆钉 MOUNTING BUTTON 5-42-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

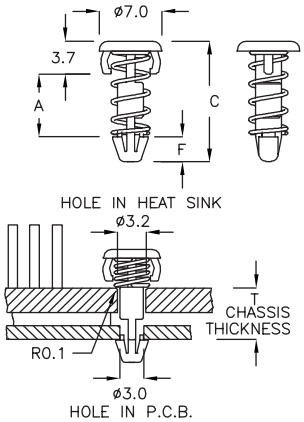


| PART NO | A | C | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MB-07U | 7.0 | 13.5 | 2.8 | 4.5~5.5 | 2000 |
| MB-07UA | 9.0 | 15.2 | 2.5 | 4.5~7.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 散热片铆钉 MOUNTING BUTTON 5-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

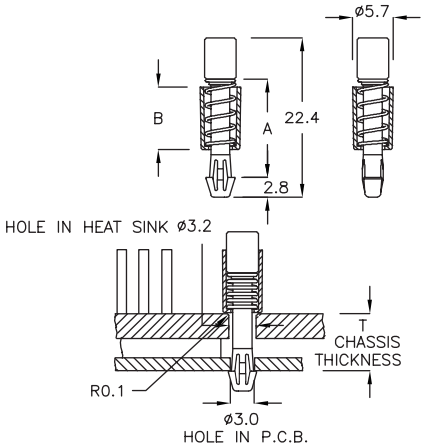


| PART NO | A | B | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-08J | 13.8 | 8.8 | 5.0~8.5 | 2000 |

## 散热片铆钉 MOUNTING BUTTON 5-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

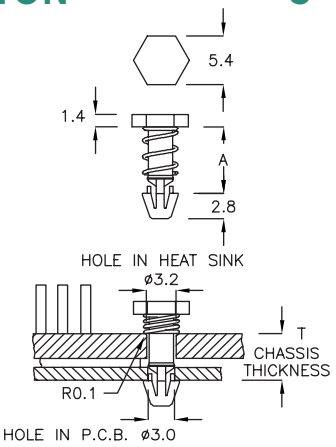


| PART NO | A | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MB-08N | 7.4 | 3.0~4.0 | 2000 |



## 散热片铆钉 MOUNTING BUTTON 5-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

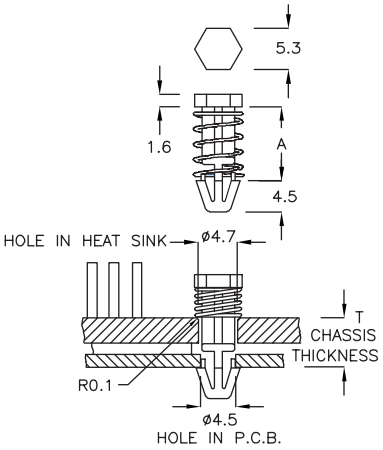


| PART NO | A | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MB-8KP | 8.8 | 3.0~5.3 | 1000 |

## 散热片铆钉 MOUNTING BUTTON 5-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

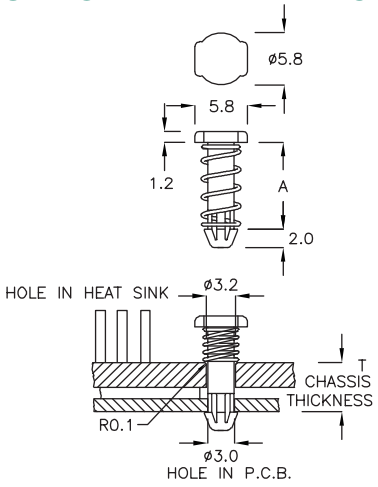


| PART NO | A | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MB-13 | 9.6 | 4.5~5.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 散热片铆钉 MOUNTING BUTTON 5-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

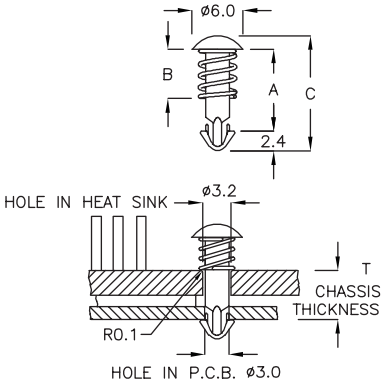


| PART NO | A | B | C | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MB-13A | 9.6 | 7.8 | 13.5 | 3.6~5.0 | 2000 |
| MB-21 | 17.6 | 14.7 | 21.6 | 7.5~9.0 | |

## 散热片铆钉 MOUNTING BUTTON 5-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







| PART NO | A | B | HOLE IN P.C.B. | HOLE IN HEAT SINK | T CHASSIS THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| MB-15C | 12.5 | ø6.4 | ø3.0 | ø3.2 | 5.5~6.5 | 1.5 | 3.3 | 1000 |
| MB-15K | 12.5 | ø6.4 | ø3.2 | ø3.4 | 4.5~6.5 | 1.5 | 3.3 | |
| MB-15F | 14.0 | ø5.5 | ø3.0 | ø3.2 | 7.0~8.0 | 1.5 | 2.8 | 2000 |

## 散热片铆钉 MOUNTING BUTTON 5-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




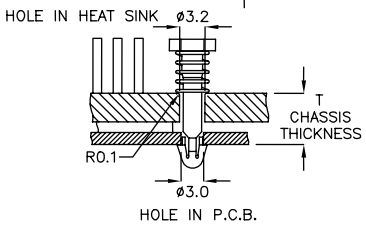


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MB-17C | 12.9 | 3.0~5.0 | 2000 |

## 散热片铆钉 MOUNTING BUTTON 5-44-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




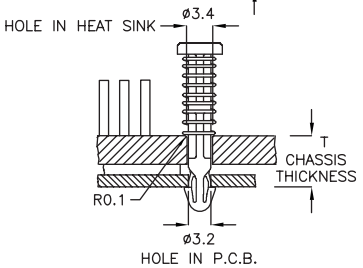


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MB-17KM | 17.7 | 7.5~9.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 散热片铆钉 MOUNTING BUTTON 5-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| MB−11KH | 9.0 | ø6.2 | 1.5 | 1.2 | 2000 |
| MB−14K | 9.5 | ø6.4 | 3.3 | 0.9 | |
| MB−14A | 9.5 | ø6.4 | 3.3 | 1.5 | |
| MB−13FD | 11.0 | ø6.2 | 1.5 | 1.2 | |
| MB−07W | 14.0 | ø6.4 | 2.0 | 1.8 | |
| MB−07C | 14.0 | ø6.4 | 3.3 | 1.8 | |
| MB−15JQ | 14.0 | ø5.5 | 1.5 | 1.5 | |
| MB−15D | 15.0 | ø5.0 | 2.0 | 1.8 | |

## 散热片铆钉 MOUNTING BUTTON 5-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MB−15A | 11.5 | ø6.4 | 2000 |
| MB−12XQ | 8.7 | ø6.4 | |

## 散热片铆钉 MOUNTING BUTTON 5-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MB−14M | 9.5 | ø6.4 | 2000 |

## 散热片铆钉 MOUNTING BUTTON 5-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.4
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MB−15NK | 10.0 | ø5.3 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 散热片铆钉 MOUNTING BUTTON — 5-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.7
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MB−17F | 13.1 | ø5.2 | 1000 |

## 散热片铆钉 MOUNTING BUTTON — 5-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- HOLE IN HEAT SINK: Φ3.2
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MB−99 | 11.0 | ø6.4 | 2000 |
| MB−99A | 14.0 | ø6.4 | |

## 散热片铆钉 MOUNTING BUTTON — 5-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- HOLE IN HEAT SINK: Φ3.7
- SPECIFIC SPRING SPEC FOR APPLICATIVE THICKNESS OF CHASSIS




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MBH−16K | 13.1 | 5.2 | 1000 |



## 定位销 PIN PLANAR LOCATOR — 5-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| MBZ−06 | 5.5 | 2000 |

## 铆钉 CANOE CLIP — 5-46-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MB−014 | 4.6 | >2.4 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 CANOE CLIP 5-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C CHASSIS THICKNESS | D HOLE IN CHASSIS | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| MB-14Q | 3.1 | ø3.5 | 0.8~1.0 | ø1.8 | 1.2 | >3.0 | 2000 |
| MB-14R | 3.8 | ø5.0 | 0.8~1.0 | ø3.0 | 0.7 | >3.5 | |
| MB-14S | 3.8 | ø5.0 | 0.8~1.0 | ø3.0 | 0.5 | >3.5 | |
| MB-14H | 5.5 | ø5.0 | 0.8~1.0 | ø3.0 | 0.5 | >5.0 | |

## 铆钉 CANOE CLIP 5-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

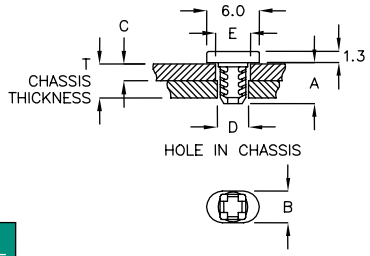


| PART NO | A | B | C CHASSIS THICKNESS | D HOLE IN CHASSIS | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| MBT-06 | 4.7 | 3.6 | 0.8~1.0 | ø3.5 | ø3.5 | >5.0 | 2000 |
| MBT-16J | 15.0 | 3.9 | 1.0~1.2 | ø3.5 | ø4.0 | >5.0 | 1000 |

## 铆钉 CANOE CLIP 5-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

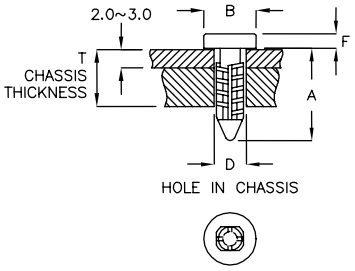


| PART NO | A | B | D HOLE IN CHASSIS | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| MB-011 | 9.7 | ø5.5 | ø2.9 | 1.5 | >5.0 | 2000 |
| MB-19A | 17.6 | ø10.9 | ø5.0 | 1.0 | >5.5 | |

## 铆钉 CANOE CLIP 5-47-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | F | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| MB-14C | 2.6 | 1.0 | 2.0 | ø1.8 | >2.6 | 2000 |
| MB-14F | 3.8 | 1.6 | 3.5 | ø1.8 | >3.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 铆钉 CANOE CLIP 5-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

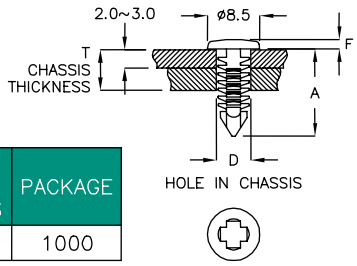


| PART NO | A | F | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MB-17A | 14.3 | 1.5 | ø4.9~ø4.95 | >8.0 | 1000 |

## 铆钉 MOUNTING BUTTON 5-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

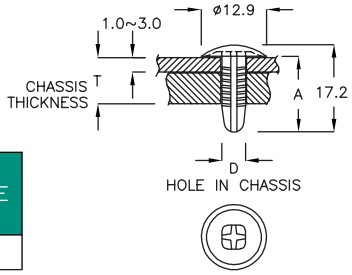


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB-17 | 14.9 | ø5.0~ø5.1 | >6.0 | 1000 |

## 铆钉 CANOE CLIP 5-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|
| WCD-6A | 10.0 | ø5.6~ø5.7 | 2000 |

## 铆钉 CANOE CLIP 5-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

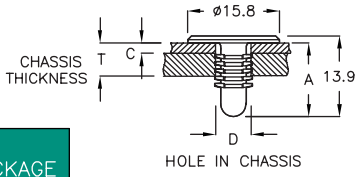


| PART NO | A | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBY-12JW | 12.7 | 1.6 | ø6.1 | >6.0 | 1000 |

## 铆钉 CANOE CLIP 5-48-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|
| MB-35 | 35.0 | ø4.7~ø4.9 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 间隔柱用铆钉 SUPPORTING RIVET — 5-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| MB−14D | 5.0 | ø2.5 | 3.0 | 2000 |

## 铆钉 CANOE CLIP — 5-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| PART NO | A | D HOLE IN CHASSIS | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ MBTB−19 | 12.0 | ø3.5 | >12.0 | 2000 |



## 铆钉 CANOE CLIP — 5-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW




| PART NO | A | D HOLE IN CHASSIS | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ MBTH−19 | 17.3 | ø4.8 | 0.7~13.0 | 1000 |

## 铆钉 CANOE CLIP — 5-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | D HOLE IN CHASSIS | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MBTR−32 | 30.0 | ø7.1 | 1.5~25.4 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 铆钉 CANOE CLIP 5-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

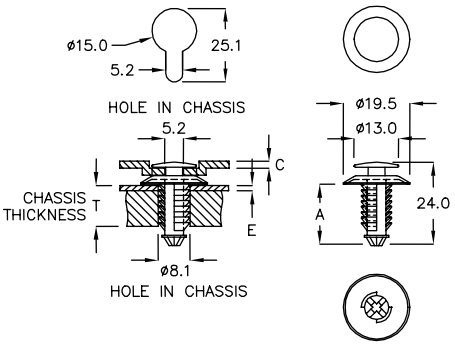


| PART NO | A | C CHASSIS THICKNESS | E CHASSIS THICKNESS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MBDA-24 | 17.5 | 2.3 | 0.8 | 12.0 | 1000 |

## 螺丝固定扣 PLASTIC SCREW 5-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

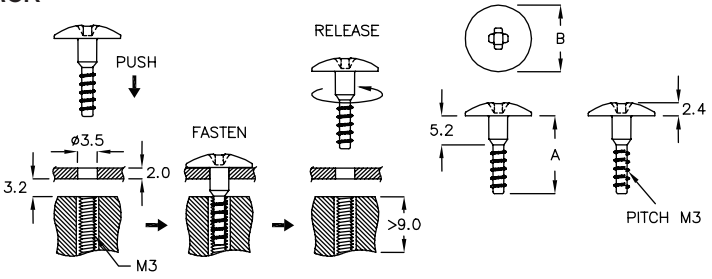


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| SZ-3M15HC | ø12.0 | 14.0 | 1000 |

## 螺丝固定扣 PLASTIC SCREW 5-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

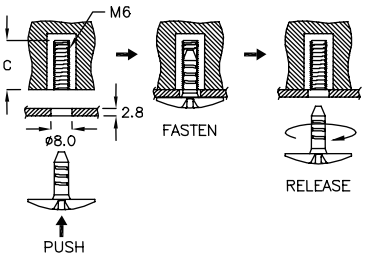


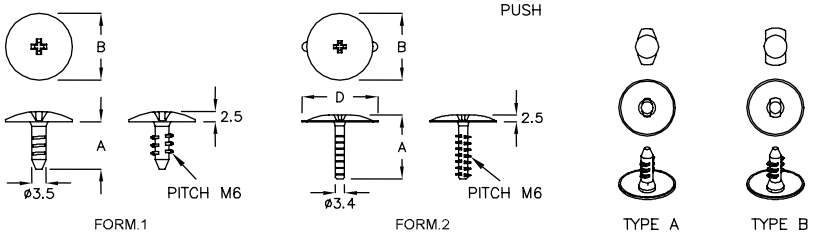


| PART NO | MATERIAL | A | B | C | D | HEAD STYLE | FIN STYLE | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| SZ-6M12 | N66 | 12.0 | ø16.8 | 18.5 | | FORM.1 | TYPE A | 1000 |
| SZ-6M12KD | N66 | 12.0 | ø16.8 | 18.5 | | FORM.1 | TYPE B | |
| SZ-6M13F | N66 | 13.5 | ø20.0 | 18.5 | 24.0 | FORM.2 | TYPE B | |
| SZ-6M17D | N66 | 17.5 | ø20.0 | 22.0 | 24.0 | FORM.2 | TYPE B | |
| SZ-6M21MQ | N66 | 21.5 | ø20.0 | 25.0 | 24.0 | FORM.2 | TYPE B | |
| SZ-6M21A | ABS+PC | 21.5 | ø25.0 | 25.0 | 28.6 | FORM.2 | TYPE A | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 SNAP RIVET 5-51-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

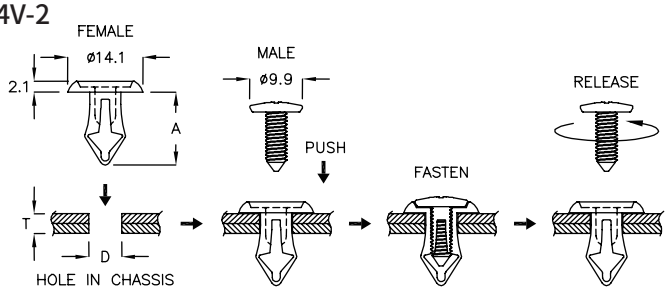


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MEL-6A | 13.65 | ø5.9 | 4.5 | 1000 |

## 铆钉 SNAP RIVET 5-51-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

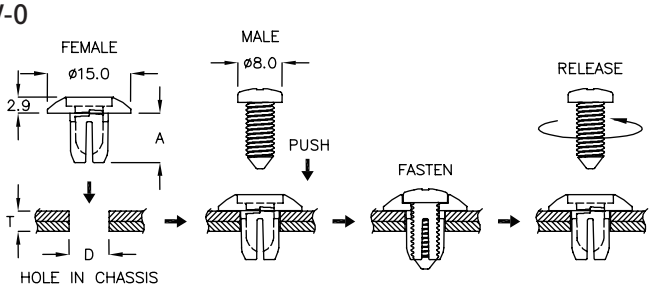


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MEP-07 | 8.86 | ø7.0 | 4.0~5.5 | 1000 |

## 铆钉 SNAP RIVET 5-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MEC-18 | 18.45 | ø5.0 | 9.5~11.5 | 1000 |



## 铆钉 MOUNTING BUTTON 5-51-4

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK




| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | D | PACKAGE |
|---|---|---|---|---|---|
| SRU-3 | 15.7 | ø3.2 | 10.5~11.5 | ø5.8 | 2000 |
| SRU-3A | 11.0 | ø2.7 | 9.0~9.5 | ø5.6 | |
| SRU-3S | 14.3 | ø2.7 | 10.7~11.2 | ø5.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 MOUNTING BUTTON 5-52-1

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK

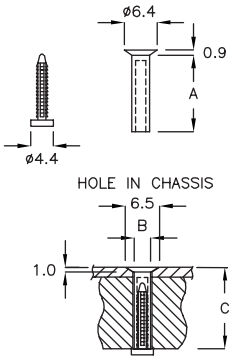


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SRU-3F | 15.1 | ø3.5 | 16.2~16.8 | 2000 |

## 铆钉 MOUNTING BUTTON 5-52-2

- MALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- FEMALE MATERIAL: PU
- COLOR: BLACK

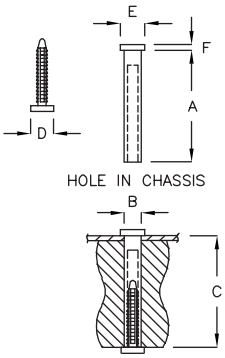


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| SRU-3C | 18.6 | ø3.4 | 18.8~19.5 | ø4.4 | ø4.7 | 1.1 | 2000 |
| SRU-3H | 26.0 | ø4.5 | 26.2~26.8 | ø5.4 | ø6.0 | 1.1 | |
| SRU-3J | 21.0 | ø4.4 | 21.2~21.8 | ø6.0 | ø6.0 | 1.0 | |
| SRU-3K | 17.6 | ø4.2 | 17.8~18.4 | ø7.4 | ø7.4 | 1.2 | |
| SRU-3M | 15.3 | ø4.5 | 15.8~16.2 | ø7.4 | ø7.4 | 1.2 | |
| SRU-3ND | 25.5 | ø4.3 | 25.8~26.3 | ø6.0 | ø6.0 | 1.0 | |
| SRU-3P | 15.3 | ø4.1 | 15.8~16.2 | ø7.4 | ø7.4 | 1.2 | |
| SRU-3R | 23.5 | ø4.3 | 23.7~24.3 | ø6.0 | ø6.0 | 1.0 | |
| SRU-3T | 20.4 | ø3.4 | 21.0~20.6 | ø4.4 | ø4.7 | 1.1 | |

## 铆钉 MOUNTING BUTTON 5-52-3

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

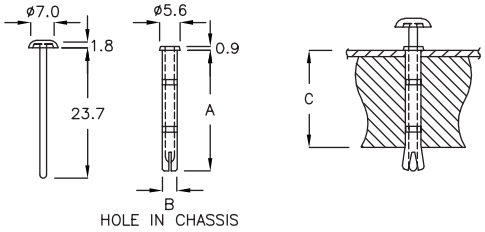


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-4WY | 23.5 | ø4.0 | 20.5~21.5 | 2000 |

## 铆钉 MOUNTING BUTTON 5-52-4

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

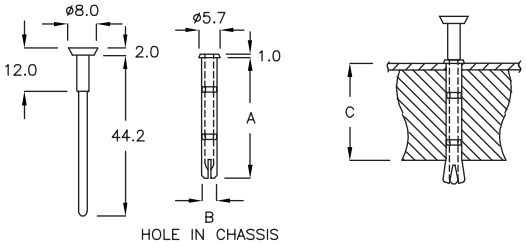


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| SR-4DK | 33.2 | ø4.0 | 29.0~30.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 铆钉 SNAP RIVET 5-53-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

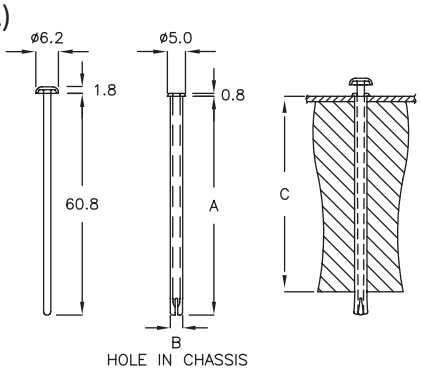


| PART NO | A | B HOLE IN CHASSIS | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ SR-60F | 60.0 | ø3.5 | 57.2 | 500 |

## 固定扣 SNAP LATCH 5-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

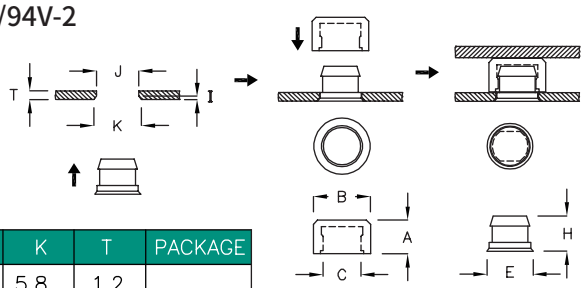


| PART NO | A | B | C | E | H | I | J | K | T | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| LH-013 | 4.0 | ø6.9 | ø4.5 | ø5.6 | 4.2 | 0.6 | 5.1 | 5.8 | 1.2 | 2000 |
| LH-015 | 9.4 | ø8.9 | ø4.5 | ø5.6 | 4.2 | 0.5 | 5.1 | 5.8 | 1.0 | |
| LH-016 | 5.1 | ø6.9 | ø4.5 | ø5.6 | 4.2 | 0.6 | 5.1 | 5.8 | 1.2 | |
| LH-017 | 3.6 | ø6.9 | ø4.5 | ø5.6 | 3.5 | 0.6 | 5.1 | 5.8 | 1.2 | |
| LH-018 | 3.4 | ø6.9 | ø4.5 | ø5.6 | 3.5 | 1.3 | 5.1 | 5.8 | 1.9 | |
| LH-019 | 3.8 | ø6.9 | ø4.6 | ø5.4 | 4.2 | 0.55 | 4.9 | 5.6 | 1.1 | |
| LH-021 | 3.0 | ø6.9 | ø4.6 | ø5.6 | 3.4 | 0.6 | 5.15 | 5.8 | 1.2 | |
| LH-024 | 2.9 | ø6.9 | ø4.5 | ø5.6 | 2.75 | 0.45 | 5.15 | 6.05 | 0.8 | |
| LH-026 | 4.0 | ø6.9 | ø4.5 | ø5.6 | 3.9 | 0.6 | 5.1 | 5.8 | 0.8 | |
| LH-027 | 3.3 | ø6.9 | ø4.6 | ø5.95 | 3.3 | 0.66 | 5.1 | 6.6 | 1.0 | |

## 固定扣 SNAP LATCH 5-53-3

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

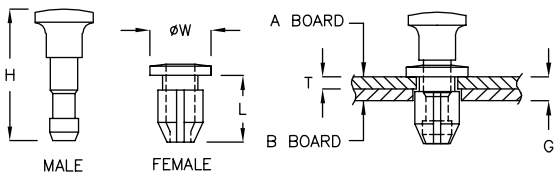


| PART NO | T THICKNESS | G THICKNESS | A HOLE | B HOLE | L | W | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| LH-01C | 1.8~2.0 | 3.4~4.8 | ø6.0 | ø6.4 | 9.2 | 8.5 | 15.3 | 1000 |
| LH-01D | 2.1 | 4.1~4.8 | ø6.0 | ø6.4 | 9.2 | 8.5 | 18.2 | |
| LH-01F | 2.5 | 4.5~4.8 | ø6.25 | ø6.4 | 9.6 | 8.5 | 19.3 | |
| LH-01M | 1.6 | 2.7~3.6 | ø6.1 | ø6.4 | 8.6 | 8.5 | 17.5 | |
| LH-01P | 2.0 | 3.6~4.0 | ø6.1 | ø6.3 | 9.2 | 8.5 | 17.5 | |
| LH-1 | 1.8~2.0 | 3.4~4.0 | ø6.0 | ø6.4 | 9.2 | 8.5 | 18.2 | |
| LH-1L | 3.9 | 7.7~8.2 | ø6.0 | ø6.4 | 11.3 | 8.5 | 20.2 | |
| LH-2 | 1.5 | 3.8~4.6 | ø7.6 | ø8.0 | 9.9 | 10.8 | 18.2 | 500 |
| LH-3 | 2.5 | 3.0~5.2 | ø7.6 | ø8.0 | 10.4 | 10.8 | 18.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定扣 SNAP LATCH 5-54-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

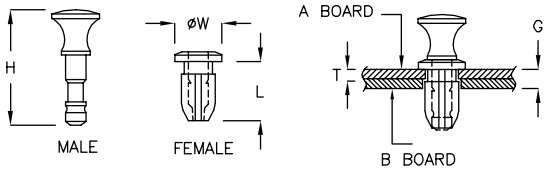


| PART NO | T THICKNESS | G THICKNESS | A HOLE | B HOLE | L | W | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| LH-01H | 1.5~1.6 | 4.1~4.3 | ø4.6 | ø4.8 | 8.1 | 6.5 | 15.9 | 1000 |
| LH-1RK | 1.5~1.6 | 4.1~4.3 | ø4.6 | ø4.8 | 8.1 | 6.5 | 12.9 | |
| LH-1Q | 0.8 | 1.6~2.3 | ø6.4 | ø6.55 | 6.7 | 8.5 | 16.4 | |

## 固定扣 SNAP LATCH 5-54-2

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL,BLACK

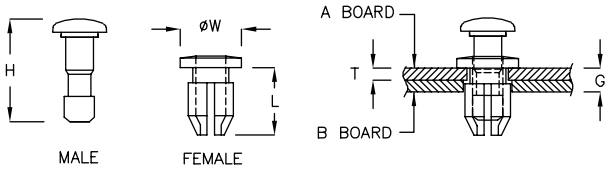


| PART NO | T THICKNESS | G THICKNESS | A HOLE | B HOLE | L | W | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| LH-01J | 1.8~2.0 | 3.4~4.0 | ø6.0 | ø6.4 | 9.2 | 8.5 | 14.0 | 1000 |

## 固定扣 SNAP LATCH 5-54-3

- MATERIAL: PC(UL)
- COLOR: BLACK

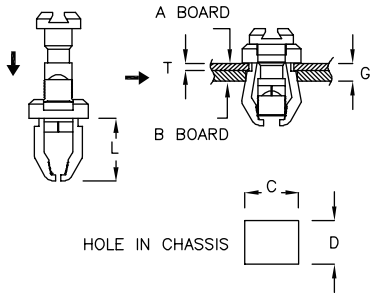


| PART NO | T THICKNESS | G THICKNESS | A BOARD HOLE CxD | B BOARD HOLE CxD | L | PACKAGE |
|---|---|---|---|---|---|---|
| LH-009 | 1.2 | 2.4~2.7 | 9.0x9.0 | 9.5x9.0 | 12.2 | 200 |

## 固定扣 SNAP LATCH 5-54-4

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK







| PART NO | T THICKNESS | G THICKNESS | A HOLE | B HOLE | C | D | L | W | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| LH-2D | 1.5 | 3.8~4.6 | ø7.6 | ø8.0 | 4.6 | 15.8 | 9.9 | 10.8 | 500 |
| LH-2C | 1.6 | 3.4~3.7 | ø7.6 | ø8.0 | 4.5 | 15.6 | 9.0 | 10.9 | |
| LH-2T | 1.6 | 3.4~3.7 | ø7.6 | ø8.0 | 4.6 | 15.8 | 9.0 | 10.9 | |
| LH-04C | 1.6 | 2.4~3.6 | ø7.6 | ø8.0 | 4.6 | 16.0 | 8.8 | 10.7 | |
| LH-04D | 2.4 | 3.5 | ø7.5 | ø8.0 | 5.0 | 16.0 | 9.9 | 10.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定扣 SNAP LATCH 5-55-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

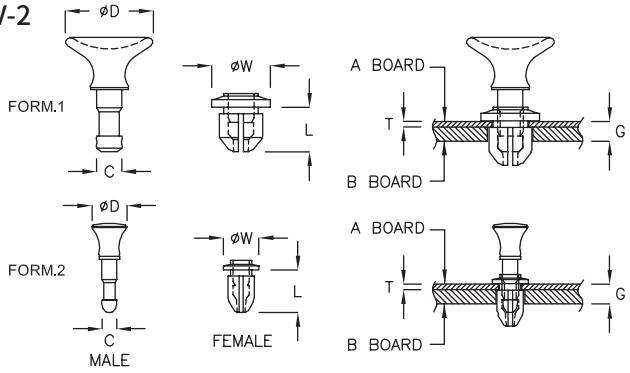


| PART NO | T THICKNESS | G THICKNESS | A HOLE | B HOLE | C | D | L | W | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| LH-04A | 1.0 | 2.6~3.0 | ø7.8 | ø8.0 | 4.6 | 16.0 | 8.1 | 10.7 | 1 | 500 |
| LH-4KP | 1.0 | 2.8~3.8 | ø4.7 | ø4.8 | 2.7 | 6.35 | 7.7 | 6.5 | 2 | 1000 |

## 固定扣 SNAP LATCH 5-55-2

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

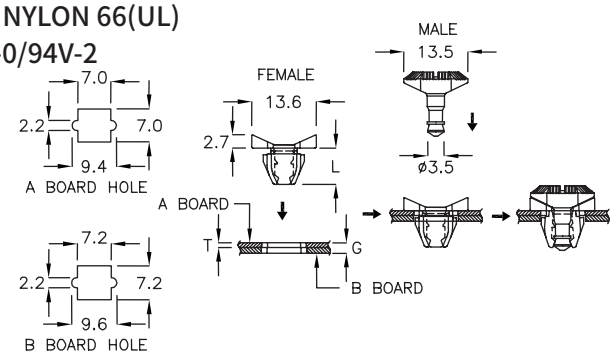


| PART NO | T THICKNESS | G THICKNESS | L | PACKAGE |
|---|---|---|---|---|
| LHM-7JQ | 1.0 | 2.2 | 7.7 | 500 |



## 固定扣 SNAP LATCH 5-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

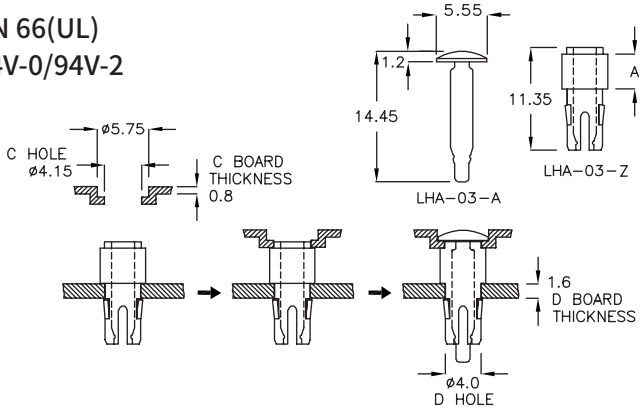


| PART NO | A | PACKAGE |
|---|---|---|
| LHA-03 | 3.9 | 2000 |

## 固定扣 SNAP LATCH 5-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

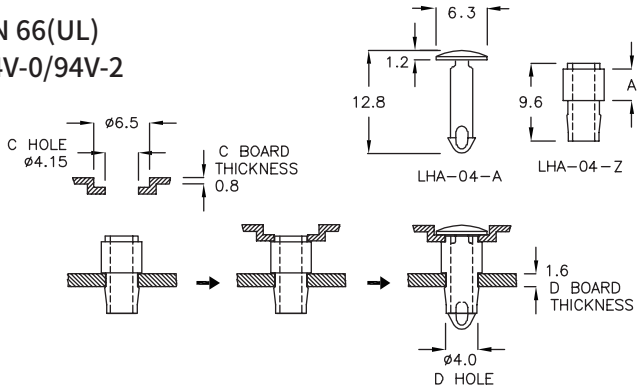


| PART NO | A | PACKAGE |
|---|---|---|
| LHA-04 | 3.9 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## P.C.B. 固定座 P.C.B. MOUNT 5-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

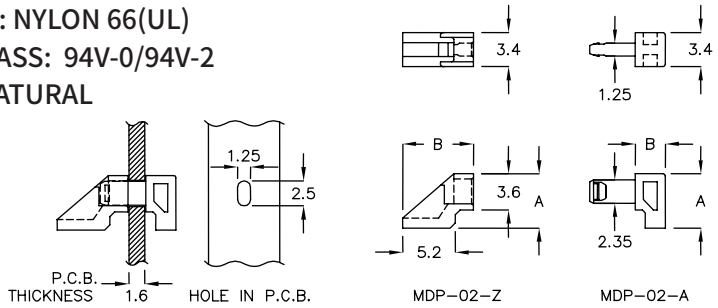


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MDP-02-A | 5.4 | 3.0 | 2000 |
| MDP-02-Z | 5.4 | 7.0 | |



## 固定扣 MOUNT 5-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LHY-01 | 15.0 | 6.0 | 11.0 | 500 |



## 天线固定扣 MOUNT 5-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| LHY-12 | 12.0 | 7.0 | 9.2 | 6.6 | 7.0 | 2.4 | 2000 |
| LHY-20 | 19.9 | 5.7 | 16.75 | 10.1 | 13.9 | 6.1 | 1000 |

## 固定扣 MOUNT 5-56-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LHG-06M | 6.5 | 0.85 | 4.3 | 1000 |

## 固定扣 NIFLATCH 5-56-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LHJ-33C | 35.0 | 7.1 | 33.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 天线固定扣 MOUNT 5-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MRT−19Q | 19.8 | 16.7 | 1.0~1.5 | 1000 |
| MRT−19SK | 19.8 | 16.7 | 1.5~2.0 | |



## 塑胶螺丝 PLASTIC SCREW 5-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- D: SCREW

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| S−2M10C | ø7.0 | 10.0 | 2.2 | M2 | 2000 |



## 塑胶螺丝 PLASTIC SCREW 5-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| S−2M07 | ø4.0 | 6.9 | 1.6 | M2.6 | 2000 |
| S−2M8DK | ø4.0 | 8.2 | 1.8 | M2.6 | |
| S−2M9A | ø4.0 | 9.5 | 1.6 | M2.6 | |
| S−2M10 | ø4.0 | 10.5 | 1.8 | M2.6 | |



## 塑胶螺丝 PLASTIC SCREW 5-57-4

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- D: SCREW

| PART NO | A | B | C | D SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| SU−304 | ø2.9 | 4.0 | 2.5 | M3 | 1.5 | 2000 |
| SU−508 | ø4.8 | 8.8 | 3.0 | M5 | 2.5 | |



## 塑胶螺丝 PLASTIC SCREW 5-57-5

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK
- D: SCREW

| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S−302Y | ø5.85 | 4.35 | 1.0 | M3 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺丝 PLASTIC SCREW 5-58-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW
- OPTIONAL MATERIAL: NYLON 66(UL)




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-306A | ø5.7 | 5.9 | 2.5 | M3 | 2000 |

## 塑胶螺丝 PLASTIC SCREW 5-58-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-410W | ø6.5 | 9.9 | 1.1 | M4 | 1000 |
| S-412W | ø6.5 | 11.9 | 1.1 | M4 | |

## 塑胶螺丝 PLASTIC SCREW 5-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-410Y | ø4.9 | 10.2 | 1.0 | M4 | 1000 |

## 塑胶螺丝 PLASTIC SCREW 5-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: CLEAR, NATURAL
- D: SCREW




| PART NO | MATERIAL | A | B | C | D | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| SNT-406A | PC | ø7.0 | 6.0 | 4.0 | M4 | 1 | 1000 |
| SNT-816J | N66 | ø13.0 | 16.0 | 8.0 | M8 | 2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺丝 PLASTIC SCREW 5-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | C | D SCREW | E | PACKAGE |
|---|---|---|---|---|---|---|
| SU6A-3A | ø6.8 | 3.5 | 2.8 | #6-32 | 1.2 | 2000 |
| S-6M2A | ø8.3 | 2.2 | 2.2 | M6 | 1.0 | |

## 塑胶螺丝 PLASTIC SCREW 5-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-304F | ø11.0 | 4.45 | 2.5 | M3 | 1000 |

## 塑胶螺丝 PLASTIC SCREW 5-59-3

- MATERIAL: POM(UL)
- COLOR: BLACK

NEW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| ★ S-3M2A | ø10.0 | 3.2 | 1.50 | M3 | 5000 |

## 塑胶螺丝 PLASTIC SCREW 5-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- D: SCREW




| PART NO | MATERIAL | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| S-4M5P | N66/PPS | ø18.0 | 5.0 | 3.0 | M4 | 1000 |
| S-5M6T | N66/PPS | ø18.0 | 6.0 | 3.5 | M5 | |
| S-6M8F | N66 | ø18.0 | 8.0 | 4.0 | M6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺丝 PLASTIC SCREW 5-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-608KT | ø11.5 | 8.0 | 3.3 | M6 | 1000 |
| S-608W | ø11.5 | 5.9 | 3.3 | | |

## 塑胶螺丝 PLASTIC SCREW 5-60-2

- MATERIAL: PEEK(UL)、PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL, BLACK
- D: SCREW




| PART NO | MATERIAL | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| SQA-406 | PPS | 7.0 | 6.0 | 2.4 | M4 | 1000 |
| SQA-408 | PPS | 7.0 | 8.0 | 2.4 | | |
| SQA-410 | PEEK | 7.0 | 10.0 | 2.4 | | |
| SQA-412 | PPS | 7.0 | 12.0 | 2.4 | | |
| SQA-508 | PPS | 8.0 | 8.0 | 2.8 | M5 | |
| SQA-510 | PEEK | 8.0 | 10.0 | 2.8 | | |
| SQA-512 | PPS | 8.0 | 12.0 | 2.8 | | |
| SQA-515 | PPS | 8.0 | 15.0 | 2.8 | | |
| SQA-610 | PPS | 8.0 | 10.0 | 2.8 | M6 | |
| SQA-612 | PEEK | 8.0 | 12.0 | 2.8 | | |

## 塑胶螺丝 PLASTIC SCREW 5-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| SUN4-406 | 4.7 | 6.35 | 1.35 | #4-40 | 1000 |
| SUN4-409 | 4.7 | 9.5 | 1.35 | | |
| SUN4-412 | 4.7 | 12.7 | 1.35 | | |
| SUN4-419 | 4.7 | 19.0 | 1.35 | | |
| SUN4-425 | 4.7 | 25.4 | 1.35 | | |
| SUN6-606 | 6.2 | 6.35 | 2.25 | #6-32 | |
| SUN6-609 | 6.2 | 9.5 | 2.25 | | |
| SUN6-612 | 6.2 | 12.7 | 2.25 | | |
| SUN6-619 | 6.2 | 19.0 | 2.25 | | |
| SUN6-625 | 6.2 | 25.4 | 2.25 | | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺丝 PLASTIC SCREW 5-61-1

- MATERIAL: PC(UL), NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR, NATURAL
- MATERIAL: PEEK(UL), PPS(UL)
- COLOR: NATURAL, BLACK
- D: SCREW




| PART NO | MATERIAL | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| SF-103BD | PEEK | ø3.2 | 2.0 | 1.2 | M1.6 | 1000 |
| SF-103NT | PEEK | ø3.2 | 2.5 | 1.2 | | |
| SF-104RM | PEEK | ø3.2 | 3.0 | 1.2 | | |
| SF-104WK | PEEK | ø3.2 | 3.5 | 1.2 | | |
| SF-105DP | PEEK | ø3.2 | 4.0 | 1.2 | | |
| SF-205 | PC/N66 | ø3.8 | 3.3 | 1.2 | M2 | 1000 |
| SF-304 | N66 | ø6.0 | 2.3 | 1.7 | M3 | 2000 |
| SF-306 | PC/N66 | ø5.4 | 4.6 | 1.4 | M3 | 1000 |
| SF-308 | PC/N66 | ø5.8 | 6.4 | 1.5 | | |
| SF-310 | PC/N66 | ø5.5 | 9.0 | 1.2 | | |
| SF-312 | PC/N66 | ø5.1 | 10.8 | 1.4 | | |
| SF-314 | PC | ø5.6 | 12.8 | 1.4 | | |
| SF-406 | PC | ø7.4 | 3.8 | 2.4 | M4 | 1000 |
| SF-408 | PC/N66 | ø7.4 | 5.8 | 2.4 | | |
| SF-410 | PC | ø7.6 | 7.9 | 2.1 | M4 | 500 |
| SF-412 | PC | ø7.4 | 9.8 | 2.4 | M4 | 1000 |
| SF-414 | PC/PPS | ø7.4 | 11.6 | 2.4 | | |
| SF-416 | PC/N66 | ø7.4 | 13.8 | 2.4 | | |
| SF-417 | PC/PPS | ø7.4 | 14.6 | 2.4 | | |
| SF-418 | PC/PPS | ø7.4 | 15.6 | 2.4 | | |
| SF-511 | PC | ø9.2 | 8.2 | 2.5 | M5 | |
| SF-513 | PC | ø9.1 | 10.2 | 2.5 | | |
| SF-515 | PC | ø9.2 | 12.2 | 2.5 | | |
| SF-517 | PC/PPS | ø9.1 | 14.5 | 2.5 | | |
| SF-518 | PC/PPS | ø9.1 | 15.5 | 2.5 | | |
| SF-520 | PC/PPS | ø9.1 | 17.5 | 2.5 | | |
| SN4-12 | PC/N66 | ø5.6 | 10.55 | 2.1 | #4-40 | |

## 塑胶螺丝 PLASTIC SCREW 5-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- D: SCREW




| PART NO | MATERIAL | A | B | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-4M2D | PPS | ø6.0 | 2.5 | M4 | 2000 |
| S-5M2K | PPS | ø7.0 | 2.8 | M5 | |
| S-6M02 | N66 | ø8.0 | 2.1 | M6 | |
| S-8M03 | PPS | ø10.0 | 3.0 | M8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺丝 PLASTIC SCREW 5-62-1

- MATERIAL: PC(UL), NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR, NATURAL
- MATERIAL: PEEK(UL), PPS(UL), PEI
- COLOR: NATURAL, BLACK
- D: SCREW




| PART NO | MATERIAL | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| S-102LM | PEEK | ø3.0 | 2.0 | 1.2 | M1.6 | 2000 |
| S-102SY | PEEK | ø3.0 | 2.5 | 1.2 | | |
| S-103FC | PEEK | ø3.8 | 3.17 | 1.2 | | |
| S-103A | PC/N66 | ø3.8 | 3.3 | 1.2 | | |
| S-103YJ | PEEK | ø3.0 | 3.5 | 1.2 | | |
| S-104KP | PEEK | ø3.0 | 4.0 | 1.2 | | |
| S-104QH | PEEK | ø3.8 | 4.76 | 1.2 | | |
| S-105K | PC/N66 | ø3.0 | 4.95 | 1.0 | | |
| S-106 | PC/N66 | ø3.8 | 6.0 | 1.2 | | |
| S-107WK | PEEK | ø3.8 | 7.94 | 1.2 | | |
| S-2M3P | PC | ø3.5 | 3.0 | 1.3 | M2.0 | |
| S-2M4K | PC/N66 | ø6.0 | 4.5 | 2.5 | | |
| S-2M6A | PC/N66 | ø3.5 | 6.5 | 1.3 | | |
| S-2M08 | PC/N66 | ø3.5 | 8.0 | 1.3 | | |
| S-2M10A | PC | ø5.7 | 10.0 | 2.5 | | |
| S-2AM11 | PC/N66 | ø4.3 | 11.0 | 1.6 | M2.5 | |
| S-2M05 | PC/N66 | ø5.7 | 5.0 | 2.8 | M2.6 | |
| S-2M06 | PC/N66 | ø5.7 | 6.0 | 2.8 | | |
| S-304C | PC/N66 | ø5.7 | 4.0 | 2.5 | M3 | |
| S-305A | PC/N66 | ø5.7 | 5.0 | 2.5 | M3 | 1000 |
| ★ S-305C | N66 | ø5.5 | 5.5 | 1.0 | | |
| S-306MK | PC/N66 | ø5.7 | 6.0 | 1.2 | | |
| S-306 | PC/N66 | ø5.7 | 6.3 | 2.5 | | |
| S-308 | PC/N66 | ø5.7 | 8.0 | 2.5 | | |
| S-310 | PC/N66 | ø5.7 | 10.0 | 2.5 | | |
| S-312 | PC/N66 | ø5.7 | 12.1 | 2.5 | | |
| S-315 | PC/N66 | ø5.7 | 15.1 | 2.5 | | |
| S-318FK | PEI | ø5.7 | 18.0 | 2.5 | | |
| S-318 | PC | ø5.7 | 18.3 | 2.5 | | |
| S-320 | PEI | ø5.7 | 20.0 | 2.5 | | |

| PART NO | MATERIAL | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| S-406 | PC/N66 | ø7.4 | 6.3 | 2.7 | M4 | 1000 |
| S-408 | PC/N66 | ø7.4 | 8.0 | 2.8 | | |
| S-410 | PC/N66 | ø7.5 | 10.2 | 2.6 | | |
| S-412 | PC/N66 | ø7.4 | 12.2 | 2.7 | | |
| S-414 | PC/N66 | ø7.5 | 14.2 | 2.7 | | |
| S-416 | PC/N66 | ø7.4 | 16.2 | 2.7 | | |
| S-420 | PC/N66 | ø7.4 | 20.0 | 2.8 | | |
| S-425 | PC/PPS | ø7.5 | 25.0 | 2.7 | | |
| S-510 | PC/N66 | ø9.1 | 10.2 | 3.5 | M5 | |
| S-512 | PC/N66 | ø9.1 | 12.2 | 3.5 | | |
| S-516 | PC | ø9.1 | 16.1 | 3.5 | | |
| S-520 | PC | ø9.1 | 20.2 | 3.6 | | |
| S-525 | PC/PPS | ø9.1 | 25.0 | 3.5 | | |
| S-530 | PC/PPS | ø9.1 | 30.0 | 3.5 | | |
| S-605 | PC/N66 | ø9.0 | 4.1 | 3.3 | M6 | |
| S-606 | PC/PPS | ø9.0 | 6.0 | 3.3 | | |
| S-608 | PC/PPS | ø9.0 | 8.0 | 3.3 | | |
| S-610 | PC/PPS | ø9.0 | 10.0 | 3.3 | | |
| S-612 | PC/PPS | ø9.0 | 12.0 | 3.3 | | |
| S-615 | PC/PPS | ø9.0 | 15.0 | 3.3 | | |
| S-618 | PC/PPS | ø9.0 | 18.0 | 3.3 | | |
| S-620 | PC/PPS | ø9.0 | 20.0 | 3.3 | | |
| SU2-12A | PC/N66 | ø4.2 | 12.7 | 1.5 | #2-56 | 2000 |
| SU6-06 | PC/N66 | ø6.9 | 6.4 | 2.5 | #6-32 | |

## 塑胶螺丝 PLASTIC SCREW 5-62-2

- MATERIAL: ABS+PC
- COLOR: BLACK
- D: SCREW

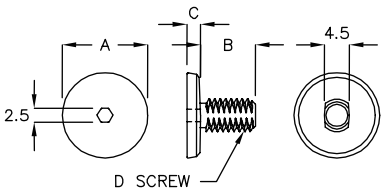


| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-610TY | ø15.6 | 10.0 | 2.5 | M6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺丝 PLASTIC SCREW 5-63-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- D: SCREW M7X0.75(UNF)




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-7M06 | 8.8 | 6.8 | 1.5 | M7X0.75 | 1000 |

## 塑胶螺丝 PLASTIC SCREW 5-63-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-318C | ø9.0 | 10.0 | 2.0 | M3 | 1000 |
| S-423C | ø10.4 | 15.0 | 5.0 | M4 | |
| S-523C | ø10.6 | 15.1 | 5.0 | M5 | |
| S-626C | ø10.5 | 18.0 | 5.0 | M6 | |

## 螺丝 SCREW 5-63-3

- MATERIAL: ABS+PC
- COLOR: GRAY
- SCREW MATERIAL: ALLOY BRASS
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| SW4-08 | ø8.3 | 8.0 | 6.4 | M4 | 500 |

## 螺丝 SCREW 5-63-4

- MATERIAL: ABS+PC
- COLOR: GRAY
- SCREW MATERIAL: ALLOY BRASS
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| SW5-16 | ø12.8 | 10.3 | 5.7 | M5 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 螺旋塞环 SCREW PLUG — 5-64-1

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| SM-UNEF58 | ø23.5 | 8.0 | 3.5 | 5/8"-24UNEF | 200 |
| SM-PF12 | ø26.3 | 8.1 | 3.5 | PF1/2" | |
| SM-M8 | ø12.0 | 8.5 | 2.4 | M8 | 1000 |
| SM-M10 | ø14.0 | 8.5 | 2.4 | M10 | |
| SM-M12 | ø16.15 | 8.5 | 3.35 | M12 | |
| SM-M12AC | ø16.15 | 8.5 | 3.35 | M12 | |
| SM-M16 | ø20.2 | 8.0 | 3.45 | M16 | 200 |
| SM-M20 | ø25.5 | 7.95 | 3.6 | M20 | |
| SM-M20A | ø25.5 | 6.0 | 3.6 | M20 | |
| SM-M25 | ø30.3 | 8.45 | 3.55 | M25 | |

## 防水螺旋塞环 WATERPROOF PLUG — 5-64-2

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- D: SCREW
- WATERPROOF PROVE: IP67




| PART NO | A | B | C | D SCREW | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| SM-UNEF58-X | ø23.5 | 8.0 | 3.5 | 5/8"-24UNEF | WSR-22AP | 200 |
| SM-PF12-X | ø26.3 | 8.1 | 3.5 | PF1/2" | OPW-20 | |
| SM-M8-X | ø12.0 | 8.5 | 2.4 | M8 | OPW- A | 1000 |
| SM-M10-X | ø14.0 | 8.5 | 2.4 | M10 | OPW-9CD | |
| SM-M12-X | ø16.15 | 8.5 | 3.35 | M12 | WSR-11RM | |
| SM-M12AC-X | ø16.15 | 8.5 | 3.35 | M12 | WSR-11RM | |
| SM-M16-X | ø20.2 | 8.0 | 3.45 | M16 | OPW-15D | 200 |
| SM-M20-X | ø25.5 | 7.95 | 3.6 | M20 | OPW-19M | |
| SM-M20A-X | ø25.5 | 6.0 | 3.6 | M20 | OPW-19M | |
| SM-M25-X | ø30.3 | 8.45 | 3.55 | M25 | OPW-24A | |

ASSEMBLE WITH P.G. PART OPW-SERIES, WSR-SERIES

## 螺旋塞环 SCREW PLUG — 5-64-3

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | C | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| SM-M10TC | ø14.0 | 8.5 | 2.4 | M10 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防水螺旋塞环 WATERPROOF PLUG 5-65-1

- MATERIAL: NYLON 66 (UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW
- WATERPROOF PROVE: IP67




| PART NO | A | B | C | D SCREW | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| SM-M10TC-X | ø14.0 | 8.5 | 2.4 | M10 | OPW-9CD | 1000 |

ASSEMBLE WITH P.G. PART OPW-SERIES

## 塑胶螺丝 PLASTIC SCREW 5-65-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | C | D SCREW | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| S-608KT-X | ø11.5 | 8.0 | 3.3 | M6 | UWX-11 | 1000 |
| S-608W-X | ø11.5 | 5.9 | 3.3 | | | |

ASSEMBLE WITH P.G. PART UWX-SERIES



## 塑胶螺帽 PLASTIC NUT 5-65-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- D: SCREW




| PART NO | MATERIAL | A | B | D SCREW | PACKAGE |
|---|---|---|---|---|---|
| S-2M | PC/N66 | 5.0 | 2.4 | M2.6 | 1000 |
| S-2MD | PC | 5.0 | 1.9 | M2.6 | |
| S-3M | PC/N66 | 5.4 | 2.5 | M3 | |
| S-4M | PC/N66 | 8.0 | 3.2 | M4 | |
| S-5M | PC/N66 | 8.0 | 4.4 | M5 | |
| S-7M | N66 | 10.2 | 3.95 | M7x0.75 | |
| S-8MG | N66 | 13.0 | 4.8 | M8 | 500 |
| S-12M | N66 | 18.0 | 5.1 | M12x1.5 | 1000 |
| UN4-40AN | N66 | 4.75 | 2.54 | #4-40 | |
| UN4-40DK | N66 | 6.35 | 2.54 | #4-40 | |
| UN6-32 | PC/N66 | 6.2 | 2.5 | #6-32 | |
| UN6-32BP | N66 | 6.35 | 3.05 | #6-32 | |
| UN6-32RT | N66 | 7.75 | 3.05 | #6-32 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶螺帽 PLASTIC NUT 5-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | D | E | PACKAGE |
|---|---|---|---|---|---|
| S-3MF | ø8.5 | 3.2 | M3 | 5.4 | 1000 |
| S-4MF | ø10.0 | 4.0 | M4 | 6.9 | |
| S-5MF | ø11.0 | 5.0 | M5 | 7.9 | |

## 塑胶螺帽 PLASTIC NUT 5-66-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- D: SCREW




| PART NO | A | B | D | E | PACKAGE |
|---|---|---|---|---|---|
| UN10-24 | ø10.55 | 6.35 | #10-24 | 9.15 | 1000 |

## 塑胶螺帽 PLASTIC NUT 5-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| SMA4-40C | ø9.55 | 7.9 | #4-40 | 1000 |
| SMA6-32F | ø9.55 | 7.9 | #6-32 | |

## 塑胶螺帽 PLASTIC NUT 5-66-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- D: SCREW




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| SMC4-40D | ø7.6 | 7.1 | #4-40 | 1000 |

## V 型扣 V CLIP 5-66-5

- MATERIAL: POM
- COLOR: BLACK

NEW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ VKW-14A | 11.0 | 8.0 | 14.13 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 06 如何使用胶带程序

## 准备安装表面:

为了获得最佳黏着效果，请将胶带固定座贴在清洁、干燥、无油的表面上。
贴上前请务必清洁黏合表面，请用水 1:1稀释的异丙醇混合液擦拭表面后，待表面完全干燥。

## 如何正确安装胶带:

若要正确安装及使用胶带固定座，请先移除离型纸后将固定座放置到位，平均施以约15psi(1.05kg/cm²)之压力按压以获得有效贴合。

## 理想施工温度:

温度介于在15℃至38℃之间，勿低于10℃。

1.用干净的布并用稀释的异丙醇混合液擦拭清洁表面。

2.待表面完全干燥。

3.请先移除离型纸后将其固定座放置到位,平均施以15psi(1.05Kg/cm²)之压力按压以获得有效贴合,温度介于在15℃至38℃之间,勿低于10℃。

4.等待一段时间直至贴合强度稳定。

## 胶带保存:

胶带固定座储存环境为21℃和50%相对湿度，避免因未确实密封及开放包装，会有背胶黄化现象。
如果储存条件（环境）与建议条件不同，可能会缩短保质期并导致黏合强度下降。
我们持续提高产品可靠性，但错误使用可能会造成损坏，如果您对产品的正确使用有任何疑问/疑虑，请咨询我们。

# 06

## 线材固定
## CABLE CLAMPS

## 线材隔离
## SADDLES

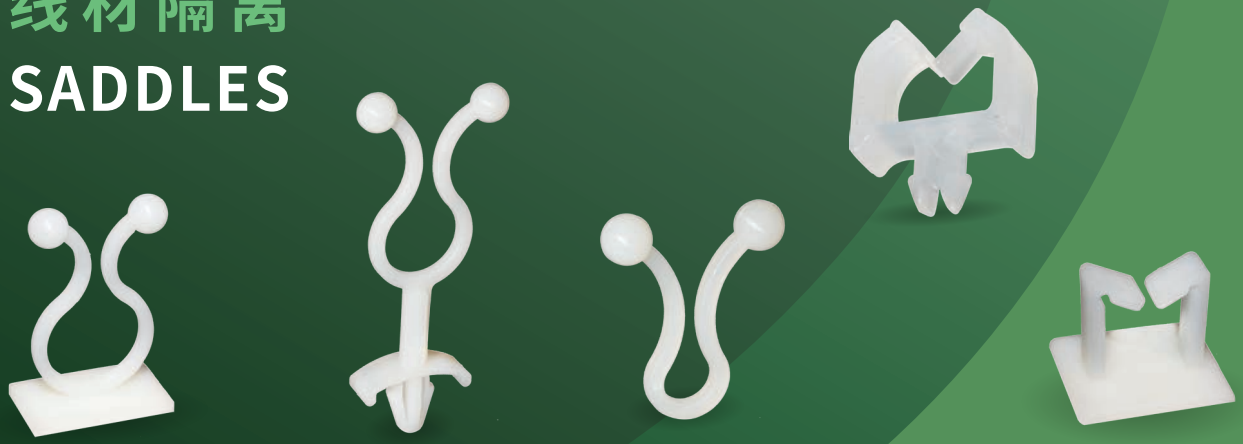

## 电线固定板 WIRE MOUNT 6-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

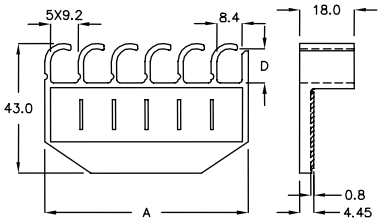


| PART NO | A | D | PACKAGE |
|---|---|---|---|
| 6FW−10 | 67.2 | 11.0 | 50 |

## 电线固定板 WIRE MOUNT 6-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| ★ CMR−8GH | 8.1 | 1.4 | ø1.38 | 2000 |

## 电线固定板 WIRE MOUNT 6-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CMY−10CT | 4.5 | 9.45 | 6.85 | 1000 |
| CMY−10A | 4.5 | 10.2 | 7.6 | |

## 电线固定板 WIRE MOUNT 6-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

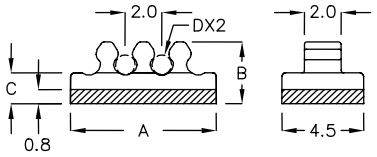


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CMR−6TH | 6.1 | 4.2 | 1.8 | ø1.3 | 2000 |
| CMR−8AT | 8.0 | 3.4 | 1.7 | ø1.0 | |
| CMR−8KF | 8.1 | 4.2 | 1.8 | ø1.38 | |



## 电线固定板 WIRE MOUNT 6-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

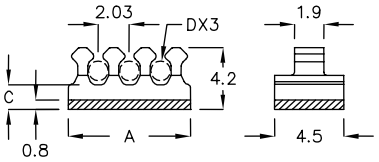


| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CMR−8D | 8.1 | 1.8 | ø1.3 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 WIRE MOUNT 6-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

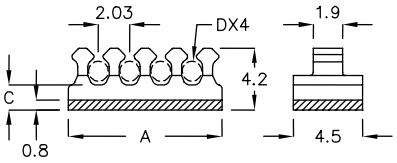


| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CMR-10FK | 10.0 | 1.8 | ø1.3 | 2000 |

## 电线固定板 WIRE MOUNT 6-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

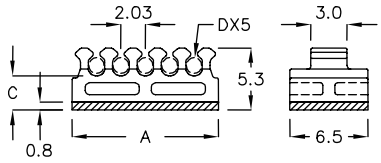


| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CMX-12A | 12.2 | 3.0 | ø1.3 | 2000 |

## 电线固定板 WIRE MOUNT 6-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

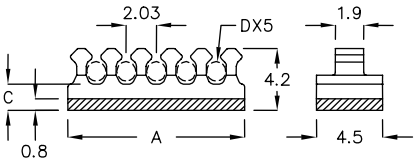


| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CMR-12QW | 12.0 | 1.8 | ø1.3 | 2000 |

## 束线固定板 ADHESIVE BACKED MOUNT 6-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M







| PART NO | A | B | C | D | E | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|
| AB-2S | 13.0 | 13.0 | 4.8 | 2.1 | 2.8 | YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142S YJ-160, YJ-203S | 1000 |
| AB-2 | 19.0 | 19.0 | 4.7 | 1.7 | 3.8 | | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 2.6mm

## 束线固定板 ADHESIVE BACKED MOUNT 6-3-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 COUNTERSUNK SCREW







| PART NO | A | B | C | D | E | F | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| AB-3S | 19.8 | 19.8 | 6.4 | 1.6 | 4.3 | ø4.4 | YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S | 500 |
| AB-3 | 28.3 | 28.3 | 6.7 | 1.8 | 5.0 | ø4.8 | | 200 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 束线固定板
## ADHESIVE BACKED MOUNT — 6-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH #6-32 COUNTERSUNK SCREW




| PART NO | A | B | C | D | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| AB-20PJ | 19.8 | 19.8 | 7.4 | 1.7 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-120, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

## 束线固定板
## ADHESIVE BACKED MOUNT — 6-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M2 or M3 SCREW




| PART NO | A | B | C | D | E | F | WITH SCREW | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| AB-3R | 15.0 | 9.0 | 5.3 | 1.95 | 3.8 | 10.5 | M2 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-120, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S | 500 |
| AB-3P | 24.0 | 12.0 | 5.3 | 1.95 | 4.0 | 18.0 | M3 | | |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



## 束线固定板
## ADHESIVE BACKED MOUNT — 6-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| AB-20QW | 39.6 | 19.8 | 7.4 | 1.7 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-120, YJ-142, YJ-142S, YJ-156<br>YJ-160, YJ-203, YJ-203S | 200 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 束线固定板
## ADHESIVE BACKED MOUNT 6-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




| PART NO | A | B | C | D | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| ABT-60L | 60.0 | 20.0 | 8.2 | 1.8 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-120, YJ-142, YJ-142S, YJ-156<br>YJ-160, YJ-203, YJ-203S | 200 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

## 压线座 WIRE CLAMP 6-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FS-05 | 2.4 | 5.0 | 4.1 | 3.2 | 13.2 | 2000 |
| FS-12PT | 1.5 | 5.0 | 3.2 | 2.4 | 12.3 | |

## 压线座 WIRE CLAMP 6-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FCP-05 | 5.2 | 13.0 | 500 |



## 压线座 WIRE CLAMP 6-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ FCP-7 | 7.0 | 13.0 | 500 |



## 隔离束线座 WIRE SADDLE 6-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| AB-5 | 6.0 | 15.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FU-10AK | 8.5 | 10.0 | 6.1 | 2.1 | 2.3 | 2000 |
| FU-10DF | 8.5 | 10.0 | 6.9 | 3.1 | 3.15 | |
| FU-15A | 8.5 | 15.2 | 5.8 | 2.5 | 2.7 | |



## 隔离束线座 WIRE SADDLE 6-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FUS-10C | 6.5 | 10.5 | 4.5 | 2000 |



## 电线固定座 WIRE MOUNT 6-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | E | PACKAGE |
|---|---|---|---|---|
| FUM-12 | 11.25 | 8.0 | 9.03 | 2000 |
| FUM-12FD | 13.1 | 8.0 | 10.45 | |



## 隔离束线座 WIRE SADDLE 6-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FUA-16 | 6.0 | 10.0 | 2000 |



## 电线固定座 WIRE MOUNT 6-6-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FWF-1A | 14.0 | 12.0 | 3.5 | 5.1 | 3.8 | 2.6 | 1000 |
| FWF-1C | 24.0 | 12.0 | 3.6 | 9.6 | 4.8 | 2.6 | 500 |
| FWF-1D | 20.0 | 12.0 | 3.6 | 7.6 | 4.8 | 2.6 | |
| FWF-1M | 24.0 | 12.0 | 3.8 | 9.4 | 5.2 | 2.8 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FWF−1F | 24.0 | 12.0 | 3.6 | 9.6 | 4.8 | 2.6 | 500 |
| FWF−1N | 24.0 | 12.0 | 4.1 | 9.6 | 4.8 | 3.1 | |
| FWF−1P | 24.0 | 12.0 | 4.1 | 9.4 | 5.2 | 3.1 | |



## 电线固定座 WIRE MOUNT 6-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

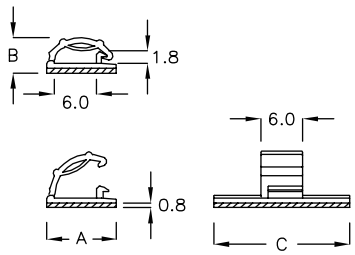


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHW−1C | 10.0 | 5.5 | 19.5 | 500 |

## 电线固定座 WIRE MOUNT 6-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

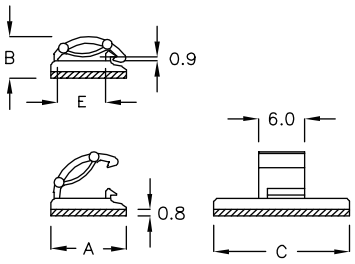


WITH LOCK FEATURE

| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| CHW−01 | 10.0 | 5.8 | 19.5 | 6.0 | 500 |
| CHW−2M | 14.1 | 8.4 | 19.6 | 10.35 | |
| CHW−04 | 10.0 | 5.8 | 12.0 | 6.0 | |
| CHW−05 | 10.0 | 5.8 | 18.8 | 6.3 | |
| CHW−07 | 10.0 | 5.8 | 19.5 | 6.1 | |

## 电线固定座 WIRE MOUNT 6-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

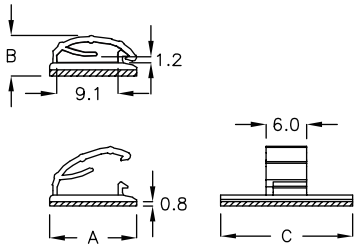


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHW−2K | 13.0 | 6.3 | 20.0 | 500 |

## 电线固定座 WIRE MOUNT 6-7-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

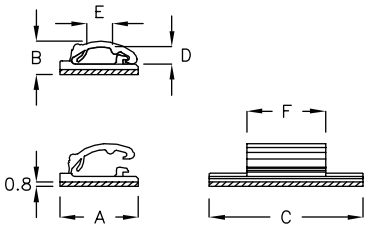


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| CHW−2Q | 10.0 | 4.7 | 19.5 | 2.2 | 3.3 | 10.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

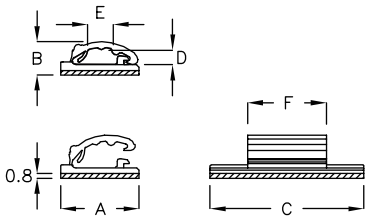


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| CHW-2AC | 10.0 | 4.7 | 19.5 | 1.8 | 3.3 | 10.0 | 500 |

## 电线固定座 WIRE MOUNT 6-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | D | E | PACKAGE |
|---|---|---|---|---|---|
| CHW-10MK | 10.0 | 7.3 | 4.2 | 6.4 | 500 |

## 电线固定座 WIRE MOUNT 6-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| CHW-1A | 10.0 | 6.1 | 19.5 | 3.0 | 6.0 | 6.0 | 500 |
| CHW-1J | 8.5 | 4.7 | 12.0 | 1.8 | 3.5 | 7.0 | 1000 |
| CHW-2C | 10.0 | 6.3 | 20.0 | 3.0 | 5.9 | 11.0 | 500 |
| CHW-3R | 10.0 | 7.9 | 30.0 | 4.3 | 5.4 | 20.0 | |



## 电线固定座 WIRE MOUNT 6-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

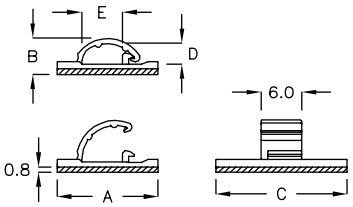


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CHW-1D | 15.0 | 5.4 | 19.5 | 3.0 | 6.0 | 500 |
| CHW-1H | 15.0 | 5.3 | 19.5 | 2.5 | 6.0 | |



## 电线固定座 WIRE MOUNT 6-8-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

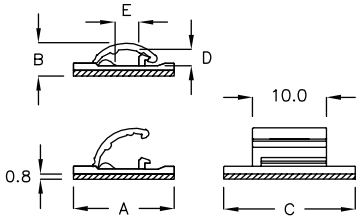


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CHW-1F | 15.0 | 5.4 | 19.5 | 2.5 | 3.4 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CHW-4NJ | 13.5 | 5.1 | 13.0 | 2.6 | 8.5 | 500 |

## 电线固定座 WIRE MOUNT 6-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

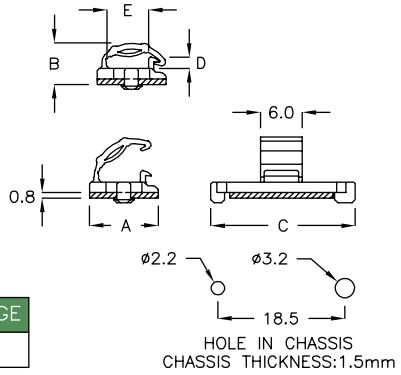


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CZQ-1SK | 10.0 | 6.1 | 21.0 | 1.7 | 6.0 | 500 |

## 电线固定座 WIRE MOUNT 6-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CZJ-20K | 20.5 | 10.1 | 12.5 | 2.7 | 8.8 | 500 |

## 电线固定座 WIRE MOUNT 6-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FGH-01 | ø3.2 | 10.3 | 10.0 | 500 |



## 电线固定座 MOUNTING PURSE LOCK 6-9-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE




WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| AB-8C | 9.5 | 28.2 | 25.0 | ø8.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 MOUNTING PURSE LOCK —— 6-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | E | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| AB-4 | 6.7 | 28.6 | 10.0 | 19.8 | ø5.8 | 500 |
| AB-9 | 11.0 | 31.3 | 9.0 | 19.2 | ø10.5 | 200 |



## 电线固定座 MOUNTING PURSE LOCK —— 6-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| AB-3DT | 4.0 | 18.0 | 18.0 | 14.0 | ø3.0 | 500 |
| AB-04C | 4.9 | 25.2 | 20.0 | 13.0 | ø4.0 | |
| AB-04D | 4.9 | 21.1 | 14.5 | 15.5 | ø4.0 | |
| AB-05C | 6.0 | 24.7 | 20.0 | 13.0 | ø5.0 | |
| AB-7 | 8.7 | 22.8 | 20.0 | 13.0 | ø7.0 | |
| AB-07C | 8.7 | 23.0 | 15.5 | 16.0 | ø7.0 | |
| AB-8 | 9.5 | 28.2 | 25.0 | 13.0 | ø8.2 | |
| AB-08D | 9.5 | 25.4 | 15.5 | 20.0 | ø8.2 | |
| AB-8FA | 9.5 | 27.0 | 20.0 | 14.0 | ø8.5 | |
| AB-10 | 10.8 | 31.3 | 21.1 | 19.2 | ø10.0 | 200 |
| AB-10D | 10.8 | 27.3 | 18.5 | 21.0 | ø10.0 | |
| AB-12A | 14.0 | 35.5 | 22.0 | 13.0 | ø12.5 | |
| AB-13 | 14.8 | 35.5 | 22.0 | 13.0 | ø13.0 | |
| AB-13A | 14.8 | 35.5 | 25.0 | 20.0 | ø13.3 | |
| AB-16 | 17.8 | 39.4 | 25.0 | 13.0 | ø16.2 | |
| AB-16C | 17.9 | 39.3 | 25.0 | 18.0 | ø16.0 | |
| AB-18 | 20.0 | 39.0 | 25.0 | 18.0 | ø18.0 | |
| AB-20R | 22.2 | 43.0 | 25.4 | 25.4 | ø20.5 | |
| AB-22 | 21.0 | 40.8 | 25.2 | 13.0 | ø19.0 | |

## 电线固定座 MOUNTING PURSE LOCK —— 6-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | D | E | F | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|---|---|
| AB-8S | 9.6 | 26.3 | 6.25 | 1.9 | 25.4 | ø8.5 | 200 |
| AB-8H | 9.6 | 26.3 | 12.6 | 1.9 | 25.4 | ø8.5 | |
| AB-10A | 11.6 | 28.0 | 27.3 | 1.9 | 25.4 | ø10.2 | |
| AB-11A | 11.4 | 27.4 | 4.8 | 2.0 | 13.0 | ø9.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 MOUNTING PURSE LOCK — 6-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | C | D | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| AB-18JK | 21.0 | 25.2 | 26.8 | ø18.5 | 200 |
| AB-18MD | 21.0 | 25.2 | 16.8 | ø18.5 | |

## 隔离束线座 WIRE SADDLE — 6-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CHAD-42JF | 18.0 | 28.0 | 25.2 | 14.8 | 100 |

## 隔离束线座 WIRE SADDLE — 6-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED
- WITH M2.5 SCREW

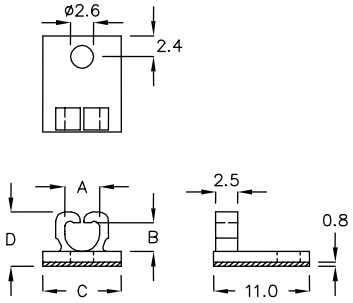


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CHF-4A | 4.0 | 3.3 | 9.0 | 6.5 | 1000 |

## 隔离束线座 WIRE SADDLE — 6-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED
- WITH M2.5 or M3 SCREW

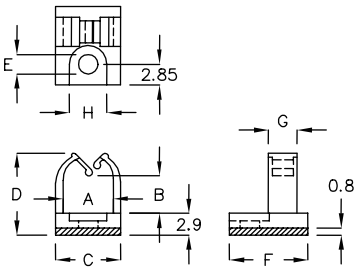


| PART NO | A | B | C | D | E | F | G | H | USE SCREW | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| CHF-8 | 6.9 | 5.0 | 9.1 | 11.3 | ø2.7 | 11.0 | 4.1 | 5.1 | M2.5 | 500 |
| CHF-8A | 6.9 | 5.0 | 9.1 | 11.2 | ø3.1 | 11.0 | 4.1 | 5.1 | M3 | |
| CHF-8C | 7.0 | 8.8 | 9.0 | 15.0 | ø2.7 | 10.9 | 4.0 | 5.2 | M2.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

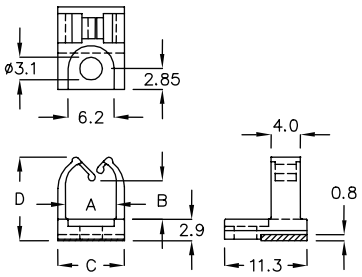


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CHFQ-6DM | 6.9 | 5.25 | 9.1 | 11.4 | 1000 |

## 隔离束线座 WIRE SADDLE 6-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M2.5 or M3 SCREW




| PART NO | A | B | C | D | E | F | G | H | J | USE SCREW | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| CHFA-4RQ | 4.7 | 8.3 | 6.5 | 13.0 | ø2.7 | 11.0 | 4.1 | 2.9 | 5.1 | M2.5 | 1000 |
| CHFA-6QW | 6.8 | 13.9 | 10.0 | 19.6 | ø3.1 | 15.0 | 5.0 | 5.0 | 5.1 | M3 | |
| CHFA-11AM | 11.5 | 16.3 | 15.5 | 23.2 | ø3.1 | 19.0 | 5.3 | 5.0 | 5.1 | | 500 |
| CHFA-15GM | 15.5 | 33.4 | 19.5 | 40.7 | ø3.1 | 19.0 | 8.0 | 4.5 | 5.6 | | 200 |
| CHFA-18TK | 18.0 | 38.7 | 22.0 | 46.0 | ø3.1 | 22.0 | 8.0 | 5.0 | 5.6 | | 100 |

## 隔离束线座 WIRE SADDLE 6-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

WITH LOCK FEATURE

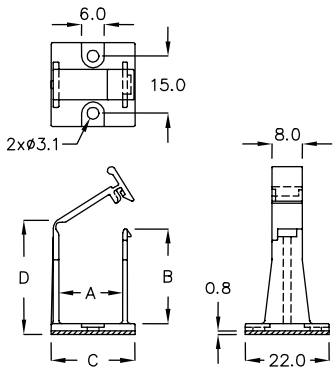


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CHFR-16M | 16.8 | 37.2 | 22.0 | 42.0 | 100 |

## 隔离束线座 WIRE SADDLE 6-12-4

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 CPUNTERSUNK SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CHFZ-17A | 10.4 | 17.2 | 13.6 | 23.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

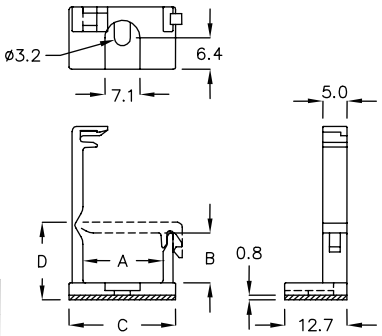


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CKMH-16 | 16.3 | 10.1 | 21.6 | 15.6 | 200 |



## 隔离束线座 WIRE SADDLE 6-13-2

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| AB-20C | 4.55 | 2.7 | 9.6 | 7.2 | 9.6 | 2000 |
| AB-20H | 4.5 | 2.7 | 8.0 | 7.3 | 8.8 | |
| AB-20JQ | 4.5 | 2.7 | 8.0 | 7.3 | 6.0 | |



## 隔离束线座 WIRE SADDLE 6-13-3

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ABH-4K | 4.5 | 2.2 | 7.6 | 5.65 | 2000 |

## 隔离束线座 WIRE SADDLE 6-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ABH-4GN | 4.5 | 3.7 | 8.0 | 9.7 | 1000 |

## 隔离束线座 WIRE SADDLE 6-13-5

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| CAR-4A | 4.5 | 2.95 | 9.4 | 8.25 | 9.4 | 2.0 | 2000 |
| CAR-9CD | 9.2 | 6.0 | 12.7 | 14.2 | 12.7 | 4.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-14-1

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CAM−7DF | 7.5 | 9.0 | 10.0 | 14.5 | 500 |



## 隔离束线座 WIRE SADDLE 6-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ABD−10P | 3.4 | 2.7 | 5.0 | 7.2 | 2000 |

## 隔离束线座 WIRE SADDLE 6-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




| PART NO | A | B | C | D | F | H | J | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CHFD−6RM | 6.8 | 6.3 | 9.0 | 14.1 | 10.9 | 2.85 | 5.2 | 1000 |
| CHFD−9GD | 9.0 | 9.0 | 12.7 | 18.3 | 12.7 | 3.5 | 5.3 | |

## 隔离束线座 WIRE SADDLE 6-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CHFT−5AM | 5.3 | 9.0 | 7.5 | 15.8 | 1000 |

## 隔离束线座 WIRE SADDLE 6-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

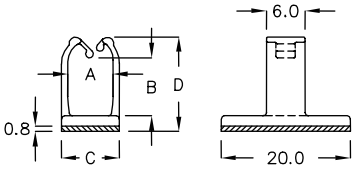


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CML−7RJ | 7.0 | 9.0 | 9.0 | 14.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

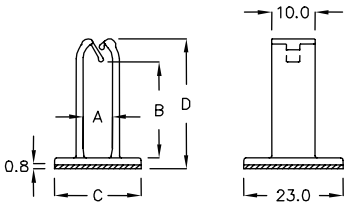


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CMLA−6 | 6.8 | 25.0 | 20.0 | 32.8 | 200 |

## 隔离束线座 WIRE SADDLE 6-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

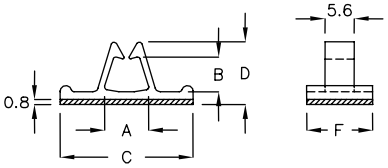


| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| AB−15A | 8.4 | 6.7 | 25.5 | 12.0 | 12.7 | 500 |
| AB−15F | 8.4 | 6.0 | 17.6 | 11.3 | 8.9 | |

## 电线固定座 WIRE MOUNT 6-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

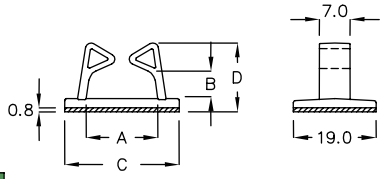


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| AB−15H | 16.6 | 6.3 | 26.4 | 15.7 | 500 |



## 隔离束线座 WIRE SADDLE 6-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

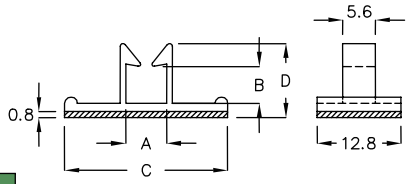


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| AB−15 | 6.4 | 5.8 | 25.5 | 11.5 | 500 |
| AB−15C | 6.4 | 4.5 | 19.0 | 10.2 | |



## 隔离束线座 WIRE SADDLE 6-15-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| AB−11KW | 11.5 | 26.8 | 17.0 | 34.7 | 13.5 | 5.3 | 200 |
| AB−20GP | 20.0 | 15.3 | 28.0 | 23.3 | 25.0 | 10.0 | 100 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

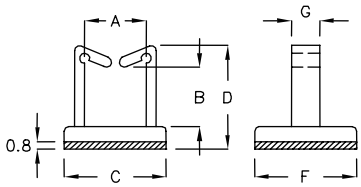


| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| AB-20A | 11.2 | 8.2 | 21.0 | 16.3 | 19.0 | 5.3 | 500 |
| AB-11CF | 11.5 | 10.0 | 16.0 | 18.2 | 12.5 | 5.3 | |
| AB-20F | 11.5 | 10.0 | 17.0 | 17.9 | 12.5 | 5.3 | |
| AB-20 | 11.5 | 10.0 | 21.0 | 17.9 | 19.0 | 5.3 | |
| AB-20K | 16.6 | 9.8 | 26.4 | 17.9 | 19.0 | 7.0 | |
| AB-17K | 17.0 | 27.8 | 22.0 | 35.2 | 22.0 | 10.0 | 100 |
| AB-20D | 20.0 | 10.0 | 25.7 | 17.9 | 19.0 | 5.3 | 500 |



## 隔离束线座 WIRE SADDLE 6-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| AB-16LM | 6.8 | 14.0 | 10.0 | 20.0 | 16.0 | 5.0 | 500 |
| AB-20M | 6.8 | 14.0 | 10.0 | 20.0 | 20.0 | 5.0 | |
| AB-11SJ | 11.5 | 19.8 | 15.5 | 26.8 | 19.0 | 5.3 | 200 |
| AB-15RK | 15.1 | 26.2 | 19.5 | 34.0 | 19.5 | 10.0 | 100 |
| AB-20L | 16.5 | 10.2 | 20.5 | 18.2 | 18.9 | 7.0 | 200 |



## 隔离束线座 WIRE SADDLE 6-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

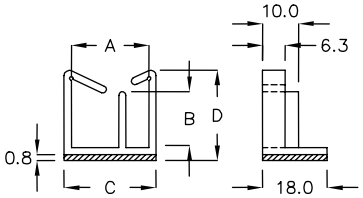


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| AB-21A | 21.7 | 15.5 | 25.7 | 24.3 | 200 |



## 隔离束线座 WIRE SADDLE 6-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ★ ABF-20GS | 19.8 | 17.4 | 23.0 | 22.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: ABS+PC
- COLOR: BLACK
- ADHESIVE TAPE: 3M

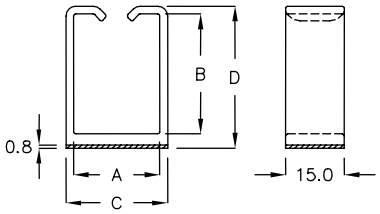


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ABF-34DM | 36.0 | 29.1 | 40.0 | 34.7 | 100 |
| ABF-36CK | 22.0 | 30.7 | 26.0 | 36.3 | |
| ★ ABF-55FN | 55.0 | 13.0 | 58.3 | 17.0 | |

## 隔离束线座 WIRE SADDLE 6-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| ABK-5Q | 5.8 | 24.0 | 9.0 | 29.3 | 20.0 | 8.0 | 200 |

## 隔离束线座 WIRE SADDLE 6-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

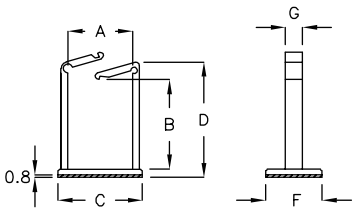


| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| CMF-10CS | 10.4 | 13.6 | 13.0 | 19.8 | 22.0 | 10.0 | 200 |
| CMF-15A | 15.1 | 27.7 | 19.5 | 34.0 | 19.5 | 10.0 | 100 |
| CMF-17 | 17.0 | 27.8 | 22.0 | 34.0 | 22.0 | 10.0 | |
| CMF-23 | 23.0 | 31.8 | 30.0 | 40.8 | 20.0 | 6.0 | |

## 隔离束线座 WIRE SADDLE 6-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW

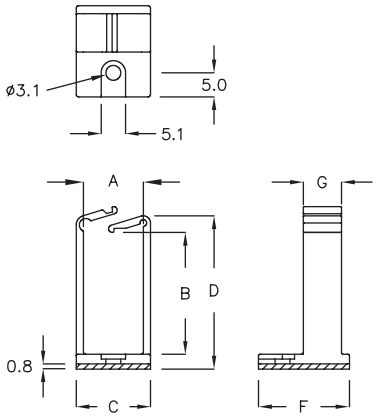


| PART NO | A | B | C | D | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ CNL-12FP | 12.5 | 25.4 | 15.5 | 32.0 | 19.0 | 8.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| CHU-06 | 10.8 | 18.5 | 21.0 | 14.8 | 500 |
| CHU-06K | 10.8 | 18.5 | 16.0 | 14.8 | |

## 隔离束线座 WIRE SADDLE 6-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| PAC-40GS | 22.0 | 34.7 | 26.0 | 40.3 | 100 |
| PAC-50M | 27.0 | 44.7 | 31.0 | 50.3 | |



## 隔离束线座 WIRE SADDLE 6-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CZK-28F | 28.6 | 22.8 | 200 |

## 隔离束线座 WIRE SADDLE 6-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

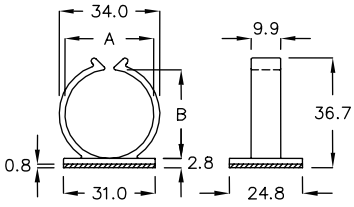


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CZT-30JR | 30.0 | 29.8 | 100 |

## 隔离束线座 WIRE SADDLE 6-18-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

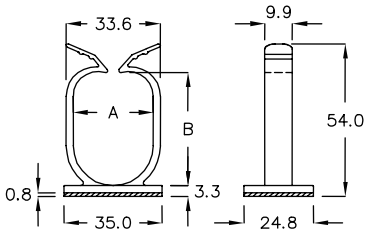


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CZW-28JK | 28.6 | 40.5 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

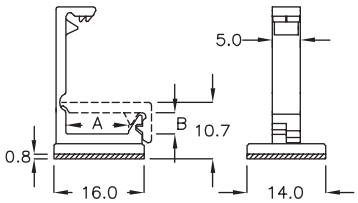


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PAK11−4A | 11.1 | 4.4 | 200 |

## 隔离束线座 WIRE SADDLE 6-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

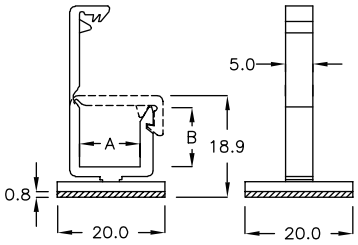


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PAD11−11 | 11.1 | 11.4 | 200 |

## 隔离束线座 WIRE SADDLE 6-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

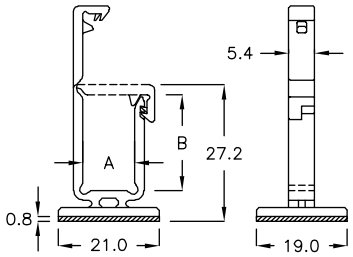


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PAD10−19 | 11.0 | 19.3 | 200 |



## 隔离束线座 WIRE SADDLE 6-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

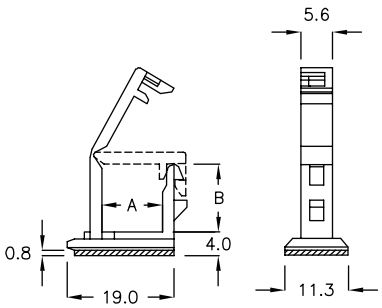


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CKM−01 | 10.8 | 12.0 | 200 |

## 隔离束线座 WIRE SADDLE 6-19-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

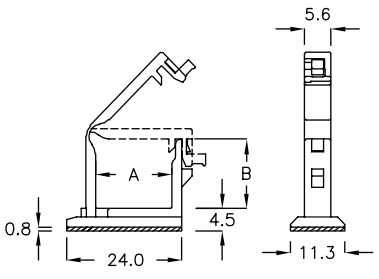


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CKZ−16 | 16.0 | 14.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CKM-02 | 10.5 | 11.5 | 4.0 | 200 |
| CKM-03 | 11.1 | 15.0 | 4.0 | |



## 电线固定板 CABLE CLAMP 6-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CKZA-16K | 16.0 | 15.7 | 200 |

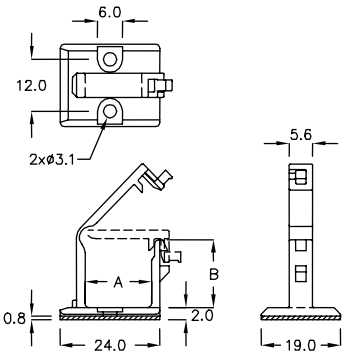

## 隔离束线座 WIRE SADDLE 6-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CKMA-21 | 14.0 | 27.6 | 32.8 | 100 |

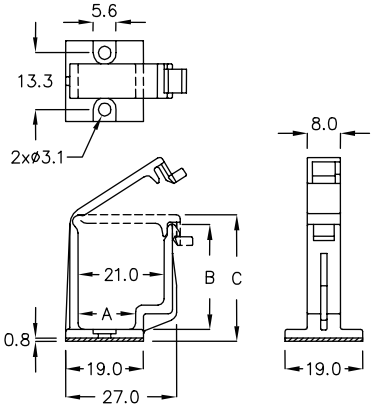

## 隔离束线座 WIRE SADDLE 6-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CKW-01 | 13.6 | 5.3 | 200 |

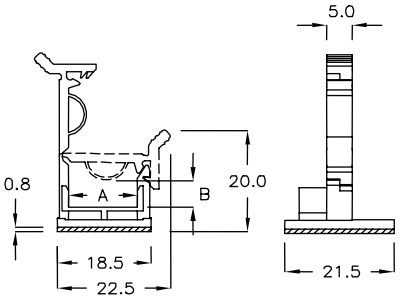

## 电线固定座 WIRE MOUNT 6-20-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| FRAC-3K | ø16.0 | 7.3 | ø3.8 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ4~Φ5
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-1P | 12.0 | 7.3 | 19.0 | ø4.5 | 500 |



## 电线固定座 WIRE MOUNT 6-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ4~Φ5
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-1 | 16.0 | 7.3 | 18.9 | ø4.4 | 500 |






## 电线固定座 WIRE MOUNT 6-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ4~Φ5
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-1GH | 16.0 | 7.2 | 15.6 | ø4.4 | 500 |



## 电线固定座 WIRE MOUNT 6-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D CABLE DIM: | PACKAGE |
|---|---|---|---|---|---|
| FW-1A | 19.0 | 8.8 | 20.2 | ø6.0 | 500 |
| FW-1AM | 19.0 | 8.8 | 19.0 | ø5.2 | |






## 电线固定座 WIRE MOUNT 6-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FW-1AS | 19.0 | 8.5 | 19.0 | ø5.2 | 10.2 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FW-1AK | 16.0 | 7.3 | 19.0 | ø4.0 | 10.2 | 500 |
| FW-1AP | 16.0 | 6.4 | 16.0 | ø3.0 | 8.5 | |
| FW-1AQ | 16.0 | 7.4 | 19.0 | ø4.0 | 10.2 | |
| FW-1AR | 16.0 | 7.4 | 19.0 | ø3.6 | 10.2 | |
| FW-1AT | 16.0 | 7.4 | 19.0 | ø4.2 | 10.2 | |

## 电线固定座 WIRE MOUNT 6-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-1B | 20.7 | 9.0 | 13.0 | ø5.6 | 500 |
| FW-1C | 20.7 | 7.5 | 10.0 | ø3.6 | |

## 电线固定座 WIRE MOUNT 6-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FW-1AJ | 12.0 | 7.3 | 12.0 | ø3.8 | 9.0 | 500 |

## 电线固定座 WIRE MOUNT 6-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-2F | 20.8 | 8.6 | 13.0 | ø4.7 | 500 |

## 电线固定座 WIRE MOUNT 6-22-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-01H | 13.0 | 6.0 | 12.0 | ø3.3 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-23-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FW-01F | 12.0 | 4.6 | 10.0 | 1000 |



## 电线固定座 WIRE MOUNT 6-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| FW-2 | 16.0 | 7.2 | 19.0 | 8.3 | 500 |
| FW-02P | 14.0 | 7.2 | 16.0 | 6.3 | |
| FW-02Q | 18.0 | 7.2 | 19.0 | 10.2 | |



## 电线固定座 WIRE MOUNT 6-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FW-6NJ | 6.5 | 4.5 | 12.0 | 1.4 | 4.0 | 6.0 | 1000 |
| FW-02N | 9.8 | 4.5 | 9.5 | 1.4 | 6.5 | 6.4 | |
| FW-2JG | 8.0 | 7.6 | 12.0 | 4.4 | 5.1 | 4.0 | 500 |
| FW-2MQ | 10.0 | 5.9 | 9.4 | 2.5 | 4.25 | 6.4 | |
| FW-2MP | 12.0 | 6.3 | 9.4 | 2.5 | 6.25 | 6.4 | |
| FW-2S | 12.5 | 6.0 | 9.5 | 2.5 | 8.4 | 6.7 | |
| FW-2SP | 12.7 | 6.3 | 12.5 | 2.5 | 8.2 | 6.3 | |
| FW-2AG | 12.7 | 6.4 | 12.7 | 2.8 | 8.4 | 6.4 | |
| FW-2M | 14.5 | 6.4 | 9.5 | 2.5 | 10.2 | 6.4 | |
| FW-2MA | 16.7 | 6.6 | 13.0 | 3.1 | 11.6 | 9.0 | |



## 电线固定座 WIRE MOUNT 6-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FW-2SC | 9.0 | 5.3 | 4.0 | 2.9 | 6.4 | 1000 |
| FW-9NT | 9.0 | 5.3 | 8.0 | 2.9 | 6.5 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FW-1Q | 11.7 | 5.2 | 10.0 | 2.0 | 5.2 | 6.0 | 1000 |
| FW-1S | 11.7 | 5.6 | 16.0 | 2.5 | 5.2 | 7.1 | |
| FW-1M | 12.3 | 6.4 | 15.9 | 3.2 | 6.0 | 7.0 | |
| FW-19A | 19.9 | 6.1 | 11.9 | 2.6 | 13.2 | 10.0 | 500 |
| FW-019 | 19.9 | 6.7 | 14.0 | 3.2 | 13.2 | 10.0 | |

## 电线固定座 WIRE MOUNT 6-24-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|
| FYS-4HJ | 12.0 | 5.8 | 14.0 | ø2.1 | 500 |

## 电线固定座 WIRE MOUNT 6-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FW-2D | 19.0 | 11.8 | 19.0 | 7.8 | 12.5 | 9.7 | 500 |
| FW-2DP | 19.05 | 12.25 | 19.05 | 7.85 | 11.7 | 9.5 | |
| FW-2RN | 19.25 | 12.15 | 15.5 | 7.9 | 11.7 | 14.0 | |
| FW-2DG | 26.0 | 19.4 | 19.0 | 15.0 | 18.6 | 9.5 | |
| FW-2DT | 29.4 | 12.2 | 19.0 | 7.8 | 22.0 | 9.5 | 200 |



## 电线固定座 WIRE MOUNT 6-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FW-2DS | 14.9 | 9.5 | 19.0 | 6.0 | 7.9 | 9.6 | 500 |
| FW-2DM | 16.0 | 9.5 | 19.0 | 6.0 | 9.0 | 9.6 | |
| FW-6D | 20.8 | 12.1 | 19.0 | 8.2 | 13.6 | 9.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

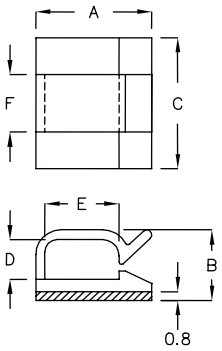


| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FW-1DS | 11.4 | 8.1 | 16.0 | 4.7 | 6.0 | 7.0 | 500 |
| FW-3DK | 13.0 | 8.7 | 14.0 | 5.2 | 9.0 | 7.1 | |
| FW-1D | 13.4 | 8.1 | 15.9 | 4.7 | 8.0 | 7.0 | |
| FW-3D | 14.4 | 8.3 | 16.0 | 4.8 | 9.0 | 7.0 | |
| FW-4D | 14.4 | 8.7 | 15.9 | 5.2 | 8.2 | 7.1 | |
| FW-1DL | 15.4 | 8.1 | 16.0 | 4.7 | 9.9 | 7.0 | |
| FW-5D | 16.8 | 10.2 | 16.0 | 6.5 | 10.1 | 7.0 | |
| FW-20HQ | 20.0 | 10.1 | 16.0 | 6.6 | 15.8 | 9.0 | |
| FW-22AD | 22.7 | 9.5 | 20.0 | 6.0 | 18.0 | 10.0 | 200 |
| FW-33H | 33.0 | 10.4 | 20.0 | 6.0 | 26.8 | 10.0 | |

## 电线固定座 WIRE MOUNT 6-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FW-2KP | 12.0 | 7.0 | 12.1 | 3.5 | 6.2 | 9.0 | 500 |
| FW-2KQ | 13.0 | 7.05 | 12.0 | 3.5 | 8.2 | 9.0 | |
| FW-2K | 14.0 | 7.24 | 12.1 | 3.5 | 10.5 | 10.0 | |
| FW-2LP | 14.0 | 9.8 | 16.0 | 6.0 | 7.5 | 9.0 | |
| FW-2LQ | 16.0 | 9.8 | 16.0 | 6.0 | 9.6 | 9.0 | |
| FW-2L | 16.0 | 9.9 | 16.0 | 6.0 | 12.0 | 9.0 | |

## 电线固定座 WIRE MOUNT 6-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: ABS+PS
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | D | E | PACKAGE |
|---|---|---|---|---|---|
| FW-15ZK | 15.4 | 8.1 | 5.2 | 13.2 | 1000 |
| ★ FW-25AF | 22.5 | 23.3 | 18.9 | 18.9 | 500 |

## 电线固定座 WIRE MOUNT 6-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FDW-1 | 16.0 | 7.3 | 16.0 | 3.7 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FDW−3 | 27.0 | 9.3 | 17.0 | 5.7 | 500 |

## 电线固定座 WIRE MOUNT 6-26-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ★ FDW−18A | 18.9 | 6.1 | 15.9 | 2.7 | 500 |

## 电线固定座 WIRE MOUNT 6-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ★ FDW−25A | 25.0 | 6.1 | 16.0 | 2.7 | 500 |

## 电线固定座 WIRE MOUNT 6-26-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

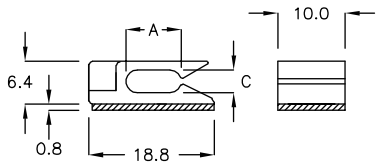


| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CU−01A | 8.2 | 3.3 | 1000 |



## 电线固定座 WIRE MOUNT 6-26-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CU−01D | 8.6 | 3.3 | 4.9 | 3.3 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M4 COUNTERSUNK SCREW

| PART NO | A | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| FSC-01 | 25.3 | 25.4 | 3.3 | 13.6 | ø4.7 | 500 |
| FSC-02 | 25.4 | 25.4 | 3.05 | 12.5 | ø5.0 | |



## 排线固定座 FLAT CABLE CLAMP 6-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

| PART NO | A | C | D | E | PACKAGE |
|---|---|---|---|---|---|
| FDX-40 | 40.0 | 22.0 | 4.0 | 14.5 | 500 |






## 电线固定座 WIRE MOUNT 6-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FDM-42 | 42.0 | 19.1 | 35.0 | 100 |






## 固定座 MOUNT 6-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FSL-12GK | 8.0 | 6.3 | 1000 |






## 电线固定座 WIRE MOUNT 6-27-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FDK-25 | 17.0 | 7.65 | 25.0 | 500 |




6

线材固定 线材隔离

CABLE CLAMP, SADDLE

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FW-11 | 15.5 | 7.6 | 500 |



## 电线固定座 WIRE MOUNT 6-28-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FYK-16A | 16.15 | 4.3 | 8.0 | 1.5 | 13.0 | 500 |






## 电线固定座 WIRE MOUNT 6-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FYM-20M | 20.5 | 5.8 | 8.0 | 3.0 | 18.5 | 500 |
| FYM-21 | 21.0 | 4.3 | 8.0 | 1.5 | 19.0 | |



## 电线固定座 WIRE MOUNT 6-28-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FW-2DN | 25.4 | 12.2 | 15.6 | 7.9 | 8.0 | 500 |
| FW-2DA | 25.4 | 12.2 | 15.6 | 7.9 | 11.7 | |
| FW-2DC | 25.4 | 15.5 | 15.9 | 11.1 | 11.7 | |
| FW-2DL | 25.4 | 12.1 | 25.4 | 7.9 | 11.8 | |
| FW-2DW | 25.4 | 12.1 | 25.4 | 7.9 | 15.0 | |

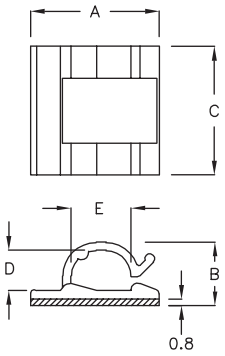

## 电线固定座 WIRE MOUNT 6-28-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FW-2DR | 25.4 | 16.3 | 25.4 | 11.8 | 15.0 | 200 |
| FW-2DK | 25.4 | 16.3 | 25.4 | 11.8 | 18.4 | |
| FW-2DY | 40.0 | 26.2 | 40.0 | 20.2 | 20.0 | 50 |
| FW-2DJ | 40.0 | 26.2 | 40.0 | 20.2 | 28.8 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FW-1CH | 18.2 | 13.2 | 19.0 | ø5.0 | 8.4 | 500 |
| FW-2CH | 18.2 | 15.2 | 19.0 | ø7.8 | 9.9 | |
| FW-3CH | 18.2 | 13.2 | 19.0 | ø6.7 | 8.4 | |
| FW-4CH | 23.0 | 15.3 | 15.0 | ø7.8 | 9.9 | |



## 电线固定座 WIRE MOUNT 6-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| ★ FWGH-17B | 18.2 | 21.2 | 13.0 | ø5.1 | 17.2 | 500 |

## 电线固定座 WIRE MOUNT 6-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ7.8
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- SUIT FOR ARCUATE SURFACE




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-2C | 18.2 | 11.0 | 19.0 | ø7.8 | 500 |



## 电线固定座 WIRE MOUNT 6-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- CABLE DIAMETER: Φ9.1
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-2DQ | 25.1 | 12.6 | 25.1 | ø9.1 | 500 |

## 电线固定座 WIRE MOUNT 6-29-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FW-6F | 38.0 | 22.8 | 37.2 | 18.0 | 28.6 | 100 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FW-7 | 19.2 | 11.4 | 20.0 | 500 |
| FW-7S | 19.2 | 11.4 | 15.0 | |

## 电线固定座 WIRE MOUNT 6-30-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWB-12 | 57.3 | 24.8 | 26.5 | 19.1 | 100 |

## 电线固定座 WIRE MOUNT 6-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

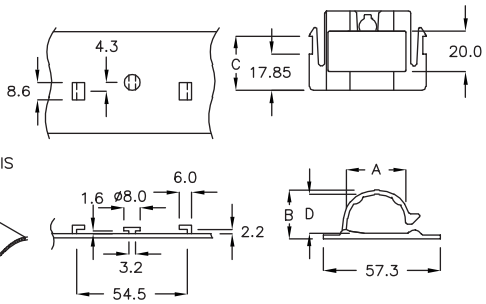


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWJ-01 | 28.6 | 24.0 | 26.5 | 19.1 | 100 |

## 电线固定座 WIRE MOUNT 6-30-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FSD-6A | 16.5 | 9.8 | 32.0 | 6.0 | 500 |

## 电线固定座 WIRE MOUNT 6-30-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| FWG-38 | 24.7 | 37.5 | ø5.8 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-31-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWG-10 | 13.4 | 5.95 | 10.0 | ø2.7 | 1000 |
| FWG-12 | 14.5 | 6.75 | 12.0 | ø3.7 | 200 |



## 电线固定座 WIRE MOUNT 6-31-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWGA-10C | 7.0 | 4.4 | 10.3 | ø2.0 | 500 |



## 电线固定座 WIRE MOUNT 6-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

WITH LOCK FEATURE

| PART NO | A | B CLOSE DIA | C | PACKAGE |
|---|---|---|---|---|
| FW-CD30 | 13.8 | ø8.6 | 16.0 | 200 |

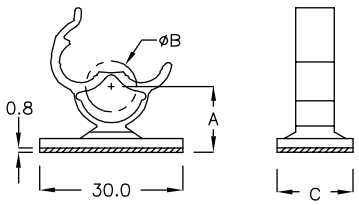

## 电线固定扣 CABLE CLAMP 6-31-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M4 SCREW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PCX-39M | ø36.9 | 12.6 | ø4.9 | 100 |






## 电线固定座 TIE MOUNT 6-31-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE:3M
- ALSO CAN BE FASTENED WITH M4 SCREW

WITH LOCK FEATURE

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| LFW-3 | 22.0 | 15.5 | ø11.7 | 200 |

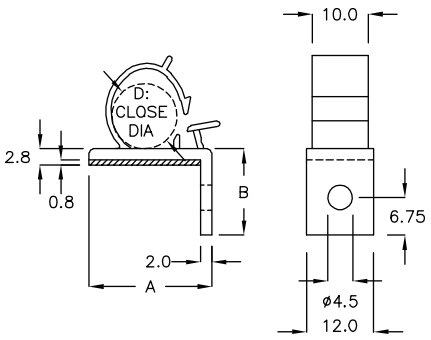




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 TIE MOUNT 6-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

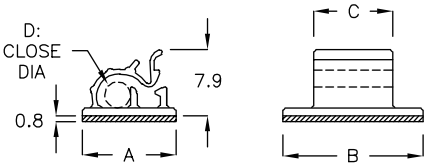


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWZ-3A | 11.3 | 18.5 | 11.2 | ø3.4 | 500 |

## 电线固定座 TIE MOUNT 6-32-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M







WITH LOCK FEATURE

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FW-04S | 22.0 | 16.0 | 10.0 | ø11.7 | 18.6 | 200 |
| FW-3 | 25.0 | 19.6 | 12.0 | ø9.0 | 16.7 | |
| FW-03A | 19.0 | 19.0 | 9.0 | ø6.8 | 13.6 | |
| FW-3S | 21.0 | 19.0 | 9.0 | ø7.8 | 13.1 | |
| FW-3L | 21.6 | 16.8 | 12.0 | ø10.4 | 15.8 | |
| FW-4 | 29.8 | 19.8 | 14.7 | ø12.6 | 27.2 | 100 |
| FW-04L | 33.5 | 24.8 | 16.2 | ø19.0 | 31.0 | |

## 电线固定座 TIE MOUNT 6-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

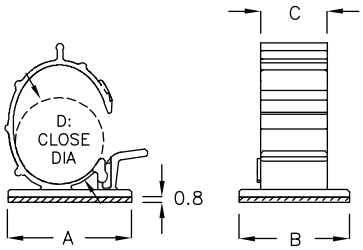


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FDD-28 | 28.0 | 25.0 | 15.0 | ø19.5~ø20.0 | 100 |

## 电线固定座 TIE MOUNT 6-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

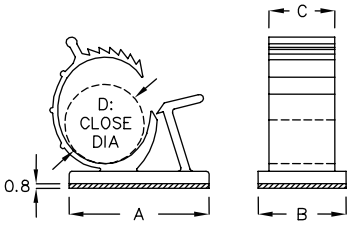


WITH LOCK FEATURE

| PART NO | A | B | C | D CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| FW-33 | 30.0 | 16.0 | 12.0 | ø10.5~ø14.5 | 200 |
| FW-33A | 25.5 | 16.0 | 12.0 | ø10.5~ø14.5 | |
| FW-39KP | 36.0 | 19.0 | 12.7 | ø18.5~ø22.5 | 100 |
| FW-35 | 38.2 | 20.0 | 12.9 | ø14.5~ø18.5 | |
| FW-39 | 38.8 | 20.0 | 12.9 | ø18.5~ø22.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 TIE MOUNT 6-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

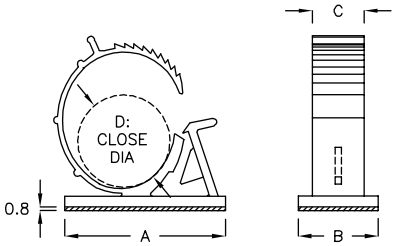


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-35C | 35.0 | 19.0 | 12.9 | ø27.0~ø29.0 | 100 |
| FW-40 | 40.0 | 20.0 | 12.9 | ø22.5~ø26.5 | |

## 电线固定座 TIE MOUNT 6-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

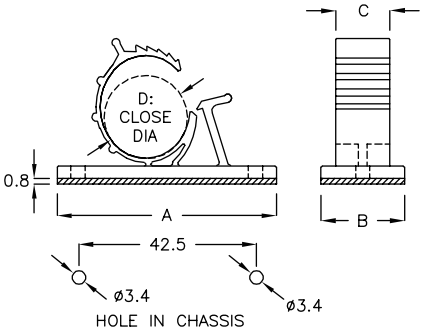


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWP-33 | 52.5 | 20.0 | 13.0 | ø10.5~13.5 | 200 |
| FWP-52 | 52.5 | 20.0 | 13.0 | ø14.5~17.5 | 100 |

## 电线固定座 TIE MOUNT 6-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 TAPPING SCREW

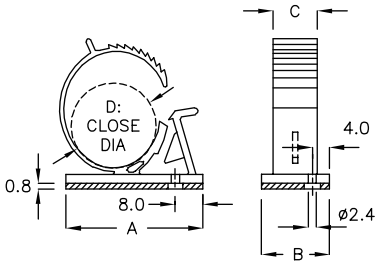


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWP-40 | 39.9 | 19.9 | 12.9 | ø22.5~ø26.5 | 100 |

## 电线固定座 WIRE MOUNT 6-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 COUNTERSUNK SCREW

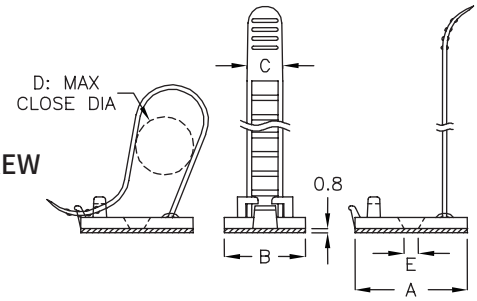


| PART NO | A | B | C | D: MAX CLOSE DIA | E | PACKAGE |
|---|---|---|---|---|---|---|
| FWA-12 | 20.0 | 15.0 | 5.0 | ø12.0 | ø3.4 | 200 |
| FWA-13 | 25.0 | 18.0 | 7.9 | ø13.0 | ø3.5 | |
| FWA-17 | 25.0 | 18.0 | 7.9 | ø17.0 | ø3.5 | |
| FWA-19 | 20.0 | 15.0 | 5.0 | ø19.5 | ø3.4 | |
| FWA-21 | 25.0 | 18.0 | 8.1 | ø18.5 | ø3.5 | |
| FWA-22 | 30.5 | 21.0 | 12.0 | ø22.0 | ø3.5 | 100 |
| FWA-22C | 31.8 | 21.0 | 12.0 | ø22.0 | ø3.6 | |
| FWA-26 | 30.5 | 21.0 | 12.0 | ø26.0 | ø3.5 | |
| FWA-32K | 35.0 | 25.0 | 14.0 | ø32.5 | ø3.2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT — 6-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 COUNTERSUNK SCREW

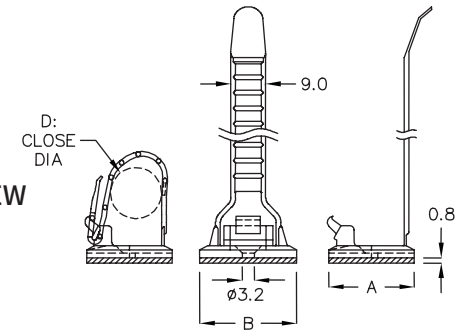


| PART NO | A | B | D CLOSE DIA | PACKAGE |
|---|---|---|---|---|
| FWX-08 | 22.0 | 25.0 | ø8.0~ø10.0 | 200 |
| FWX-10 | 22.0 | 25.0 | ø10.0~ø12.0 | |
| FWX-15 | 22.0 | 25.0 | ø17.0~ø18.0 | |
| FWX-15A | 22.0 | 25.0 | ø18.5~ø19.5 | |

## 电线固定板 FLAT CABLE CLAMP — 6-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FCW-40GQ | 40.0 | 53.5 | 11.2 | 19.3 | 100 |

## 排线固定板 FLAT CABLE CLAMP — 6-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

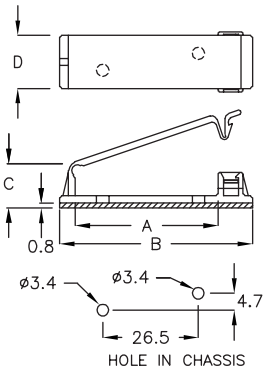


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FCW-40MH | 39.7 | 53.5 | 11.7 | 14.7 | 100 |

## 电线固定座 CABLE CLAMP — 6-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- ADHESIVE TAPE: 3M

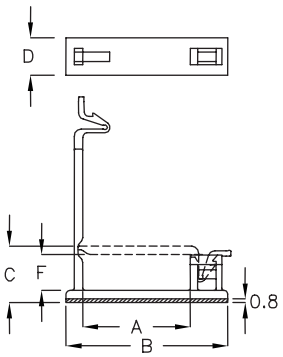


| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FCW-23GK | 23.0 | 34.5 | 12.0 | 8.0 | 7.6 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 CABLE CLAMP 6-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FCW-4CK | 4.7 | 12.0 | 8.6 | 9.5 | 5.0 | 1000 |
| FCW-13RT | 13.7 | 23.0 | 21.8 | 20.0 | 17.0 | 100 |
| FCW-16A | 16.7 | 26.0 | 27.9 | 20.0 | 23.6 | |
| FCW-17HD | 17.0 | 26.2 | 14.2 | 10.0 | 10.2 | |
| FCW-35QT | 21.6 | 35.0 | 17.6 | 15.0 | 13.0 | |
| FCW-27A | 26.9 | 38.0 | 16.4 | 15.0 | 12.5 | |
| FCW-27KM | 27.0 | 38.5 | 14.4 | 11.2 | 9.5 | |
| FCW-27CS | 27.0 | 38.5 | 14.4 | 15.0 | 9.5 | |
| FCW-29 | 31.6 | 45.4 | 10.4 | 18.9 | 5.5 | |
| FCW-30 | 32.0 | 45.7 | 12.2 | 19.2 | 7.0 | |
| FCW-32MT | 32.7 | 44.7 | 21.7 | 15.0 | 15.8 | |
| FCW-31F | 31.6 | 45.0 | 18.4 | 15.0 | 13.0 | |
| FCW-35XR | 35.0 | 48.9 | 11.5 | 13.0 | 6.5 | |
| FCW-36CT | 36.0 | 44.8 | 17.6 | 12.7 | 13.1 | |
| FCW-40 | 39.7 | 53.5 | 13.1 | 19.2 | 7.7 | |
| FCW-40K | 39.7 | 53.5 | 15.3 | 19.3 | 10.0 | |
| FCW-41 | 41.3 | 55.2 | 10.4 | 18.7 | 5.0 | |
| FCW-41RK | 41.4 | 55.2 | 10.4 | 18.8 | 5.0 | |
| FCW-50 | 64.0 | 77.5 | 12.3 | 19.2 | 6.5 | |
| FCW-50H | 65.2 | 79.2 | 18.8 | 18.9 | 13.3 | |
| FCW-52KT | 52.2 | 61.0 | 13.4 | 12.7 | 8.8 | |
| FCW-52A | 52.6 | 66.5 | 15.8 | 19.8 | 10.1 | |

## 电线固定座 CABLE CLAMP 6-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW

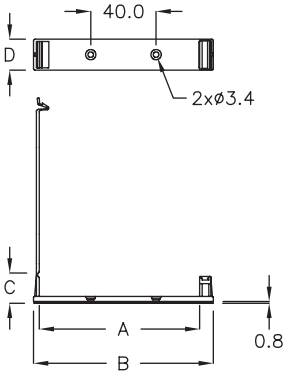


| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | FCW-98C | 98.2 | 110.0 | 18.1 | 18.9 | 50 |



## 电线固定座 CABLE CLAMP 6-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FCW-11JM | 11.0 | 19.0 | 15.9 | 12.0 | 11.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 CABLE CLAMP 6-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| FCW-16QS | 16.0 | 20.6 | 4.3 | 10.0 | 2.0 | 500 |

## 电线固定座 CABLE CLAMP 6-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FCW-16GR | 16.0 | 20.6 | 5.3 | 10.0 | 200 |
| FCW-24GR | 24.0 | 28.6 | 6.2 | 10.0 | |
| FCW-30GR | 30.0 | 34.6 | 5.3 | 10.0 | |



## 电线固定座 WIRE MOUNT 6-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

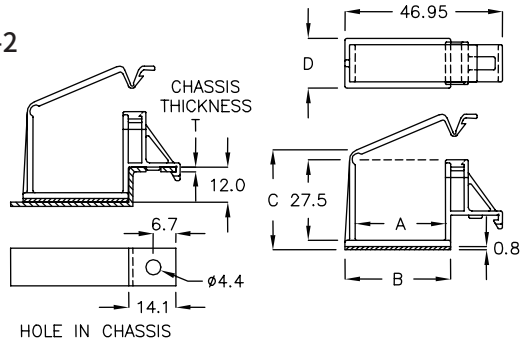


WITH LOCK FEATURE

| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| FCWT-27QH | 26.9 | 31.5 | 30.4 | 14.8 | 1.2 | 100 |



## 电线固定座 CABLE CLAMP 6-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWT-17C | 17.0 | 26.2 | 14.2 | 10.0 | 100 |
| FWT-21 | 21.0 | 31.0 | 19.3 | 19.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 CABLE CLAMP — 6-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWT−25 | 31.6 | 45.0 | 18.8 | 19.05 | 100 |
| FWT−25A | 33.0 | 44.45 | 11.2 | 19.05 | |

## 电线固定座 CABLE CLAMP — 6-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWT−53C | 53.9 | 66.7 | 22.5 | 15.0 | 100 |

## 电线固定座 CABLE CLAMP — 6-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FCY−27SY | 28.5 | 44.4 | 11.0 | 19.0 | 100 |

## 排线固定板 FLAT CABLE CLAMP — 6-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FC−10N | 10.4 | 18.8 | 500 |



## 排线固定板 FLAT CABLE CLAMP — 6-37-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FC−15N | 10.5 | 19.0 | 15.0 | 25.0 | 200 |
| FC−25N | 10.5 | 25.0 | 23.0 | 25.2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP — 6-38-1

- MATERIAL: NYLON 66(UL)
- COLOR: GRAY
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FB-15A | 10.3 | 15.0 | 1000 |



## 排线固定板 FLAT CABLE CLAMP — 6-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FC-25A | 9.6 | 25.4 | 500 |






## 排线固定板 FLAT CABLE CLAMP — 6-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FCR-09 | 6.8 | 22.0 | 1000 |



## 排线固定板 FLAT CABLE CLAMP — 6-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

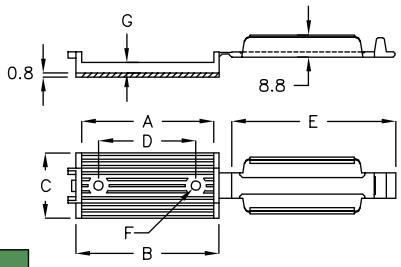


| PART NO | A | B | C | D | E | F | G | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| FCM-50 | 53.0 | 57.3 | 26.0 | 39.0 | 64.6 | 2-ø3.8 | 4.1 | 40 PIN | 100 |

## 排线固定板 FLAT CABLE CLAMP — 6-38-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




| PART NO | A | B | C | D | E | F | G | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| FCM-26AM | 26.6 | 29.7 | 25.0 | 14.85 | 37.9 | ø3.8 | 3.0 | 16 PIN | 100 |
| FCM-30 | 30.5 | 34.5 | 25.4 | 17.5 | 42.0 | ø3.8 | 3.1 | 24 PIN | |
| FCM-31 | 26.8 | 30.7 | 25.4 | 15.5 | 38.5 | ø3.65 | 3.0 | 16 PIN | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP 6-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW




| PART NO | A | B | C | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|
| FCM-25H | 24.8 | 31.0 | 3.6 | 16 PIN | 200 |

## 排线固定板 FLAT CABLE CLAMP 6-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | E | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|---|
| FCM-25S | 22.0 | 28.0 | 3.0 | 4.7 | 10.0 | 15 PIN | 200 |
| FCM-25 | 29.3 | 36.5 | 3.0 | 4.7 | 10.0 | 20 PIN | |
| FCM-25M | 55.8 | 61.2 | 4.0 | 4.7 | 15.0 | 40 PIN | 100 |

## 排线固定板 FLAT CABLE CLAMP 6-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCD-25 | 31.5 | 40.7 | 6.8 | 12.7 | 25 PIN | 100 |
| FCD-40 | 52.0 | 61.2 | 6.9 | 12.7 | 40 PIN | |

## 排线固定板 FLAT CABLE CLAMP 6-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FDQ-18 | 17.5 | 22.0 | 3.9 | 13.0 | 13 PIN | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP —— 6-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCD-17 | 17.0 | 26.2 | 6.6 | 12.7 | 13 PIN | 200 |
| FCD-19GK | 19.0 | 27.5 | 12.5 | 12.7 | 13 PIN | |
| FCD-19A | 19.0 | 28.0 | 5.8 | 10.0 | 13 PIN | |
| FCD-21BH | 21.5 | 30.0 | 13.5 | 12.7 | 13 PIN | 100 |
| FCD-26GK | 26.5 | 35.0 | 8.2 | 10.0 | 20 PIN | |
| FCD-26EZ | 26.5 | 35.0 | 13.5 | 12.7 | 20 PIN | |
| FCD-27 | 27.0 | 36.0 | 10.8 | 12.7 | 20 PIN | |
| FCD-27C | 27.0 | 36.0 | 13.8 | 12.7 | 20 PIN | |
| FCD-27F | 27.0 | 36.0 | 16.5 | 15.0 | 20 PIN | |
| FCD-29KT | 29.5 | 38.0 | 13.5 | 12.7 | 20 PIN | |
| FCD-31AN | 31.0 | 39.5 | 7.5 | 12.7 | 25 PIN | |
| FCD-25A | 31.1 | 40.4 | 7.9 | 12.7 | 25 PIN | |
| FCD-50 | 50.0 | 59.0 | 10.8 | 12.7 | 40 PIN | |
| FCD-40H | 52.0 | 61.2 | 7.6 | 12.7 | 40 PIN | |
| FCD-60H | 62.8 | 72.2 | 7.9 | 12.9 | 60 PIN | |

## 排线固定板 FLAT CABLE CLAMP —— 6-40-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
  ＊ 加中隔板
  ＊ WITH ISOLATE BOARD

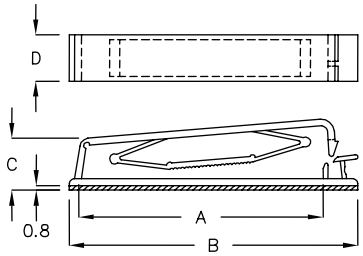


WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCC-25C | 32.0 | 45.0 | 16.0 | 19.0 | 25 PIN | 100 |
| ＊FCC-25K | 31.3 | 40.7 | 7.2 | 10.0 | 25 PIN | |
| FCC-30 | 32.0 | 45.0 | 16.6 | 18.6 | 30 PIN | |
| FCC-40 | 54.0 | 67.0 | 16.6 | 15.8 | 40 PIN | |
| FCC-40C | 53.8 | 66.0 | 12.8 | 10.2 | 40 PIN | |
| ＊FCC-41 | 54.0 | 67.0 | 16.6 | 15.8 | 40 PIN | |
| ＊FCC-41A | 53.7 | 66.7 | 17.0 | 12.8 | 40 PIN | |
| FCC-50 | 65.2 | 78.4 | 16.6 | 18.8 | 50 PIN | |
| FCC-50F | 63.7 | 76.2 | 15.9 | 19.0 | 50 PIN | |
| ＊FCC-64 | 83.5 | 97.5 | 16.6 | 16.0 | 64 PIN | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 排线固定板 FLAT CABLE CLAMP —— 6-41-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FWY-50 | 64.0 | 77.0 | 12.6 | 20.0 | 50 PIN | 100 |

## 排线固定板 FLAT CABLE CLAMP —— 6-41-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCD-60A | 62.8 | 72.2 | 7.9 | 12.9 | 45 PIN | 100 |

## 排线固定板 FLAT CABLE CLAMP —— 6-41-3

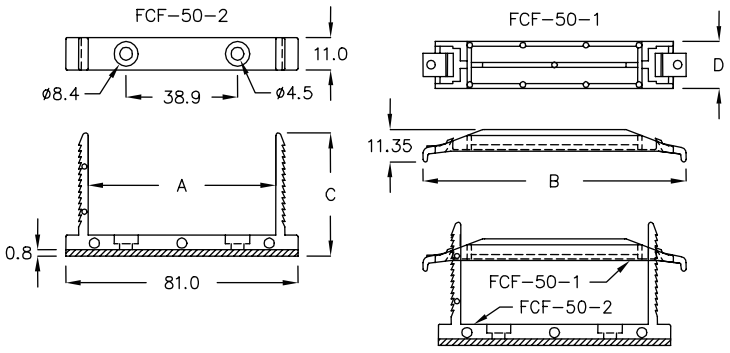


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M4 SCREW

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCF-50 | 65.4 | 91.8 | 41.1 | 16.0 | 50 PIN X30 | 100 |



## 排线固定板 FLAT CABLE CLAMP —— 6-41-4

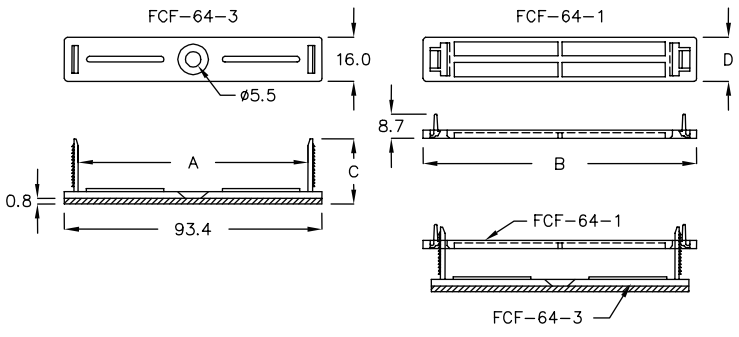


- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M5 COUNTERSUNK SCREW

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCF-64 | 83.4 | 99.2 | 22.7 | 16.1 | 64 PIN X12 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 固定座 MOUNT 6-42-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,BLUE

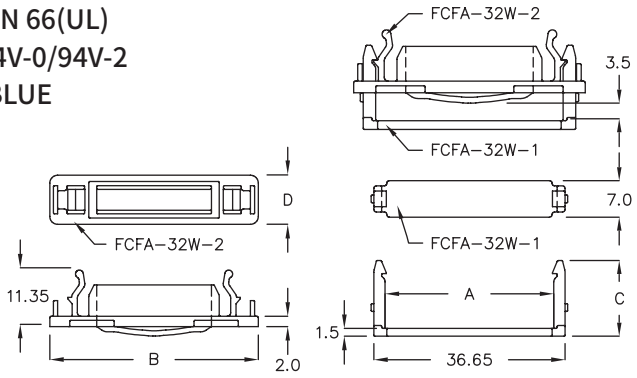


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FCFA-32W | 32.3 | 40.0 | 14.5 | 9.4 | 200 |

## 隔离束线座 WIRE SADDLE 6-42-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CID-01 | 10.0 | 1.6 | 1.6 | 2000 |

## 电线固定座 WIRE MOUNT 6-42-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

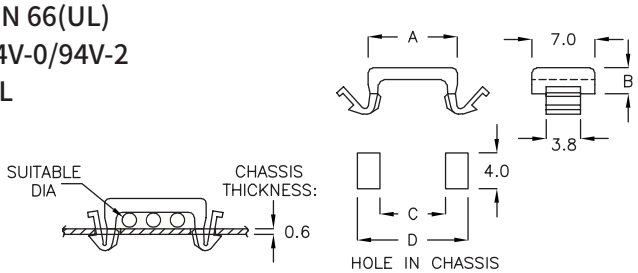


| PART NO | A | B | C | D | SUITABLE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| FBF-01 | 9.9 | 2.9 | 7.3 | 12.3 | ø1.5X3 | 2000 |
| FBF-3A | 9.9 | 3.75 | 7.3 | 12.3 | ø2.0X3 | |
| FBF-4C | 11.9 | 3.75 | 9.3 | 14.3 | ø2.0X4 | |



## 隔离束线座 WIRE SADDLE 6-42-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CSF-1MK | 1.3 | 2.8 | 1.2 | 2000 |
| CSF-1KC | 1.3 | 2.8 | 1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-43-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CHT−4GF | 4.3 | 6.7 | 8.5 | 1.75 | 2.2 | 2000 |

## 隔离束线座 WIRE SADDLE 6-43-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CMC−3A | 4.4 | 6.9 | 3.0 | 1.6 | 2000 |



## 隔离束线座 WIRE SADDLE 6-43-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CH−1MR | 3.4 | 5.8 | 3.0 | 1.8 | 1.2 | 2000 |
| CH−01K | 3.4 | 5.8 | 3.3 | 1.9 | 1.6 | |
| CH−01F | 4.3 | 6.9 | 3.1 | 1.9 | 1.6 | |
| CH−02F | 4.4 | 6.9 | 3.1 | 1.9 | 2.5 | |
| CH−5TA | 4.4 | 6.9 | 5.1 | 1.8 | 2.5 | |
| CH−01H | 5.2 | 7.8 | 5.8 | 1.9 | 1.6 | |

## 电线固定座 WIRE MOUNT 6-43-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMRW−6K | 6.3 | 1.0 | 2000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-44-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMRZ-6A | 8.0 | 1.5~1.6 | 2000 |

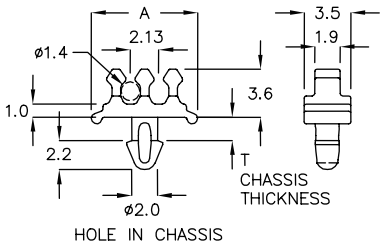




## 电线固定座 WIRE MOUNT 6-44-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CMRT-10A | 10.0 | ø1.3 | 1.6 | 1000 |
| ★ CMRT-10B | 10.0 | ø1.4 | 1.6 | |






## 隔离束线座 WIRE SADDLE 6-44-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CJA-1A | 5.4 | 6.8 | 2.0 | 2000 |






## 隔离束线座 WIRE SADDLE 6-44-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CH-01A | 6.7 | 9.0 | 5.5 | 1.2 | 2000 |
| CH-01J | 6.7 | 9.0 | 5.0 | 1.6 | |
| CH-1AM | 6.7 | 9.2 | 5.45 | 0.8 | |






## 隔离束线座 WIRE SADDLE 6-44-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548(S)

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CH-01S | 7.4 | 10.0 | 1.2~1.6 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548(S)




| PART NO | A | B | D | E HOLE IN CHASSIS | F | UL | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CH−1HK | 8.2 | 10.6 | 6.9 | ø2.75 | 3.0 | | 1.6 | 2000 |
| CH−01B | 8.2 | 10.6 | 6.9 | ø3.0 | 3.1 | | 1.6 | |
| CH−1BK | 8.3 | 10.7 | 6.9 | | 2.1 | | 1.6 | |
| CH−01C | 7.4 | 10.0 | 5.0 | | 2.2 | | 1.6 | |
| CH−1FW | 6.8 | 9.3 | 5.0 | | 2.8 | | 1.6 | |
| CH−01M | 6.5 | 9.0 | 5.0 | | 3.1 | UL | 0.8 | |
| CH−01P | 7.4 | 10.0 | 5.3 | | 2.2 | | 2.0 | |
| CH−1PD | 10.6 | 13.0 | 6.0 | | 2.5 | | 1.6 | |
| CH−01U | 8.3 | 10.7 | 7.0 | | 2.5 | | 1.6 | |
| CH−01Q | 6.6 | 9.0 | 4.9 | ø3.5 | 3.0 | | 1.0 | |
| CH−01W | 6.6 | 9.0 | 4.5 | | 3.2 | | 1.8 | |
| CH−01N | 9.0 | 11.6 | 5.3 | | 2.7 | | 1.2 | |



## 电线固定座 WIRE MOUNT 6-45-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZC−7D | 7.2 | 9.7 | 0.6~1.6 | 1000 |

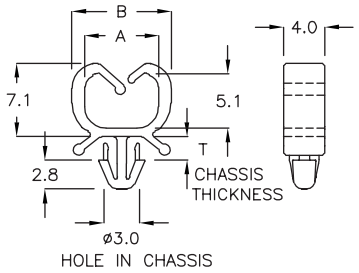




## 隔离束线座 WIRE SADDLE 6-45-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMA−4A | 6.7 | 1.0~2.0 | 1000 |

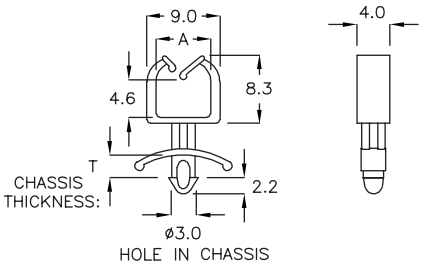

## 电线固定座 WIRE MOUNT 6-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| PCS−4A | 6.6 | 5.0 | 2000 |
| PCS−5A | 6.6 | 3.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PCS-6A | 10.0 | 3.0 | 2000 |






## 电线固定座 WIRE MOUNT 6-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| PCS-1A | 6.6 | 1.8 | 2.0 | 2000 |

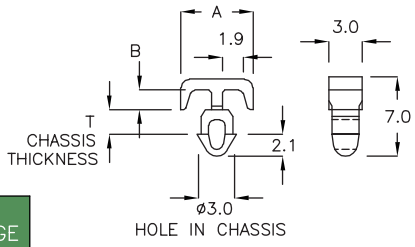




## 电线固定座 WIRE MOUNT 6-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| PCS-3A | 6.6 | 1.8 | 2.0 | 2000 |

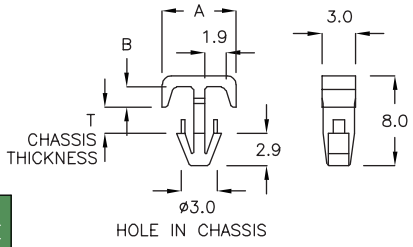




## 隔离束线座 WIRE SADDLE 6-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CHR-05 | 11.1 | 4.0 | 0.6~2.5 | 500 |

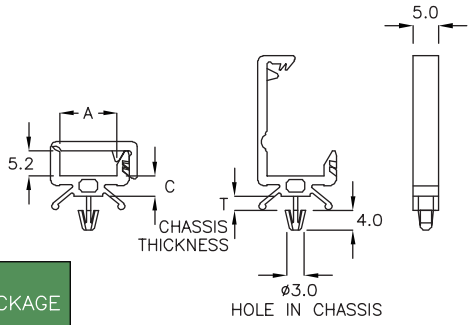




## 隔离束线座 WIRE SADDLE 6-46-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZH-2H | 2.6 | 5.0 | 0.8~1.0 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built –In Anti–Spin Function

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| TDD–4PA | 6.0 | 4.2 | 0.6~1.6 | 500 |

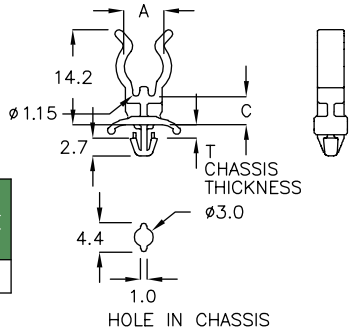

## 隔离束线座 WIRE SADDLE 6-47-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built –In Anti–Spin Function

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| TDF–12CM | ø1.0 | 1.6~2.4 | 500 |






## 隔离束线座 WIRE SADDLE 6-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CH–01Y | 8.8 | 12.0 | 8.5 | 1.0~1.6 | 2000 |






## 隔离束线座 WIRE SADDLE 6-47-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZB–9C | 9.5 | 12.1 | 0.6~1.6 | 500 |






## 隔离束线座 WIRE SADDLE 6-47-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZA–7A | 7.5 | 9.5 | 1.5 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZR-12A | 12.8 | 16.0 | 1.2~2.0 | 500 |






## 隔离束线座 WIRE SADDLE 6-48-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CH-1QF | 6.6 | 9.0 | 0.8~1.0 | 2000 |



## 隔离束线座 WIRE SADDLE 6-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CZF-6A | 5.1 | 0.8~2.0 | 1000 |

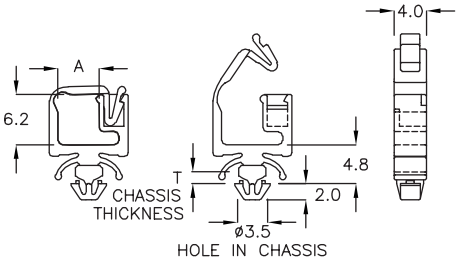

## 隔离束线座 WIRE SADDLE 6-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CZX-18K | 18.5 | 2.0~3.0 | 500 |

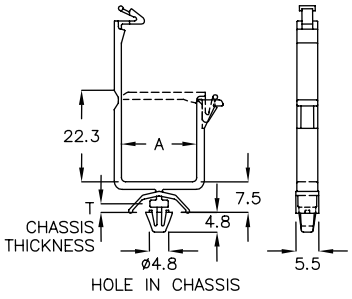




## 隔离束线座 WIRE SADDLE 6-48-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | E HOLE IN CHASSIS | F | PACKAGE |
|---|---|---|---|---|---|---|
| CH-01L | 4.3 | 6.5 | 2.8~3.0 | ø3.5 | 3.0 | 2000 |
| CH-1LA | 4.3 | 6.5 | 0.9~1.1 | ø3.6 | 3.0 | |
| CH-1LB | 4.3 | 6.5 | 3.8~4.0 | ø3.6 | 3.0 | |
| CH-01D | 4.5 | 6.5 | 4.0~4.4 | ø3.5 | 3.1 | |
| CH-1KP | 4.3 | 6.5 | 0.9~1.1 | ø3.6 | 3.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

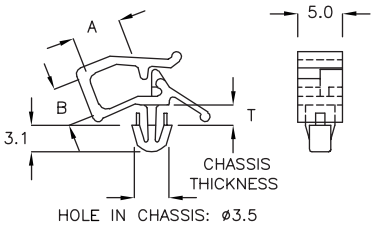


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CH-03 | 5.5 | 4.3 | 1.2~2.0 | 1000 |
| CH-03F | 4.2 | 2.6 | 1.6~2.4 | |
| CH-03S | 4.2 | 2.8 | 1.2~2.0 | |

## 隔离束线座 WIRE SADDLE 6-49-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | D | E HOLE IN CHASSIS | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TDA-4A | 7.4 | 4.5 | 8.0 | ø3.3 | 5.5 | 9.7 | 0.8~1.8 | 500 |
| TDA-10 | 5.6 | 10.0 | 5.2 | ø3.5 | 4.0 | 7.0 | 0.8~1.6 | |
| TDA-10F | 5.6 | 10.0 | 5.2 | ø3.5 | 4.0 | 7.0 | 1.4~2.2 | |
| TDA-13 | 7.4 | 13.0 | 8.0 | ø3.5 | 4.2 | 9.7 | 0.6~1.6 | |
| TDA-13C | 7.4 | 13.0 | 8.0 | ø3.5 | 3.1 | 9.7 | 0.6~1.6 | |



## 隔离束线座 WIRE SADDLE 6-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

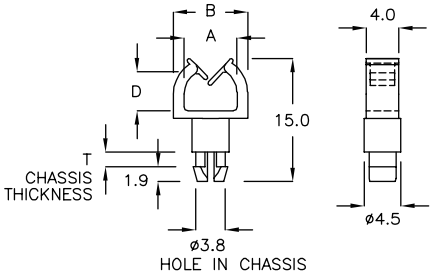


| PART NO | A | B | T CHASSIS THICKNESS | D | PACKAGE |
|---|---|---|---|---|---|
| CH-04A | 6.5 | 9.1 | 1.4~1.6 | 4.8 | 1000 |



## 隔离束线座 WIRE SADDLE 6-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | D | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CS-04A | 2.3 | 4.0 | 2.9 | 4.9 | 5.0 | 1.6~2.4 | 1000 |
| CS-04C | 2.0 | 4.5 | 2.0 | 4.8 | 5.0 | 1.6~2.4 | |
| CS-10D | 3.6 | 8.0 | 4.1 | 5.0 | 6.0 | 0.8~1.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

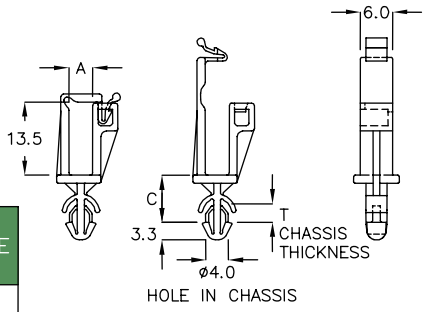


WITH LOCK FEATURE

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZS-4FG | 4.5 | 8.2 | 2.0~2.7 | 500 |
| CZS-4RK | 4.5 | 8.8 | 2.7~3.6 | |

## 隔离束线座 WIRE SADDLE 6-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




Built-In Anti-Spin Function

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CS-01C | ø3.3 | 3.2 | 0.8~1.2 | 2000 |
| CS-1DK | ø4.2 | 3.4 | 0.8~1.2 | |

## 隔离束线座 WIRE SADDLE 6-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

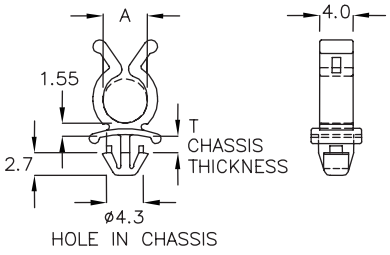


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CSA-5K | 5.3 | 1.6 | 1000 |

## 隔离束线座 WIRE SADDLE 6-50-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

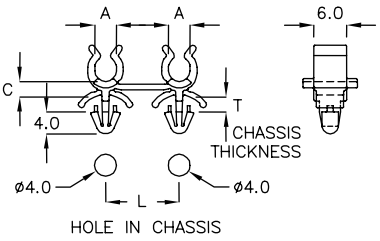


| PART NO | A | C | L | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| 2CS-2WQ | 3.95 | 2.85 | 12.0 | 1.0~1.5 | 500 |
| 2CS-2YR | 3.95 | 2.85 | 13.5 | 1.0~2.0 | |

## 电线固定座 WIRE MOUNT 6-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

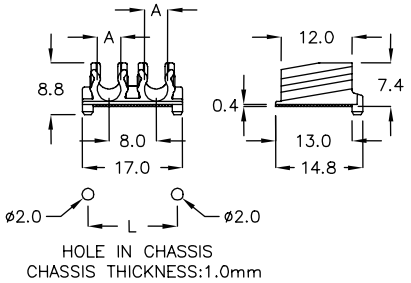


| PART NO | A | L | PACKAGE |
|---|---|---|---|
| CMZ-17K | 4.0 | 15.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-51-1

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: NATURAL

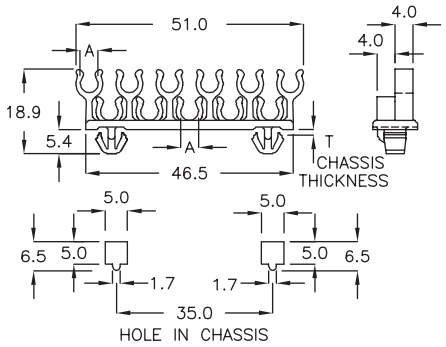


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CTX-46K | 4.0 | 1.0~1.5 | 200 |

## 隔离束线座 WIRE SADDLE 6-51-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

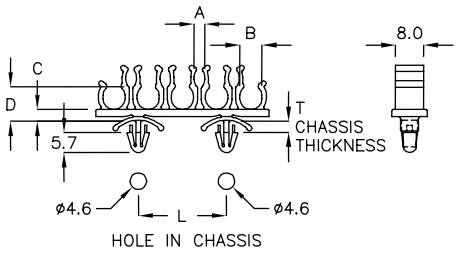


| PART NO | A | B | C | D | L | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CTX-49DW | 3.0 | 6.3 | 3.3 | 9.75 | 25.0 | 0.8~2.0 | 200 |



## 隔离束线座 WIRE SADDLE 6-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

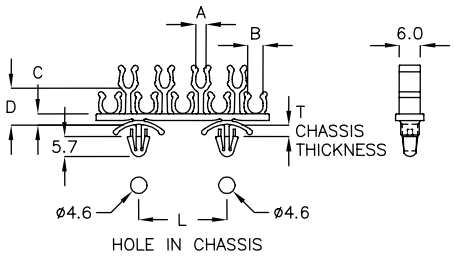


| PART NO | A | B | C | D | L | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CTX-49RC | 3.0 | 4.4 | 3.3 | 10.5 | 25.0 | 0.8~2.0 | 200 |



## 隔离束线座 WIRE SADDLE 6-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

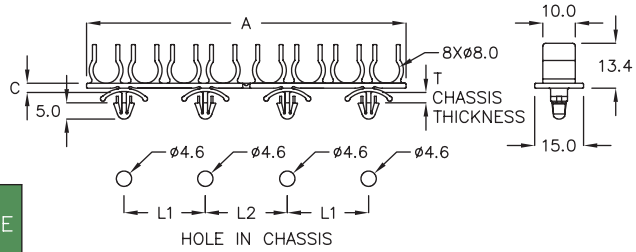


| PART NO | A | C | L1 | L2 | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CTX-98A | 98.2 | 2.8 | 25.0 | 25.2 | 1.2~2.0 | 200 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

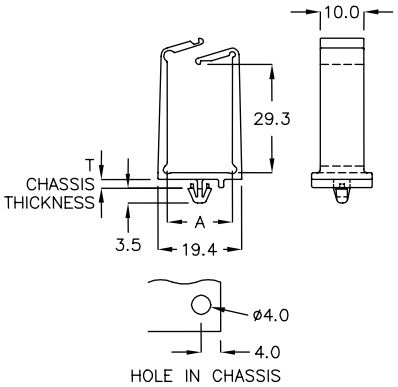


Built-In Anti-Spin Function

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMK-15Q | 15.0 | 1.4~1.7 | 100 |



## 隔离束线座 WIRE SADDLE 6-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

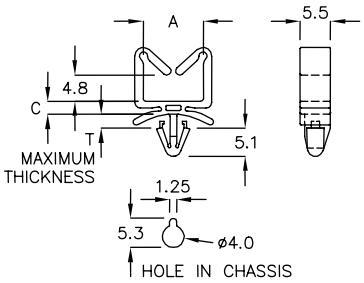


Built-In Anti-Spin Function

| PART NO | A | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZL-10JY | 10.9 | 2.35 | 1.6 | 500 |

## 隔离束线座 WIRE SADDLE 6-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | D | PACKAGE |
|---|---|---|---|
| CUK-12ST | 12.4 | 10.2 | 500 |



## 隔离束线座 WIRE SADDLE 6-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

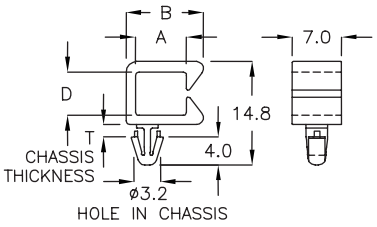


| PART NO | A | B | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CBG-6PK | 7.3 | 11.0 | 6.2 | 1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

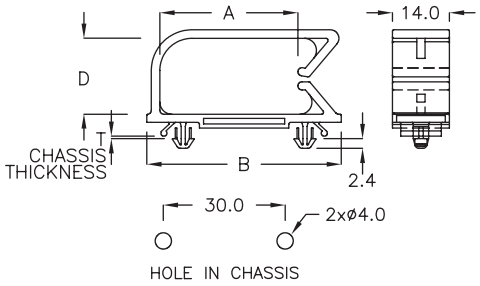


| PART NO | A | B | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| ★ CUG−34 | 34.0 | 47.9 | 18.7 | 0.8~2.0 | 200 |

## 隔离束线座 WIRE SADDLE 6-53-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CHM−01 | 7.3 | 11.3 | 4.4 | 4.8 | ø4.5 | 6.0 | 0.8~1.8 | 500 |

## 隔离束线座 WIRE SADDLE 6-53-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CUH−10A | 10.2 | 14.0 | 3.35 | 5.6 | ø4.75 | 9.5 | 0.8~1.6 | 500 |



## 隔离束线座 WIRE SADDLE 6-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CH−02 | 10.4 | 14.3 | 4.6 | 0.8~1.2 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZM–11F | 11.6 | 3.17 | 3.5 | 500 |

## 隔离束线座 WIRE SADDLE 6-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built–In Anti–Spin Function

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZY–11BH | 11.6 | 3.17 | 2.4 | 500 |

## 隔离束线座 WIRE SADDLE 6-54-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built–In Anti–Spin Function

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZP–11JK | 11.6 | 3.15 | 1.6~2.4 | 500 |

## 隔离束线座 WIRE SADDLE 6-54-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

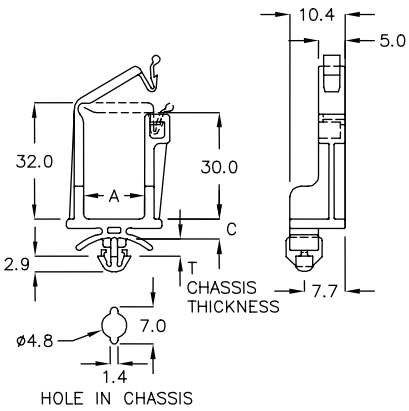


Built–In Anti–Spin Function

| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CZPA–11A | 11.6 | 3.8 | 1.6~2.4 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | D | E | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CH-05 | 10.9 | 4.1 | 9.7 | ø4.8 | 5.9 | 1.9 | 500 |
| CH-10 | 11.0 | 3.9 | 15.0 | ø4.8 | 5.8 | 1.9 | |
| CH-10A | 10.9 | 4.1 | 11.2 | ø4.8 | 2.8 | 2.0 | |
| CH-10L | 11.0 | 3.7 | 23.7 | ø4.8 | 5.6 | 2.1 | |
| CH-14 | 14.6 | 4.1 | 15.1 | ø5.0 | 6.2 | 2.1 | |
| CH-14A | 14.6 | 4.0 | 15.5 | ø5.0 | 4.2 | 3.0 | |
| CH-16 | 15.9 | 4.1 | 16.4 | ø5.0 | 5.9 | 2.1 | |
| CH-29 | 23.0 | 4.8 | 15.9 | ø5.0 | 6.2 | 1.8 | |

## 隔离束线座 WIRE SADDLE 6-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | C | D | E | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CH-16A | 15.7 | 4.0 | 15.9 | ø4.8 | 5.7 | 2.1 | 500 |

## 隔离束线座 WIRE SADDLE 6-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548(S)
CH-30(N66 94V-0) UL:E154548(S)




| PART NO | A | C | D | E | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CH-30 | 22.7 | 4.8 | 13.9 | ø5.0 | 7.1 | 3.2 | 200 |

## 隔离束线座 WIRE SADDLE 6-55-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | C | D | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CH-10C | 11.1 | 3.6 | 19.5 | 5.5 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-56-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | D | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CM-10 | 10.8 | 4.1 | 19.4 | 5.0 | 2.0 | 500 |
| CM-10L | 23.7 | 4.7 | 32.2 | 5.0 | 2.0 | |
| CM-10M | 10.8 | 4.1 | 10.3 | 5.0 | 2.0 | |
| CM-10Q | 10.8 | 4.1 | 10.3 | 2.4 | 2.0 | |
| CM-10S | 10.8 | 4.1 | 7.3 | 5.0 | 2.0 | |



## 隔离束线座 WIRE SADDLE 6-56-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | D | E HOLE IN CHASSIS | F | H | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CH-10F | 10.9 | 3.75 | 7.8 | ø4.8 | 2.7 | 5.4 | 2.4 | 1000 |
| CH-11 | 11.0 | 3.9 | 9.4 | ø4.8 | 3.0 | 5.4 | 2.4 | |
| CH-16DK | 16.0 | 3.6 | 6.7 | ø4.5 | 3.8 | 5.0 | 1.0 | 500 |



## 隔离束线座 WIRE SADDLE 6-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CAC-10A | 10.6 | 8.1 | 1.0 | 500 |



## 隔离束线座 WIRE SADDLE 6-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




Built-In Anti-Spin Function

| PART NO | A | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CHL-02 | 10.0 | 5.7 | 10.0 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

NEW

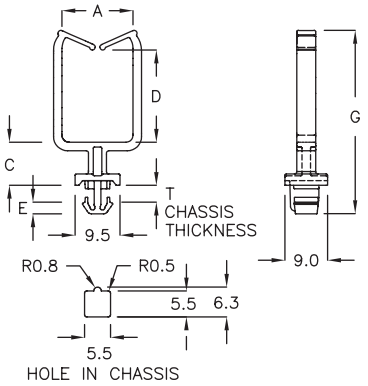


| | PART NO | A | C | D | E | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| ★ | CHLA-15A | 15.0 | 9.1 | 19.5 | 2.5 | 38.0 | 2.36~2.6 | 500 |
| ★ | CHLA-15T | 15.0 | 9.1 | 19.5 | 2.2 | 38.8 | 3.09~3.4 | |
| ★ | CHLA-15W | 15.0 | 9.1 | 19.5 | 2.0 | 36.5 | 1.0~1.1 | |

## 隔离束线座 WIRE SADDLE 6-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

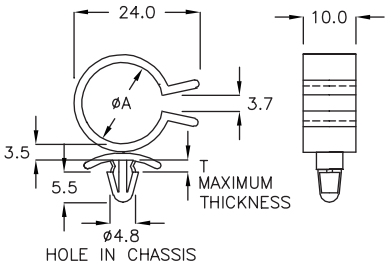


| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH-20 | ø15.5 | 1.6 | 500 |

## 隔离束线座 WIRE SADDLE 6-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

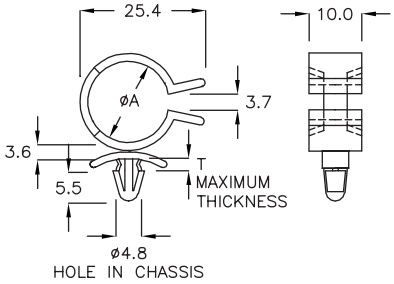


| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH-20C | ø15.0 | 1.6 | 500 |

## 隔离束线座 WIRE SADDLE 6-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

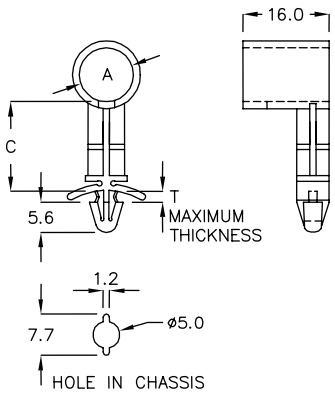


Built-In Anti-Spin Function

| PART NO | A | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CSK-6A | ø10.0 | 6.4 | 1.6 | 500 |
| CSK-26A | ø10.0 | 27.0 | 1.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

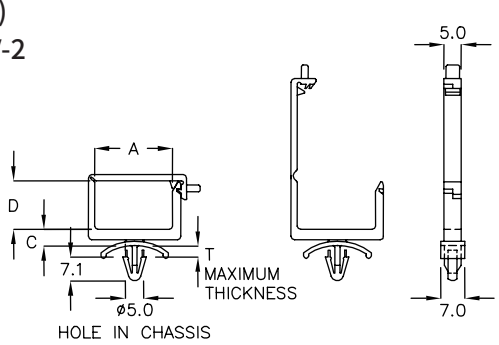


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CH-20A | 22.9 | 5.3 | 14.2 | 3.2 | 500 |

## 隔离束线座 WIRE SADDLE 6-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

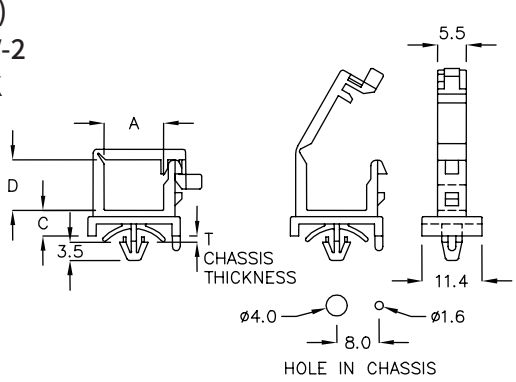


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CKS-10A | 11.0 | 4.8 | 9.5 | 0.8~1.0 | 500 |

## 隔离束线座 WIRE SADDLE 6-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

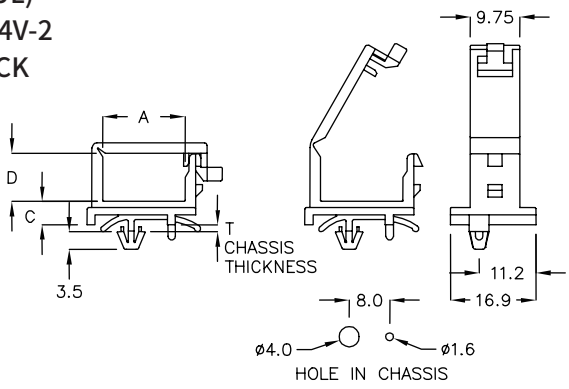


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CKS-16C | 16.0 | 4.6 | 9.5 | 0.8~1.2 | 500 |

## 隔离束线座 WIRE SADDLE 6-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

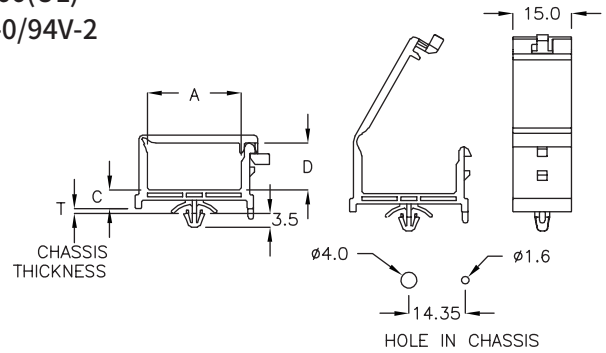


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CKS-24 | 24.0 | 4.7 | 12.0 | 0.8~1.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

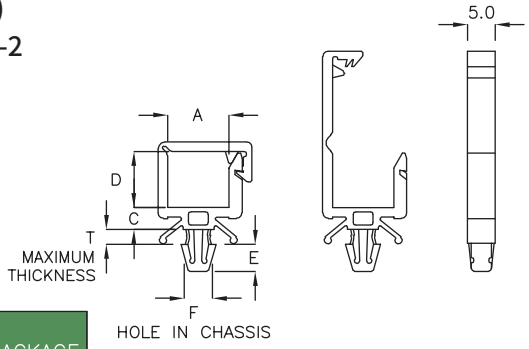


WITH LOCK FEATURE

| PART NO | A | C | D | E | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CK-5 | 11.0 | 4.0 | 5.2 | 5.1 | ø4.8~ø5.0 | 2.4 | 500 |
| CK-10 | 11.0 | 4.0 | 10.2 | 5.1 | ø4.8~ø5.0 | 2.4 | |
| CK-13HJ | 22.8 | 4.0 | 13.6 | 4.9 | ø4.8 | 0.5~1.0 | |
| CK-014 | 16.0 | 4.0 | 14.2 | 5.1 | ø4.8~ø5.0 | 2.4 | |



## 隔离束线座 WIRE SADDLE 6-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

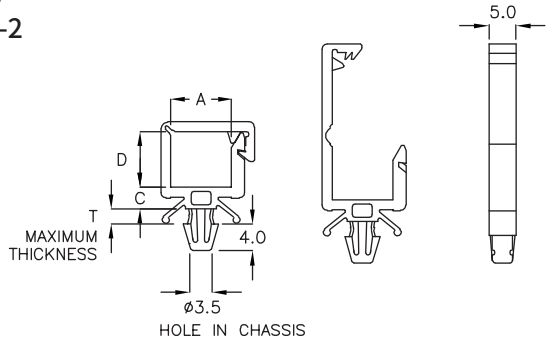


WITH LOCK FEATURE

| PART NO | A | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CHJ-05 | 11.0 | 4.0 | 5.2 | 2.4 | 500 |
| CHJ-10 | 11.0 | 4.0 | 10.2 | 2.4 | |

## 隔离束线座 WIRE SADDLE 6-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

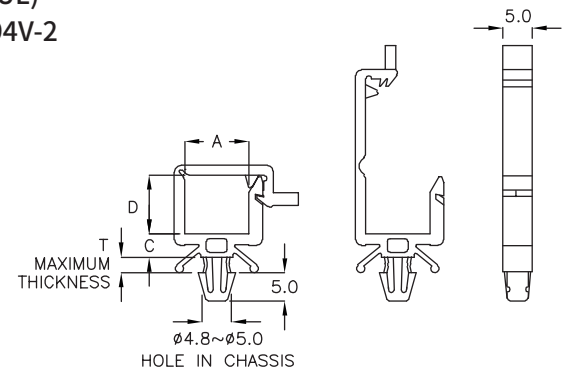


WITH LOCK FEATURE

| PART NO | A | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CK-10A | 11.0 | 4.0 | 10.4 | 2.4 | 500 |
| CK-14A | 16.0 | 4.0 | 14.0 | 2.4 | |

## 隔离束线座 WIRE SADDLE 6-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

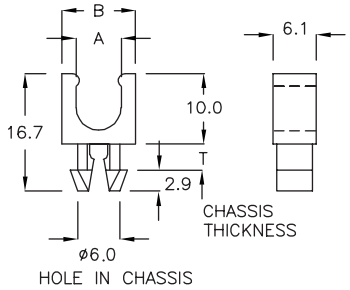


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CH-01 | 7.5 | 10.5 | 3.5 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

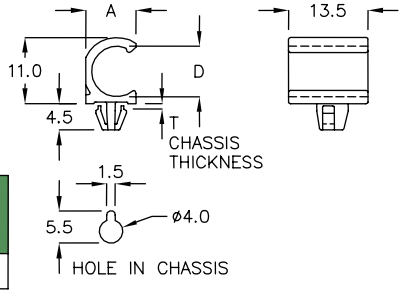


Built–In Anti–Spin Function

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CHK–01 | 8.6 | ø8.4 | 0.8 | 500 |



## 电线固定座 TIE MOUNT 6-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

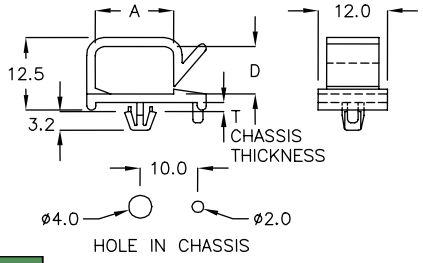


Built–In Anti–Spin Function

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FWS–01 | 13.6 | 8.2 | 0.8~1.2 | 500 |



## 电线固定座 TIE MOUNT 6-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

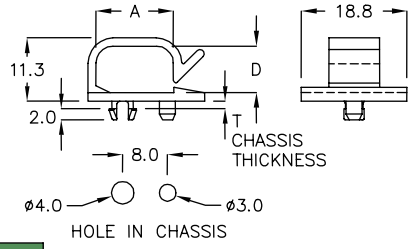


Built–In Anti–Spin Function

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FWS–02 | 13.8 | 8.3 | 0.8~1.0 | 500 |

## 隔离束线座 WIRE SADDLE 6-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

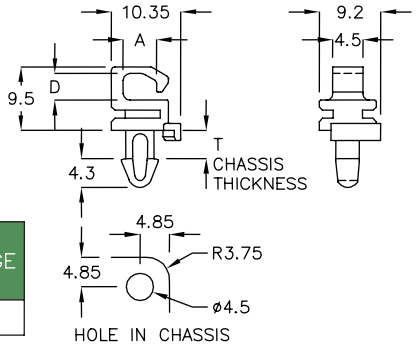


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYW–5K | 5.0 | 4.0 | 4.0 | 1000 |

## 隔离束线座 WIRE SADDLE 6-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

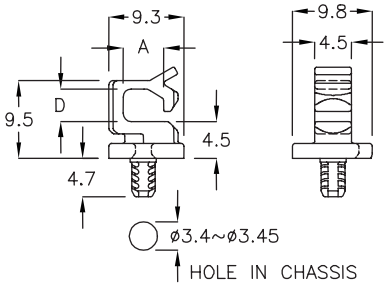


| PART NO | A | D | PACKAGE |
|---|---|---|---|
| CFK–14TS | 5.0 | 4.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

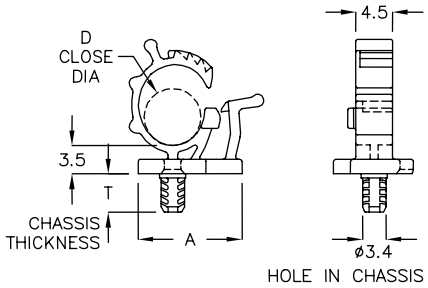


| PART NO | A | D CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CFKA-6 | 12.75 | ø6.0~ø7.0 | 5.0 | 1000 |

## 隔离束线座 WIRE SADDLE 6-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

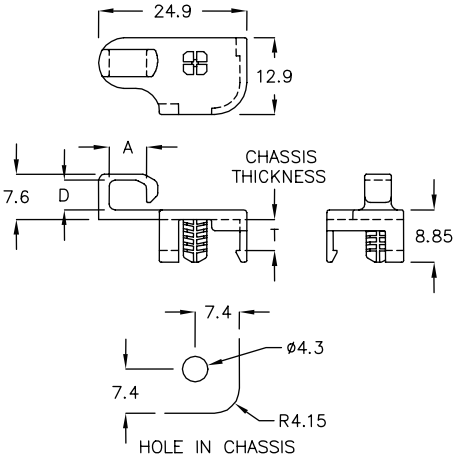


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYWF-24GH | 6.35 | 5.0 | 5.0 | 500 |

## 隔离束线座 WIRE SADDLE 6-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

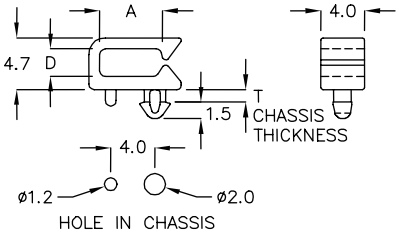


Built-In Anti-Spin Function

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CUA-8K | 5.6 | 2.5 | 1.0 | 1000 |



## 隔离束线座 WIRE SADDLE 6-61-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

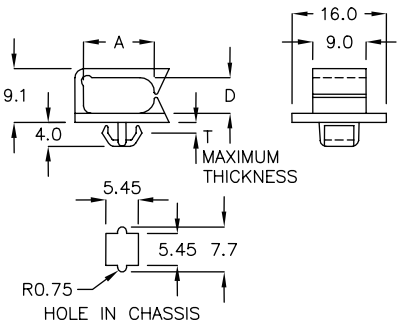


Built-In Anti-Spin Function

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CU-04 | 12.0 | 6.0 | 1.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

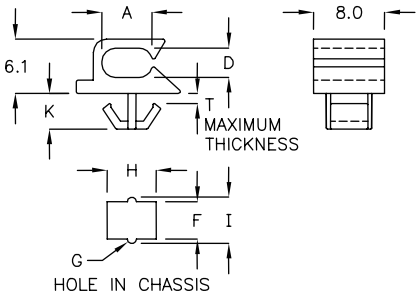


Built –In Anti–Spin Function

| PART NO | A | D | F | G | H | I | K | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CU–01H | 5.6 | 3.3 | 4.2 | R0.5 | 5.5 | 5.2 | 4.0 | 1.0 | 1000 |
| CU–01K | 5.6 | 3.3 | 4.2 | R0.5 | 5.5 | 5.2 | 4.3 | 1.2 | 2000 |
| CU–1RS | 5.6 | 3.3 | 4.1 | R0.55 | 4.3 | 5.1 | 4.3 | 1.1 | 1000 |



## 隔离束线座 WIRE SADDLE 6-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

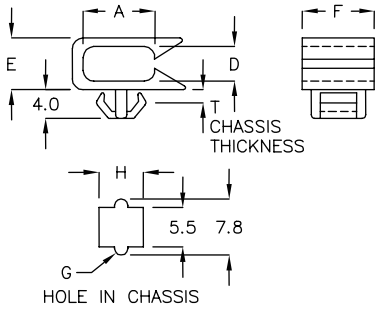


Built –In Anti–Spin Function

| PART NO | A | D | E | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CU–2C | 4.2 | 2.5 | 5.1 | 9.4 | R0.9 | 6.2 | 1.0~1.2 | 1000 |
| CU–03 | 10.0 | 4.8 | 7.2 | 10.0 | R0.85 | 5.5 | 0.6~0.8 | |

## 隔离束线座 WIRE SADDLE 6-62-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

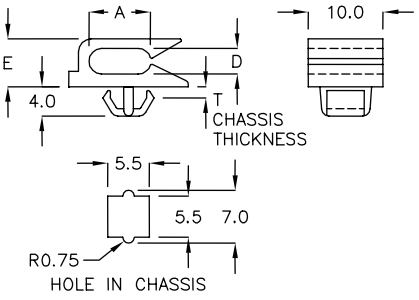


Built –In Anti–Spin Function

| PART NO | A | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CU–01 | 8.2 | 3.3 | 6.4 | 0.8~1.0 | 1000 |
| CU–01F | 9.0 | 4.6 | 7.6 | 0.8~1.0 | |

## 隔离束线座 WIRE SADDLE 6-62-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

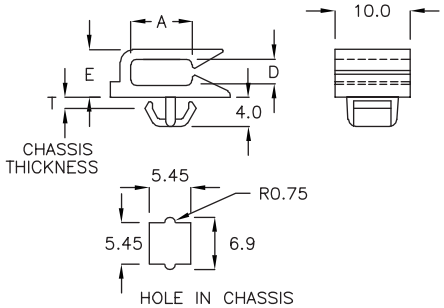


Built –In Anti–Spin Function

| PART NO | A | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CU–01J | 9.0 | 4.6 | 7.6 | 0.8~1.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-63-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

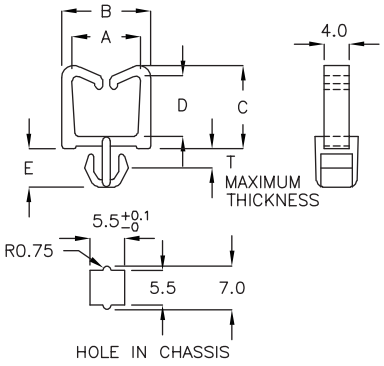


Built-In Anti-Spin Function

| PART NO | A | B | C | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CH-08 | 10.9 | 14.3 | 13.5 | 9.7 | 6.3 | 2.2 | 500 |
| CH-08L | 12.0 | 16.8 | 13.5 | 9.4 | 5.8 | 1.6 | |
| CH-08A | 11.0 | 14.3 | 15.7 | 12.0 | 6.1 | 2.2 | |



## 隔离束线座 WIRE SADDLE 6-63-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

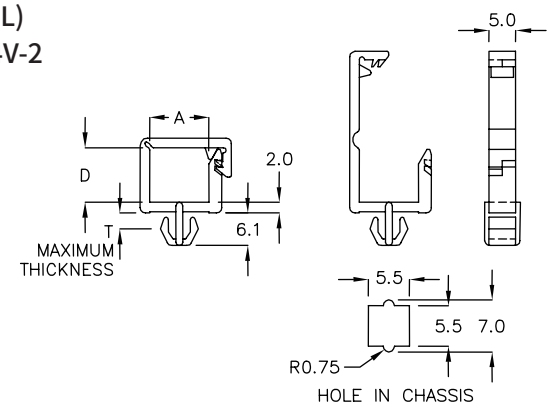


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CKH-11 | 11.1 | 10.5 | 2.0 | 500 |
| CKH-13 | 16.0 | 14.5 | 2.0 | |

## 隔离束线座 WIRE SADDLE 6-63-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: WHITE

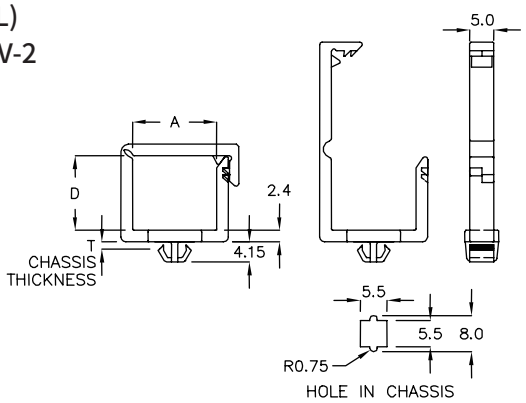


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CKH-22A | 22.2 | 21.5 | 0.8~1.0 | 500 |



## 隔离束线座 WIRE SADDLE 6-63-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

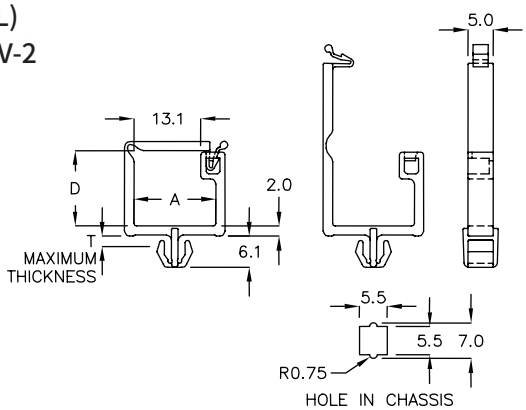


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CKHA-16 | 16.0 | 14.5 | 2.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-64-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

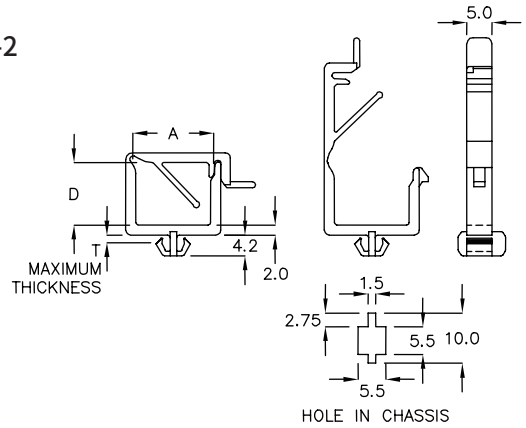


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYH-16C | 16.0 | 14.0 | 0.6 | 500 |

## 隔离束线座 WIRE SADDLE 6-64-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

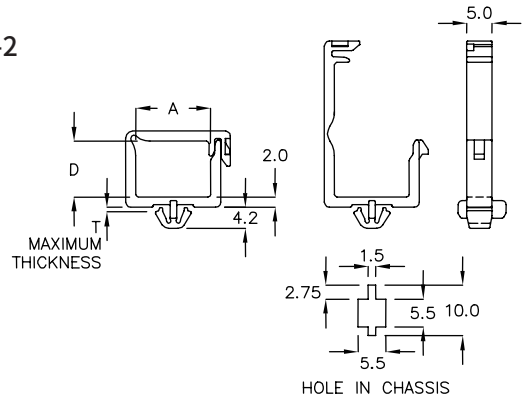


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYK-16G | 16.0 | 14.2 | 0.6 | 500 |

## 电线固定座 WIRE MOUNT 6-64-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

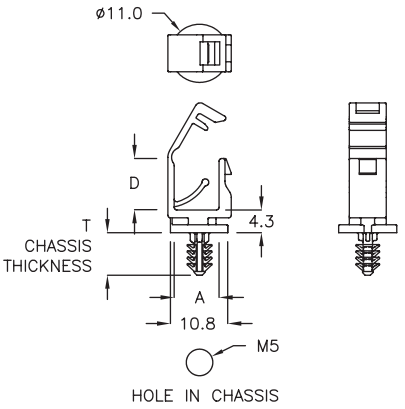


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ CYHG-8A | 8.5 | 9.7 | 7.5~8.5 | 500 |

## 隔离束线座 WIRE SADDLE 6-64-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

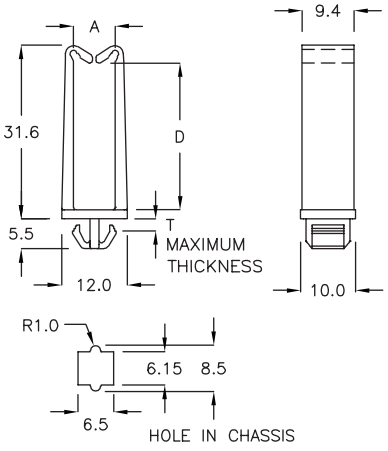


Built-In Anti-Spin Function

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CMB-7A | 7.6 | 26.8 | 1.6 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-65-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

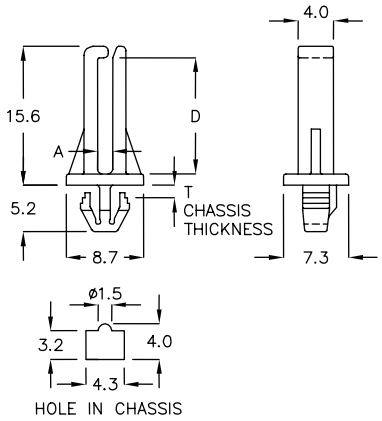


Built-In Anti-Spin Function

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CMBF-1K | 1.7 | 13.0 | 1.2 | 200 |

## 电线固定座 WIRE MOUNT 6-65-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

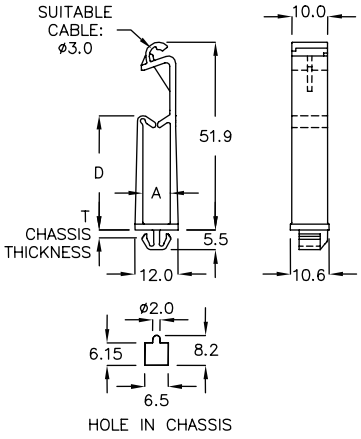


Built-In Anti-Spin Function

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYS-7TK | 7.6 | 31.6 | 1.2~1.6 | 100 |

## 电线固定座 WIRE MOUNT 6-65-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CD-4 | ø12.6 | 19.6 | 25.8 | 100 |

## 电线固定座 WIRE MOUNT 6-65-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

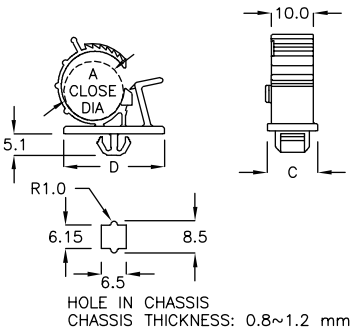


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CDF-24 | ø11.0~13.0 | 12.0 | 24.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

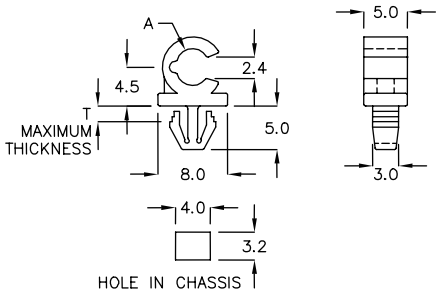


Built–In Anti–Spin Function

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH–04C | ø4.0 | 1.0 | 1000 |

## 隔离束线座 WIRE SADDLE 6-66-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

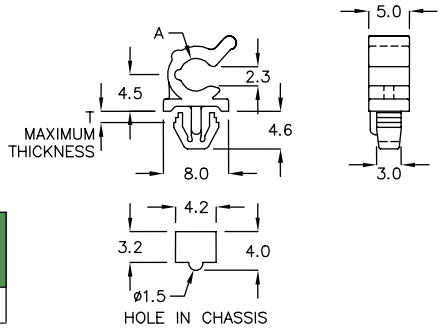


Build–In Anti–Spin Function

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CNA–04F | ø4.0 | 1.0 | 1000 |



## 隔离束线座 WIRE SADDLE 6-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

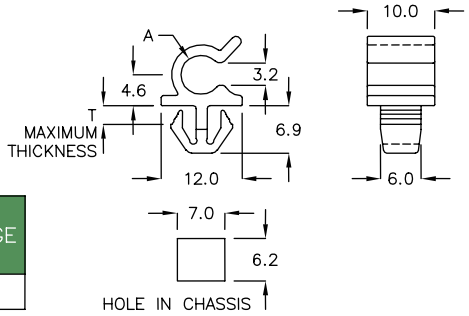


Built–In Anti–Spin Function

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH–06S | ø5.5 | 2.0 | 500 |

## 隔离束线座 WIRE SADDLE 6-66-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

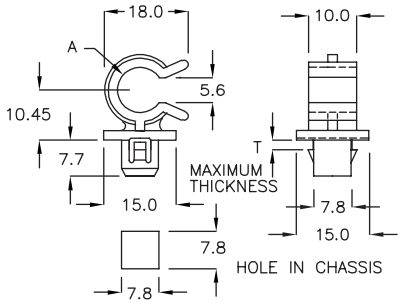


Built–In Anti–Spin Function

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CH–09 | ø9.7 | 1.5 | 200 |

## 隔离束线座 WIRE SADDLE 6-66-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

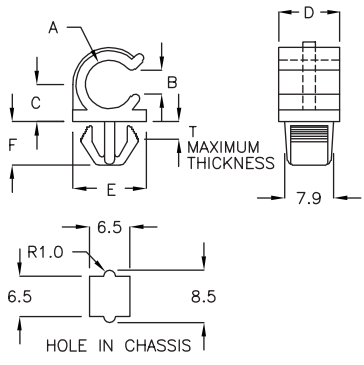


Built–In Anti–Spin Function

| PART NO | A | B | C | D | E | F | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CH–09S | ø7.9 | 3.5 | 6.0 | 9.9 | 12.0 | 7.0 | 1.7 | 500 |
| CH–09A | ø8.0 | 4.9 | 7.1 | 8.0 | 11.6 | 5.55 | 1.7 | |
| CH–09C | ø9.5 | 3.8 | 6.75 | 9.9 | 13.5 | 7.0 | 1.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-67-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

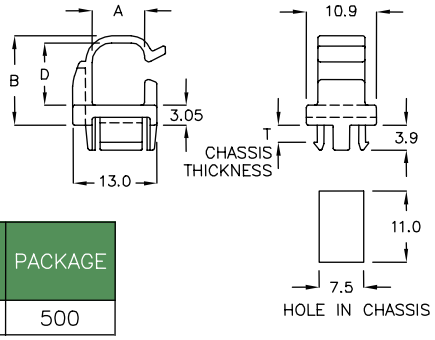


| PART NO | A | B | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CYWK-8H | 8.1 | 13.9 | 9.7 | 2.5 | 500 |



## 隔离束线座 WIRE SADDLE 6-67-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

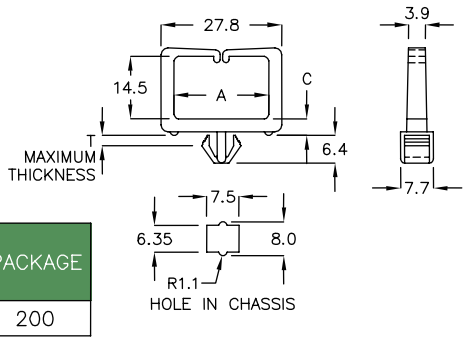


Built-In Anti-Spin Function

| PART NO | A | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CHN-01 | 21.6 | 3.9 | 2.2 | 200 |

## 电线固定座 WIRE MOUNT 6-67-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

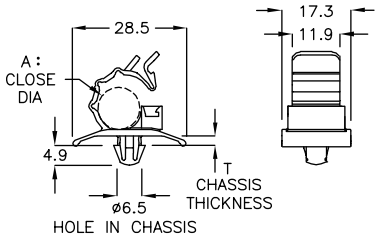


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CCD-01 | ø10.0 | 0.8~1.2 | 200 |

## 电线固定座 WIRE MOUNT 6-67-4

- MATERIAL: PE
- COLOR: BLACK

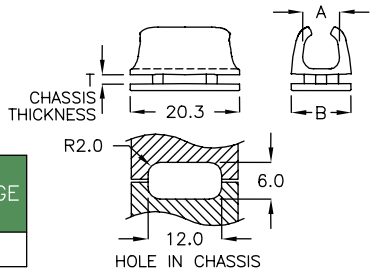


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| BAK-20A | 6.7 | 11.0 | 1.6 | 500 |



## 电线固定座 WIRE MOUNT 6-67-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

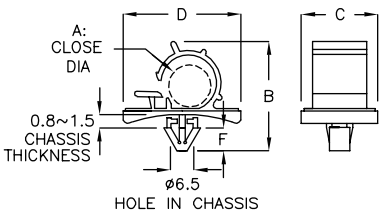


WITH LOCK FEATURE

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| CC-3 | ø9.5 | 23.9 | 17.0 | 26.0 | 5.0 | 200 |
| CC-3PH | ø7.8 | 24.9 | 19.0 | 21.0 | 4.8 | |
| CC-4 | ø13.5 | 32.0 | 19.4 | 30.3 | 5.2 | 100 |
| CC-04A | ø17.0 | 33.7 | 19.3 | 30.2 | 5.1 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-68-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | F | PACKAGE |
|---|---|---|---|---|---|
| CS-6 | ø6.2 | 14.0 | 6.35 | 5.8 | 500 |
| CS-12 | ø6.2 | 14.0 | 13.0 | 5.9 | |

## 光纤固定座 FIBER HOUSING 6-68-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

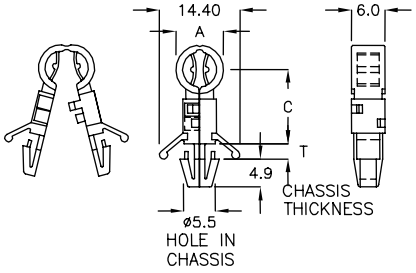


| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CCA-13 | ø8.5 | 13.0 | 0.8~2.3 | 500 |

## 光纤固定座 FIBER HOUSING 6-68-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Built-In Anti-Spin Function
WITH LOCK FEATURE

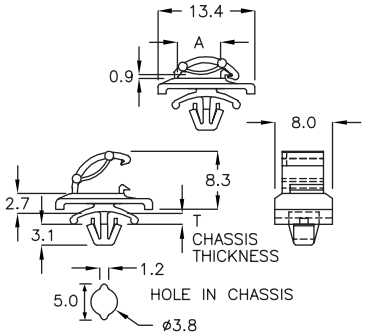


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CHX-01 | 6.0 | 0.8~1.6 | 1000 |
| CHX-1A | 6.0 | 0.8~2.5 | |



## 电线固定座 WIRE MOUNT 6-68-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

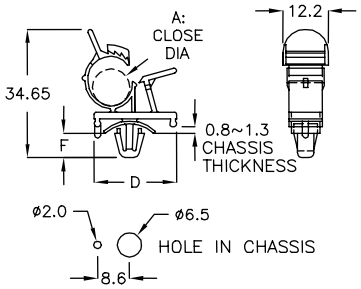


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | D | F | PACKAGE |
|---|---|---|---|---|
| FWD-01 | ø7.7~ø10.0 | 22.1 | 6.8 | 500 |
| FWD-02 | ø8.0~ø9.5 | 19.3 | 6.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-69-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

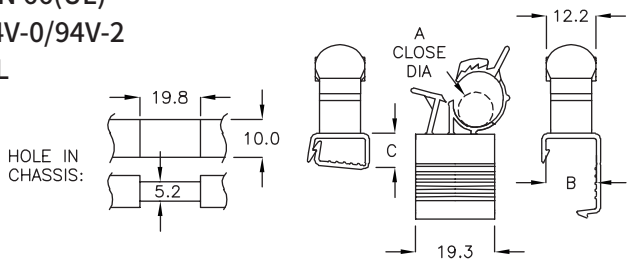


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FWC-01 | ø7.5~ø9.0 | 12.4 | 8.2 | 100 |

## 电线固定座 WIRE MOUNT 6-69-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

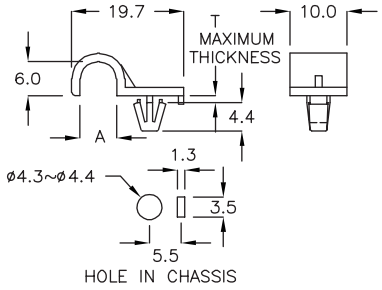


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CU-06A | 6.4 | 1.1 | 1000 |

## 电线固定座 WIRE MOUNT 6-69-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

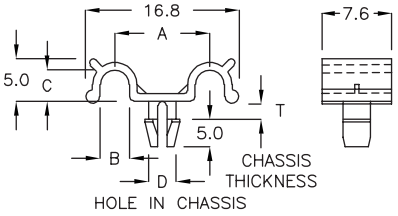


| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CIC-01 | 10.4 | 3.2 | 3.4 | ø3.2 | 1.6~1.8 | 1000 |

## 电线固定座 WIRE MOUNT 6-69-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

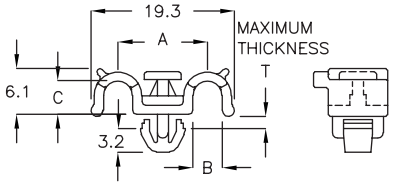


Built-In Anti-Spin Function

| PART NO | A | B | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CIS-18K | 12.0 | 3.95 | 4.5 | 1.5 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-70-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

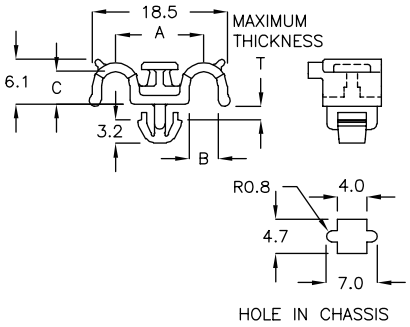


Built –In Anti–Spin Function

| PART NO | A | B | C | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CIS–18RS | 12.0 | 3.95 | 4.5 | 1.6~2.0 | 1000 |

## 电线固定座 WIRE MOUNT 6-70-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

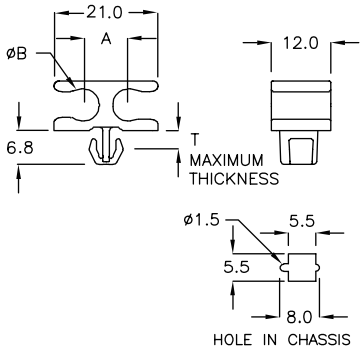


Built –In Anti–Spin Function

| PART NO | A | B | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| CIK–21 | 8.7 | ø6.5 | 2.5 | 500 |

## 电线固定座 WIRE MOUNT 6-70-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

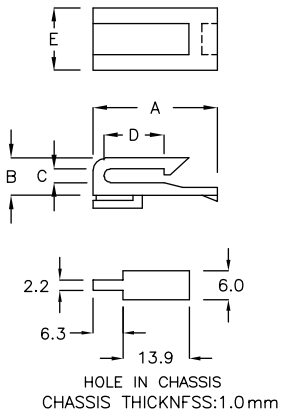


Built –In Anti–Spin Function

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| LFE–01 | 20.1 | 6.0 | 2.2 | 9.7 | 10.0 | 1000 |



## 电线固定座 WIRE MOUNT 6-70-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

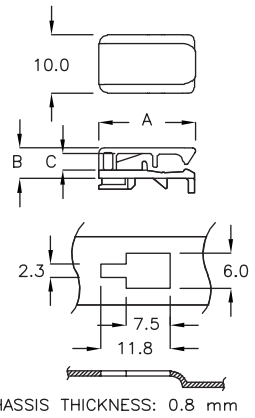


Built –In Anti–Spin Function

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LFK–16A | 16.5 | 5.3 | 2.85 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-71-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CNG-13 | 8.5 | 12.0 | 8.8 | 5.6 | 1.6 | 500 |

## 电线固定座 WIRE MOUNT 6-71-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

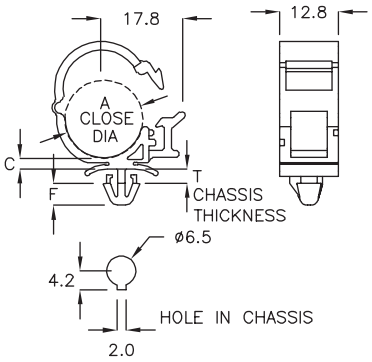


| PART NO | A | C | T CHASSIS THICKNESS | F | PACKAGE |
|---|---|---|---|---|---|
| CCF-17RS | ø17.0 | 2.3 | 0.8 | 4.8 | 100 |

## 电线固定座 WIRE MOUNT 6-71-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

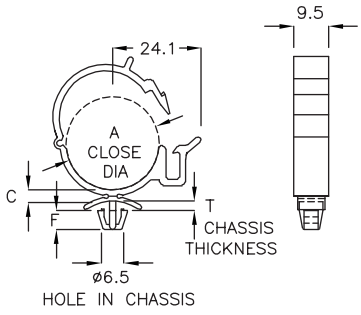


WITH LOCK FEATURE

| PART NO | A | C | T CHASSIS THICKNESS | F | PACKAGE |
|---|---|---|---|---|---|
| CKL-25 | ø25.4 | 3.6 | 0.8~1.8 | 5.6 | 100 |
| CKL-25A | ø25.4 | 3.6 | 2.5~3.0 | 5.7 | |

## 电线固定座 WIRE MOUNT 6-71-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

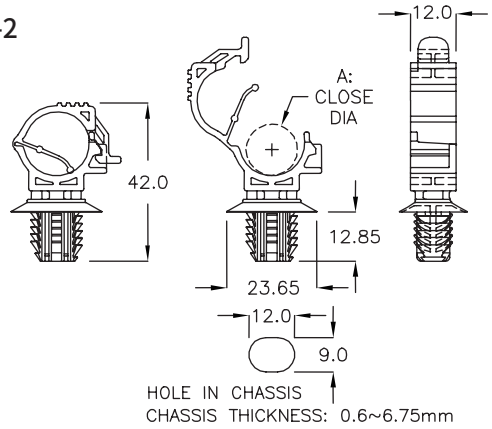


| PART NO | A | PACKAGE |
|---|---|---|
| CKIM-16HQ | ø10.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-72-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

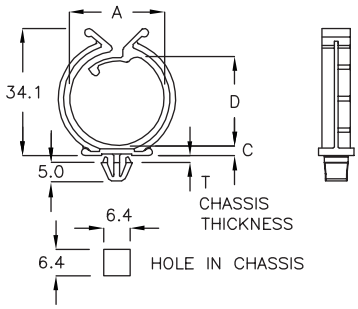


| PART NO | A | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TDH−25 | 25.5 | 2.55 | 24.0 | 0.6~1.2 | 200 |

## 隔离束线座 WIRE SADDLE 6-72-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

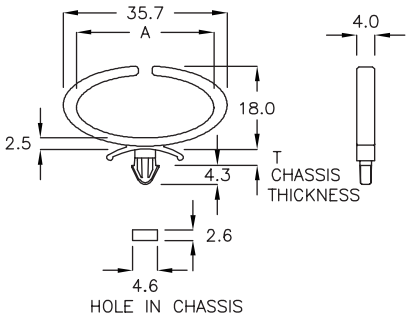


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CHP−2A | 29.9 | 1.2~2.8 | 500 |

## 隔离束线座 WIRE SADDLE 6-72-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

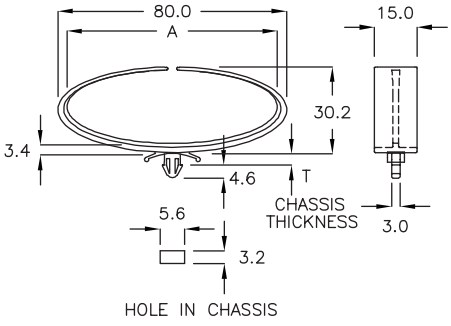


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CHP−8A | 73.5 | 2.5~3.0 | 100 |

## 隔离束线座 WIRE SADDLE 6-72-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

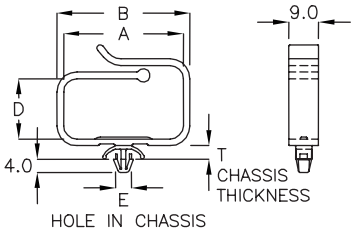


| PART NO | A | B | D | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CND−40 | 36.0 | 40.0 | 18.1 | ø4.8 | 1.3~2.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-73-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

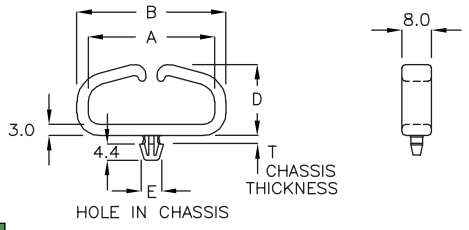


| PART NO | A | B | D | E HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CKQ-40 | 33.8 | 39.8 | 18.5 | ø4.9~ø5.0 | 1.8~2.0 | 500 |
| CKQ-44 | 41.6 | 48.8 | 23.4 | ø4.9~ø5.0 | 1.8~2.0 | 200 |
| CKQ-55 | 49.0 | 55.0 | 18.3 | ø4.9~ø5.0 | 1.8~2.0 | |

## 隔离束线座 WIRE SADDLE 6-73-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

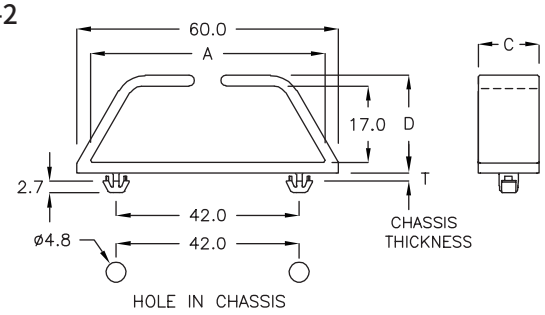


| PART NO | A | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CKQ-60 | 53.8 | 14.0 | 22.0 | 1.5 | 200 |

## 隔離束线座 WIRE SADDLE 6-73-3

- MATERIAL: PP
- COLOR: NATURAL

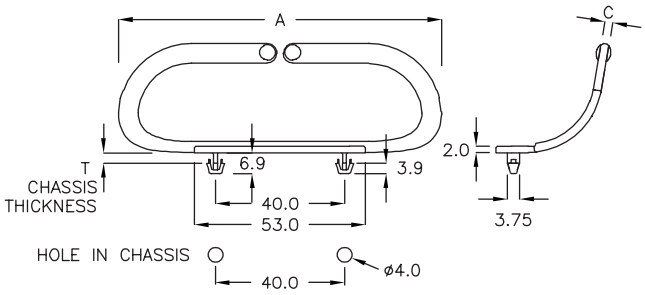


| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CKF-40 | 100.0 | 2.5 | 3.0 | 100 |

## 隔離束线座 WIRE SADDLE 6-73-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

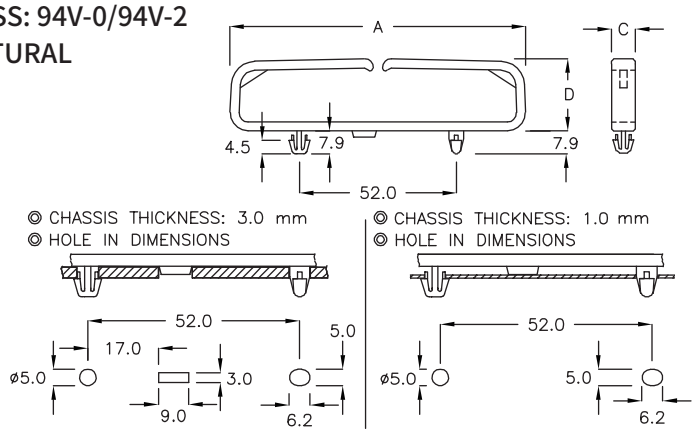


| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CKQ-98 | 98.0 | 8.0 | 24.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-74-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

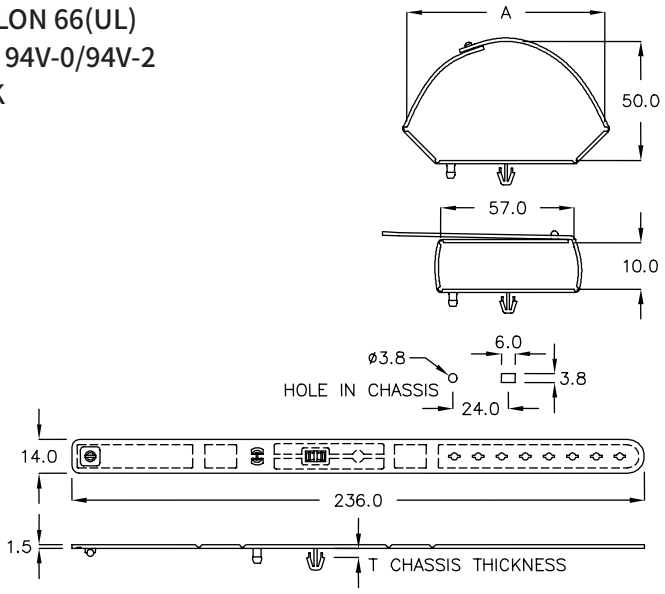


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| BSR−235 | 80.0 | 3.2 | 200 |

## 隔离束线座 WIRE SADDLE 6-74-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

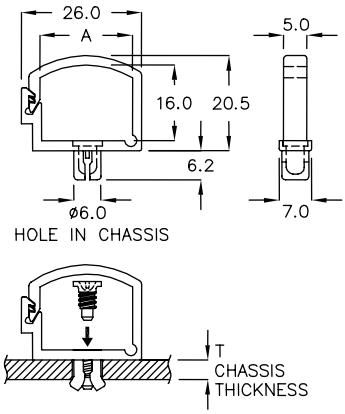


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CKP−16 | 20.0 | 1.6~2.6 | 500 |

## 电线固定座 WIRE MOUNT 6-74-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

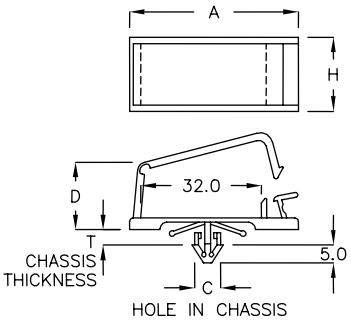


WITH LOCK FEATURE

| PART NO | A | C HOLE IN CHASSIS | D | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| FWH−01 | 44.8 | ø6.4 | 17.5 | 18.8 | 1.8~3.2 | 200 |
| FWH−02 | 44.45 | ø6.3 | 12.3 | 19.0 | 0.5~1.8 | |

## 电线固定板 CABLE CLAMP 6-74-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

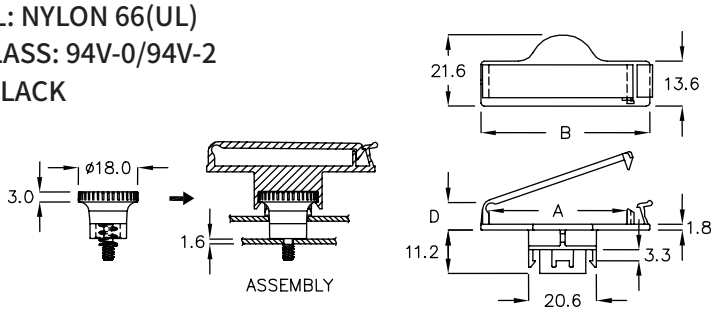


WITH LOCK FEATURE

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| FWTA−42A | 42.0 | 51.2 | 8.4 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 CABLE CLAMP 6-75-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

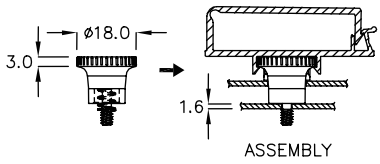





WITH LOCK FEATURE

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| FWTA-42C | 42.0 | 51.2 | 14.3 | 100 |

## 电线固定座 WIRE MOUNT 6-75-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







WITH LOCK FEATURE

| PART NO | A | B | C | D | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CKK-3C | 16.6 | 28.0 | 16.0 | 17.7 | 4.7 | 1.0 | 500 |
| CKK-3A | 16.6 | 28.0 | 16.0 | 18.8 | 4.9 | 3.0 | |
| CKK-03 | 19.1 | 31.0 | 16.0 | 18.6 | 4.9 | 3.0 | |
| CKK-04 | 24.1 | 34.3 | 20.0 | 17.9 | 4.8 | 3.0 | |
| CKK-05 | 24.1 | 36.0 | 20.0 | 12.2 | 4.8 | 3.0 | |
| ★ CKK-33G | 33.1 | 44.2 | 20.0 | 17.0 | 2.8 | 0.8 | 200 |

## 电线固定座 WIRE MOUNT 6-75-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







WITH LOCK FEATURE

| PART NO | A | B | C | D | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CKK-3F | 16.6 | 27.0 | 16.0 | 17.3 | 15.0 | 0.8~1.0 | 200 |
| CKK-05A | 24.1 | 36.0 | 20.0 | 12.4 | 8.0 | 0.8~1.0 | 500 |
| CKK-05D | 28.1 | 40.0 | 20.0 | 13.3 | 8.0 | 0.8~1.0 | |

## 电线固定座 WIRE MOUNT 6-75-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







WITH LOCK FEATURE

| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CKK-05C | 24.1 | 36.0 | 20.0 | 12.4 | 0.8~2.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-76-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

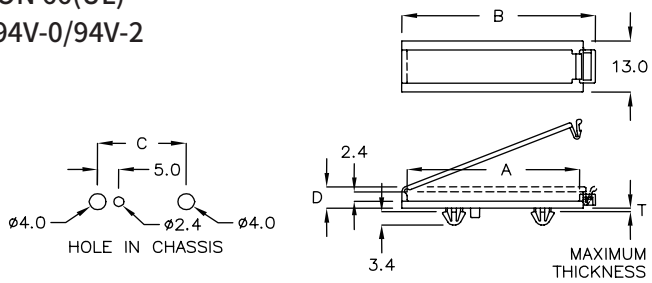


WITH LOCK FEATURE

| PART NO | A | B | C | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| FAB-41K | 41.0 | 45.9 | 21.0 | 5.4 | 0.5 | 200 |

## 电线固定座 WIRE MOUNT 6-76-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

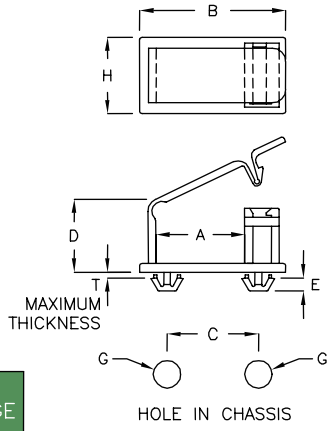


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | G | H | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CKK-06 | 19.4 | 31.9 | 20.0 | 15.2 | 2.85 | ø6.0 | 16.8 | 1.0 | 200 |
| CKK-06A | 19.4 | 31.9 | 20.0 | 15.2 | 2.85 | ø6.0 | 16.8 | 1.2 | 500 |
| CKK-5K | 24.1 | 36.0 | 20.0 | 8.9 | 3.0 | ø4.0 | 8.0 | 1.0 | |
| CKK-24AF | 24.1 | 34.3 | 20.0 | 17.9 | 2.8 | ø4.0 | 8.0 | 0.8 | |

## 电线固定座 WIRE MOUNT 6-76-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

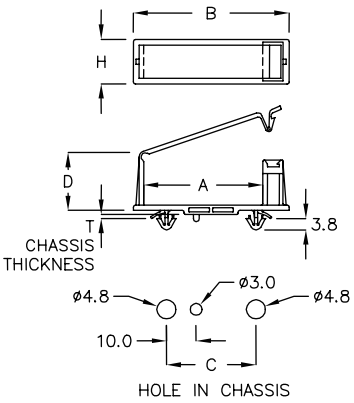


WITH LOCK FEATURE

| PART NO | A | B | C | D | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CYA-40 | 40.0 | 52.3 | 30.0 | 10.3 | 15.0 | 0.8~1.0 | 100 |
| CYA-40KM | 40.0 | 52.3 | 33.0 | 23.4 | 15.0 | 0.8~1.0 | |
| CYA-40PS | 40.0 | 52.3 | 33.0 | 23.4 | 15.0 | 1.2~1.4 | |
| CYA-45 | 45.0 | 57.3 | 30.0 | 13.8 | 17.0 | 0.8~1.0 | |
| CYA-45AM | 45.0 | 57.3 | 33.0 | 33.6 | 17.0 | 0.8~1.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-77-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

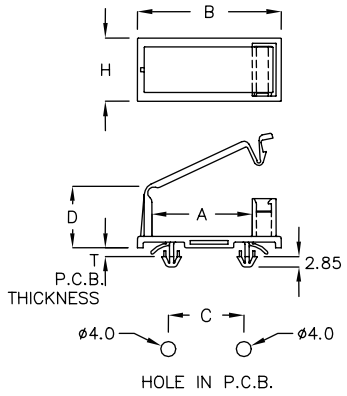


WITH LOCK FEATURE

| PART NO | A | B | C | D | H | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CKK-26F | 26.5 | 38.0 | 20.0 | 16.5 | 16.8 | 0.8~2.0 | 200 |

## 电线固定座 WIRE MOUNT 6-77-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

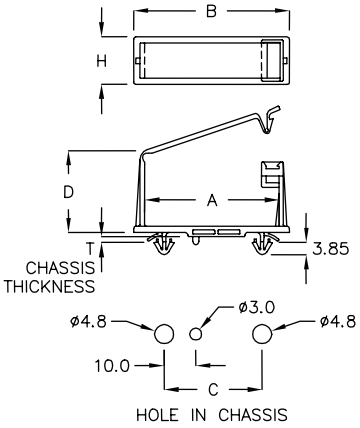


WITH LOCK FEATURE

| PART NO | A | B | C | D | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CYAA-43 | 42.6 | 49.3 | 31.0 | 35.0 | 15.0 | 1.2~1.4 | 100 |

## 电线固定座 WIRE MOUNT 6-77-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

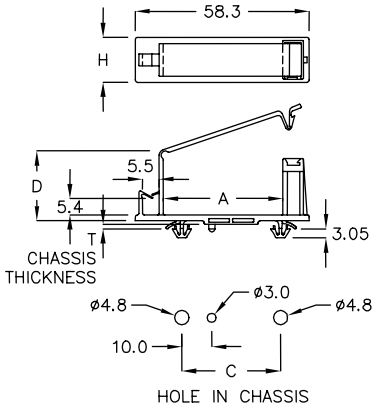


| PART NO | A | C | D | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CYG-40RT | 40.0 | 33.0 | 23.2 | 15.0 | 0.8~1.0 | 100 |

## 排线固定板 FLAT CABLE CLAMP 6-77-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCC-20 | 31.3 | 7.1 | 0.8~2.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-78-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

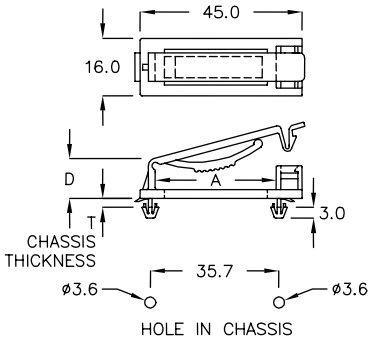


WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCS-20 | 33.6 | 10.7 | 1.4~1.6 | 200 |

## 排线固定板 FLAT CABLE CLAMP 6-78-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

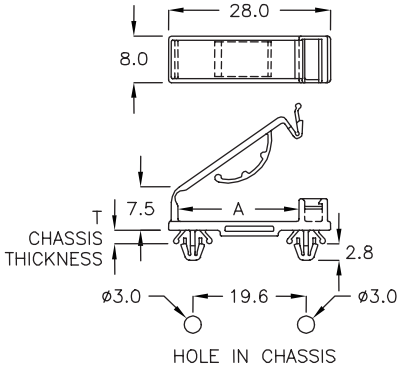


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FCSD-21A | 21.0 | 0.8~1.2 | 200 |

## 电线固定座 WIRE MOUNT 6-78-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

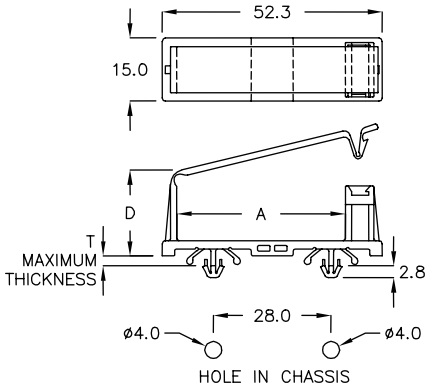


WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| FAA-40C | 40.0 | 26.0 | 2.0 | 100 |

## 电线固定座 WIRE MOUNT 6-78-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

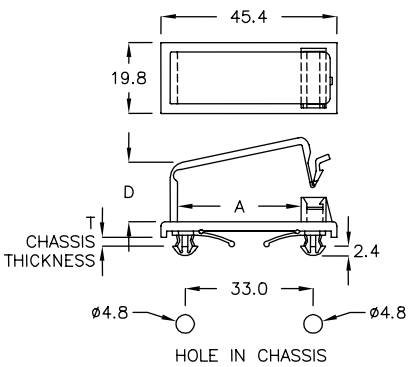


WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FAA-31K | 31.8 | 15.0 | 0.8~2.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-79-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

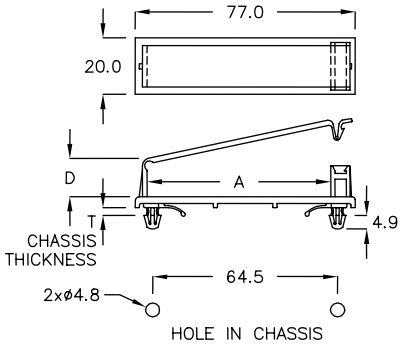


WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FAA-50 | 64.0 | 9.0 | 1.8~2.3 | 100 |
| FAA-51 | 64.0 | 15.4 | 1.8~2.3 | |

## 电线固定座 WIRE MOUNT 6-79-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

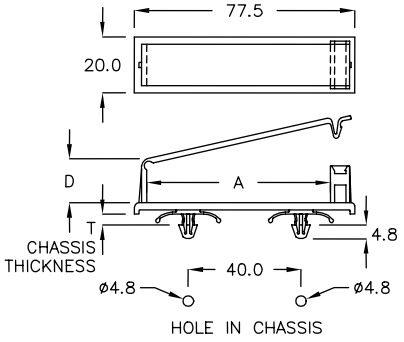


WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FAA-51A | 65.1 | 15.4 | 2.0~3.4 | 100 |

## 电线固定座 WIRE MOUNT 6-79-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

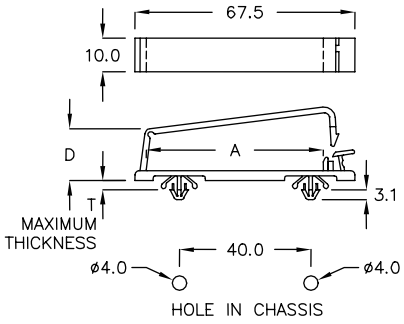


WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCC-40A | 54.0 | 16.0 | 2.0 | 100 |

## 电线固定座 WIRE MOUNT 6-79-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

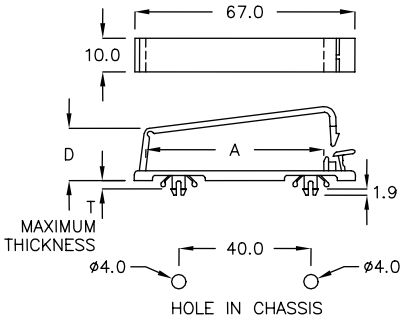


WITH LOCK FEATURE

| PART NO | A | D | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCC-40D | 54.0 | 16.0 | 2.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-80-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

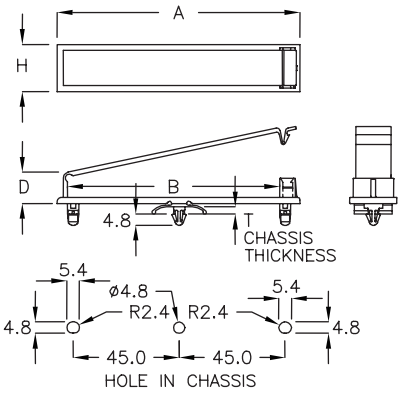


WITH LOCK FEATURE

| PART NO | A | B | D | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CXK-90A | 103.0 | 90.0 | 13.6 | 20.0 | 2.0~2.3 | 100 |

## 电线固定板 CABLE CLAMP 6-80-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

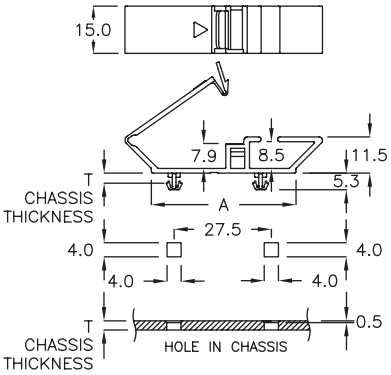


WITH LOCK FEATURE

| | PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ | FCMW-62A | 46.0 | 2.6~2.9 | 100 |

## 电线固定座 WIRE MOUNT 6-80-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




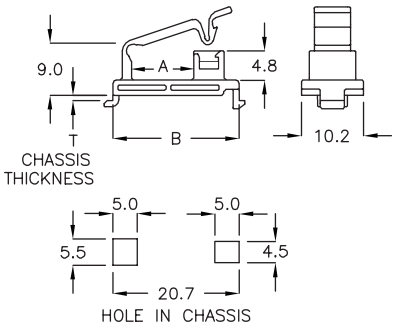


WITH LOCK FEATURE

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCZ-10C | 10.2 | 20.7 | 0.8 | 200 |

## 电线固定座 WIRE MOUNT 6-80-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




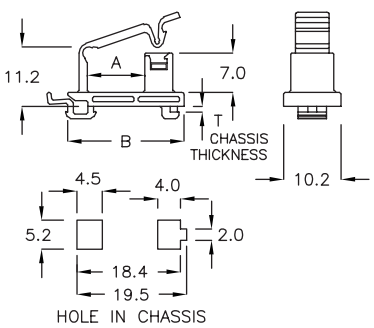


WITH LOCK FEATURE

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCX-10A | 10.2 | 20.7 | 0.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-81-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

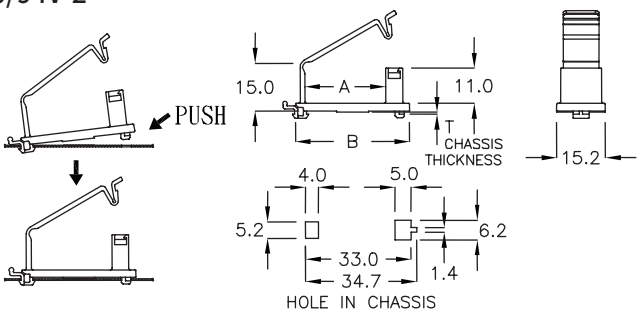


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCX-25GL | 25.25 | 35.65 | 0.6 | 200 |

## 电线固定座 WIRE MOUNT 6-81-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

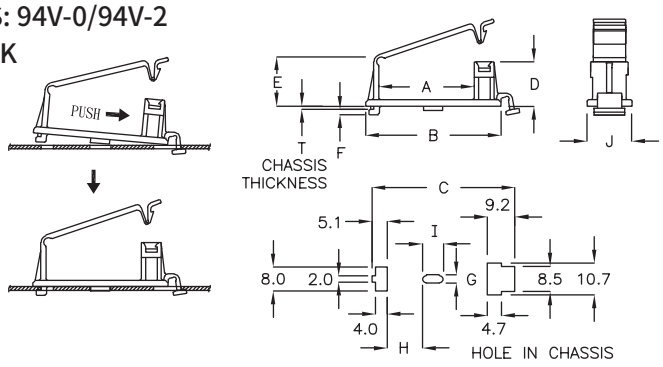


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | F | G | H | I | J | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FCQ-19A | 19.4 | 31.9 | 33.35 | 14.0 | 16.0 | 1.8 | 2.3 | 6.75 | 6.65 | 16.8 | 0.7~0.8 | 200 |
| FCQ-27 | 27.0 | 40.5 | 43.3 | 14.75 | 17.0 | 1.8 | 2.3 | 11.7 | 6.65 | 15.0 | 0.7~0.8 | |
| FCQ-31HS | 31.3 | 44.8 | 47.8 | 14.75 | 17.0 | 1.0 | 2.6 | 12.8 | 6.65 | 15.0 | 0.7~0.8 | |
| FCQ-31GR | 31.6 | 45.0 | 47.8 | 14.75 | 16.6 | 1.0 | 2.6 | 12.8 | 6.6 | 15.0 | 1.2 | |

## 电线固定座 WIRE MOUNT 6-81-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

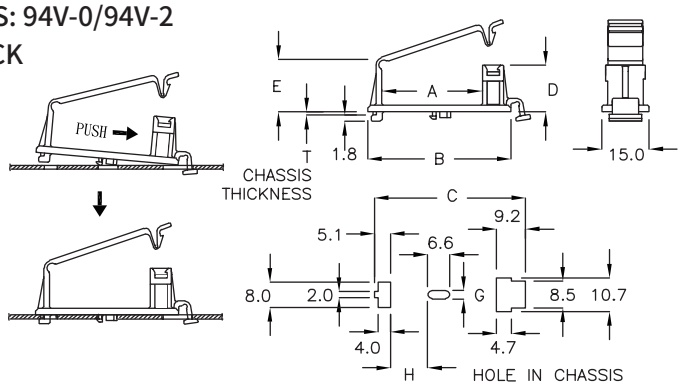


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| FCQ-31K | 31.3 | 44.8 | 47.8 | 14.75 | 17.0 | 2.6 | 12.8 | 0.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-82-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




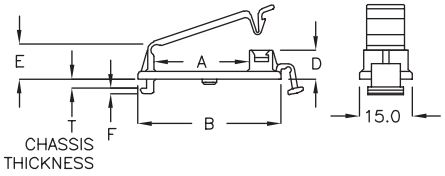





HOLE IN CHASSIS

| PART NO | A | B | C | D | E | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| FCQ-27LR | 27.0 | 40.5 | 42.2 | 8.2 | 10.0 | 1.5 | 2.3 | 11.7 | 2.4 | 200 |

## 电线固定座 WIRE MOUNT 6-82-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




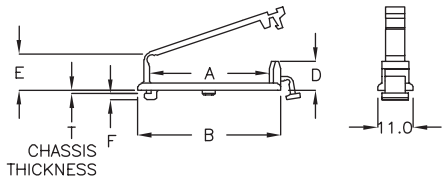


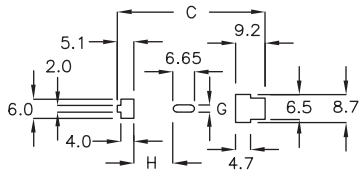


HOLE IN CHASSIS

| PART NO | A | B | C | D | E | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| FCQ-35JK | 37.1 | 44.3 | 45.75 | 9.05 | 11.4 | 1.8 | 2.3 | 12.1 | 0.8 | 100 |

WITH LOCK FEATURE

## 电线固定座 WIRE MOUNT 6-82-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




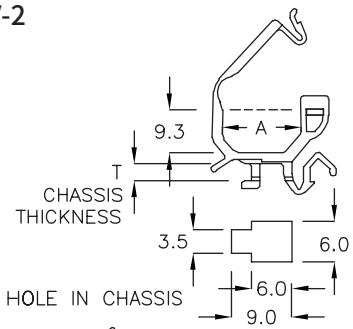


HOLE IN CHASSIS

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CKX-11A | 11.8 | 1.2~1.6 | 500 |

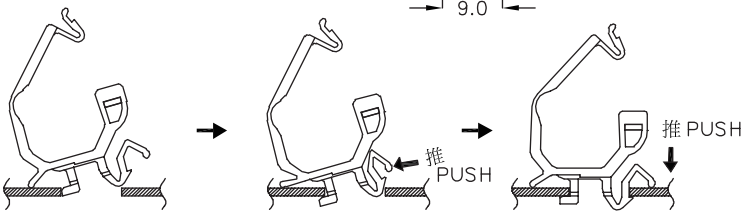




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-83-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  可由板上拆卸

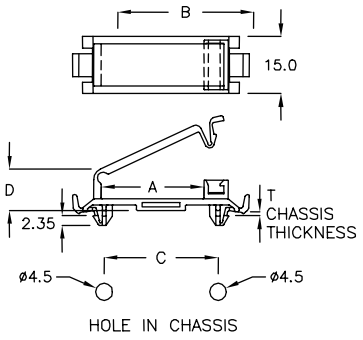


WITH LOCK FEATURE

| PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CXR−27A | 27.0 | 36.0 | 30.0 | 10.9 | 0.8 | 200 |

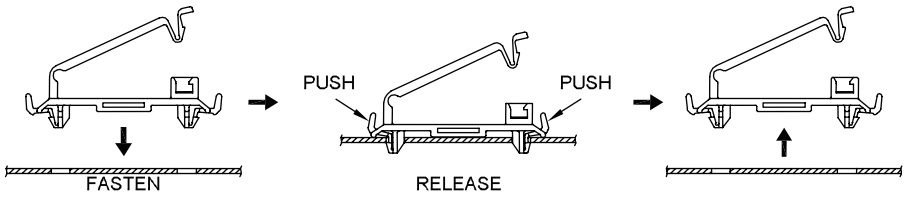

## 电线固定座 WIRE MOUNT 6-83-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

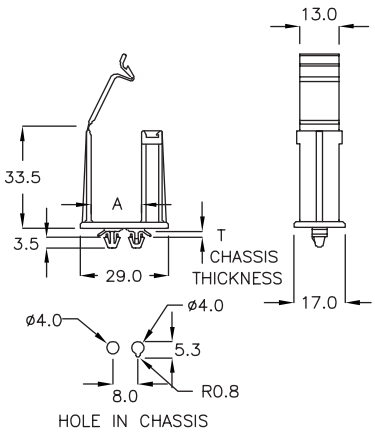


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYB−16A | 16.7 | 0.8~1.2 | 100 |

## 隔离束线座 WIRE SADDLE 6-83-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

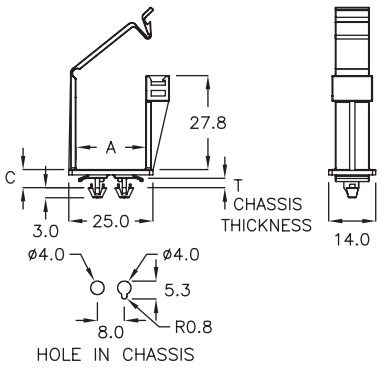


| PART NO | A | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ CZSA−20C | 20.8 | 5.4 | 2.1~2.5 | 100 |



## 电线固定座 WIRE MOUNT 6-83-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

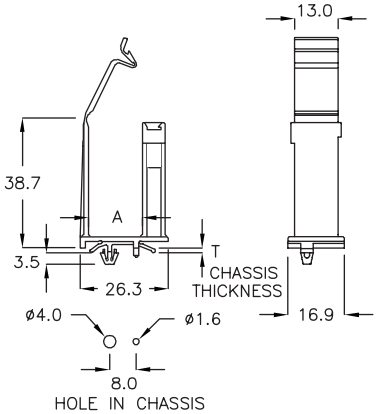


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYC−16F | 16.0 | 0.8~1.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-84-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

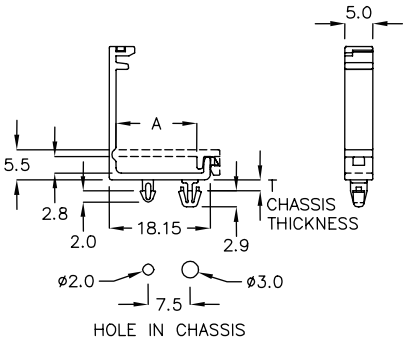


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYQ-15A | 14.5 | 1.5 | 500 |

## 电线固定座 WIRE MOUNT 6-84-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

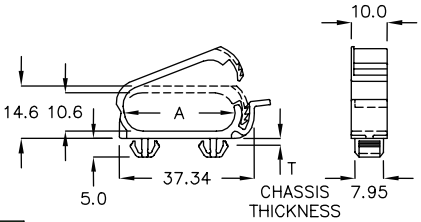


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FQCM-37A | 30.3 | 0.8~1.2 | 500 |



## 隔离束线座 WIRE SADDLE 6-84-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

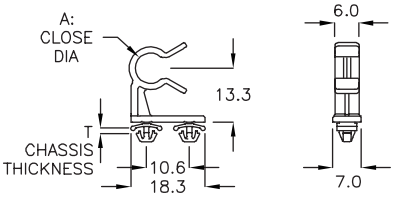


| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMW-08 | ø7.7 | 0.8 | 500 |






## 电线固定座 WIRE MOUNT 6-84-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

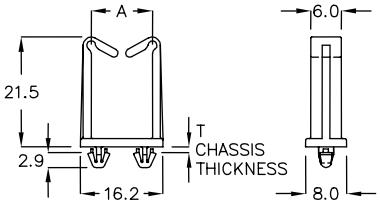


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYL-12M | 12.0 | 1.0 | 500 |

## 隔离束线座 WIRE SADDLE 6-84-5

- MATERIAL: PP
- COLOR: BLACK

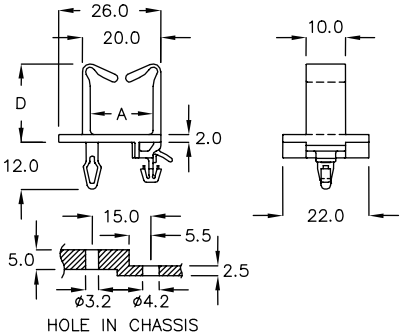


| PART NO | A | D | PACKAGE |
|---|---|---|---|
| CRN-16 | 16.0 | 20.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-85-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

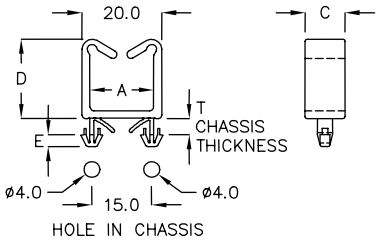


| PART NO | A | C | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CRC-16K | 16.0 | 10.0 | 20.0 | 3.0 | 0.8~2.3 | 200 |
| CRC-16PS | 16.0 | 10.0 | 24.0 | 2.4 | 1.0~2.3 | |
| CRC-16F | 16.4 | 10.4 | 24.5 | 2.1 | 1.0~2.3 | |

## 电线固定座 WIRE MOUNT 6-85-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

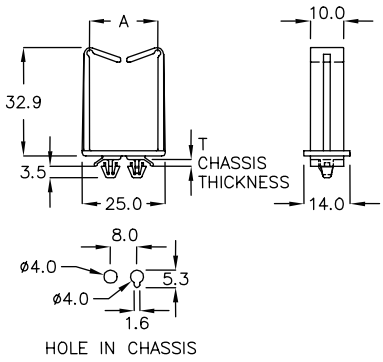


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYD-20A | 20.8 | 0.8~1.2 | 100 |



## 隔离束线座 WIRE SADDLE 6-85-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

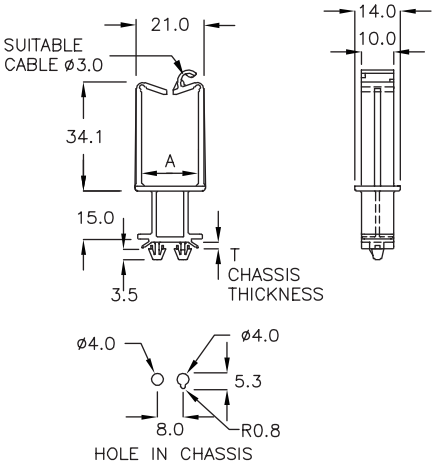


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYM-17A | 17.8 | 0.8~1.2 | 100 |

## 电线固定座 WIRE MOUNT 6-85-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

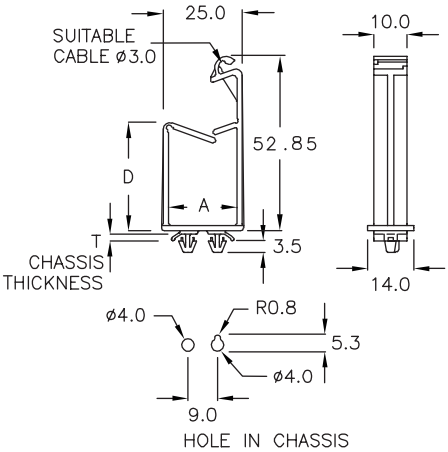


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CYR-20K | 20.8 | 32.8 | 0.8~1.2 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-86-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

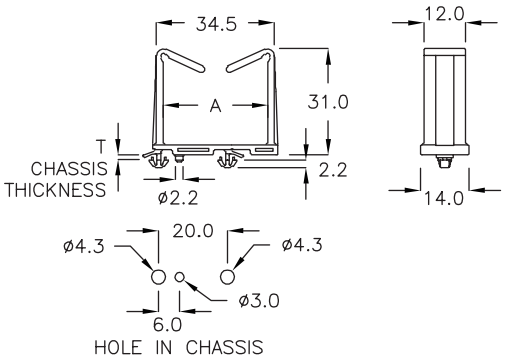


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CYP-30MC | 30.5 | 0.8~1.2 | 200 |

## 隔离束线座 WIRE SADDLE 6-86-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

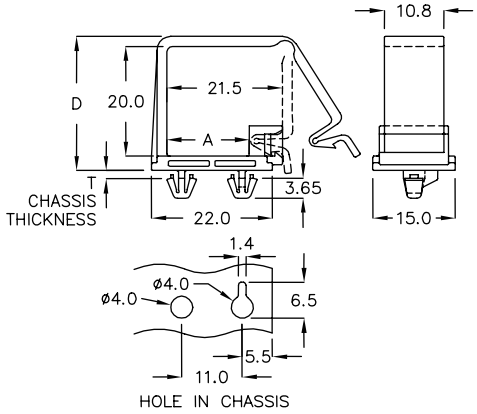


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CKKS-20KY | 15.0 | 24.4 | 1.2 | 500 |

## 隔离束线座 WIRE SADDLE 6-86-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

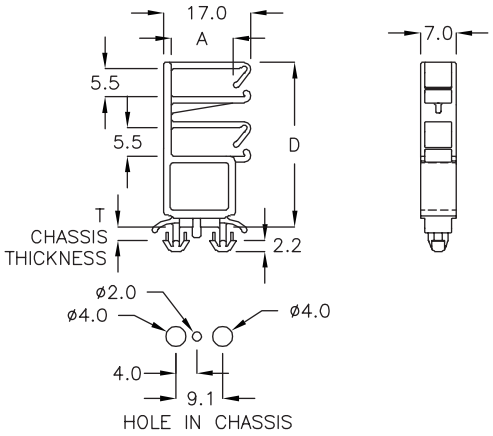


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FYH-5K | 12.0 | 31.95 | 1.6~2.4 | 100 |



## 隔离束线座 WIRE SADDLE 6-86-4

- MATERIAL: POM
- COLOR: NATURAL

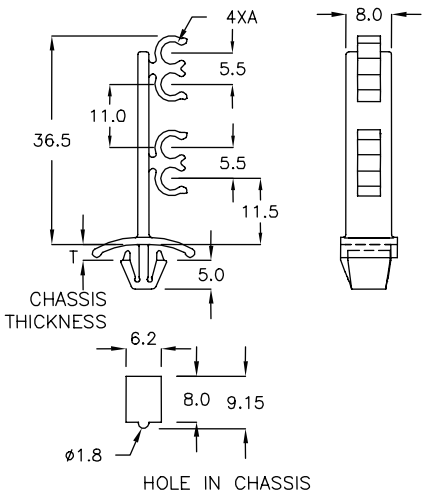


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CTK-44Q | ø4.0 | 1.0~2.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-87-1

- MATERIAL: POM
- COLOR: NATURAL

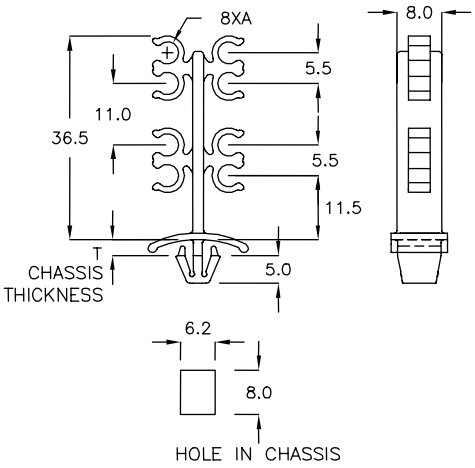


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CTM-44P | ø4.0 | 1.0~2.0 | 200 |



## 电线固定座 WIRE MOUNT 6-87-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

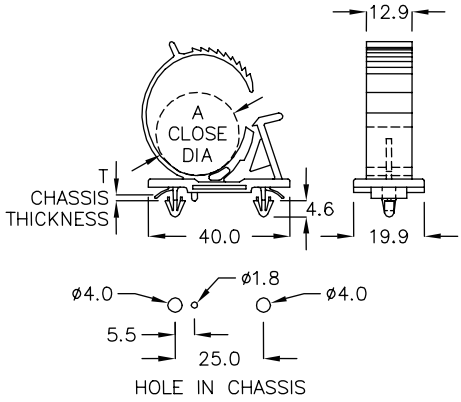


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FWW-40 | ø22.5~ø26.5 | 0.8~2.0 | 100 |
| FWW-40C | ø22.5~ø26.5 | 0.8 | |

## 电线固定座 WIRE MOUNT 6-87-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

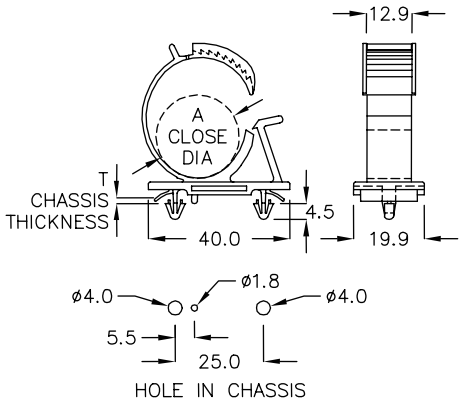


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FWQ-40 | ø22.5~ø26.5 | 0.8~2.0 | 100 |



## 电线固定座 WIRE MOUNT 6-87-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

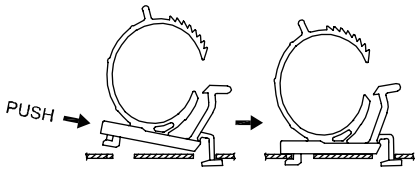


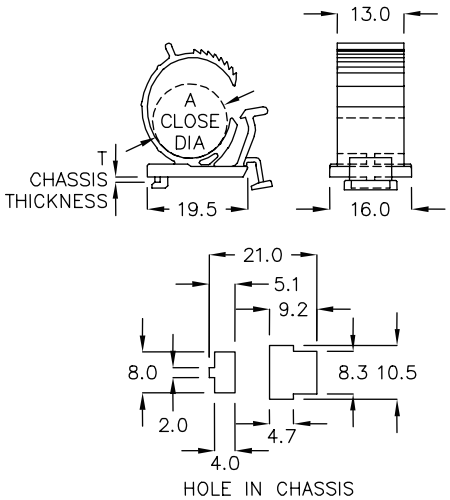


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FW-24 | ø13.0~ø14.5 | 0.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 WIRE MOUNT 6-88-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

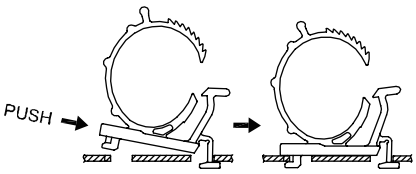


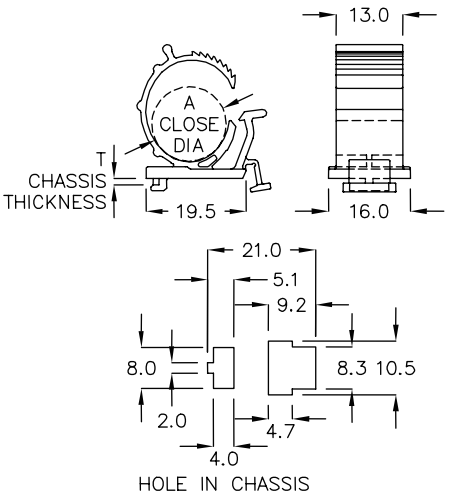


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FW-24CM | ø12.5~ø15.0 | 1.0 | 200 |



## 电线固定座 WIRE MOUNT 6-88-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

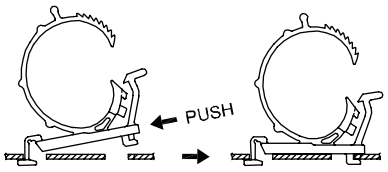


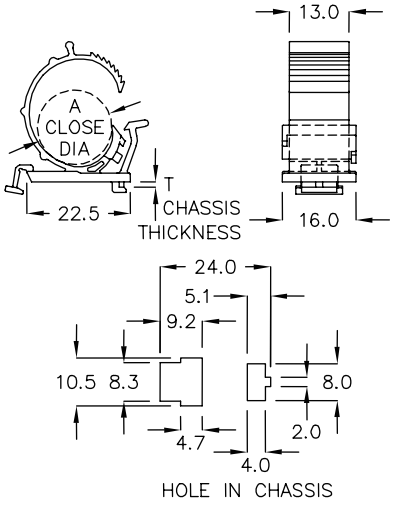


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| FDH-14J | ø14.5~ø17.0 | 1.0 | 100 |

## 电线固定座 WIRE MOUNT 6-88-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

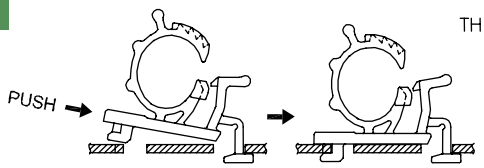


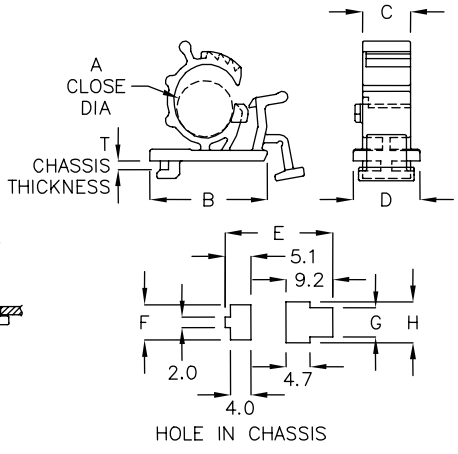


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | B | C | D | E | F | G | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| FWR-6A | ø6.0~ø7.0 | 15.85 | 6.5 | 9.0 | 17.7 | 7.0 | 5.8 | 8.0 | 0.9~1.1 | 500 |
| FWR-7M | ø7.5~ø8.5 | 16.0 | 6.5 | 9.0 | 17.7 | 7.0 | 5.8 | 8.0 | 0.9~1.1 | |
| FWR-9C | ø8.5~ø10.0 | 18.8 | 13.0 | 16.0 | 21.0 | 8.0 | 8.3 | 10.5 | 0.9~1.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 排线固定板 FLAT CABLE CLAMP — 6-89-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

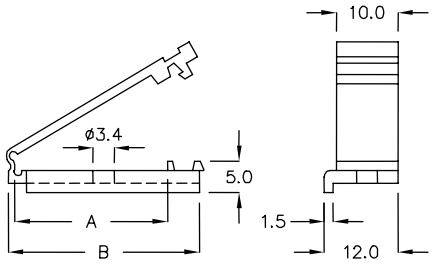


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FCM-25J | 24.8 | 31.0 | 200 |

## 排线固定板 FLAT CABLE CLAMP — 6-89-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

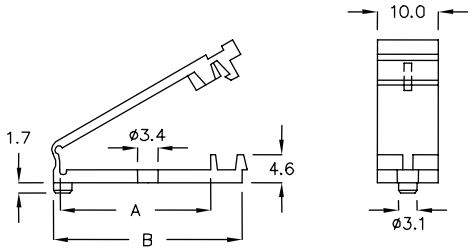


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FCM-26 | 24.8 | 31.0 | 200 |



## 排线固定板 FLAT CABLE CLAMP — 6-89-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

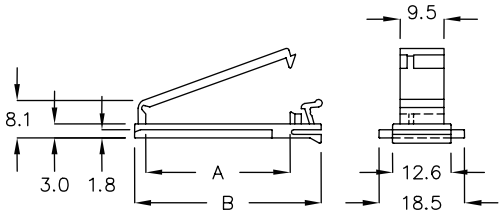


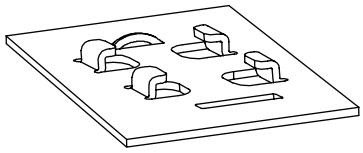

HOLE IN CHASSIS (REF.)

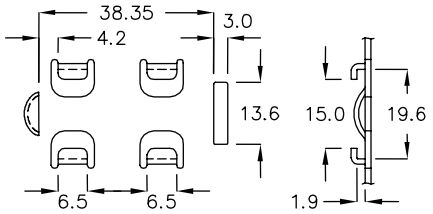


HOLE IN CHASSIS

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LFD-25 | 31.2 | 40.5 | 200 |

## 排线固定板 FLAT CABLE CLAMP — 6-89-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

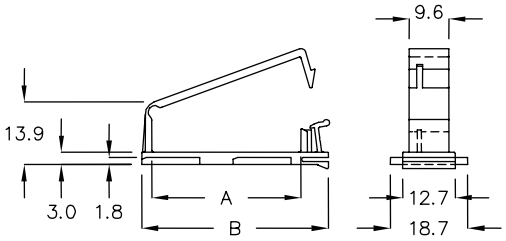


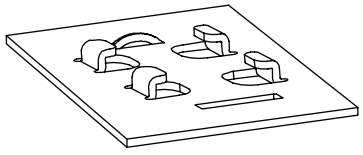

HOLE IN CHASSIS (REF.)

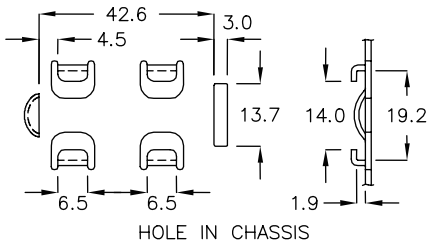


HOLE IN CHASSIS

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LFN-36C | 36.0 | 45.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP — 6-90-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

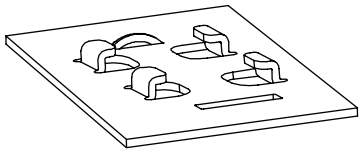

HOLE IN CHASSIS (REF.)

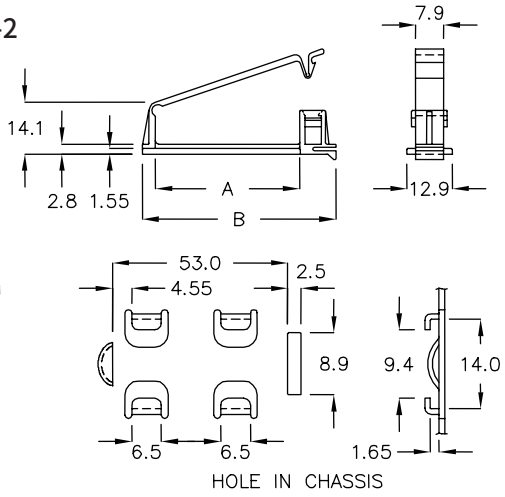


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LFN-40K | 40.75 | 54.65 | 100 |

## 排线固定板 FLAT CABLE CLAMP — 6-90-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



HOLE IN CHASSIS (REF.)

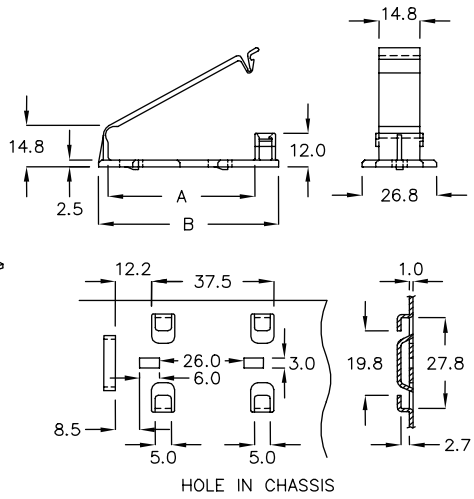


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LFZ-52K | 52.6 | 64.5 | 100 |

## 排线固定板 FLAT CABLE CLAMP — 6-90-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK



HOLE IN CHASSIS (REF.)

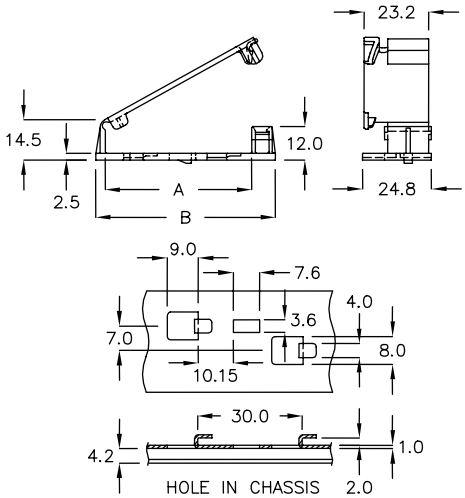


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LFZN-52A | 52.6 | 64.5 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 CABLE CLAMP 6-91-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

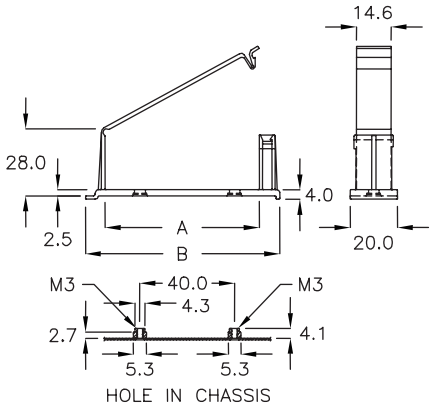


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FCWA-65KC | 65.1 | 82.1 | 100 |

## 电线固定板 CABLE CLAMP 6-91-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

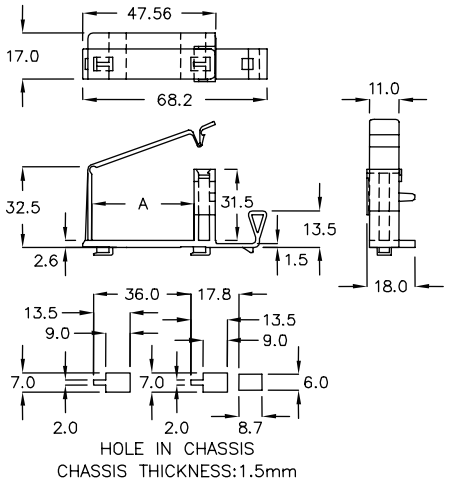


WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| FCAT-38D | 38.0 | 100 |

## 电线固定板 CABLE CLAMP 6-91-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

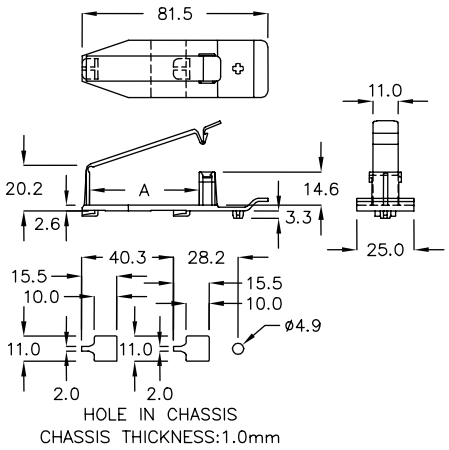


WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| FCA-48C | 48.0 | 100 |

## 隔离束线座 WIRE SADDLE 6-91-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




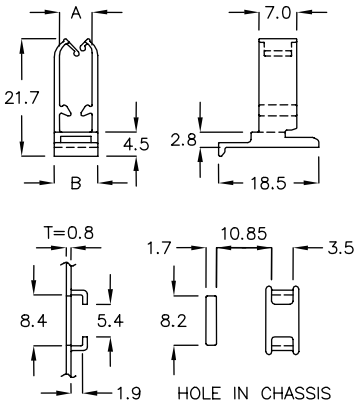


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CYJ-6A | 6.0 | 8.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP 6-92-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

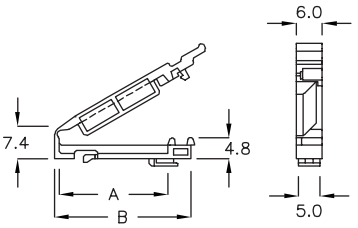


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FCK-31M | 24.9 | 31.3 | 500 |

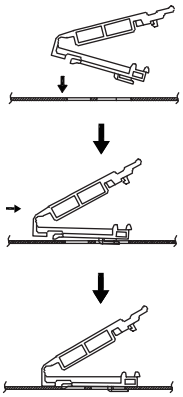




## 排线固定座 FLAT CABLE CLIP 6-92-2

- MATERLIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

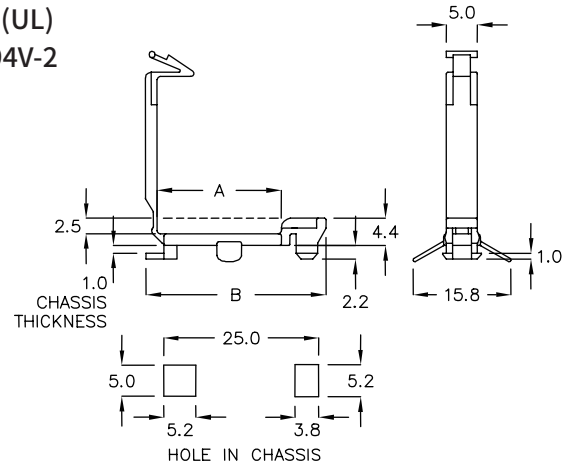


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CUD-20 | 20.0 | 29.0 | 200 |

## 电线固定座 WIRE MOUNT 6-92-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

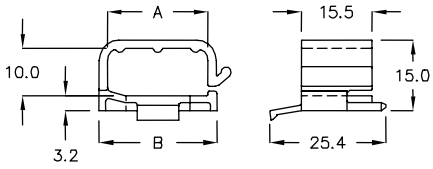


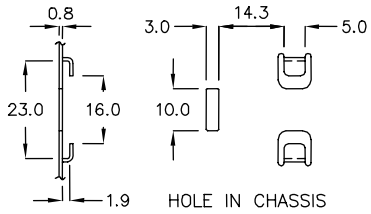


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FYC-22GL | 22.0 | 25.8 | 200 |

## 电线固定座 WIRE MOUNT 6-92-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

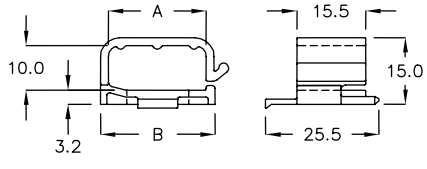



HOLE IN CHASSIS (REF.)

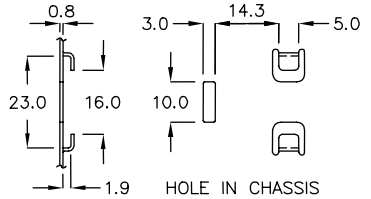


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FYC-22H | 22.0 | 25.8 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-93-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

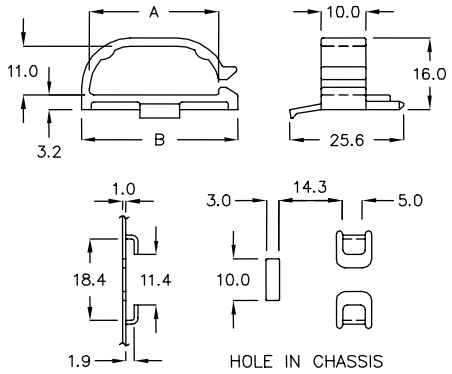


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FYC-29T | 29.0 | 35.2 | 200 |



## 电线固定座 WIRE MOUNT 6-93-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK

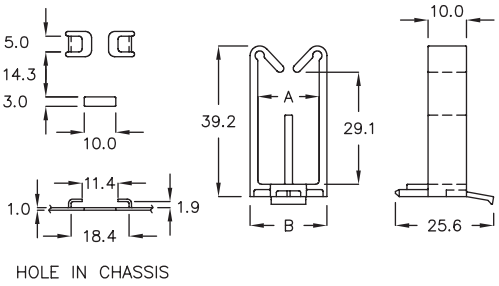


| PART NO | A | B | MATERIAL | PACKAGE |
|---|---|---|---|---|
| FYCA-16H | 16.0 | 20.0 | N66 | 200 |
| FYCA-20K | 20.8 | 25.8 | N66 | |
| ★ FYCA-16PC | 16.0 | 20.0 | PC | |
| ★ FYCA-20PC | 20.8 | 25.8 | PC | |

## 电线固定座 WIRE MOUNT 6-93-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

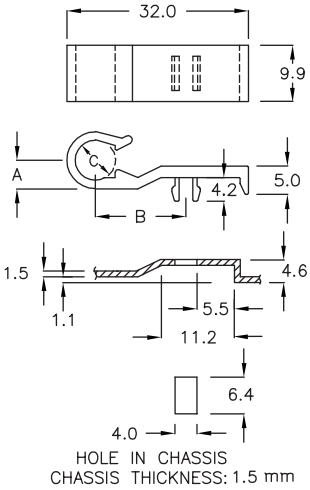


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CU-07C | 5.0 | 16.0 | ø6.9 | 500 |

## 压线座 WIRE MOUNT 6-93-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

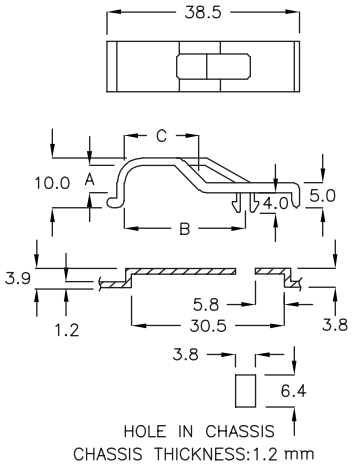


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CU-07F | 5.5 | 24.2 | 15.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定夹 FLAT CABLE CLAMP — 6-94-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FBC−15 | 27.0 | 15.0 | 500 |

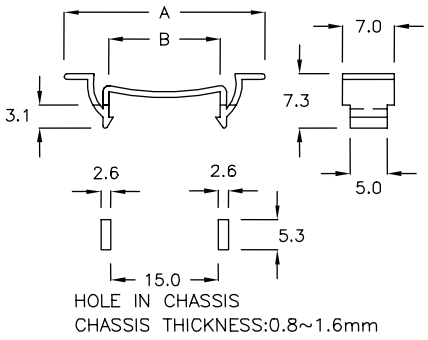

## 排线固定夹 FLAT CABLE CLAMP — 6-94-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FBC−21 | 33.0 | 21.0 | 500 |

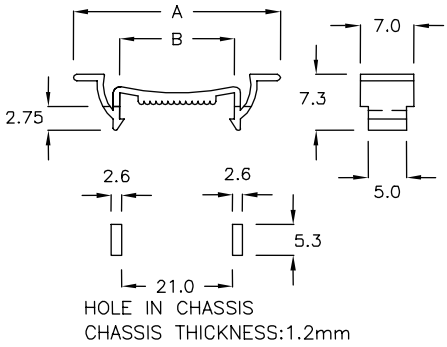

## 电线固定扣 WIRE CLIP — 6-94-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FBM−10A | 12.35 | 10.45 | 2000 |

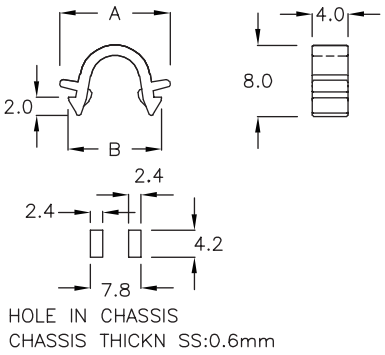

## 电线固定座 CABLE CLAMP — 6-94-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FDP−19 | 18.8 | 11.55 | 500 |



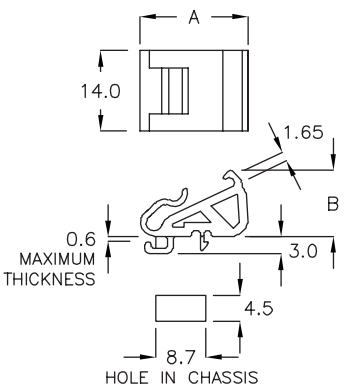




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP — 6-95-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

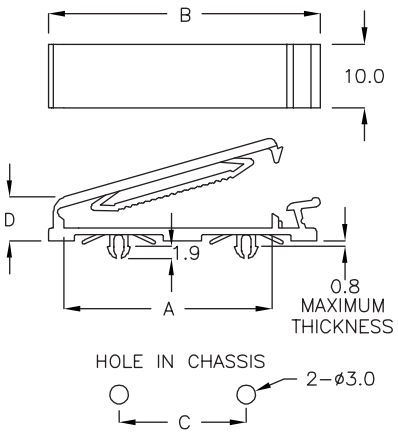


WITH LOCK FEATURE

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FCJ-25K | 32.7 | 42.7 | 20.0 | 6.9 | 100 |

## 排线固定夹 FLAT CABLE CLAMP — 6-95-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

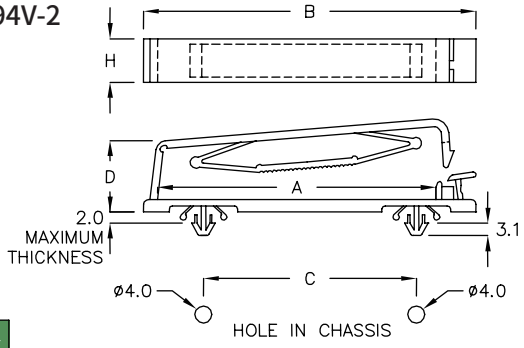


WITH LOCK FEATURE

| PART NO | A | B | C | D | H | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|---|
| FCC-15A | 14.4 | 32.6 | 15.0 | 13.7 | 9.1 | 10 PIN | 200 |
| FCC-25A | 25.0 | 39.6 | 20.0 | 13.0 | 13.3 | 20 PIN | |
| FCC-30A | 39.6 | 55.0 | 35.0 | 13.0 | 12.5 | 30 PIN | 100 |
| FCC-40B | 53.5 | 67.0 | 40.0 | 16.2 | 10.1 | 40 PIN | |
| FCC-50A | 64.6 | 77.6 | 49.7 | 13.6 | 10.1 | 50 PIN | |
| FCC-50C | 64.3 | 77.0 | 49.7 | 12.8 | 10.0 | 50 PIN | |

## 排线固定板 FLAT CABLE CLAMP — 6-95-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ASSEMBLY:
  1.INSERT ASLOPE
  2.DEPRESS THE CLAMP

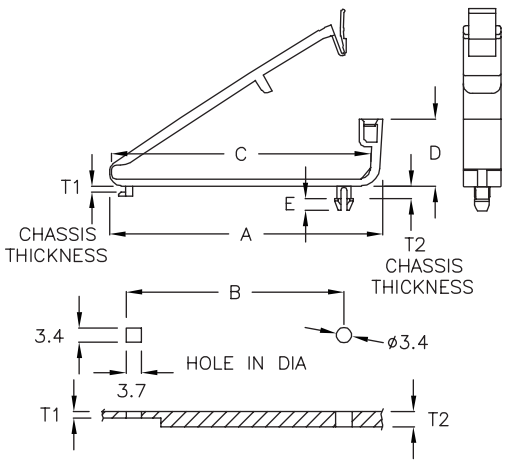


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | T1 | T2 | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| FCG-60A | 58.2 | 46.7 | 55.3 | 14.6 | 2.5 | 1.0 | 2.4 | 100 |
| FCG-60C | 58.2 | 46.7 | 55.3 | 11.9 | 1.8 | 1.0 | 1.0 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 排线固定板 FLAT CABLE CLAMP 6-96-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FC-27N | 27.8 | 10.5 | 500 |

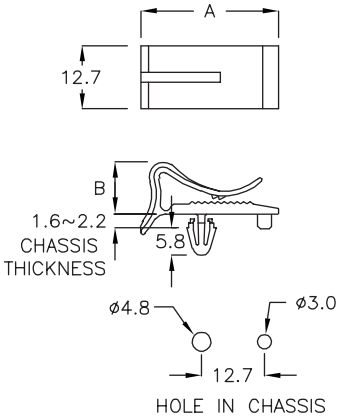

## 排线固定板 FLAT CABLE CLAMP 6-96-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ASSEMBLY:
  1.INSERT ASLOPE
  2.DEPRESS THE MOUNT

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| LFC-01 | 26.4 | 9.6 | 19.0 | 17.6 | 200 |

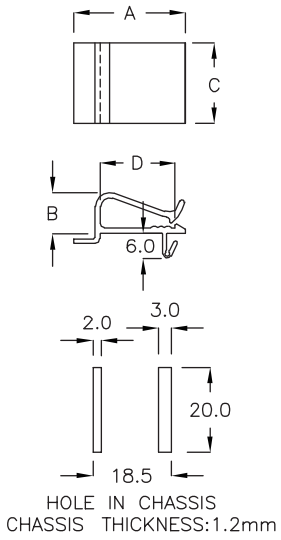

## 排线固定板 FLAT CABLE CLIP 6-96-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FC-45N | 45.0 | 10.9 | 200 |

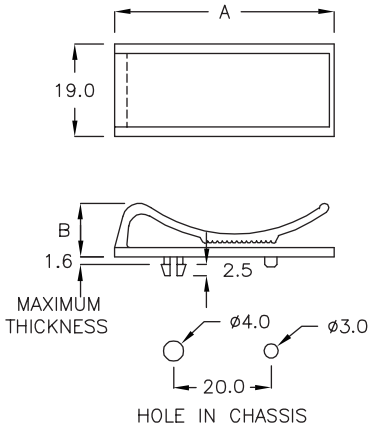

## 电线固定扣 WIRE CLIP 6-96-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A CLOSE DIA | B | PACKAGE |
|---|---|---|---|
| PC-08T | ø7.8 | 24.4 | 500 |
| PC-10T | ø10.0 | 29.3 | |

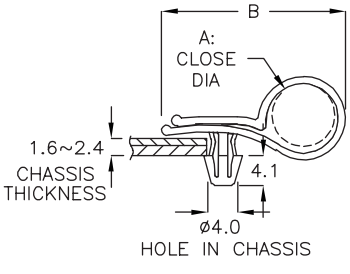




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定扣 WIRE CLIP 6-97-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TA–5 | 4.2 | 2.5 | 4.7 | 1000 |

## 电线固定扣 WIRE CLIP 6-97-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE




| PART NO | A CLOSE DIA | B | D HOLE IN CHASSIS | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TA–3C | ø3.8 | 15.5 | ø6.5 | 5.7 | 1.6 | 1000 |

## 电线固定扣 WIRE CLIP 6-97-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

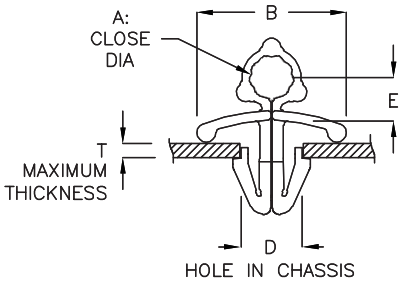


| PART NO | A CLOSE DIA | B | D HOLE IN CHASSIS | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TA–2K | ø2.9 | 12.0 | ø4.5 | 3.5 | 0.6~1.6 | 1000 |

## 电线固定扣 WIRE CLIP 6-97-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE




| PART NO | A CLOSE DIA | B | D HOLE IN CHASSIS | E | T MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TA–3M | ø3.8 | 14.8 | ø6.5 | 5.7 | 1.2 | 1000 |
| TA–5M | ø5.0 | 11.7 | ø6.5 | 4.3 | 2.0 | |
| TA–6 | ø5.5 | 12.5 | ø5.5 | 5.0 | 2.0 | |
| TA–7 | ø7.5 | 14.1 | ø5.5 | 4.6 | 2.0 | |
| TA–8 | ø8.4 | 16.5 | ø6.0 | 6.2 | 1.6 | |
| TA–08A | ø8.4 | 13.5 | ø5.5 | 6.2 | 1.6 | |
| TA–11 | ø11.1 | 16.2 | ø6.0 | 7.0 | 1.9 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE CLIP 6-98-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TF8-3DC | 8.1 | 3.5 | 19.2 | ø6.5 | 0.8~1.2 | 1000 |



## 隔离束线座 WIRE CLIP 6-98-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

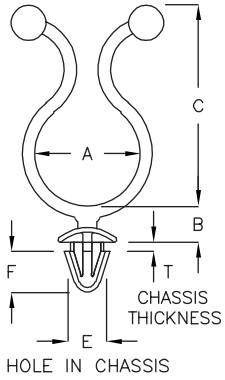


WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | E HOLE IN CHASSIS | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TN16-5 | 16.2 | 5.4 | 30.5 | ø14.0 | 1.4~1.7 | ø5.0 | 6.3 | 500 |



## 隔离束线座 WIRE CLIP 6-98-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

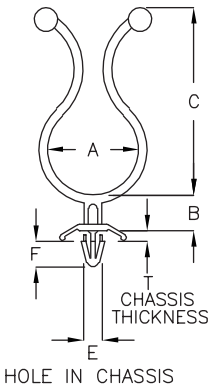


WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | E HOLE IN CHASSIS | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TB20-8 | 20.6 | 8.1 | 42.0 | ø18.5 | 1.0~2.0 | ø3.5 | 6.0 | 500 |
| TB8-8 | 9.5 | 8.0 | 23.3 | ø7.7 | 0.8~2.4 | ø3.0 | 3.7 | |



## 隔离束线座 WIRE CLIP 6-98-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

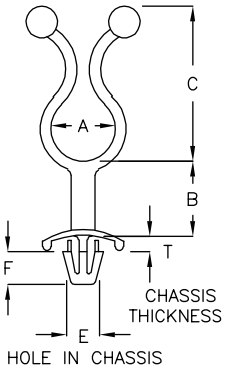


WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | E HOLE IN CHASSIS | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TA7-23 | 6.7 | 23.7 | 17.2 | ø5.5 | 0.5~2.0 | ø5.0 | 3.2 | 500 |
| TA8-15A | 8.6 | 15.0 | 26.3 | ø7.5 | 1.2~3.0 | ø4.0 | 5.2 | |
| TA9-15 | 10.7 | 15.0 | 26.3 | ø9.4 | 1.2~3.0 | ø4.0 | 5.2 | |
| TA11-4A | 10.8 | 4.6 | 26.3 | ø9.3 | 0.3~2.2 | ø5.0 | 5.6 | |
| TA11-50A | 11.5 | 50.2 | 26.7 | ø10.1 | 0.8~2.7 | ø4.8~ø5.0 | 5.1 | |
| TA14-2C | 14.8 | 2.4 | 30.5 | ø13.0 | 0.8~1.6 | ø4.8 | 5.1 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE CLIP — 6-99-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TA10−4 | 10.5 | 4.0 | 28.0 | ø9.3 | 1.9~2.9 | 500 |
| TA10−20 | 10.5 | 20.0 | 27.6 | ø9.4 | 1.8~2.8 | |
| TA16−3 | 15.9 | 3.5 | 32.0 | ø14.4 | 1.0~2.6 | |
| TA16−18 | 16.0 | 18.0 | 32.0 | ø14.4 | 1.2~2.4 | |

## 隔离束线座 WIRE CLIP — 6-99-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

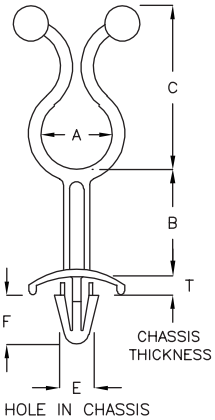


E154548

WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | E HOLE IN CHASSIS | F | UL | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| TA5−60 | 5.1 | 60.4 | 20.7 | ø4.4 | 0.8~2.7 | ø4.8~ø5.0 | 7.2 | | 500 |
| TA8−3 | 8.6 | 3.5 | 19.0 | ø7.0 | 1.2~1.8 | ø4.0 | 3.0 | UL | 1000 |
| TA8−3L | 8.6 | 3.2 | 19.0 | ø7.0 | 1.2~2.3 | ø4.0 | 3.3 | | |
| TA8−6 | 8.8 | 5.6 | 19.1 | ø7.0 | 1.2~1.8 | ø4.8~ø5.0 | 7.6 | UL | |
| TA8−10 | 8.0 | 10.5 | 22.7 | ø6.8 | 1.2~2.8 | ø5.0 | 7.2 | UL | 500 |
| TA8−20 | 8.0 | 20.2 | 22.7 | ø6.8 | 1.2~2.8 | ø5.0 | 7.2 | UL | |
| TA10−3 | 10.9 | 3.0 | 27.0 | ø9.5 | 1.1~2.6 | ø5.0 | 7.3 | UL | |
| TA10−3A | 10.9 | 3.1 | 27.0 | ø9.5 | 1.2~3.8 | ø5.0 | 6.6 | | |
| TA10−15 | 11.0 | 15.5 | 27.0 | ø9.7 | 1.1~2.6 | ø5.0 | 7.1 | UL | |
| TA10−35 | 10.9 | 35.0 | 27.0 | ø9.6 | 1.5~3.0 | ø5.0 | 7.2 | UL | |
| TA11−4 | 11.0 | 4.4 | 26.4 | ø9.5 | 0.6~2.4 | ø5.0 | 7.5 | UL | |
| TA11−5 | 11.5 | 4.7 | 28.0 | ø10.3 | 0.8~2.0 | ø4.0 | 5.5 | | |
| TA11−50 | 11.5 | 50.2 | 26.7 | ø10.1 | 0.8~2.7 | ø4.8~ø5.0 | 7.1 | UL | |
| TA11−21 | 11.8 | 21.2 | 27.5 | ø10.2 | 0.6~2.7 | ø5.0 | 6.6 | UL | |
| TA11−43 | 11.5 | 43.5 | 26.7 | ø10.1 | 0.8~2.7 | ø4.8~ø5.0 | 7.0 | | |
| TA12−10 | 12.0 | 10.1 | 27.0 | ø10.2 | 1.2~3.2 | ø4.8~ø5.0 | 6.6 | | |
| TA14−2 | 14.4 | 2.4 | 30.5 | ø13.0 | 0.3~1.8 | ø4.8 | 7.6 | | |
| TA16−4 | 16.0 | 3.5 | 30.8 | ø14.0 | 1.3~2.9 | ø5.0 | 7.2 | UL | |
| TA16−60 | 16.0 | 60.4 | 32.0 | ø14.5 | 0.8~2.7 | ø4.8~ø5.0 | 7.1 | UL | 200 |
| TA19−30 | 18.7 | 30.0 | 36.4 | ø16.5 | 0.9~3.0 | ø4.8~ø5.0 | 7.0 | | |
| TA20−8 | 20.6 | 8.1 | 36.7 | ø18.4 | 0.8~3.0 | ø4.8~ø5.0 | 7.1 | | 500 |
| TA20−16 | 20.3 | 16.2 | 36.3 | ø18.3 | 1.5~3.1 | ø5.0 | 7.2 | UL | |
| TA24−3 | 24.3 | 3.0 | 43.6 | ø22.0 | 0.6~2.7 | ø5.0 | 6.9 | UL | |
| TA37−3 | 37.5 | 3.3 | 59.3 | ø35.0 | 1.1~2.4 | ø4.8~ø5.0 | 6.7 | UL | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-100-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

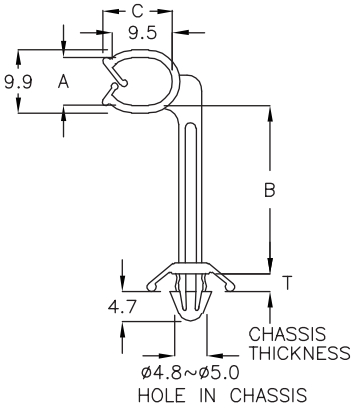


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TUA-34 | 7.5 | 34.2 | 11.0 | 0.5~2.1 | 500 |

## 隔离束线座 WIRE SADDLE 6-100-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

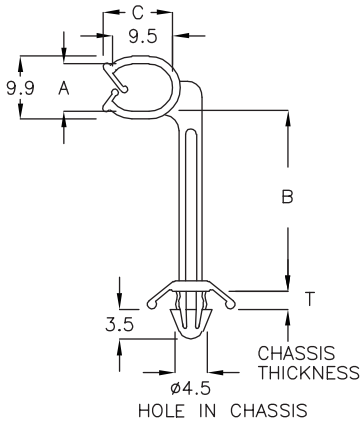


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TUA-40 | 7.5 | 34.0 | 11.0 | 0.8~1.6 | 500 |

## 隔离束线座 WIRE CLIP 6-100-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

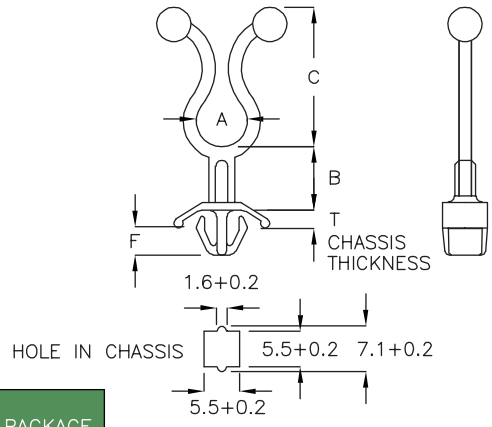


Built-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | T CHASSIS THICKNESS | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| TD5-36 | 5.4 | 36.5 | 18.4 | ø4.5 | 0.8~1.2 | 3.8 | 500 |
| TD8-3 | 8.0 | 3.2 | 21.7 | ø6.7 | 0.8~1.4 | 5.3 | 1000 |
| TD12-3 | 11.8 | 3.3 | 29.0 | ø10.6 | 0.8~1.4 | 5.3 | |
| TD11-20A | 11.5 | 19.9 | 28.2 | ø10.0 | 0.8~2.2 | 3.6 | 500 |



## 隔离束线座 WIRE CLIP 6-100-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

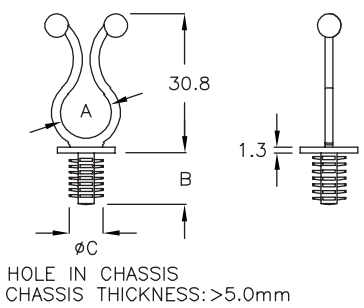


WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE A | PACKAGE |
|---|---|---|---|---|---|
| TG12-03 | 11.8 | 11.5 | 6.35 | ø10.5 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE CLIP — 6-101-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

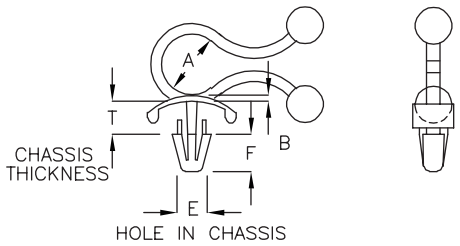


WITH LOCK FEATURE

| PART NO | A | B | CLOSE A | T CHASSIS THICKNESS | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| TDY8−1 | 8.2 | 1.0 | ø7.0 | 2.7~3.9 | ø4.0 | 5.1 | 1000 |
| TDY8−1A | 8.3 | 1.0 | ø7.1 | 0.8~2.1 | ø3.0 | 3.7 | |
| TDY8−1C | 8.2 | 1.0 | ø7.1 | 0.8~2.3 | ø4.5 | 4.9 | |

## 隔离束线座 WIRE CLIP — 6-101-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

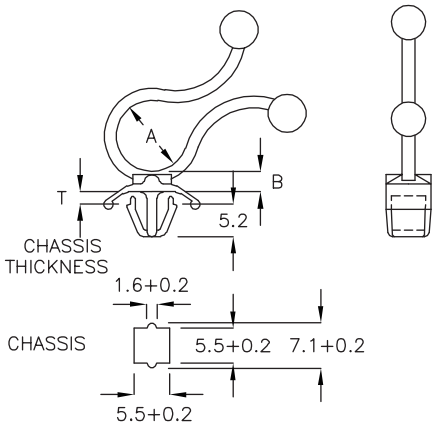


Built −In Anti−Spin Function
WITH LOCK FEATURE

| PART NO | A | B | CLOSE A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TDY11−3 | 11.0 | 3.2 | ø9.6 | 0.8~1.2 | 500 |



## 隔离束线座 WIRE CLIP — 6-101-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

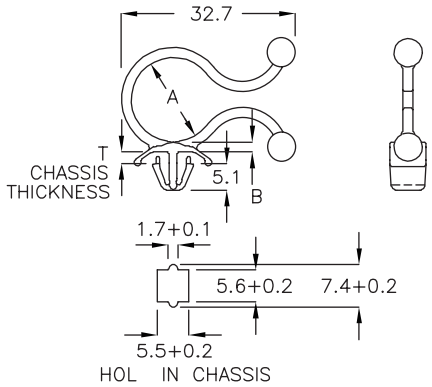


Built −In Anti−Spin Function
WITH LOCK FEATURE

| PART NO | A | B | CLOSE A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TDR16−1K | 16.2 | 1.9 | ø14.5 | 1.2~1.5 | 500 |

## 隔离束线座 WIRE SADDLE — 6-101-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

E154548

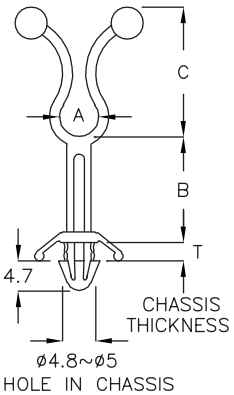


WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TK6−34 | 6.1 | 34.0 | 20.2 | ø5.1 | 0.5~2.3 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE CLIP 6-102-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

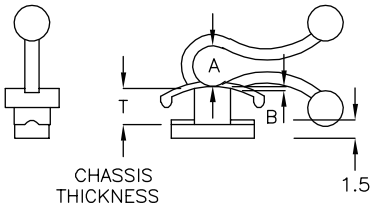


Insert With 90 Degree Angle
And Press Down
WITH LOCK FEATURE

| PART NO | A | B | CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TEY4-1 | 4.5 | 0.25 | ø3.7 | 2.7~3.7 | 1000 |




## 隔离束线座 WIRE CLIP 6-102-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

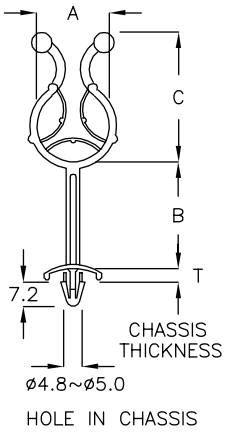


WITH LOCK FEATURE

| PART NO | A | B | C | MAX BUNDLE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TE21-04 | 20.5 | 4.0 | 37.2 | ø14.5 | 1.0~3.1 | 500 |
| TE21-32 | 20.5 | 32.1 | 37.2 | ø14.5 | 1.0~3.1 | |
| TE21-40 | 20.5 | 40.1 | 37.2 | ø14.5 | 1.0~3.1 | |

## 隔离束线座 WIRE SADDLE 6-102-3



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

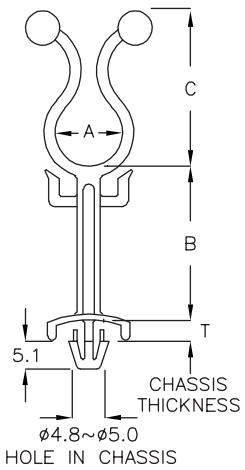


WITH LOCK FEATURE

| PART NO | A | B | C | CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| TX11-52 | 11.8 | 52.5 | 26.6 | ø10.2 | 0.3~2.5 | 500 |

## 隔离束线座 WIRE SADDLE 6-102-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




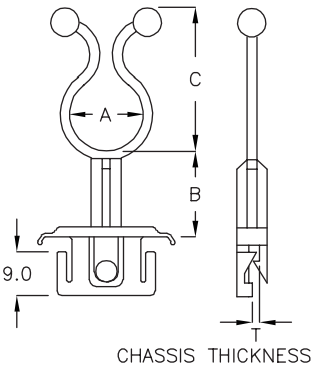


WITH LOCK FEATURE

| PART NO | A | B | C | T CHASSIS THICKNESS | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| TT15-10 | 14.9 | 10.0 | 29.2 | 1.6~2.0 | ø13.3 | 500 |
| TT15-10A | 14.9 | 10.0 | 29.2 | 2.1~2.5 | | |
| TT15-17 | 14.9 | 17.4 | 29.2 | 1.6~2.0 | | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 隔离束线座 WIRE SADDLE 6-103-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

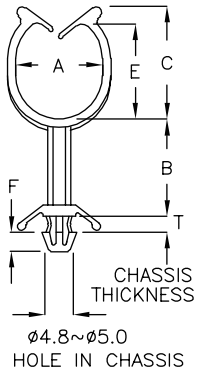


| PART NO | A | B | C | E | T CHASSIS THICKNESS | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| TU14-7 | 14.5 | 7.0 | 19.5 | 16.2 | 0.5~2.0 | 3.4 | 500 |
| TU14-12 | 14.8 | 12.0 | 19.5 | 16.7 | 0.5~2.3 | 2.8 | |
| TU14-17 | 14.8 | 16.8 | 19.5 | 16.2 | 0.5~2.3 | 3.5 | |
| TU14-25 | 14.8 | 25.0 | 19.5 | 16.2 | 0.5~2.3 | 3.5 | |
| TU14-27 | 14.8 | 26.8 | 19.5 | 16.2 | 0.5~2.3 | 3.6 | |
| TU14-37 | 14.8 | 36.8 | 19.5 | 16.2 | 0.5~2.3 | 3.5 | |



## 隔离束线座 WIRE SADDLE 6-103-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

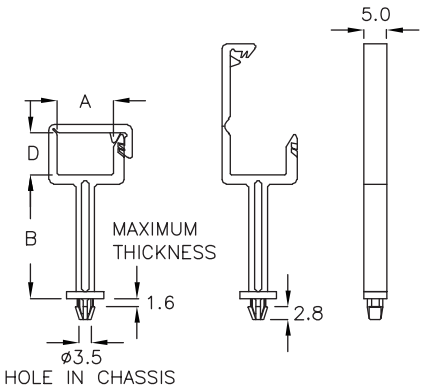


WITH LOCK FEATURE

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| CHB-26A | 12.1 | 26.7 | 9.1 | 500 |

## 隔离束线座 WIRE SADDLE 6-103-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A SUITABLE BUNDLE DIA | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TUT-10 | ø9.0~ø12.5 | 10.0 | 15.6 | 0.5~2.3 | 500 |

## 隔离束线座 WIRE SADDLE 6-103-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

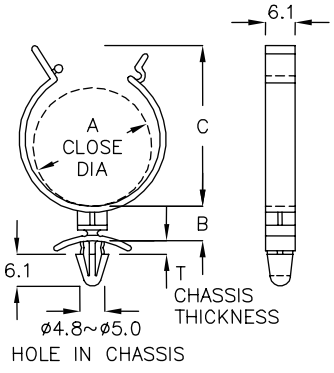


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| TC20-6 | ø20.5 | 6.55 | 29.7 | 0.8~2.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-104-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

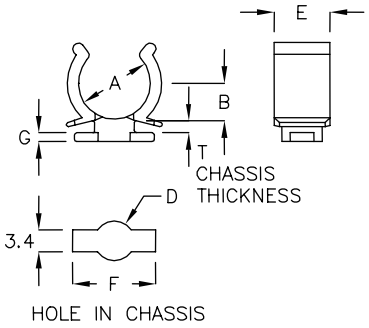


Insert With 90 Degree Angle
And Press Down

| PART NO | A | B | D HOLE IN CHASSIS | E | F | G | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CHQ-03 | ø3.1 | 3.2 | ø4.2 | 5.6 | 10.1 | 1.3 | 1.2 | 2000 |
| CHQ-07 | ø7.3 | 4.2 | ø5.2 | 7.0 | 10.4 | 1.3 | 1.2 | |
| CHQ-08 | ø7.9 | 4.3 | ø5.2 | 7.0 | 10.4 | 1.3 | 1.2 | 1000 |
| CHQ-9 | ø8.5 | 4.7 | ø5.2 | 7.0 | 10.4 | 1.05 | 1.2 | |
| CHQ-11 | ø10.7 | 5.3 | ø5.2 | 7.0 | 10.4 | 1.3 | 1.3 | |

## 隔离束线座 WIRE SADDLE 6-104-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

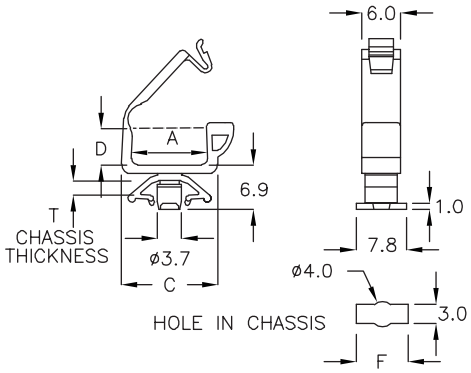


INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

| PART NO | A | C | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CKB-7A | 11.0 | 15.0 | 7.0 | 8.2 | 1.6 | 500 |
| CKB-10A | 16.0 | 19.8 | 10.0 | 8.0 | 0.8 | |

## 隔离束线座 WIRE SADDLE 6-104-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

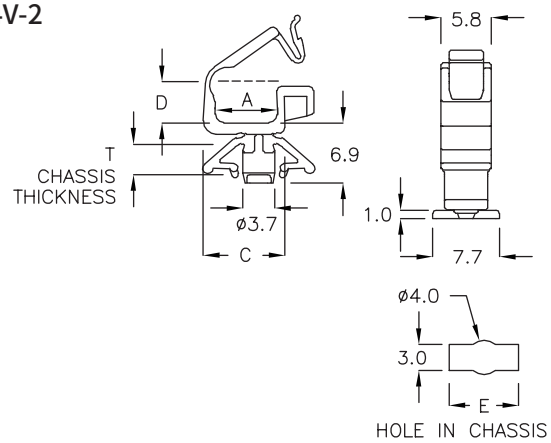


INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

| PART NO | A | C | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CKB-4JH | 7.2 | 9.4 | 4.8 | 8.0 | 1.0~1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-105-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CKA-2A | 4.0 | 1.0 | 2000 |

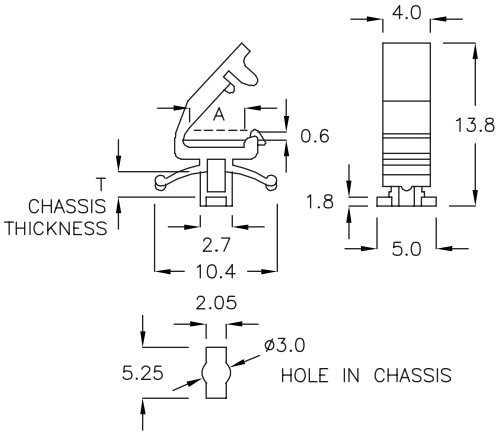




## 隔离束线座 WIRE SADDLE — 6-105-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

INSERT WITH 90 DEGREE ANGLE
AND PRESS DOWN
WITH LOCK FEATURE

| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CKN-11Y | 10.9 | 9.2 | 0.8~1.6 | 500 |

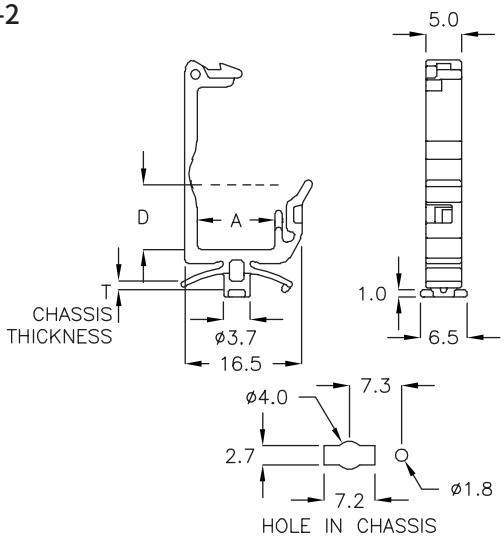

## 电线固定座 WIRE MOUNT — 6-105-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

Build-In Anti-Spin Function
WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CKY-11A | 11.9 | 0.8~1.0 | 500 |

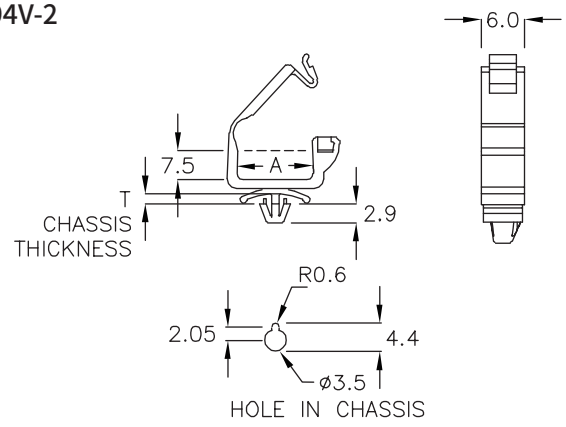




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-106-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

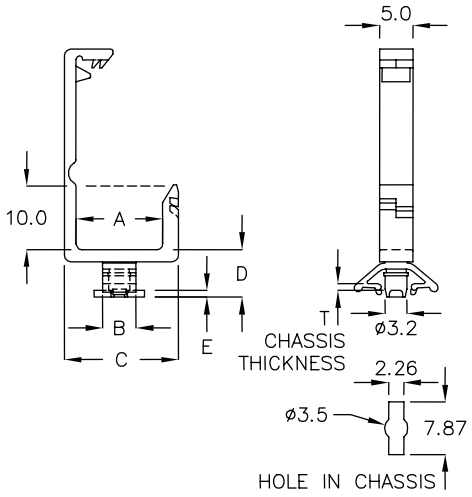


Insert With 90 Degree Angle
And Press Down
WITH LOCK FEATURE

| PART NO | A | B | C | D | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CMG-10 | 13.0 | 5.0 | 17.2 | 7.15 | 1.0 | 0.6~1.0 | 500 |
| CMG-24J | 24.0 | 9.0 | 28.2 | 7.35 | 1.2 | 0.8~1.0 | |

## 隔离束线座 WIRE SADDLE 6-106-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

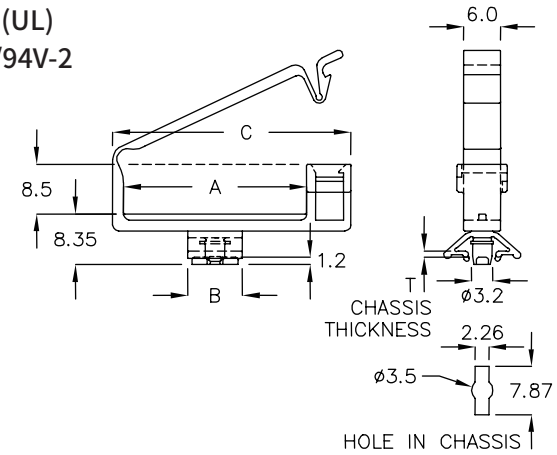


Insert With 90 Degree Angle
And Press Down
WITH LOCK FEATURE

| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CMGA-30 | 30.0 | 9.0 | 39.1 | 0.8~1.0 | 200 |

## 电线固定座 WIRE MOUNT 6-106-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

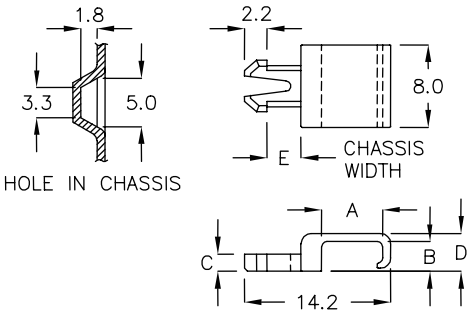


| PART NO | A | B | C | D | E CHASSIS WIDTH | PACKAGE |
|---|---|---|---|---|---|---|
| CKT-1A | 5.9 | 2.9 | 1.7 | 3.7 | 3.1 | 1000 |
| CKT-1C | 5.9 | 2.7 | 1.7 | 3.5 | 3.1 | |

## 电线固定座 WIRE MOUNT 6-106-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

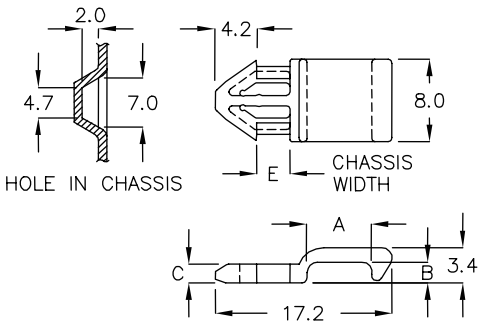


| PART NO | A | B | C | E CHASSIS WIDTH | PACKAGE |
|---|---|---|---|---|---|
| CKT-03 | 6.3 | 2.0 | 1.8 | 3.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-107-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

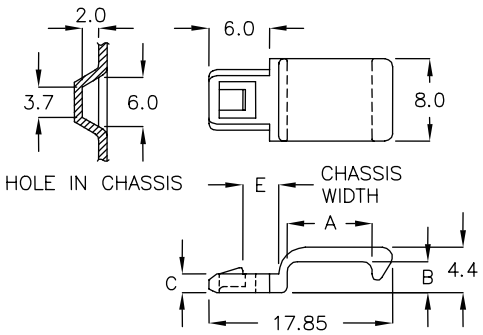


| PART NO | A | B | C | E CHASSIS WIDTH | PACKAGE |
|---|---|---|---|---|---|
| CKT−04 | 8.3 | 3.0 | 1.8 | 3.0 | 1000 |

## 电线固定座 WIRE MOUNT 6-107-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ FAS−5A | 5.2 | 1.4 | 1.8 | 1000 |

## 隔离束线座 WIRE SADDLE 6-107-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

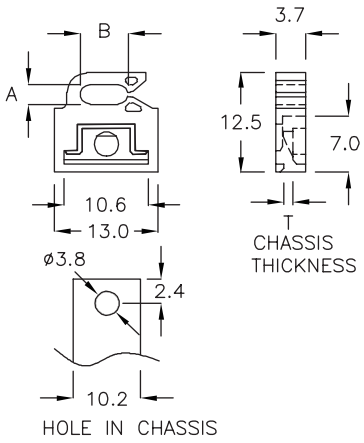


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| CTR−01 | 2.5 | 6.0 | 1.2~1.3 | 2000 |



## 隔离束线座 WIRE SADDLE 6-107-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

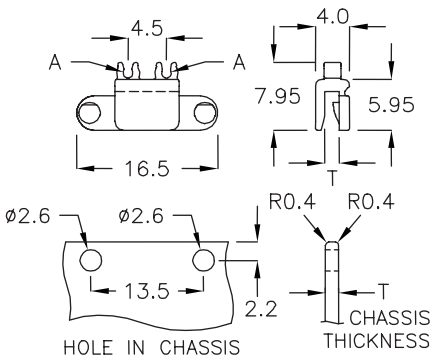


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMM−1AS | ø1.1 | 1.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-108-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

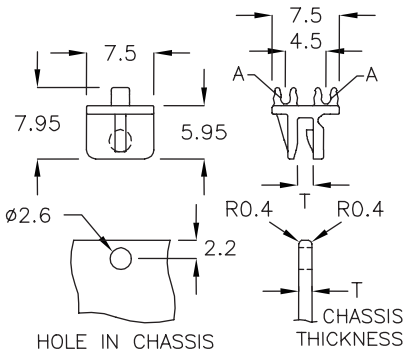


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CMQ−1TJ | ø1.1 | 1.6 | 2000 |



## 电线固定座 WIRE MOUNT 6-108-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




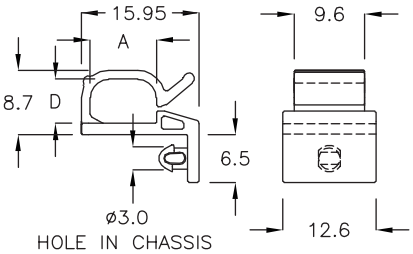


| PART NO | A | D | PACKAGE |
|---|---|---|---|
| FAM−16 | 9.0 | 6.0 | 500 |

## 电线固定座 WIRE MOUNT 6-108-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

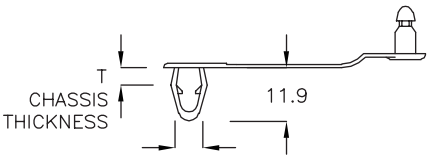








SUITABLE BUNDLE DIA

| PART NO | A SUITABLE BUNDLE DIA | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| PDT−06 | ø5.0~ø6.5 | 47.6 | 0.8~2.4 | 500 |
| PDT−08 | ø7.0~ø8.5 | 53.6 | 0.8~2.4 | |
| PDT−10 | ø9.5~ø11.0 | 57.3 | 0.8~2.4 | |

## 电线固定座 WIRE MOUNT 6-108-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

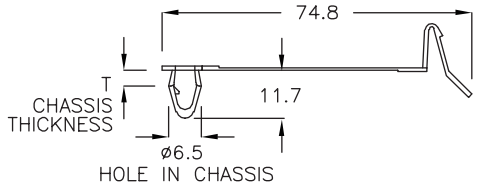








SUITABLE BUNDLE DIA

| PART NO | A SUITABLE BUNDLE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| PDT−1A | ø13.0 | 0.8~2.4 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-109-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

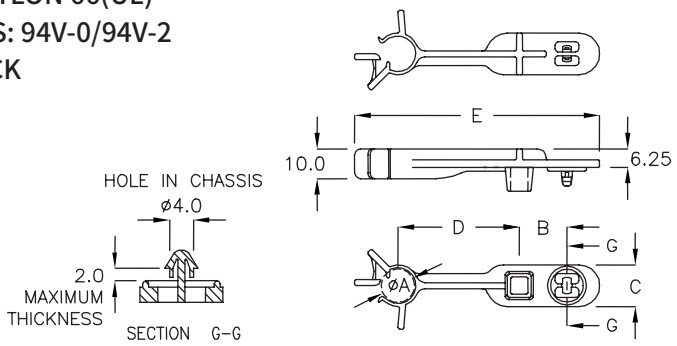


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FLA-50 | 9.6 | 16.0 | 14.0 | 40.3 | 82.3 | 100 |

## 隔离束线座 WIRE SADDLE 6-109-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

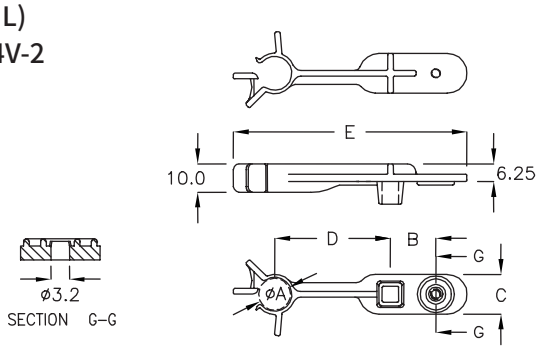


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| FLA-50A | 9.6 | 16.0 | 14.0 | 40.3 | 82.3 | 100 |

## 电线固定夹 WIRE CLIP 6-109-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

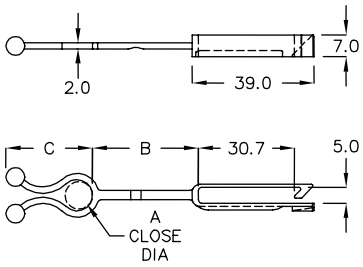


WITH LOCK FEATURE

| PART NO | A CLOSE DIA | B | C | PACKAGE |
|---|---|---|---|---|
| CXT-10 | ø8.8 | 33.6 | 27.8 | 100 |

## 电线固定座 WIRE MOUNT 6-109-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

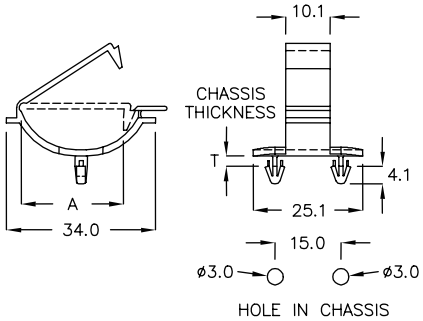


WITH LOCK FEATURE

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CKK-02 | 22.8 | 1.8~2.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 理线座 WIRE MOUNT 6-110-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| DFA-22C | 22.5 | 500 |

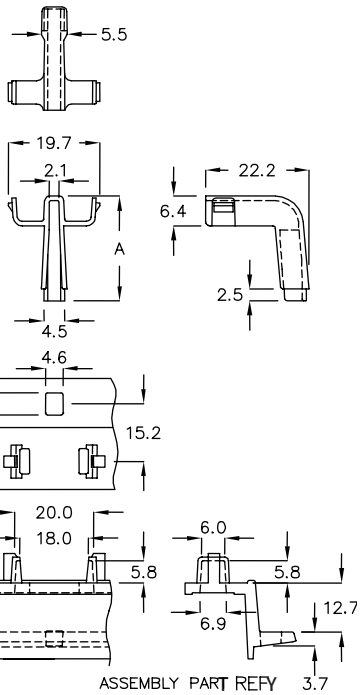


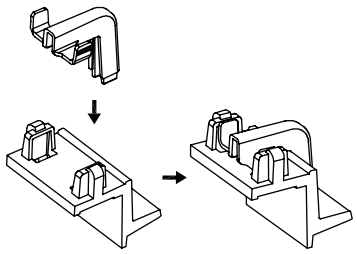

组装方式

## 电线固定座 WIRE MOUNT 6-110-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

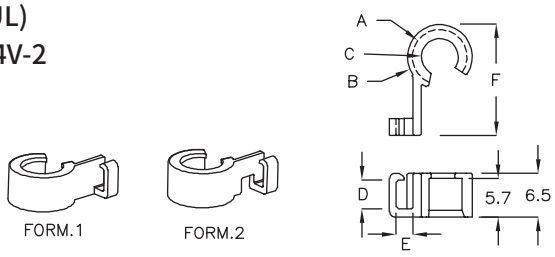


| PART NO | A | B | C | D | E | F | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| KYK-08 | ø8.1 | ø9.7 | ø5.5 | 4.3 | 2.5 | 16.5 | 1 | 1000 |
| KYK-10A | ø10.1 | ø11.9 | ø7.7 | 4.3 | 2.5 | 17.6 | 1 | |
| KYK-11 | ø10.1 | ø11.9 | ø7.7 | 4.3 | 2.5 | 17.6 | 2 | |
| KYK-14D | ø12.1 | ø14.1 | ø9.7 | 4.3 | 2.5 | 20.7 | 2 | |

## 电线固定座 WIRE MOUNT 6-110-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| KYC-10RM | ø10.0 | 1000 |



## 电线固定座 WIRE MOUNT 6-110-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| KYF-10 | ø10.1 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-111-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| KYF−10BQ | ø10.0 | 1000 |



## 电线固定座 WIRE MOUNT 6-111-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| KYM−10TP | ø10.4 | 1000 |

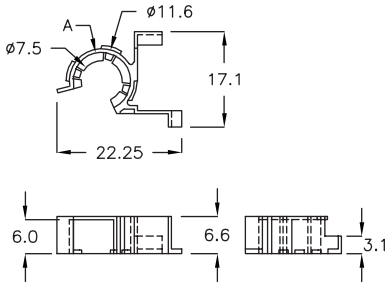

## 电线固定座 WIRE MOUNT 6-111-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| KYR−10C | ø10.1 | 1000 |

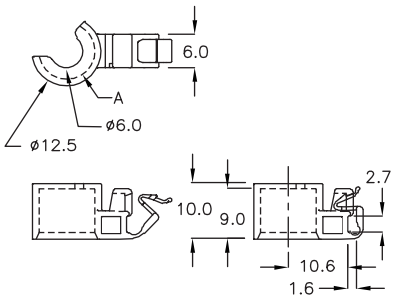

## 电线固定座 WIRE MOUNT 6-111-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| KYR−10DA | ø10.1 | 1000 |

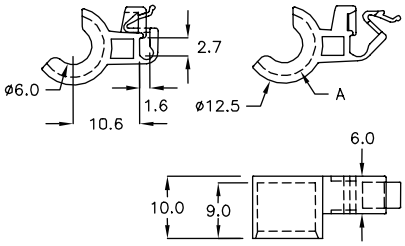

## 电线固定座 WIRE MOUNT 6-111-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| KYT−08 | ø7.9 | 1000 |

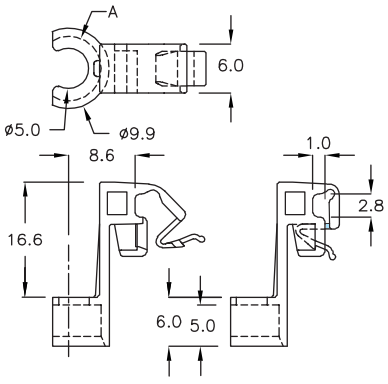


6

线材固定 线材隔离 CABLE CLAMP, SADDLE

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-112-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| KYT-8MY | ø7.9 | 1000 |

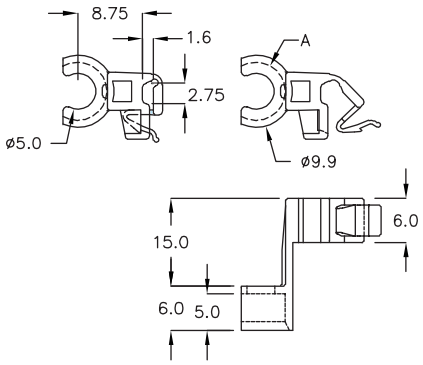

## 电线固定座 WIRE MOUNT 6-112-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| KYW-8HL | ø7.9 | 1000 |

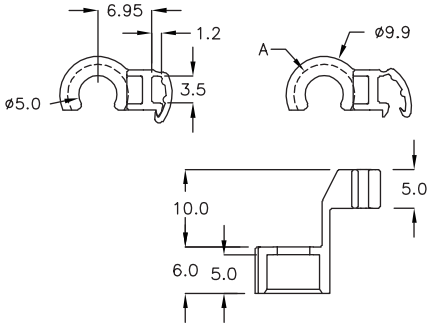

## 电线固定座 WIRE MOUNT 6-112-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

WITH LOCK FEATURE

| PART NO | A | PACKAGE |
|---|---|---|
| KYH-08 | ø7.9 | 1000 |

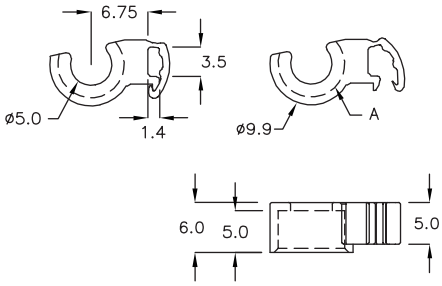

## 隔离束线座 WIRE SADDLE 6-112-4

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CIM-27A | ø3.8 | 1000 |

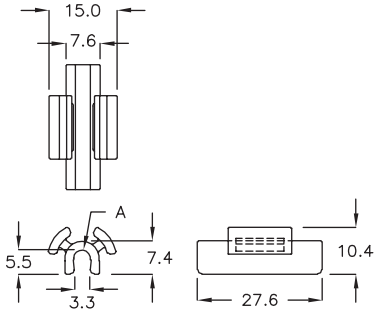

## 电线固定扣 WIRE MOUNT 6-112-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHST-25 | ø12.7 | ø5.0 | 25.07 | 500 |
| CHST-28 | ø15.7 | ø5.0 | 28.1 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定环 TWIST LOCK — 6-113-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

E154548(S)

| PART NO | A | B | C | D | CLOSE DIA | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| A–3DS | 3.9 | 6.3 | 14.5 | 1.3 | ø3.0 | | 1000 |
| A–4A | 4.4 | 7.2 | 14.95 | 1.6 | ø3.5 | | |
| A–5KA | 5.3 | 8.7 | 18.05 | 1.65 | ø4.2 | | |
| A–5 | 5.0 | 8.5 | 22.0 | 1.8 | ø4.2 | UL | |
| A–8 | 8.3 | 12.0 | 26.2 | 2.3 | ø7.0 | UL | |
| A–11 | 11.0 | 15.2 | 30.0 | 2.3 | ø9.7 | UL | |
| A–13 | 13.2 | 17.2 | 32.5 | 2.3 | ø11.5 | | |
| A–14A | 14.7 | 18.7 | 35.0 | 2.0 | ø13.2 | | |
| A–15 | 14.7 | 18.8 | 33.0 | 2.0 | ø13.0 | | |
| A–15A | 15.0 | 19.0 | 33.7 | 1.8 | ø14.0 | | 500 |
| A–18 | 19.2 | 23.3 | 38.5 | 2.0 | ø16.3 | UL | |
| A–19 | 18.9 | 22.9 | 35.0 | 2.2 | ø17.3 | | |
| A–22 | 22.0 | 27.5 | 42.0 | 2.0 | ø20.0 | UL | |
| ★ A–22K | 22.4 | 27.4 | 40.1 | 2.0 | ø20.0 | | |
| A–25 | 25.0 | 29.7 | 44.8 | 2.35 | ø23.0 | | |
| A–28 | 28.7 | 33.5 | 55.0 | 2.0 | ø26.6 | | |
| ★ A–29 | 29.3 | 34.0 | 48.6 | 2.3 | ø27.0 | | |
| A–30 | 29.6 | 33.7 | 55.5 | 2.0 | ø27.0 | | |
| A–38 | 38.0 | 44.0 | 63.0 | 2.3 | ø35.0 | | |



## 电线固定环 TWIST LOCK — 6-113-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




WITH LOCK FEATURE

E154548

| PART NO | A | B | C | D | CLOSE DIA | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| 2A–7 | 7.0 | 32.7 | 73.8 | 1.9 | ø5.9 | UL | 500 |
| 2A–7L | 7.0 | 60.0 | 101.5 | 2.0 | ø5.8 | | |
| 2A–8 | 8.0 | 10.2 | 56.5 | 1.9 | ø6.5 | UL | |
| 2A–10 | 10.0 | 30.4 | 82.2 | 2.0 | ø8.6 | | |
| 2A–10A | 10.0 | 30.0 | 82.2 | 3.0 | ø8.6 | | |
| 2A–13S | 14.8 | 85.0 | 147.8 | 2.0 | ø12.2 | | 200 |



## 隔离束线座 WIRE SADDLE — 6-113-3

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHA–01 | 65.0 | 80.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-114-1

- MATERIAL: PP
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| 6FW-11 | 22.0 | 100 |

## 光纤固定座 FIBER HOUSING 6-114-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | B | C SUITABLE CABLE DIA | PACKAGE |
|---|---|---|---|---|
| CKR-01 | 11.5 | 6.0 | ø4.0 ~ ø4.2 | 1000 |



## 光纤固定座 FIBER HOUSING 6-114-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 994V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | B | C SUITABLE CABLE DIA | PACKAGE |
|---|---|---|---|---|
| CKR-02 | 15.0 | 5.3 | ø5.3 ~ ø5.5 | 1000 |
| CKR-3A | 16.1 | 5.3 | ø5.8 ~ ø6.0 | |

## 光纤固定座 FIBER HOUSING 6-114-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | B | C SUITABLE CABLE DIA | PACKAGE |
|---|---|---|---|---|
| CKR-1P | 10.5 | 5.3 | ø1.5~ø1.7 | 1000 |

## 电线固定座 TIE MOUNT 6-114-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




WITH LOCK FEATURE

| PART NO | A | C SUITABLE CABLE DIA | PACKAGE |
|---|---|---|---|
| CHH-01 | 8.0 | ø8.6 ~ ø8.8 | 500 |
| CHH-02 | 6.5 | ø5.0 ~ ø5.2 | 1000 |
| CHH-03 | 6.5 | ø6.0 ~ ø6.2 | |
| CHH-04 | 8.0 | ø7.0 ~ ø7.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 线夹 TUBE BINDER 6-115-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

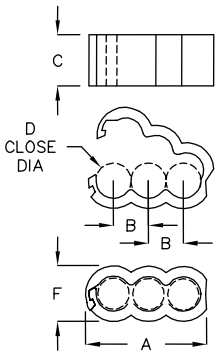


WITH LOCK FEATURE

| PART NO | A | B | C | D CLOSE DIA | F | PACKAGE |
|---|---|---|---|---|---|---|
| FCM-20 | 14.2 | 4.1 | 6.0 | ø4.0 | 6.9 | 1000 |
| FCM-20C | 8.9 | 2.3 | 5.0 | ø2.0 | 4.0 | |

## 线夹 TUBE BINDER 6-115-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




WITH LOCK FEATURE

| PART NO | A | B | C | D CLOSE DIA | F | PACKAGE |
|---|---|---|---|---|---|---|
| FQC-17B | 19.1 | 7.15 | 6.0 | ø4.6 | 8.5 | 1000 |
| FQC-22D | 25.8 | 7.15 | 6.0 | ø6.7 | 11.2 | |

## 线夹 TUBE BINDER 6-115-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

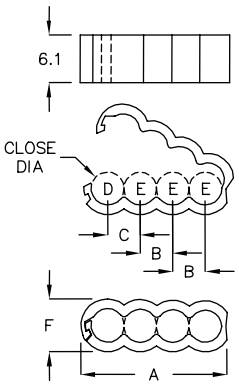


WITH LOCK FEATURE

| PART NO | A | B | C | D CLOSE DIA | E CLOSE DIA | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| FCM-20A | 18.4 | 4.1 | 4.1 | ø4.2 | ø4.2 | 7.1 | 1000 |
| FCM-20F | 22.9 | 5.1 | 5.1 | ø5.2 | ø5.2 | 8.3 | |
| FCM-20H | 26.5 | 6.2 | 5.55 | ø4.9 | ø6.2 | 9.2 | |

## 线夹 TUBE BINDER 6-115-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

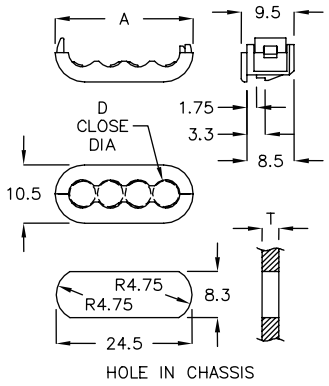


WITH LOCK FEATURE

| PART NO | A | D CLOSE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| FCH-24A | 24.8 | ø4.7~ø5.0 | 1.5 or 3.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 CABLE CLAMP — 6-116-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

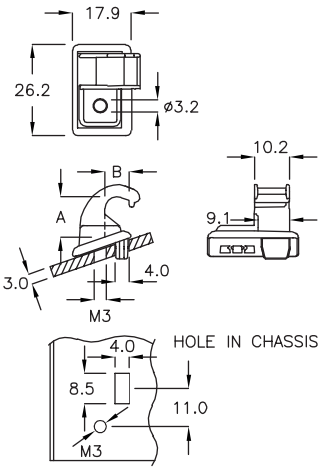


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BAR-01 | 11.6 | 7.0 | 100 |

## 排线固定板 FLAT CABLE CLAMP — 6-116-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

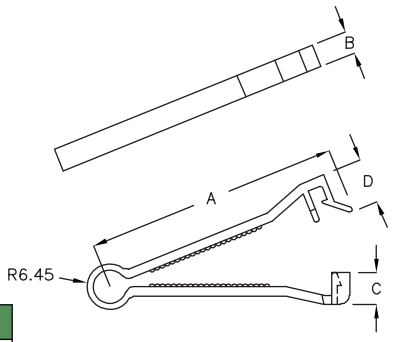


WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCM-35A | 70.55 | 6.4 | 8.9 | 12.5 | 40 PIN | 200 |

## 排线固定板 FLAT CABLE CLAMP — 6-116-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

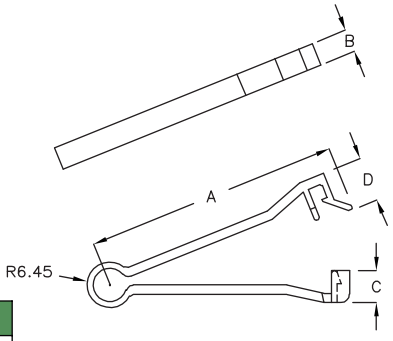


WITH LOCK FEATURE

| PART NO | A | B | C | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|---|
| FCM-35S | 62.55 | 6.4 | 8.9 | 12.5 | 30 PIN | 200 |
| FCM-35 | 70.55 | 6.4 | 8.9 | 12.5 | 40 PIN | |
| FCM-35M | 97.65 | 7.9 | 8.9 | 12.7 | 60 PIN | 100 |

## 隔离束线座 WIRE SADDLE — 6-116-4

- MATERIAL: NYLON 66+25%FRP
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

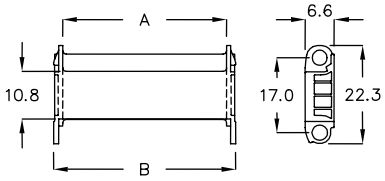


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DFK-38A | 38.0 | 42.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 塑胶拖链 CABLE CARRIER — 6-117-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK







| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DFG-16BL | 16.0 | 22.5 | 200 |

## 电线固定座 WIRE SADDLE — 6-117-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| AB-1S | 12.8 | 7.0 | 5.8 | 3.0 | ø3.3 | 4.1 | YJ-80, YJ-90 YJ-98, YJ-100, YJ-120 YJ-142, YJ-142S, YJ-156 YJ-160, YJ-203, YJ-203S | 1000 |
| AB-1 | 15.3 | 9.9 | 6.6 | 3.4 | ø3.5 | 5.2 | YJ-80, YJ-90 YJ-98, YJ-100, YJ-115 YJ-120, YJ-140, YJ-142 YJ-142S, YJ-156, YJ-160 YJ-203, YJ-203S, YJ-205 | 1000 |
| AB-1L | 23.0 | 15.9 | 9.7 | 5.0 | ø6.55 | 8.25 | | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6 or 4.8mm

## 电线固定座 WIRE SADDLE — 6-117-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

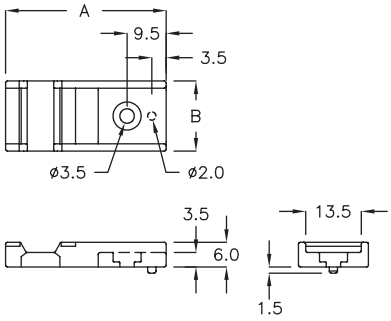


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ ABL-39C | 39.0 | 17.0 | 200 |

## 电线固定座 WIRE SADDLE — 6-117-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

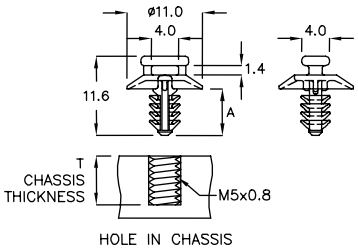


| PART NO | A | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| MBDG-11C | 6.8 | 7.5~8.5 | YJ-80, YJ-90, YJ-98 YJ-100, YJ-120, YJ-142S YJ-160, YJ-203S | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电线固定座 CABLE SADDLE 6-118-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

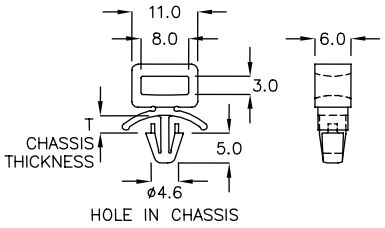


| PART NO | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|
| YLC-16T | 0.8~2.0 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-115, YJ-120, YJ-140, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S, YJ-205 | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm

## 电线固定座 CABLE SADDLE 6-118-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

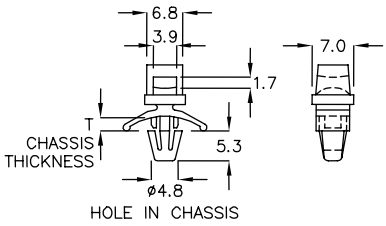


| PART NO | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|
| YL-1 | 0.8~2.0 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-120, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S | 1000 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm

## 电线固定座 CABLE SADDLE 6-118-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

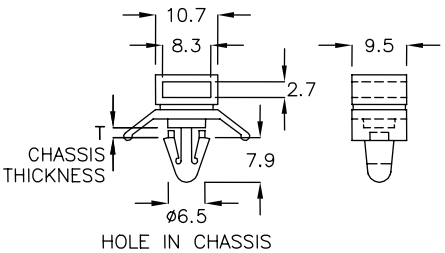


| PART NO | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|
| YL-06 | 1.6 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-115, YJ-120, YJ-140, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S, YJ-205 | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 CABLE SADDLE 6-119-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

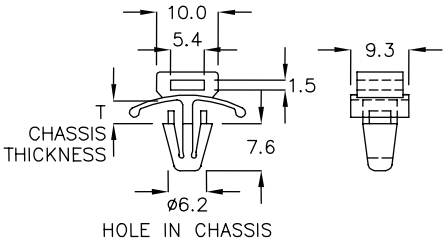


| PART NO | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|
| YLA-01 | 3.2 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-115, YJ-120<br>YJ-142S, YJ-156, YJ-160<br>YJ-203S, YJ-205 | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm

## 电线固定座 CABLE SADDLE 6-119-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

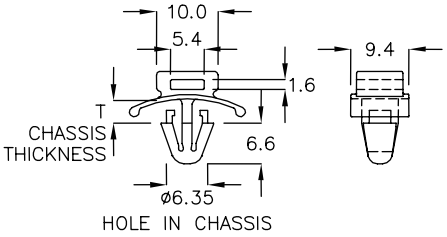


| PART NO | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|
| YLB-1J | 1.2~2.5 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-115, YJ-120, YJ-140, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S, YJ-205 | 500 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm

## 电线固定座 CABLE SADDLE 6-119-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

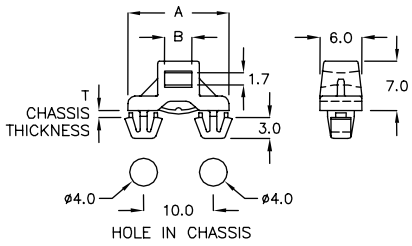


| PART NO | A | B | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YLF-14BR | 14.5 | 3.9 | 0.8 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-120, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S | 500 |
| YLF-14AJ | 14.5 | 3.9 | 3.0 | | |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 3.6mm



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 CABLE SADDLE — 6-120-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YL-5 | 22.0 | 10.0 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-115, YJ-120, YJ-140, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S, YJ-205 | 1000 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



## 电线固定座 CABLE SADDLE — 6-120-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | G | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| YL-3 | 19.5 | 9.5 | 4.8 | 5.3 | 1.4 | ø3.5 | 2.2 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-115, YJ-120<br>YJ-140, YJ-142, YJ-142S<br>YJ-156, YJ-160, YJ-203<br>YJ-203S, YJ-205 | 1000 |
| YL-03A | 19.05 | 9.65 | 5.1 | 5.05 | 1.6 | ø4.5 | 2.0 | | |
| YL-3MC | 21.0 | 11.5 | 5.2 | 5.3 | 1.8 | ø5.2 | 2.0 | | |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



## 护线套 EDGING — 6-120-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| UTF-7A | 7.5 | 5.8 | 3.0 | YJ-80, YJ-90, YJ-98, YJ-100<br>YJ-115, YJ-120, YJ-140, YJ-142<br>YJ-142S, YJ-156, YJ-160<br>YJ-203, YJ-203S, YJ-205 | 1000 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 4.8mm



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-121-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

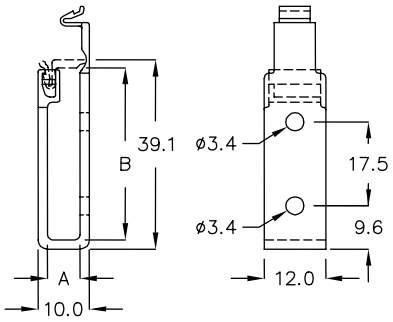


WITH LOCK FEATURE

| PART NO | A | B | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| CZD-39A | 6.4 | 35.8 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-120, YJ-142S<br>YJ-160, YJ-203S | 100 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 2.6mm

## 固定座 MOUNT — 6-121-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWK-23 | 23.0 | 28.0 | 9.8 | 19.6 | 200 |
| FWK-25 | 25.0 | 30.0 | 10.0 | 20.0 | |
| FWK-27 | 27.5 | 32.5 | 9.8 | 19.6 | |

## 固定座 MOUNT — 6-121-3

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FWK-08 | 5.7 | 8.4 | 7.0 | 14.9 | 500 |

## 电线固定座 WIRE MOUNT — 6-121-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

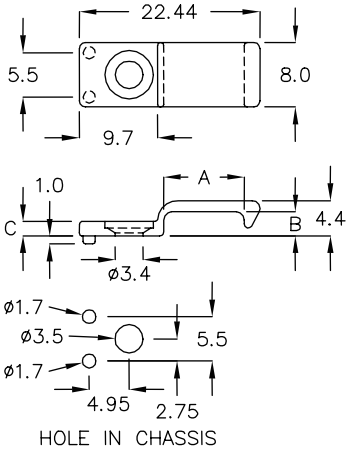


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CKTW-10 | 10.0 | 3.0 | 1.8 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 WIRE CLAMP 6-122-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW




| | PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| ★ | FSB-8C | 4.95 | 2.1 | 17.4 | ø2.2~ø3.0 | 8.0 | 5.0 | 500 |



## 电线固定座 WIRE MOUNT 6-122-2

- MATERIAL: ABS+PC (UL)
- COLOR: BLACK
- WITH M3 SCREW

NEW

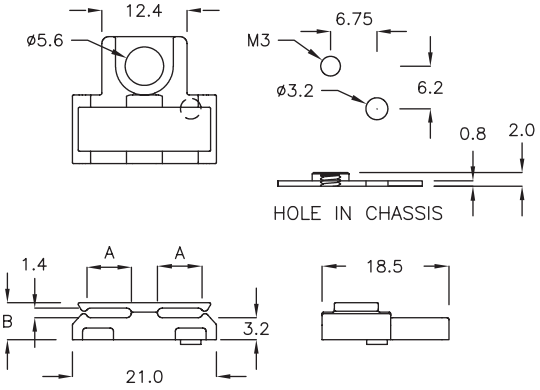


| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | FYCG-20C | 6.5 | 5.4 | 200 |

## 电线固定板 WIRE CLAMP 6-122-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FSA-01 | 5.9 | 4.4 | 18.6 | 500 |

## 电线固定座 WIRE MOUNT 6-122-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

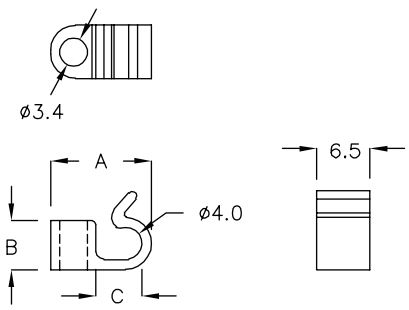


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHG-04 | 12.3 | 6.0 | 5.6 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 压线固定板 WIRE CLAMP — 6-123-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







FORM.2




FORM.1

此产品亦可贴背胶
OPTIONAL WITH ADHESIVE TAPE ON BASE

| PART NO | A | B | C | D | E | F | G | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| FSK-5A | 3.0 | 1.8 | 12.8 | 2.0 | 5.0 | 5.0 | 10.0 | 1 | 1000 |
| FSK-08 | 4.5 | 3.2 | 14.3 | 3.5 | 8.0 | 3.7 | 10.0 | 2 | |
| FSK-10 | 5.5 | 4.1 | 15.3 | 4.5 | 10.0 | 3.7 | 10.0 | 2 | 500 |
| FSK-10RP | 6.5 | 5.0 | 16.0 | 5.5 | 10.0 | 3.0 | 9.3 | 2 | |
| FSK-10KM | 7.5 | 5.9 | 17.0 | 6.5 | 10.0 | 3.0 | 9.3 | 2 | |

## 隔离束线座 WIRE SADDLE — 6-123-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

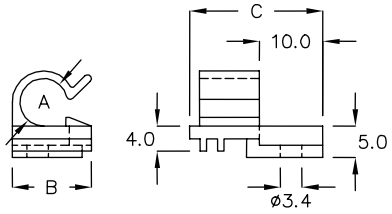


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHF-7 | ø7.5 | 12.5 | 21.0 | 500 |

## 隔离束线座 WIRE SADDLE — 6-123-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

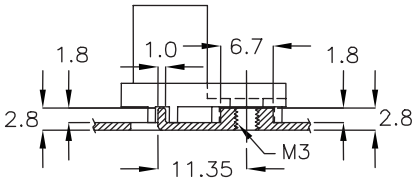


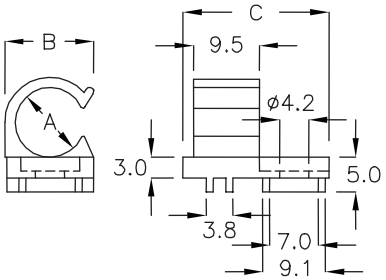


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHF-7A | ø10.0 | 12.8 | 21.0 | 500 |

## 电线固定座 WIRE MOUNT — 6-123-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 or #6-32 SCREW










| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FAC-01 | 8.0 | 7.3 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT — 6-124-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 or #6-32 SCREW

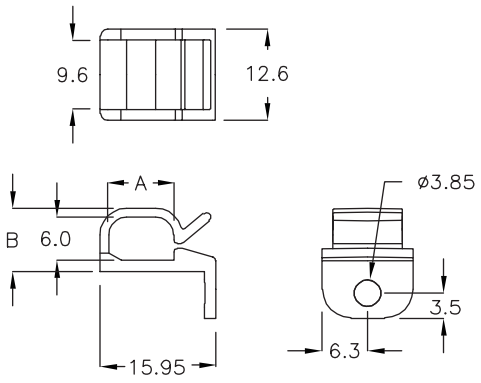


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FAC-02 | 9.0 | 8.7 | 1000 |

## 电源线固定座 POWER CORD MOUNTING — 6-124-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

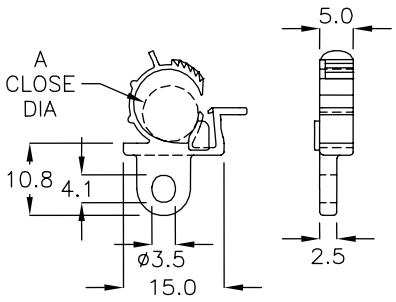


| PART NO | A | PACKAGE |
|---|---|---|
| FWI-8CM | ø7.5~ø8.3 | 100 |

## 电线固定座 WIRE MOUNT — 6-124-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

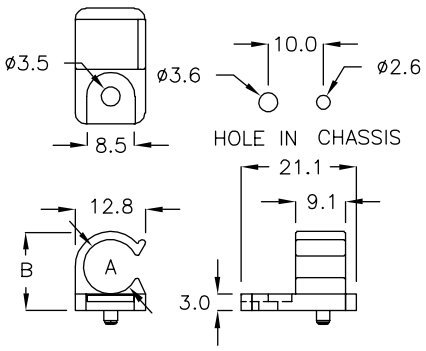


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FAF-10 | ø10.0 | 14.5 | 500 |



## 电线固定座 WIRE MOUNT — 6-124-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

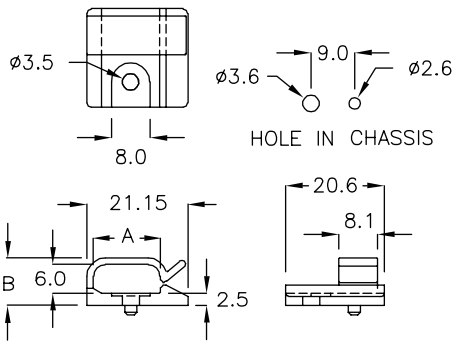


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FAG-01 | 14.0 | 9.9 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT — 6-125-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

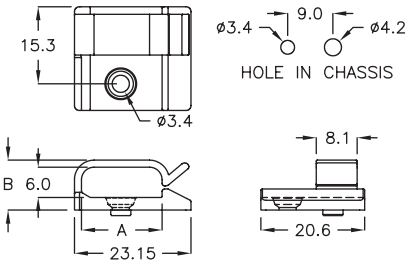


| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | FAP-23C | 16.0 | 9.9 | 500 |

## 电线固定座 WIRE MOUNT — 6-125-2

- MATERIAL: ABS+PC (UL)
- COLOR: BLACK
- WITH M3 SCREW

NEW

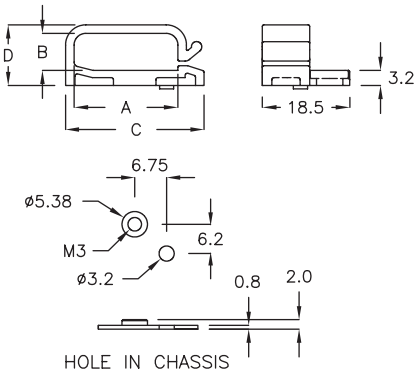


| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | FYCS-7H | 22.0 | 7.9 | 29.3 | 12.9 | 200 |
| ★ | FYCS-15H | 22.0 | 15.0 | 25.8 | 20.0 | |

## 隔离束线座 WIRE SADDLE — 6-125-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

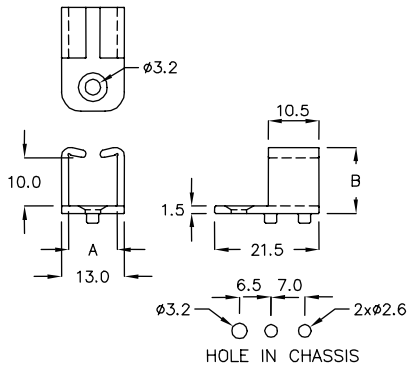


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHF-10A | 10.0 | 13.6 | 200 |

## 隔离束线座 WIRE SADDLE — 6-125-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

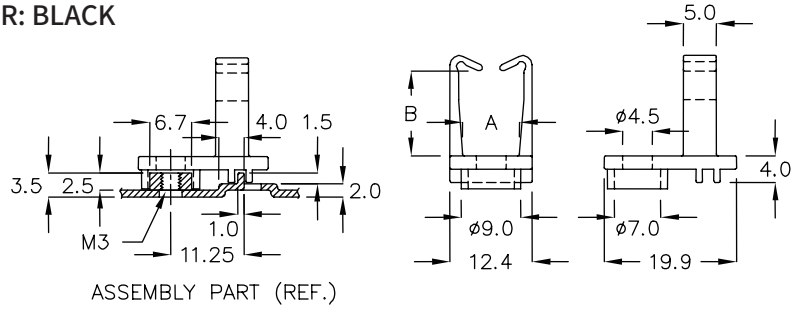


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHF-11 | 8.0 | 12.8 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-126-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

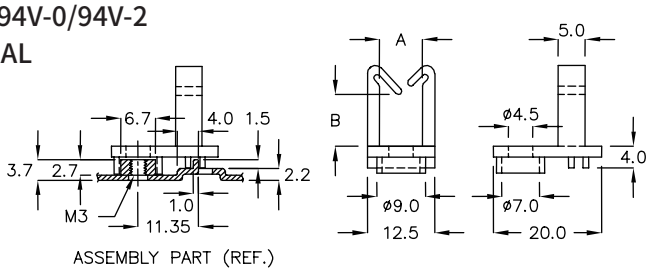


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHF-11E | 8.0 | 11.2 | 500 |

## 隔离束线座 WIRE SADDLE 6-126-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

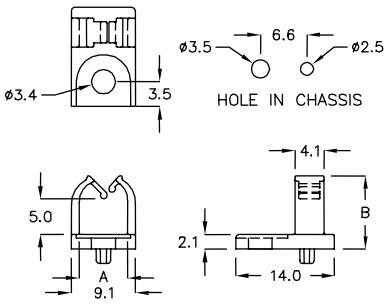


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHFB-7A | 6.9 | 10.4 | 500 |



## 隔离束线座 WIRE SADDLE 6-126-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

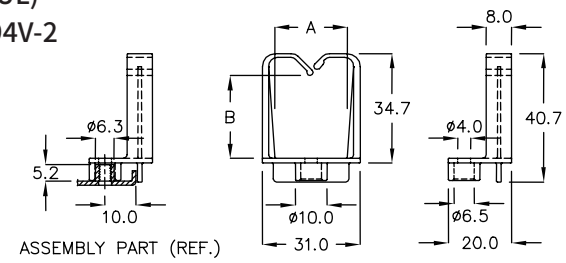


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHFM-27SJ | 23.0 | 26.0 | 100 |

## 隔离束线座 WIRE SADDLE 6-126-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNFK-11T | 11.1 | 16.6 | 500 |

## 隔离束线座 WIRE SADDLE 6-126-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 or #6-32 SCREW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNF-11 | 11.1 | 18.5 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-127-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

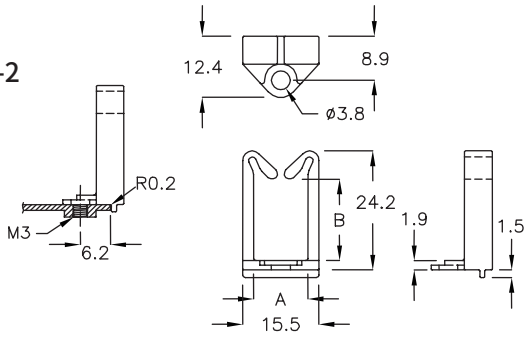


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNFA−11GS | 11.1 | 16.6 | 500 |



## 隔离束线座 WIRE SADDLE 6-127-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNF−12R | 12.0 | 18.5 | 500 |

## 隔离束线座 WIRE SADDLE 6-127-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

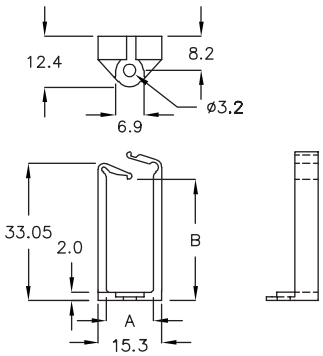


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNK−11DY | 11.3 | 29.2 | 200 |

## 隔离束线座 WIRE SADDLE 6-127-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNK−11PH | 11.3 | 46.1 | 100 |

## 隔离束线座 WIRE SADDLE 6-127-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

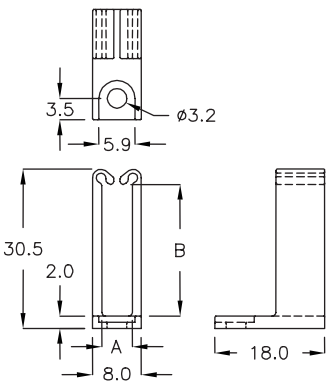


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNTF−5HY | 5.0 | 26.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-128-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

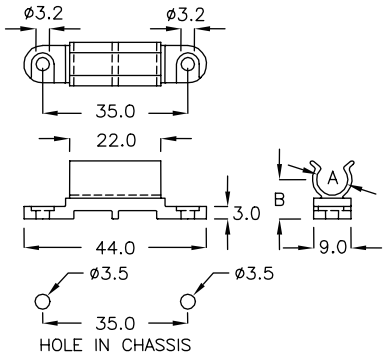


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CMS-22JC | ø7.5 | 9.5 | 500 |

## 隔离束线座 WIRE SADDLE 6-128-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE
- WITH M3 SCREW

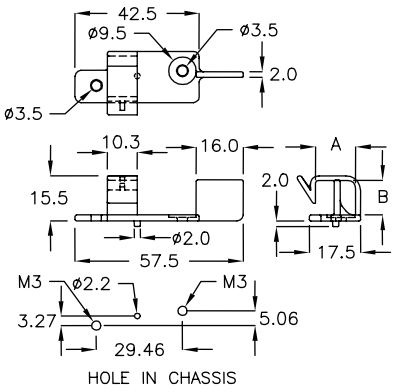


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHFK-11JS | 13.8 | 11.9 | 500 |

## 电线固定座 WIRE MOUNT 6-128-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNR-31A | ø7.0 | 10.8 | 500 |

## 电线固定座 TIE MOUNT 6-128-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

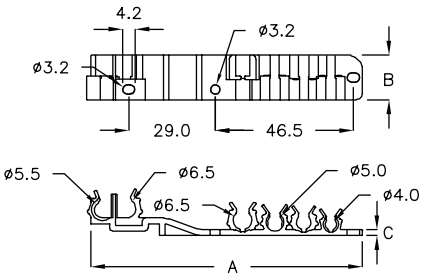


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CTT-91 | 91.2 | 15.0 | 2.0 | 200 |

## 电线固定座 WIRE MOUNT 6-128-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| FW-12C | ø12.0 | 13.7 | 8.9 | 17.0 | 500 |
| FW-08A | ø16.0 | 15.5 | 9.3 | 19.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-129-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW

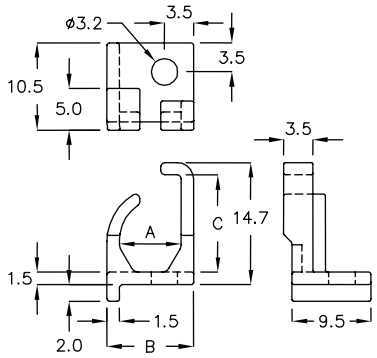


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CHFW-7A | ø7.2 | 10.4 | 11.7 | 500 |

## 隔离束线座 WIRE SADDLE 6-129-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

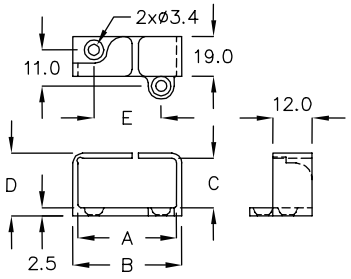


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CNQ-30A | 30.0 | 33.2 | 15.0 | 19.1 | 20.5 | 500 |
| CNQ-40K | 40.0 | 43.2 | 8.0 | 12.1 | 30.0 | |

## 隔离束线座 WIRE SADDLE 6-129-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2.5 COUNTERSUNK SCREW

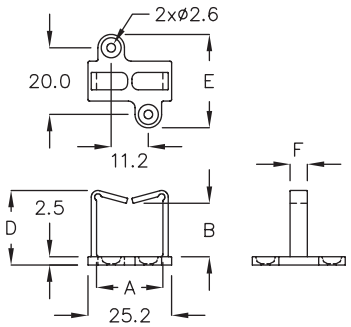


| PART NO | A | B | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| CNW-20AM | 20.0 | 18.7 | 25.1 | 28.6 | 7.5 | 100 |
| CNW-20TP | 20.0 | 10.7 | 17.1 | 28.0 | 5.2 | |

## 隔离束线座 WIRE SADDLE 6-129-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

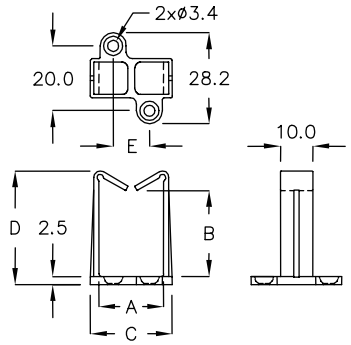


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CNW-19AT | 19.8 | 16.5 | 25.0 | 25.0 | 11.2 | 500 |
| CNW-20K | 20.0 | 26.5 | 25.2 | 35.0 | 14.2 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-130-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

| | PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | CNWB-20 | 20.0 | 26.5 | 25.0 | 13.8 | 500 |
| ★ | CNWB-24C | 24.8 | 26.5 | 30.0 | 18.8 | |

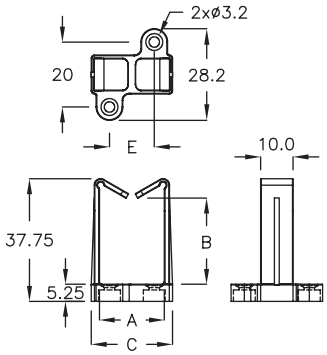

## 隔离束线座 WIRE SADDLE 6-130-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNW-35H | 35.0 | 26.7 | 100 |



## 隔离束线座 WIRE SADDLE 6-130-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNWA-15B | 15.5 | 31.7 | 200 |

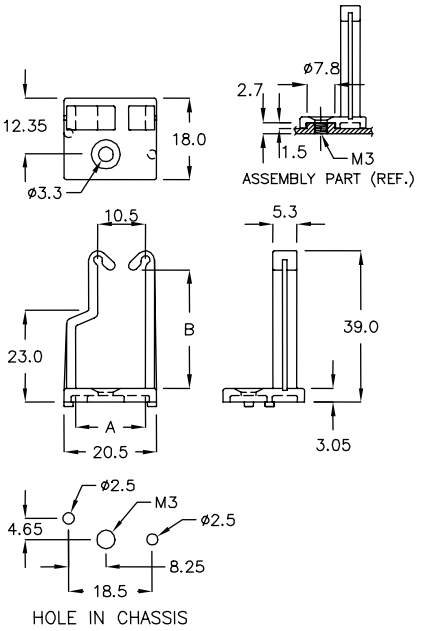

## 隔离束线座 WIRE SADDLE 6-130-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNWF-15A | 15.2 | 27.5 | 200 |

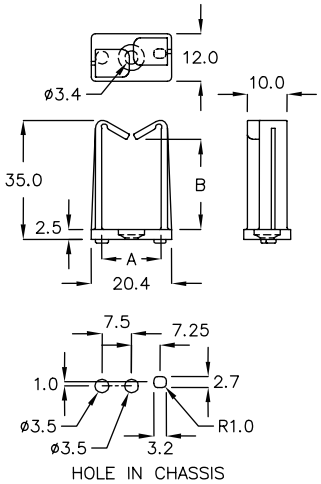




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-131-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

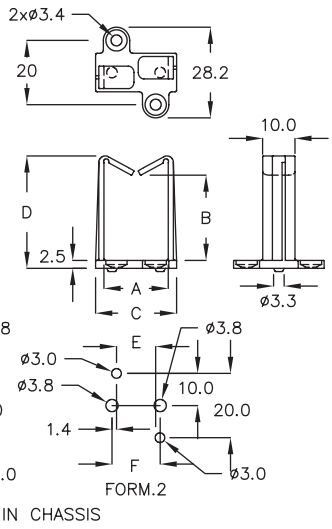


| | PART NO | A | B | C | D | E | F | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| ★ | CNWH-19C | 19.8 | 16.5 | 25.0 | 25.0 | 11.2 | 11.2 | 1 | 500 |
| | CNWZ-20D | 20.0 | 26.5 | 25.2 | 35.0 | 12.2 | 15.0 | 2 | |

## 隔离束线座 WIRE SADDLE — 6-131-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

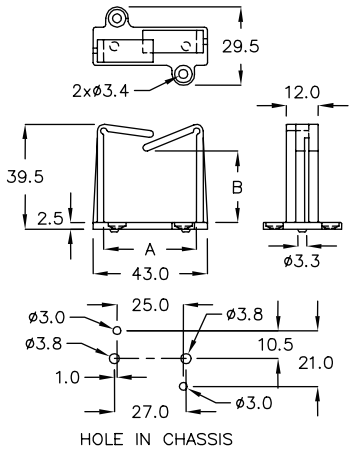


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNWZ-35M | 35.0 | 26.9 | 100 |

## 隔离束线座 WIRE SADDLE — 6-131-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

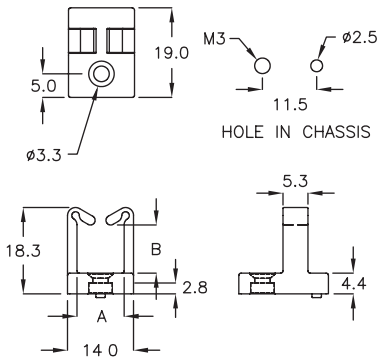


| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CKFC-10A | 10.0 | 10.0 | 100 |

## 隔离束线座 WIRE SADDLE — 6-131-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

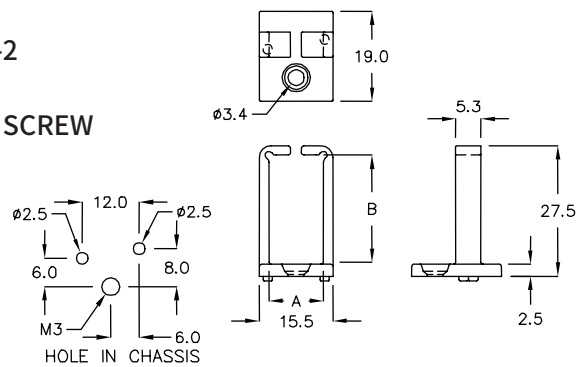


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNWG-11C | 11.5 | 23.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-132-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CHFN-11C | 11.3 | 27.2 | 200 |

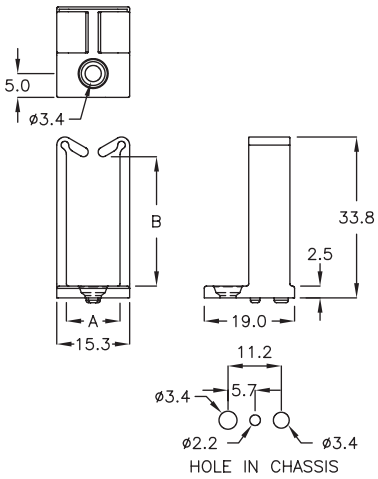

## 隔离束线座 WIRE SADDLE — 6-132-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CNWB-11F | 11.5 | 16.3 | 1000 |

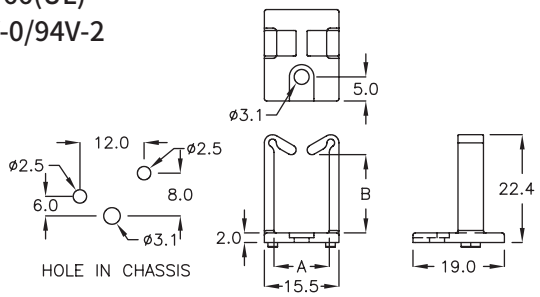

## 电线固定座 WIRE MOUNT — 6-132-3

- MATERIAL: ABS+PC
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | FYCB-12C | 12.3 | 22.0 | 200 |

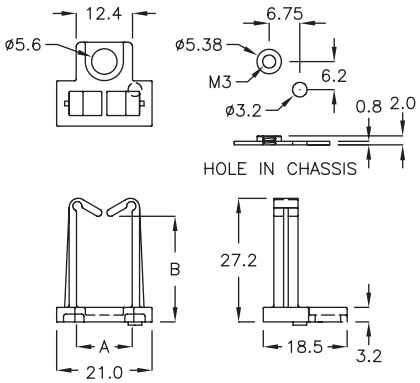

## 隔离束线座 WIRE SADDLE — 6-132-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CNH-22DC | 22.8 | 24.0 | 31.5 | 28.8 | 100 |
| CNH-28MG | 28.6 | 40.4 | 53.2 | 35.0 | |

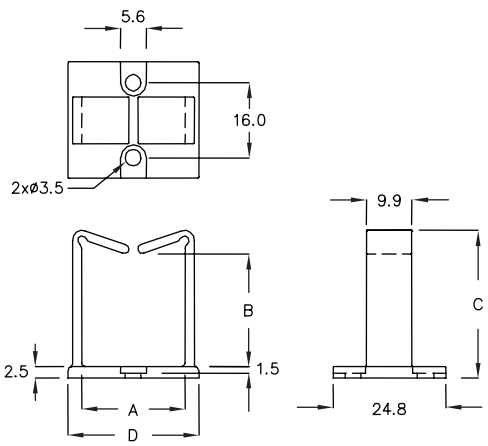




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT — 6-133-1

- MATERIAL: ABS+PC(UL)
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | FYCH-20A | 20.8 | 31.5 | 200 |

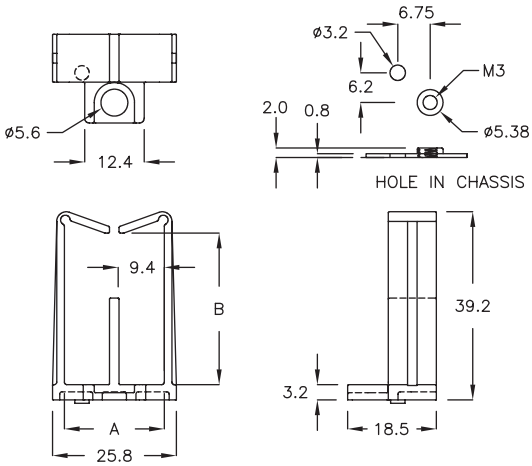

## 电线固定座 WIRE MOUNT — 6-133-2

- MATERIAL: ABS+PC
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | FYCD-25C | 22.7 | 15.4 | 200 |

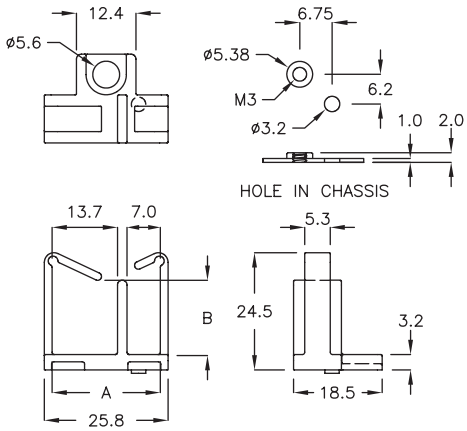

## 隔离束线座 WIRE SADDLE — 6-133-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CNHD-11S | 11.5 | 19.9 | 200 |

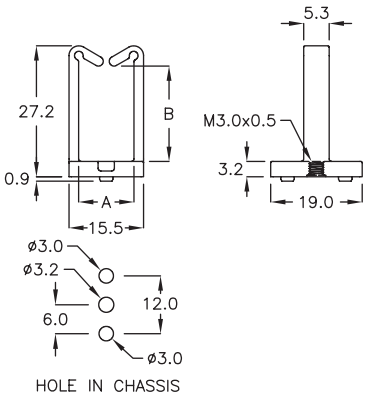

## 隔离束线座 WIRE SADDLE — 6-133-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | PACD-32F | 34.0 | 25.5 | 38.0 | 31.1 | 100 |

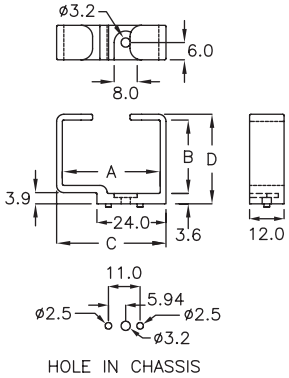


6

线材固定 线材隔离 CABLE CLAMP, SADDLE

提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-134-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

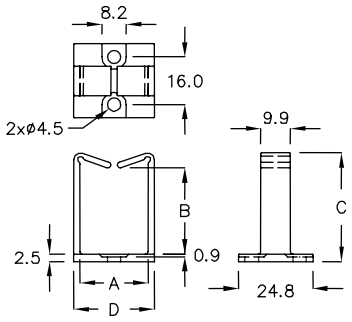


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CNHB–22A | 22.8 | 29.0 | 36.5 | 26.8 | 100 |

## 隔离束线座 WIRE SADDLE 6-134-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW

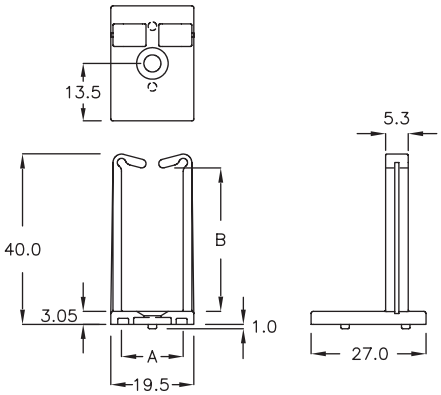





| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CKFA–14A | 14.5 | 33.7 | 100 |

## 隔离束线座 WIRE SADDLE 6-134-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2/M4 COUNTERSUNK SCREW

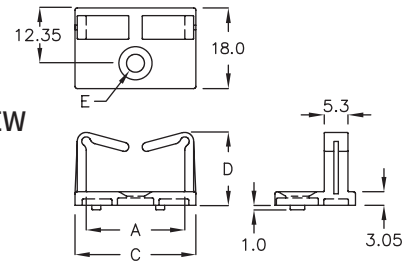





| | PART NO | A | C | D | E SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| | CKFA–22A | 22.0 | 27.0 | 22.0 | M4 | 100 |
| ★ | CKFA–22B | 22.0 | 27.0 | 30.0 | M4 | |
| ★ | CKFA–22TG | 22.0 | 27.0 | 30.0 | M2 | |
| ★ | CKFA–25C | 25.5 | 31.5 | 18.5 | M4 | |

## 隔离束线座 WIRE SADDLE 6-134-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW

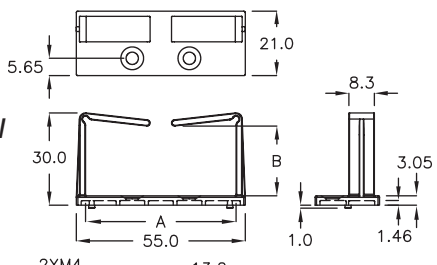





| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CKFB–49D | 49.0 | 22.7 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-135-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW




| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CHFY−8C | 8.3 | 4.85 | 500 |

## 隔离束线座 WIRE SADDLE — 6-135-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

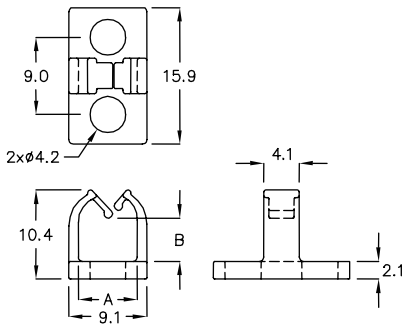


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CHFG−6AB | 6.9 | 5.0 | 1000 |

## 隔离束线座 WIRE SADDLE — 6-135-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

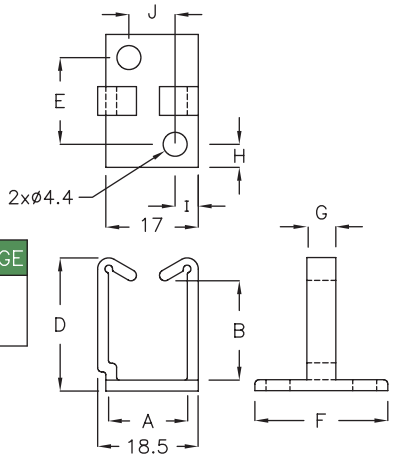


| | PART NO | A | B | D | E | F | G | H | I | J | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ★ | ABP−10W | 14.5 | 32.9 | 39.1 | 16.9 | 26.4 | 10.0 | 4.75 | 4.85 | 7.3 | 200 |
| | ABP−13C | 14.5 | 20.9 | 27.1 | 19.9 | 28.4 | 5.3 | 4.25 | 4.25 | 8.5 | |

## 隔离束线座 WIRE SADDLE — 6-135-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 SCREW

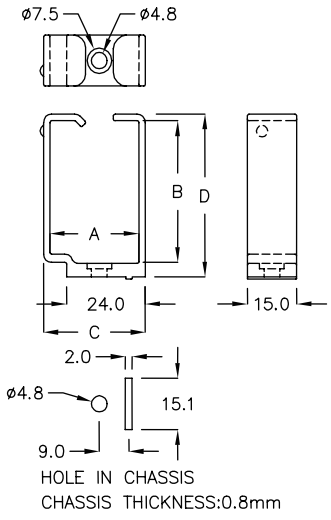


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| PACB−51Q | 27.0 | 44.7 | 31.0 | 50.7 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-136-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M4 COUNTERSUNK SCREW

NEW

| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | PACA-58D | 33.0 | 52.5 | 37.0 | 57.55 | 100 |

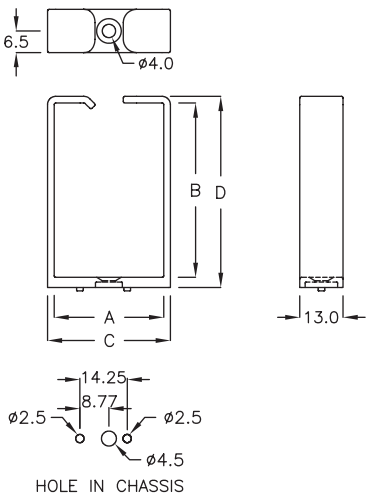




## 隔离束线座 WIRE SADDLE 6-136-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2 COUNTERSUNK SCREW

NEW

| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | PACF-120A | 36.0 | 115.0 | 40.0 | 120.0 | 50 |

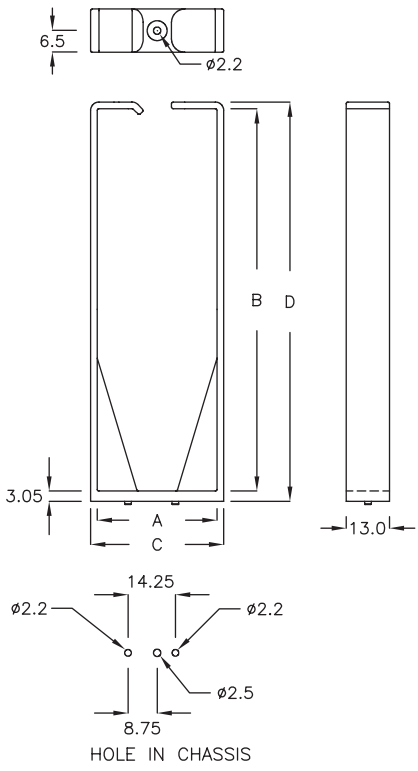

## 隔离束线座 WIRE SADDLE 6-136-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | CNWK-38A | 14.0 | 31.0 | 38.5 | 17.8 | 100 |

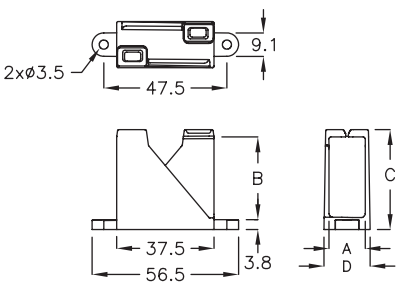




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-137-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

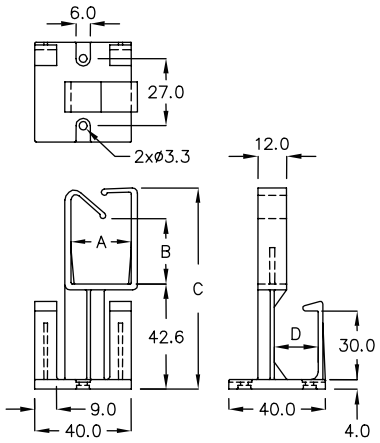


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CNHA-25SK | 25.0 | 31.0 | 85.7 | 18.25 | 50 |

## 排线固定座 FLAT CABLE CLIP — 6-137-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCM-01 | 29.1 | 4.5 | 6.0 | 500 |

## 电线固定座 WIRE MOUNT — 6-137-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

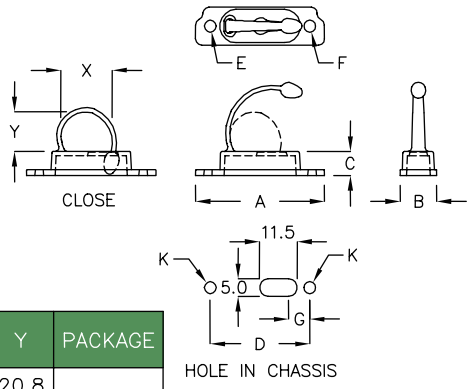


WITH LOCK FEATURE

| PART NO | A | B | C | D | E | F | G | K SCREW | X | Y | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| CMD-3H | 44.0 | 13.0 | 8.5 | 34.0 | ø4.0 | ø4.0 | 9.3 | M3 | 18.0 | 20.8 | 200 |
| CMD-3KZ | 44.0 | 13.0 | 8.5 | 34.0 | ø3.0 | ø3.0 | 9.3 | M2.5 | 18.0 | 20.8 | |
| CMD-08 | 44.0 | 12.5 | 8.0 | 34.0 | ø4.0 | ø4.0 | 9.5 | M3 | 14.7 | 11.0 | |
| CMD-8F | 44.0 | 13.0 | 8.5 | 34.0 | ø3.8 | ø3.8 | 9.3 | M3 | 16.0 | 14.2 | |
| CMD-8TM | 56.0 | 15.0 | 8.5 | 46.0 | 3.2x4.0 | ø3.2 | 10.8 | M3 | 23.0 | 16.0 | |

## 电线固定座 WIRE MOUNT — 6-137-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M2 SCREW

NEW

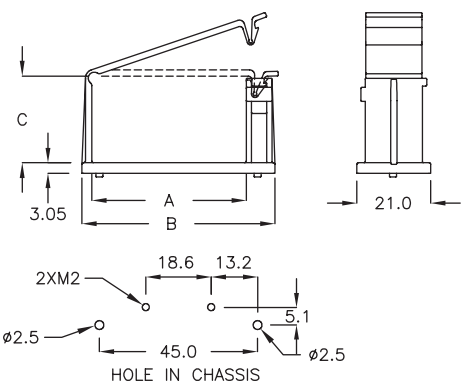


WITH LOCK FEATURE

| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| ★ | FCE-55B | 44.0 | 54.9 | 24.6 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-138-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

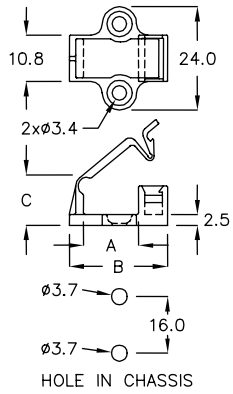


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCNQ-22BS | 12.8 | 22.8 | 11.7 | 100 |

## 电线固定座 WIRE MOUNT 6-138-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

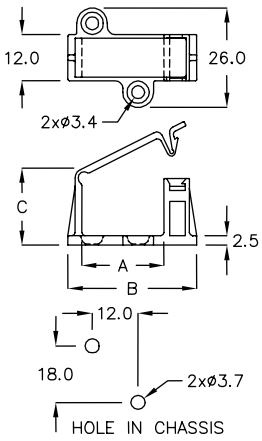


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCJS-33TY | 21.5 | 33.7 | 20.2 | 100 |

## 电线固定板 CABLE CLAMP 6-138-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL
- WITH M3 COUNTERSUNK SCREW

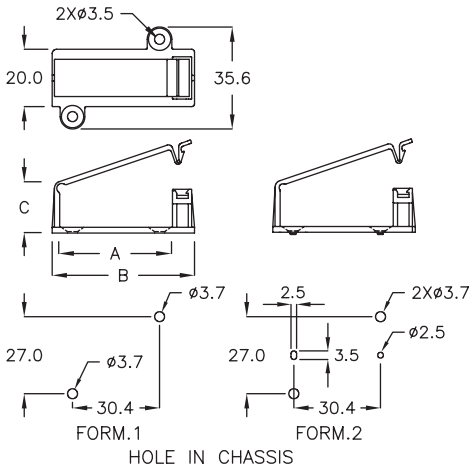


WITH LOCK FEATURE

| PART NO | A | B | C | FORM | PACKAGE |
|---|---|---|---|---|---|
| FAK-39LY | 39.4 | 49.7 | 18.0 | 1 | 100 |
| ★ FAKT-39C | 39.4 | 49.7 | 18.0 | 2 | |

## 电线固定板 CABLE CLAMP 6-138-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

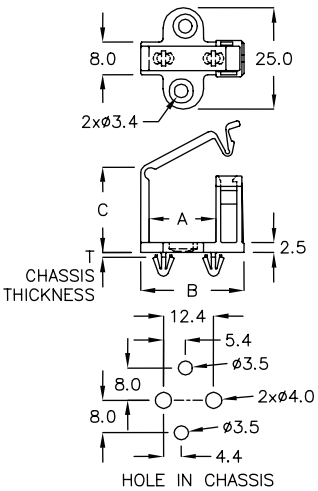


WITH LOCK FEATURE

| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| FCJK-16A | 16.5 | 25.5 | 27.0 | 1.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 CABLE CLAMP — 6-139-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW




WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FAKT-22C | 22.0 | 29.4 | 12.3 | 100 |




HOLE IN CHASSIS

## 电线固定座 WIRE MOUNT — 6-139-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW




WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCWB-63TM | 41.35 | 63.1 | 9.2 | 100 |
| FCWB-63GS | 41.35 | 63.1 | 13.8 | |




HOLE IN CHASSIS

## 电线固定座 WIRE MOUNT — 6-139-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

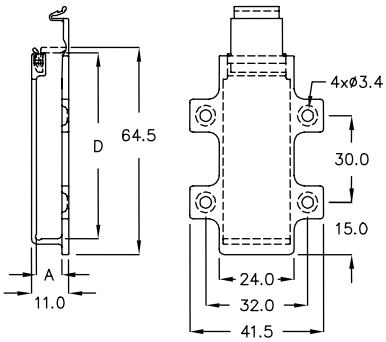


WITH LOCK FEATURE

| PART NO | A | D | PACKAGE |
|---|---|---|---|
| CZG-52FA | 7.5 | 58.0 | 100 |

## 电线固定座 WIRE MOUNT — 6-139-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW




WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCE-18A | 18.5 | 26.15 | 9.7 | 200 |




HOLE IN CHASSIS



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定板 CABLE CLAMP 6-140-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH #6-32(FLAT) SCREW

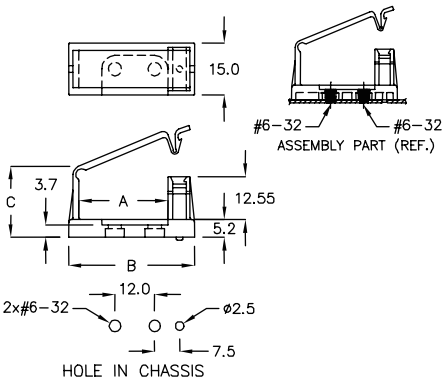


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCWG-27A | 26.9 | 38.0 | 20.6 | 100 |

## 电线固定板 CABLE CLAMP 6-140-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

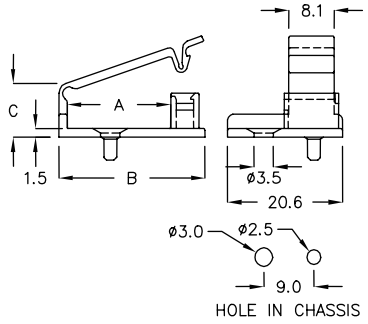


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCWY-18T | 18.5 | 26.15 | 8.9 | 100 |

## 电线固定座 WIRE MOUNT 6-140-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

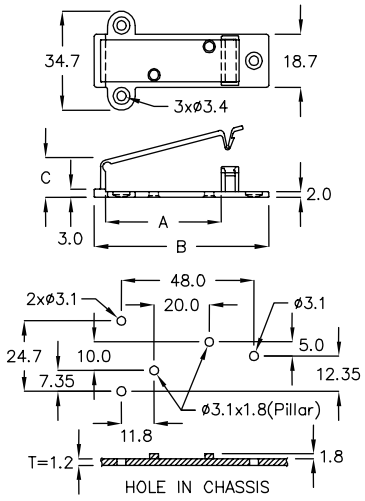


WITH LOCK FEATURE

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| FCWC-63AT | 42.05 | 63.1 | 13.1 | 100 |

## 电线固定座 WIRE MOUNT 6-140-4

- MATERIAL: ABS+PC
- COLOR: BLACK

NEW

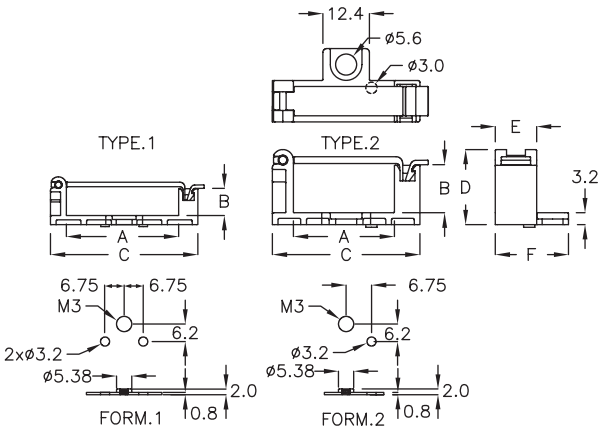


| | PART NO | A | B | C | D | E | F | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| ★ | FMT-26C | 26.9 | 13.1 | 39.3 | 20.0 | 11.0 | 19.5 | 1 | 100 |
| ★ | FMT-39C | 39.7 | 10.0 | 52.1 | 16.9 | 14.6 | 23.1 | 2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-141-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW




WITH LOCK FEATURE

| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| ★ | CKFN−18 | 18.0 | 22.0 | 22.7 | 200 |

## 隔离束线座 WIRE SADDLE — 6-141-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

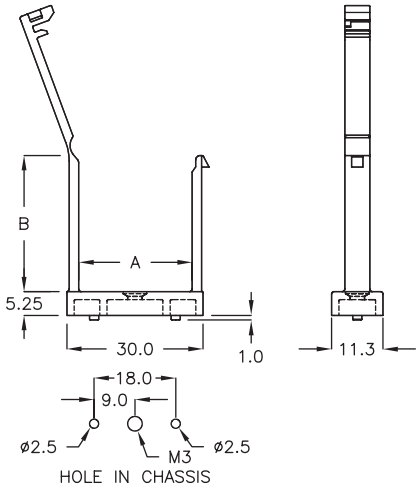


| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CKFM−25 | 25.0 | 30.0 | 500 |

## 隔离束线座 WIRE SADDLE — 6-141-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

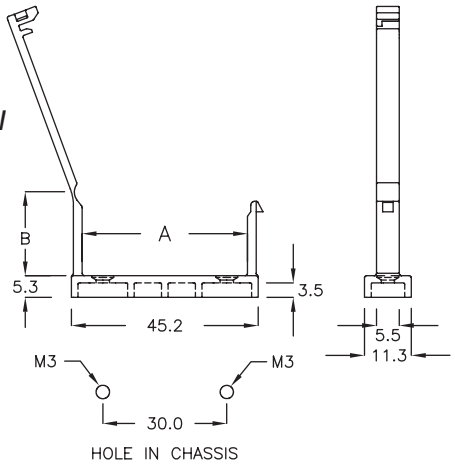


| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | CKFM−40 | 40.0 | 18.0 | 100 |

## 隔离束线座 WIRE SADDLE — 6-141-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M4 COUNTERSUNK SCREW

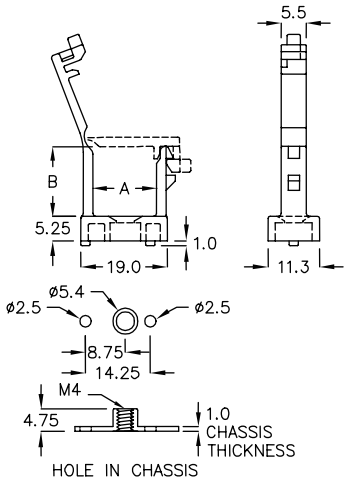


WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CKFM−14QR | 14.0 | 17.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE 6-142-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW

NEW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ CKMZ-17A | 37.4 | 10.2 | 14.8 | 200 |

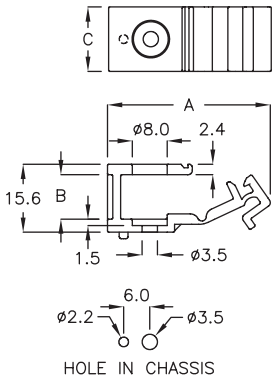

## 隔离束线座 WIRE SADDLE 6-142-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M
- ALSO CAN BE FASTENED WITH M3 SCREW

NEW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ CKMY-77C | 76.2 | 15.6 | 100 |

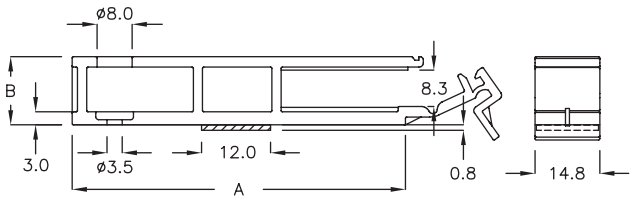




## 固定座 MOUNT 6-142-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2 COUNTERSUNK SCREW

| PART NO | A | PACKAGE |
|---|---|---|
| MMCB-13A | 28.0 | 500 |

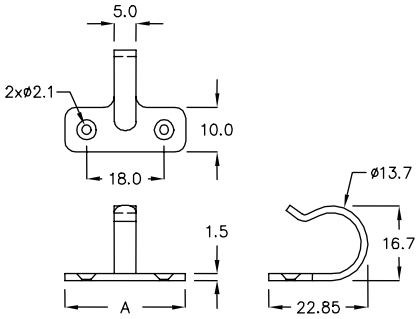

## 电线固定座 WIRE MOUNT 6-142-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2 COUNTERSUNK SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CNJ-19MT | 5.5 | 8.0 | 500 |

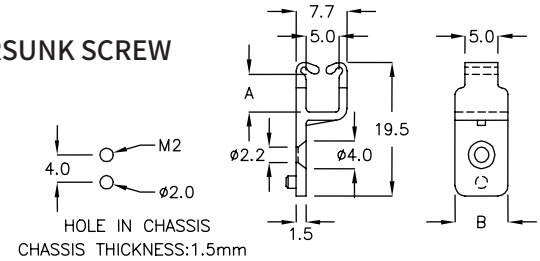




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-143-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ABGX-13C | 3.1 | 12.0 | 1000 |

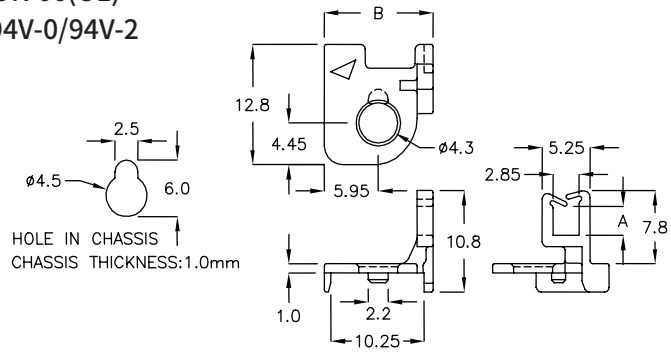

## 电线固定座 WIRE MOUNT — 6-143-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| KYA-17 | 5.7 | 9.5 | 1000 |

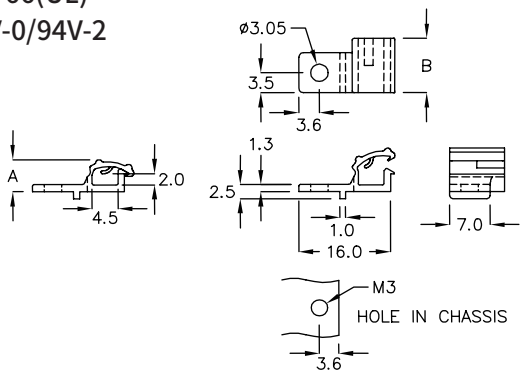

## 电线固定座 WIRE MOUNT — 6-143-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

WITH LOCK FEATURE

| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CYX-121 | 14.7 | 24.2 | 8.4 | 0.6 | 200 |
| CYX-121KP | 19.7 | 29.2 | 13.4 | 0.6 | |

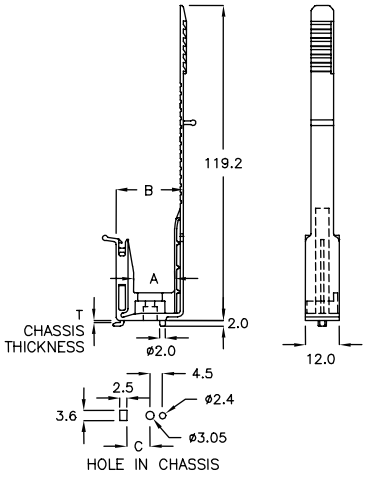

## 电线固定座 WIRE MOUNT — 6-143-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 TAPPING SCREW

WITH LOCK FEATURE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CAF-8A | 8.7 | 8.0 | 500 |

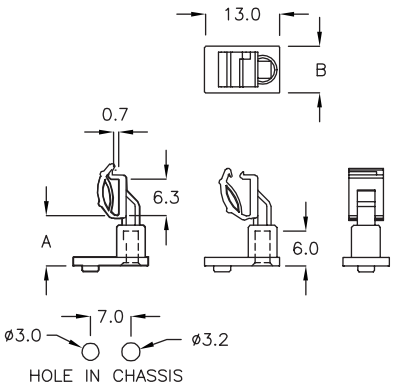




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-144-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CMP-21A | 14.0 | 5.2 | 500 |

## 隔离束线座 WIRE SADDLE 6-144-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

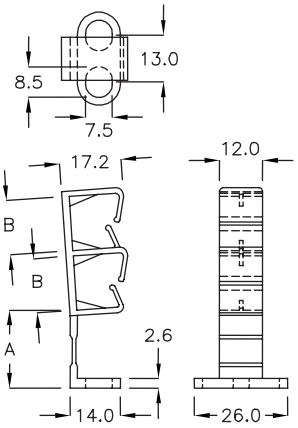


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| 2CH-15 | 21.7 | 15.0 | 100 |



## 隔离束线座 WIRE SADDLE 6-144-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

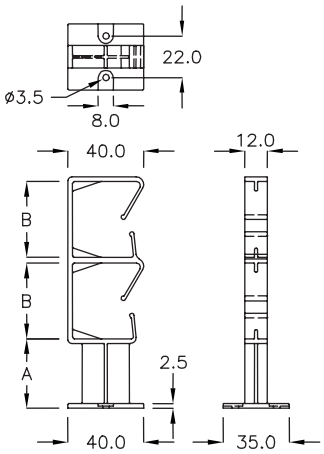


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| 2CH-40MP | 36.7 | 40.3 | 50 |



## 隔离束线座 WIRE SADDLE 6-144-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| 2CH-15A | 22.6 | 15.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 隔离束线座 WIRE SADDLE — 6-145-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| 3CH-15 | 27.6 | 15.1 | 100 |

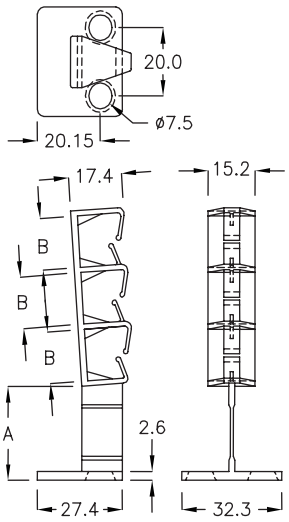

## 消磁线圈固定座 DEGAUSS COIL CLIP — 6-145-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CH-38 | 7.8 | 13.0 | 200 |



## 消磁线圈固定座 DEGAUSS COIL CLIP — 6-145-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CH-48 | 10.0 | 10.0 | 200 |

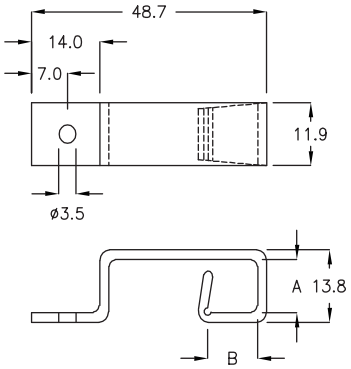

## 固定座 EDGE CONNECT BASE — 6-145-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PDB-01 | 38.0 | 10.0 | 5.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定扣 CABLE CLAMP 6-146-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| PC-01J | 7.0 | 12.8 | ø3.2 | ø2.0 | 1000 |
| PC-1RL | 7.0 | 12.75 | ø3.2 | ø2.1 | |

## 电线固定扣 CABLE CLAMP 6-146-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| PCG-5A | 10.0 | 19.0 | ø4.6 | ø5.4 | 500 |
| PCG-5CK | 10.0 | 26.0 | ø5.4 | ø5.4 | |
| PCG-5NW | 9.6 | 11.6 | ø3.5 | ø5.35 | |
| PCG-7F | 9.5 | 11.75 | ø5.4 | ø7.5 | |

## 电线固定扣 CABLE CLAMP 6-146-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| PC-01D | 6.6 | 6.7 | ø3.5 | 0.9 | ø2.7 | 2000 |
| PC-1A | 6.5 | 6.7 | ø3.4 | 1.2 | ø3.4 | |
| PC-2A | 8.5 | 11.4 | ø4.4 | 1.3 | ø5.0 | 1000 |
| PC-02D | 8.5 | 13.8 | ø4.4 | 1.5 | ø5.7 | |
| PC-2Q | 7.5 | 9.3 | ø4.1 | 1.2 | ø4.0 | |
| ★ PC-12A | 10.2 | 15.0 | ø5.08 | 1.8 | ø12.7 | 500 |

## 电线固定扣 CABLE CLAMP 6-146-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | C | D CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| PC-09 | 9.5 | 12.2 | ø4.4 | ø7.5 | 500 |
| PC-5HM | 9.5 | 11.1 | ø4.3 | ø5.6 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定扣 CABLE CLAMP 6-147-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

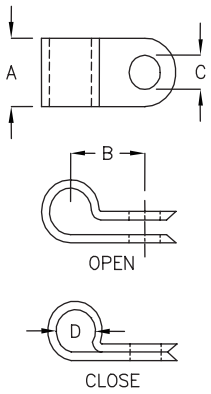


| PART NO | A | B | C | D CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| PC−1 | 13.5 | 9.0 | ø5.4 | ø3.6 | 1000 |
| PC−1C | 9.5 | 8.3 | ø4.4 | ø3.0 | 2000 |
| PC−1K | 6.3 | 9.0 | ø3.1 | ø3.5 | |
| PC−1Q | 6.5 | 9.5 | ø3.1 | ø3.0 | |
| PC−1S | 6.5 | 6.7 | ø3.5 | ø3.1 | |
| PC−2 | 10.2 | 11.5 | ø4.0 | ø5.0 | 1000 |
| PC−2H | 9.7 | 11.7 | ø4.1 | ø4.5 | |
| PC−2K | 12.7 | 10.7 | ø5.2 | ø5.7 | |
| PC−2L | 9.6 | 12.1 | ø5.0 | ø7.3 | |
| PC−2M | 9.8 | 12.1 | ø5.1 | ø6.1 | |
| PC−2S | 9.8 | 12.0 | ø5.1 | ø6.9 | |
| PC−3 | 10.0 | 11.9 | ø4.3 | ø5.6 | 500 |
| PC−3K | 9.0 | 11.35 | ø3.5 | ø5.7 | |
| PC−3M | 8.3 | 9.8 | ø4.0 | ø5.0 | |
| PC−4 | 9.7 | 12.1 | ø4.1 | ø8.3 | |
| PC−5 | 12.4 | 13.4 | ø5.0 | ø8.8 | |
| PC−05C | 9.5 | 12.0 | ø3.2 | ø8.3 | |
| PC−5F | 9.5 | 16.0 | ø4.1 | ø8.7 | |
| PC−5GW | 9.6 | 12.1 | ø4.4 | ø5.6 | |
| PC−6 | 13.5 | 16.5 | ø5.25 | ø11.4 | |
| PC−24MT | 12.0 | 21.8 | ø5.4 | ø25.0 | 200 |

## 电线固定扣 CABLE CLAMP 6-147-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

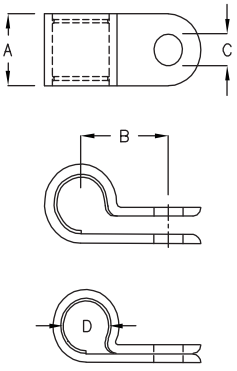


| PART NO | A | B | C | D CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| PC−3L | 10.0 | 10.0 | ø4.4 | ø5.5 | 500 |
| PC−03C | 9.8 | 11.3 | ø4.2 | ø6.9 | |
| PC−02C | 9.8 | 12.0 | ø4.2 | ø7.7 | |
| PC−6M | 10.0 | 15.1 | ø4.0 | ø11.0 | |

## 电线固定扣 CABLE CLAMP 6-147-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

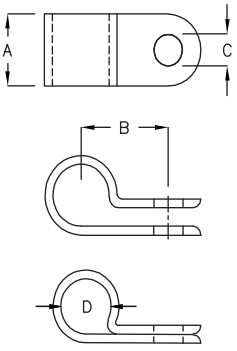


| PART NO | A | B | C | D CLOSE DIA | PACKAGE |
|---|---|---|---|---|---|
| PC−3KF | 9.0 | 11.35 | ø3.5 | ø5.7 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定扣 CABLE CLAMP 6-148-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ PLD-10AU | 15.0 | 14.8 | ø4.0 | 500 |

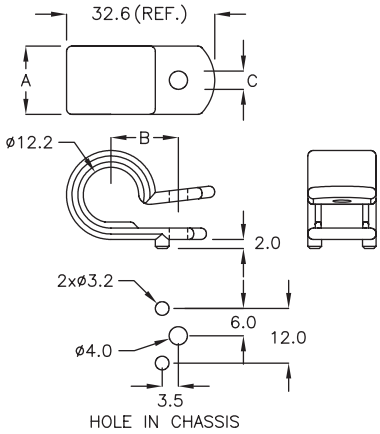

## 电线固定扣 CABLE CLAMP 6-148-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PL-1 | 10.0 | 13.4 | ø4.0 | 500 |




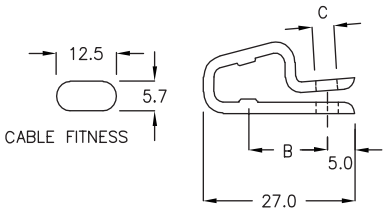

## 电线固定扣 CABLE CLAMP 6-148-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PL-01A | 10.1 | 11.0 | ø5.0 | 500 |




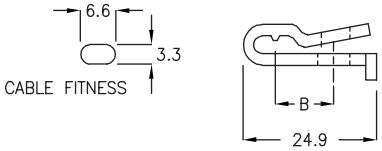

## 电线固定扣 CABLE CLAMP 6-148-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PL-3 | 10.0 | 16.15 | ø4.5 | 500 |




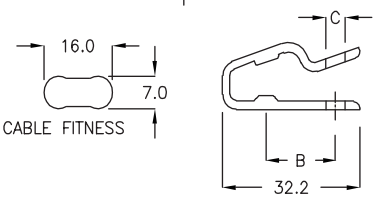

## 电线固定扣 CABLE CLAMP 6-148-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PL-04 | 10.0 | 17.0 | ø4.5 | 500 |









提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定扣 CABLE CLAMP 6-149-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

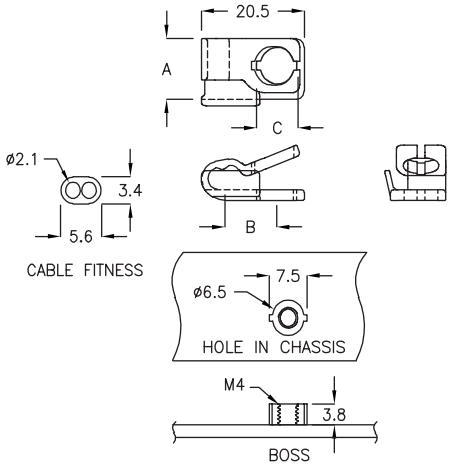


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PLA–3F | 11.0 | 9.8 | 8.0 | 500 |

## 电线固定扣 CABLE CLAMP 6-149-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

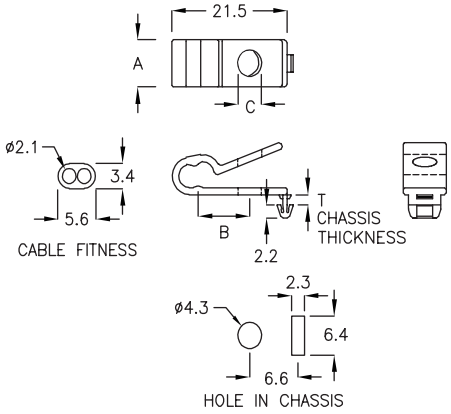


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| PLB–3Q | 8.0 | 9.6 | ø4.3 | 1.6 | 500 |

## 电线固定扣 CABLE CLAMP 6-149-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

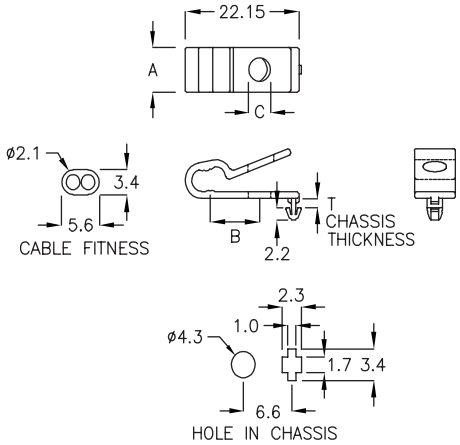


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAG |
|---|---|---|---|---|---|
| PLB–3RM | 8.0 | 9.6 | ø4.3 | 1.1~1.4 | 500 |

## 电线固定扣 CABLE CLAMP 6-149-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

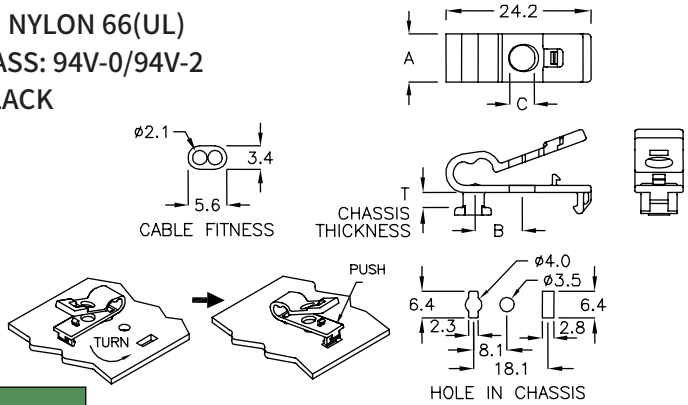


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| PLC–3KF | 8.0 | 7.8 | ø4.3 | 2.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT 6-150-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PCT-01 | 32.0 | 22.0 | 10.0 | 500 |

## 电线固定座 WIRE MOUNT 6-150-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PCT-06 | 25.0 | 17.0 | 10.0 | 500 |

## 电线固定座 WIRE MOUNT 6-150-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| PCT-03 | 25.0 | 17.0 | 10.0 | 500 |

## 电线固定座 WIRE MOUNT 6-150-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

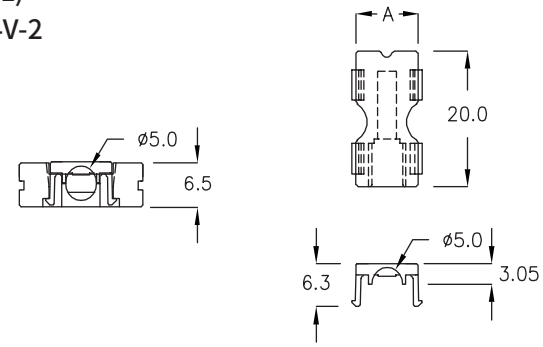


| PART NO | A | PACKAGE |
|---|---|---|
| PCU-1A | 10.0 | 500 |

ASSEMBLE WITH P.G PART PCW-01 (Page 6-151-1)



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定座 WIRE MOUNT — 6-151-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

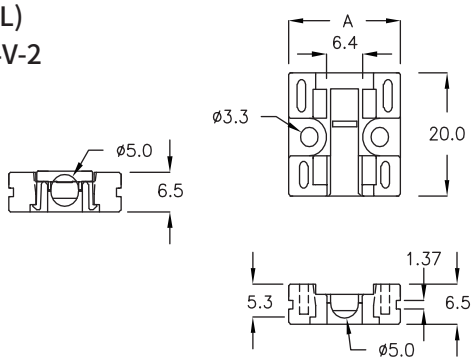


| PART NO | A | PACKAGE |
|---|---|---|
| PCW—01 | 20.0 | 500 |

ASSEMBLE WITH P.G PART PCU-1A (Page 6-150-4)

## 排线固定座 FLAT CABLE MOUNT — 6-151-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M







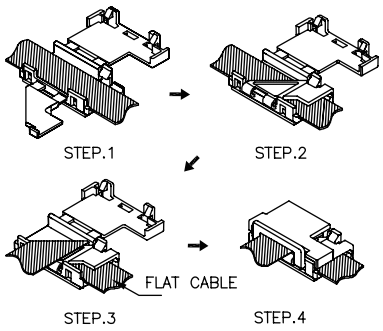


| PART NO | A | PACKAGE |
|---|---|---|
| DFB—11 | 11.0 | 100 |



## 排线固定座 FLAT CABLE MOUNT — 6-151-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

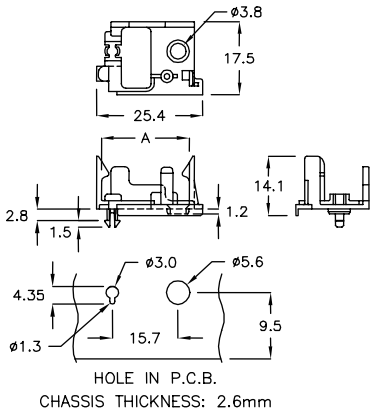


| PART NO | A | PACKAGE |
|---|---|---|
| DFQ—21CA | 21.0 | 500 |



## 排线固定座 FLAT CABLE MOUNT — 6-151-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

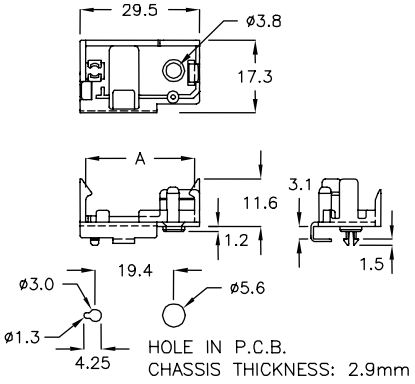


| PART NO | A | PACKAGE |
|---|---|---|
| DFQ—27MJ | 26.9 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

07

# EMI扣
# SLEEVE FERRITE CLAMP

## EMI 扣 SLEEVE FERRITE CLAMP 7-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

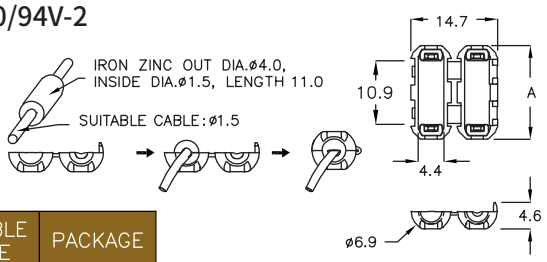


| PART NO | A | SUITABLE CABLE | PACKAGE |
|---|---|---|---|
| EMR-1C | 16.0 | ø1.15 | 500 |

## EMI 扣 SLEEVE FERRITE CLAMP 7-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | SUITABLE CABLE | PACKAGE |
|---|---|---|
| EMR-3A | ø3.5 | 500 |



## EMI 扣 SLEEVE FERRITE CLAMP 7-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | SUITABLE CABLE | PACKAGE |
|---|---|---|
| EMR-05 | ø5.0 | 200 |

## EMI 扣 SLEEVE FERRITE CLAMP 7-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | SUITABLE CABLE | PACKAGE |
|---|---|---|
| EMR-7A | ø7.5 | 200 |



## EMI 扣 SLEEVE FERRITE CLAMP 7-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | D | SUITABLE CABLE | PACKAGE |
|---|---|---|---|---|---|
| EMQ-06 | 32.8 | 9.7 | 18.0 | ø6.0 | 200 |
| EMQ-13 | 32.7 | 15.0 | 30.0 | ø13.0 | 100 |
| EMQ-9A | 32.8 | 11.6 | 22.7 | ø8.5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 08

## 电子零附件

# PCB,ELECTRONIC ASSEMBLY COMPONENTS:
# WASHER
# TRANSISTOR WASHER
# SILICONE RUBBER



## 振荡晶体垫片 OSCILLATOR WASHER 8-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TQ-05 | 10.8 | 4.5 | 1.0 | 2000 |






## 振荡晶体垫片 OSCILLATOR WASHER 8-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TQ-03 | 7.9 | 3.2 | 0.7 | 3.75 | 0.8 | 2000 |
| TQ-03A | 7.9 | 3.2 | 0.7 | 4.9 | 0.8 | |
| TQ-06 | 11.2 | 5.0 | 1.0 | 4.9 | 1.2 | |
| TQ-06A | 11.2 | 5.0 | 1.5 | 4.9 | 1.2 | |
| TQ-06H | 11.2 | 6.5 | 1.5 | 4.75 | 2.2 | |






## 振荡晶体垫片 OSCILLATOR WASHER 8-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TQ-06F | 11.0 | 4.5 | 0.7 | 2000 |



## 电容器座 E-CAP HOUSING 8-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWX-10BK | ø11.0 | ø10.0 | 10.0 | 1000 |



## 电容器座 E-CAP HOUSING 8-2-5

- MATERIAL: PP
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CW-2 | ø12.5 | ø10.2 | 9.2 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器垫片 CAPACITOR WASHER 8-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CW-10 | 20.0 | ø23.0 | 2.6 | 1000 |






## 电容器垫片 CAPACITOR WASHER 8-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CW-1CQ | ø10.0 | 1.0 | 1000 |



## 电容器垫片 CAPACITOR WASHER 8-3-3

- MATERIAL: NYLON 66+GF30%(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CW-2KM | ø8.0 | 1000 |



## 电容器座 E-CAP HOUSING 8-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CW-003 | ø16.0 | 16.0 | 1000 |



## 电容器座 E-CAP HOUSING 8-3-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWZ-7Q | ø7.9 | 5.5 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器座 E-CAP HOUSING 8-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWM-07 | ø10.0 | 5.0 | 7.0 | 1000 |






## 华司 WASHER 8-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| WWD-3K | ø17.2 | 3.0 | 2000 |



## 电容器垫片 E-CAP WASHER 8-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CWQ-13M | ø13.5 | 3.1 | 1000 |

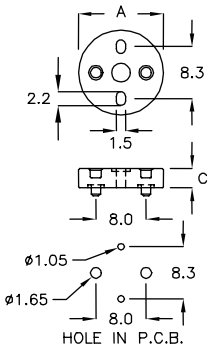




## 电容器垫片 E-CAP WASHER 8-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWF-7H | 9.9 | 7.5 | 1.1 | 2000 |






## 电容器垫片 E-CAP WASHER 8-4-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWF-7K | 10.0 | 7.6 | 1.2 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电容器垫片 E-CAP WASHER 8-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CWF−8H | 12.8 | 8.75 | 1.5 | 2.5 | 0.9 | 2000 |
| CWF−14A | 14.2 | 10.0 | 1.5 | 3.0 | 1.5 | |

## 蜂鸣器固定座 BUZZER MOUNT 8-5-2

- MATERIAL: NYLON 66+30%FRP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MTZ−4A | 13.4 | 6.6 | 4.8 | 1000 |

## 固定座 MOUNT 8-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| QDC−01 | 33.6 | 18.9 | 15.9 | 100 |

## 电容器座 E-CAP HOUSING 8-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMH−08 | 8.0 | 6.0 | 1000 |

## 电容器座 E-CAP HOUSING 8-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWB−01 | 17.8 | 22.0 | 8.0 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器座 E-CAP HOUSING 8-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWC-08 | 8.0 | 19.7 | 1000 |



## 电容器座 E-CAP HOUSING 8-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | PACKAGE |
|---|---|---|
| CWG-4A | 4.3 | 1000 |



## 电容器座 E-CAP HOUSING 8-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CWG-03 | 3.0 | 6.0 | 10.5 | 15.1 | 1000 |
| CWG-3MF | 3.0 | 5.0 | 10.0 | 15.1 | |
| CWG-3TG | 3.0 | 6.0 | 10.5 | 12.0 | |



## 电容器座 E-CAP HOUSING 8-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| CWFK-27A | 6.22 | 9.85 | 25.5 | 1.2 | 500 |

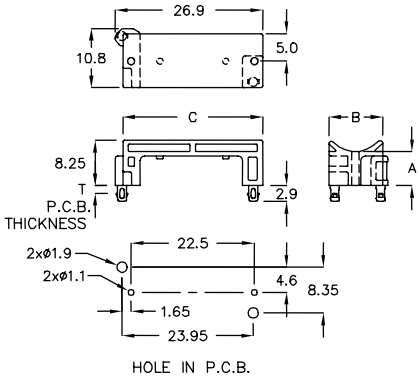

## 电容器座 E-CAP HOUSING 8-6-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2x5 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWS-01 | 5.0 | 24.4 | 500 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器座 E-CAP HOUSING 8-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | PACKAGE |
|---|---|---|
| CWH-02 | 2.0 | 1000 |



## 电容器座 E-CAP HOUSING 8-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

NEW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ CWHA-12C | 3.8 | 18.1 | 1000 |

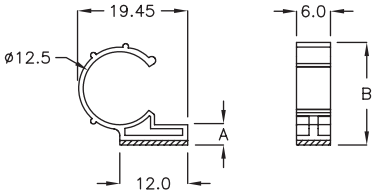




## 电容器座 E-CAP HOUSING 8-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MLA-40 | 10.8 | 16.0 | 100 |



## 电容器座 E-CAP HOUSING 8-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWD-01 | 12.6 | 10.8 | 1000 |

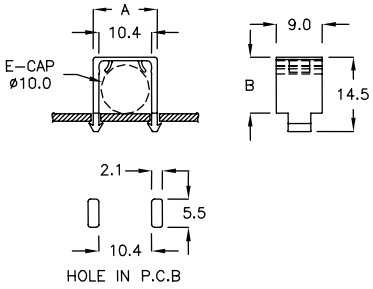

## 电容器座 E-CAP HOUSING 8-7-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWD-02 | 25.2 | 10.9 | 500 |

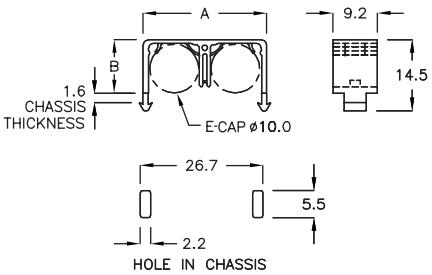




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器座 E-CAP HOUSING 8-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWD-16 | 38.0 | 15.3 | 200 |

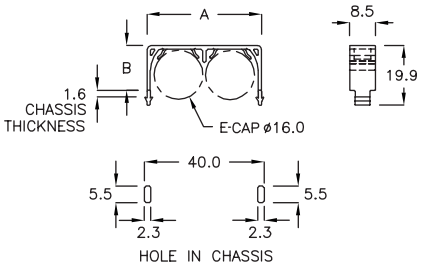




## 电容器座 E-CAP HOUSING 8-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWL-19 | 18.0 | 18.4 | 500 |



## 电容器座 E-CAP HOUSING 8-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWJ-01 | 17.0 | 22.0 | 7.0 | 500 |



## 电容器帽套 E-CAP TUBE 8-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWT-16K | ø16.5 | 30.5 | ø17.5 | 500 |
| CWT-18A | ø18.6 | 10.0 | ø18.6 | 100 |



## 电容器座 E-CAP HOUSING 8-8-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ CWTD-10C | 21.0 | 5.0 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器帽套 E-CAP TUBE 8-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DXM-27H | 27.45 | 9.3 | 500 |






## 电容器帽套 E-CAP TUBE 8-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXJ-20NC | ø12.8 | 20.0 | ø13.7 | ø11.8~ø12.3 | 500 |



## 电容器帽套 E-CAP TUBE 8-9-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXA-31JK | ø10.5 | 27.5 | ø11.5 | ø9.5~ø10.2 | 500 |
| DXA-50F | ø13.0 | 50.8 | ø14.5 | ø12.0~ø12.5 | |



## 电容器帽套 E-CAP TUBE 8-9-4

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXK-30C | ø13.0 | 30.5 | ø14.0 | ø12.0~ø12.5 | 500 |



## 电容器帽套 E-CAP TUBE 8-9-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWY-50 | ø20.5 | 40.9 | 100 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器帽套 E-CAP TUBE 8-10-1

- COLOR: BLACK




| PART NO | MATERIAL | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|---|
| DXA-16RC | PP V0 | ø12.5 | 16.0 | ø13.6 | ø11.0~ø12.0 | 500 |
| DXA-20KS | N66 V2 | ø24.0 | 20.0 | ø25.0 | ø23.5~ø24.5 | |

## 电容器帽套 E-CAP TUBE 8-10-2

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXP-28CA | ø31.0 | 28.0 | ø32.0 | ø29.5~ø30.5 | 500 |

## 电容器帽套 E-CAP TUBE 8-10-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK,NATURAL




| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXP-20TC | ø25.6 | 20.0 | ø26.6 | ø24.0~ø25.0 | 100 |
| DXP-20KF | ø26.6 | 20.0 | ø27.6 | ø25.0~ø26.0 | |
| DXP-46FM | ø31.5 | 46.5 | ø32.9 | ø30.0~ø31.0 | 486 |

## 电容器帽套 E-CAP TUBE 8-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXA-41 | ø30.0 | 41.0 | ø31.0 | ø29.2~ø31.2 | 486 |

## 电容器帽套 E-CAP TUBE 8-10-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXA-51C | ø30.0 | 51.0 | ø31.0 | ø29.7~ø31.7 | 405 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器帽套 E-CAP TUBE 8-11-1

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXA-51FL | ø30.0 | 51.0 | ø31.6 | ø29.7~ø31.7 | 405 |



## 电容器帽套 E-CAP TUBE 8-11-2

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXA-55KT | ø30.0 | 55.5 | ø31.6 | ø29.7~ø31.7 | 405 |



## 电容器帽套 E-CAP TUBE 8-11-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|---|
| DXA-65BH | ø30.0 | 65.0 | ø31.6 | ø29.5~ø31.0 | 324 |



## 电容器帽套 E-CAP TUBE 8-11-4

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E -CAP | PACKAGE |
|---|---|---|---|---|---|
| DXS-49K | ø31.0 | 49.0 | ø32.0 | ø29.5~ø30.5 | 500 |



## 电容器帽套 E-CAP TUBE 8-11-5

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | SUITABLE E CAP | PACKAGE |
|---|---|---|---|---|---|
| DXF-76 | ø31.0 | 75.8 | ø32.0 | ø29.5~ø30.5 | 243 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电容器帽套 E-CAP TUBE 8-12-1

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | SUITABLE E CAP | PACKAGE |
|---|---|---|---|---|---|
| DXC-58AS | ø31.0 | 58.0 | ø32.0 | ø29.0~ø31.0 | 324 |



## 电容器帽套 E-CAP TUBE 8-12-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

NEW

| PART NO | A | B | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|
| ★ DXD-21A | ø8.5 | 21.3 | ø8.4 | 500 |



## 电容器帽套 E-CAP TUBE 8-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | SUITABLE E-CAP | PACKAGE |
|---|---|---|---|---|
| DXH-31M | 18.4 | 31.0 | ø17.2~ø18.0 | 200 |



## 电容器座 E-CAP HOUSING 8-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWQ-01 | 15.25 | 21.1 | 500 |

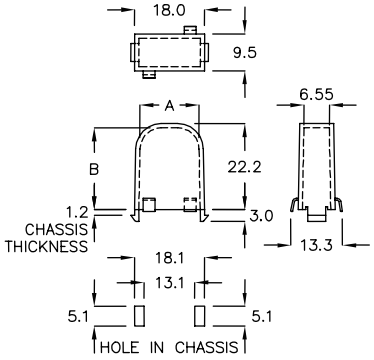

## 电感固定座 C. T. MOUNT 8-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWP-01 | 18.4 | 10.65 | 12.0 | 500 |

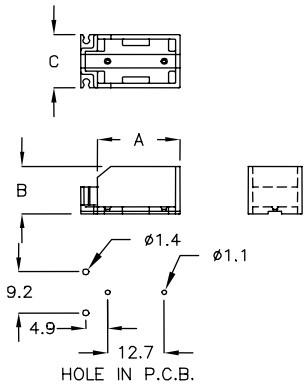




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电感固定座 INDUCTOR HOUSING 8-13-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CW-1A | 23.3 | 12.0 | 20.0 | 1000 |



## 电感固定座 INDUCTOR HOUSING 8-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CW-005 | 10.4 | 9.5 | 7.6 | 2000 |

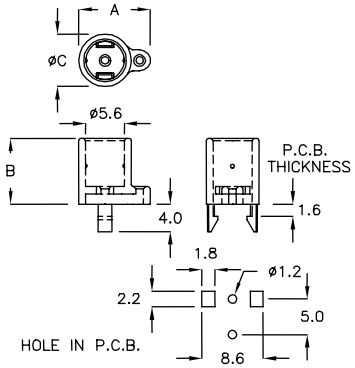

## 电容器帽套 E-CAP TUBE 8-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| DXZB-23C | 21.0 | 1000 |

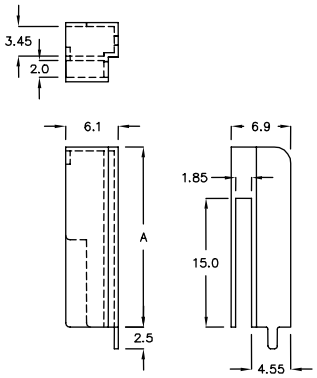

## 电容器帽套 E-CAP TUBE 8-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| DXZC-24C | 24.5 | 100 |






## 热敏电阻座 PTC MOUNT 8-13-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PTC-2K | 12.3 | 11.0 | 1000 |
| PTC-05 | 12.3 | 14.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 热敏电阻座 NTC HOLDER 8-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUG-6A | 2.5 | 6.5 | 2000 |






## 热敏电阻座 NTC HOLDER 8-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-1 | 16.2 | 5.3 | 9.9 | 1000 |



## 热敏电阻座 NTC HOLDER 8-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-1PS | 15.0 | 5.3 | 9.9 | 1000 |



## 热敏电阻座 NTC HOLDER 8-14-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-1C | 16.0 | 6.8 | 9.9 | 1000 |



## 热敏电阻座 NTC HOLDER 8-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-1A | 16.2 | 8.3 | 13.9 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 热敏电阻座 NTC HOLDER 8-15-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-3 | 17.2 | 7.7 | 13.1 | 500 |



## 热敏电阻座 NTC HOLDER 8-15-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-4 | 12.6 | 6.8 | 14.1 | 500 |






## 热敏电阻座 NTC HOLDER 8-15-3

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-4A | 12.7 | 6.8 | 8.5 | 500 |






## 热敏电阻座 NTC HOLDER 8-15-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-4C | 12.7 | 6.8 | 12.0 | 500 |






## 热敏电阻座 NTC HOLDER 8-15-5

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-4TX | 12.7 | 6.8 | 8.5 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 热敏电阻座 NTC HOLDER 8-16-1

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUX-4K | 12.7 | 6.8 | 8.4 | 500 |



## 电容器座 CAPACITOR HOUSING 8-16-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CWA-4A | 16.7 | 7.9 | 10.0 | 6.5 | 200 |
| CWA-4C | 16.7 | 7.2 | 10.0 | 5.2 | |
| CWA-4KH | 16.7 | 7.9 | 10.0 | 5.9 | |



## 电容器座 CAPACITOR HOUSING 8-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CWA-10 | 20.0 | 13.0 | 10.0 | 100 |






## 电容器座 CAPACITOR HOUSING 8-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CWR-2C | 17.5 | 9.2 | 12.5 | 7.6 | 10.0 | 200 |
| CWR-26SK | 26.3 | 11.7 | 10.0 | 10.2 | 21.7 | |






## 热敏电阻座 NTC HOLDER 8-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CWA-4F | 12.0 | 6.5 | 12.0 | 500 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电容器座 E-CAP HOUSING 8-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CWW-19H | 18.5 | 7.5 | 500 |

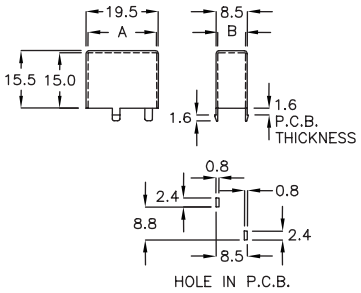







## 电容器座 E-CAP HOUSING 8-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | E | F | G | H | I | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| CWW-19PJ | 18.0 | 7.7 | 8.7 | 13.3 | 13.8 | 0.8 | 2.4 | 8.7 | 2.2 | 500 |
| CWW-19AN | 18.0 | 16.0 | 17.0 | 16.0 | 16.5 | 1.15 | 1.9 | 17.0 | 9.0 | |



## 固定座 MOUNT 8-17-3

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | FORM | PACKAGE |
|---|---|---|---|---|
| MNS-26DT | 26.0 | 13.1 | 1 | 500 |
| MNS-26KH | 26.0 | 10.0 | 2 | |

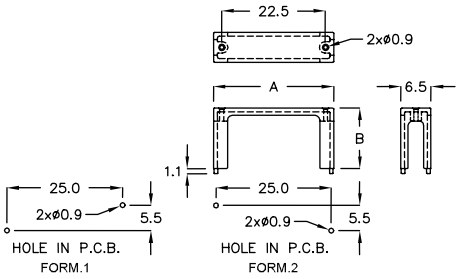

## 电容绝缘片 E-CAP INSULATING STRIP 8-17-4

- MATERIAL: PP
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| CWU-36 | 30.0 | 36.0 | 27.5 | 675 |



## 热敏电阻座 NTC HOLDER 8-17-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| HU-5 | 20.0 | 7.4 | 20.0 | 4.6 | 7.5 | 500 |
| HU-008 | 19.9 | 9.4 | 15.9 | 6.5 | 7.9 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 热敏电阻座 NTC HOLDER 8-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HU-05A | 13.4 | 6.6 | 9.0 | 5.0 | 500 |






## Y 电容座 Y CAPACITOR HOLDER 8-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-05D | 15.6 | 6.6 | 15.0 | 500 |



## 热敏电阻座 NTC HOLDER 8-18-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HU-15 | 14.5 | 9.0 | 500 |



## 热敏电阻座 NTC HOLDER 8-18-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HU-7 | 16.6 | 7.5 | 3.0 | 4.6 | 1000 |
| HU-7FG | 16.6 | 7.5 | 3.0 | 6.1 | |
| HU-07H | 16.6 | 7.5 | 2.6 | 6.1 | |
| HU-07L | 16.6 | 7.5 | 3.5 | 5.9 | |



## 热敏电阻座 NTC HOLDER 8-18-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HU-07A | 16.7 | 7.5 | 3.5 | 1000 |
| HU-07K | 19.5 | 7.5 | 3.3 | |
| HU-07P | 19.5 | 7.5 | 3.5 | |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 热敏电阻座 NTC HOLDER 8-19-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-07C | 19.8 | 7.5 | 5.9 | 1000 |
| HU-07J | 20.8 | 7.5 | 6.9 | |
| HU-07Q | 19.8 | 7.5 | 7.4 | |



## 热敏电阻座 NTC HOLDER 8-19-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HU-7AC | 16.7 | 7.5 | 3.5 | 1000 |



## 热敏电阻座 NTC HOLDER 8-19-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| HU-07F | 16.0 | 7.5 | 2.2 | 4.1 | 2.0 | 1000 |
| HU-7PK | 16.0 | 7.5 | 2.2 | 4.15 | 2.15 | |



## 热敏电阻座 NTC HOLDER 8-19-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-07M | 15.5 | 7.5 | 2.8 | 1000 |



## 热敏电阻座 NTC HOLDER 8-19-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| HU-7WF | 16.55 | 8.0 | 3.5 | 4.3 | 3.6 | 3.2 | 6.9 | 1000 |
| HU-8DM | 16.7 | 7.5 | 3.0 | 4.0 | 3.5 | 3.0 | 5.7 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 热敏电阻座 NTC HOLDER 8-20-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-7LA | 14.2 | 7.5 | 2.5 | 1000 |

## 热敏电阻座 NTC HOLDER 8-20-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | K | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| HU-07W | 14.5 | 7.5 | 3.1 | 3.9 | 4.85 | 2.7 | 1000 |
| HU-7AW | 14.5 | 7.5 | 2.7 | 3.5 | 4.85 | 2.7 | |
| HU-7WC | 16.5 | 8.0 | 3.5 | 4.3 | 6.9 | 2.7 | |
| HU-7WD | 15.5 | 7.5 | 3.1 | 3.9 | 4.85 | 2.7 | |
| HU-7QN | 16.5 | 8.0 | 3.5 | 4.3 | 6.9 | 3.5 | |

## 热敏电阻座 NTC HOLDER 8-20-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| HU-7MA | 14.5 | 7.5 | 2.0 | 3.5 | 2.5 | ø3.2 | 1000 |
| HU-7MK | 14.5 | 7.5 | 2.8 | 3.5 | 2.5 | ø3.1 | |
| HU-7RH | 14.5 | 7.5 | 1.8 | 3.3 | 2.3 | ø3.2 | |

## 热敏电阻座 NTC HOLDER 8-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

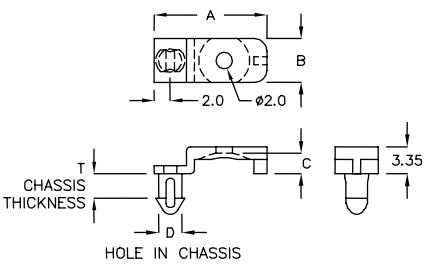


| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| HU-07U | 14.0 | 5.4 | 2.55 | ø3.0 | 2.8 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 热敏电阻座 NTC HOLDER 8-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUDK-7AH | 14.5 | 7.5 | 1.6 | 1000 |

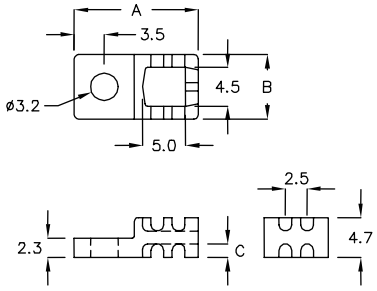

## 热敏电阻座 NTC HOLDER 8-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUH-19 | 19.0 | 7.0 | 2.5 | 500 |

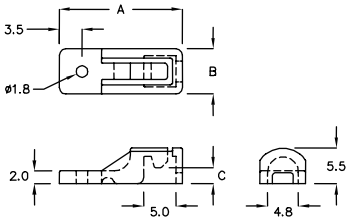

## 热敏电阻座 NTC HOLDER 8-21-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-09 | 15.5 | 9.0 | 3.4 | 1000 |



## 热敏电阻座 NTC HOLDER 8-21-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-09A | 15.5 | 9.0 | 3.4 | 1000 |



## 热敏电阻座 NTC HOLDER 8-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-09D | 18.0 | 18.6 | 3.6 | 1000 |

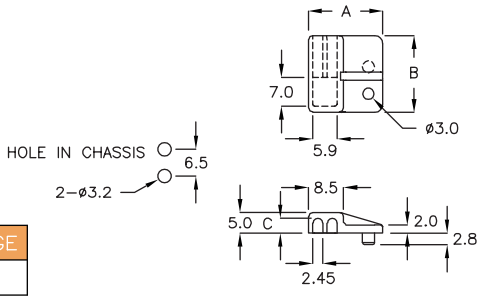




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 热敏电阻座 NTC HOLDER 8-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUD-01 | 16.55 | 8.0 | 2.3 | 1000 |






## 热敏电阻座 NTC HOLDER 8-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUA-04 | 14.0 | 7.2 | 6.2 | 1000 |

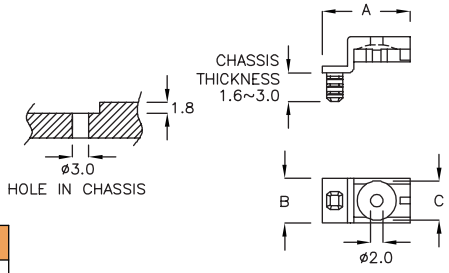

## 热敏电阻座 NTC HOLDER 8-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HU-7FT | 14.0 | 5.4 | 6.35 | 7.0 | 1000 |



## 热敏电阻座 NTC HOLDER 8-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| HUL-12CP | 12.0 | 1000 |



## 热敏电阻座 NTC HOLDER 8-22-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUC-01 | 7.5 | 4.5 | 6.4 | 2000 |

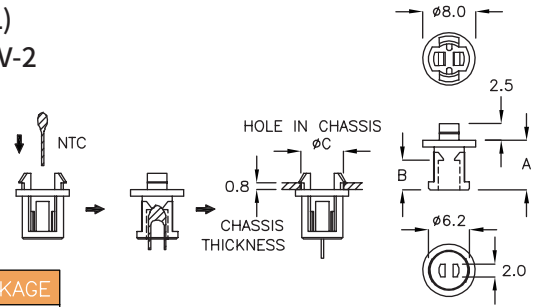




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 热敏电阻座 NTC HOLDER 8-23-1

- MATERIAL: TPR(UL)
- COLOR: BLACK

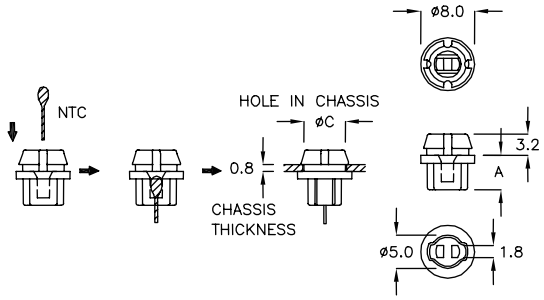


| PART NO | A | C | PACKAGE |
|---|---|---|---|
| HUC-02 | 5.2 | 6.4 | 2000 |

## 热敏电阻座 NTC HOLDER 8-23-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

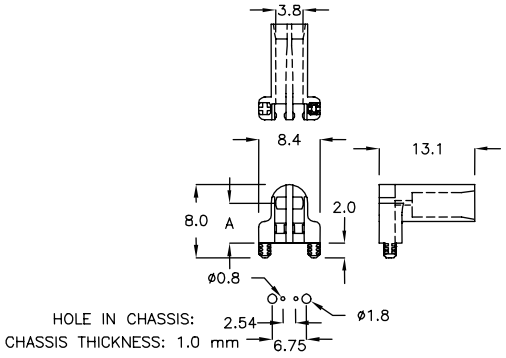


| PART NO | A | PACKAGE |
|---|---|---|
| HUP-05 | 5.5 | 500 |

## 热敏电阻座 NTC HOLDER 8-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DXW-8A | 10.5 | 8.4 | 7.5 | 1000 |

## 热敏电阻座 NTC HOLDER 8-23-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| HUM-20K | 10.6 | 500 |

## 光感应器座 LIGHT SENSOR HOLDER 8-23-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| MTU-09 | 9.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 光感应器座 LIGHT SENSOR HOLDER — 8-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| MTU−16D | 16.0 | 500 |



## 华司 WASHER — 8-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| U−6A | 6.5 | ø9.0 | ø2.6 | ø6.4 | 2000 |



## 华司 WASHER — 8-24-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| U−10A | 10.0 | ø9.0 | ø3.4 | ø6.0 | 1000 |



## 华司 WASHER — 8-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| UWA−01 | 9.9 | ø9.2 | ø3.3 | ø5.6 | 3.1 | 1000 |



## 圆体间隔柱 SPACER SUPPORT — 8-24-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| UWB−07 | 7.0 | ø9.4 | ø6.5 | ø5.9 | 1000 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | øB | øC | øD | E | PACKAGE |
|---|---|---|---|---|---|---|
| U-2DK | 2.5 | 7.0 | 3.8 | 5.0 | 1.0 | 2000 |
| U-3 | 3.2 | 6.0 | 3.1 | 4.4 | 0.7 | |
| U-3A | 3.2 | 6.0 | 3.0 | 5.0 | 1.2 | |
| U-3C | 3.0 | 5.0 | 2.2 | 4.0 | 0.5 | |
| U-3S | 3.3 | 5.0 | 2.2 | 4.1 | 1.3 | |
| U-4 | 4.2 | 6.0 | 2.2 | 4.3 | 1.3 | |
| U-04D | 4.8 | 10.5 | 6.2 | 9.4 | 0.5 | |
| U-4FR | 4.5 | 8.5 | 4.5 | 7.0 | 1.0 | |
| U-4HK | 4.5 | 9.1 | 5.5 | 6.8 | 2.7 | |
| U-4S | 4.3 | 5.0 | 2.2 | 4.2 | 1.2 | |
| U-4WP | 4.25 | 8.0 | 5.2 | 7.1 | 2.25 | |
| U-5 | 4.6 | 8.0 | 4.0 | 6.5 | 1.6 | |
| U-5C | 5.6 | 8.0 | 4.0 | 6.5 | 1.6 | |
| U-5H | 5.0 | 9.0 | 5.3 | 8.0 | 0.5 | |

| PART NO | A | øB | øC | øD | E | PACKAGE |
|---|---|---|---|---|---|---|
| U-5T | 5.0 | 9.5 | 6.0 | 8.5 | 0.5 | 2000 |
| U-05D | 5.7 | 8.0 | 3.5 | 6.1 | 0.5 | |
| U-6 | 6.5 | 8.0 | 3.5 | 6.1 | 0.85 | |
| U-06C | 6.0 | 10.5 | 6.5 | 9.5 | 0.5 | |
| U-06D | 6.5 | 10.4 | 6.9 | 9.4 | 0.5 | 1000 |
| U-7 | 7.7 | 11.0 | 3.2 | 6.7 | 2.1 | |
| U-7A | 3.5 | 8.0 | 3.5 | 5.7 | 1.2 | 2000 |
| U-07C | 7.0 | 10.0 | 3.5 | 7.5 | 2.0 | 1000 |
| U-8 | 7.7 | 11.0 | 4.0 | 7.1 | 1.6 | |
| U-8A | 7.5 | 12.4 | 8.2 | 11.4 | 0.5 | |
| U-8S | 7.7 | 11.0 | 4.0 | 7.1 | 2.0 | |
| U-10 | 3.6 | 12.0 | 4.0 | 10.1 | 1.5 | |
| U-12 | 12.0 | 10.0 | 3.2 | 6.3 | 1.5 | |
| U-12A | 12.0 | 8.5 | 4.5 | 7.0 | 6.0 | |

## 华司 WASHER 8-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| UWC-01 | 6.1 | 4.2 | 5.2 | 3.0 | 1000 |



## 华司 WASHER 8-25-3

- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | MATERIAL | A | B | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| UWT-5AC | N66 | 6.6 | ø8.1 | ø7.2 | ø3.1 | 5.0 | 4.2 | ø4.0 | 1000 |
| UWT-6QR | PBT | 8.2 | ø11.5 | ø9.5 | ø4.1 | 6.0 | 4.0 | ø8.2 | 2000 |

## 华司 WASHER 8-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| WRA-02 | 1.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 华司 WASHER 8-26-1

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

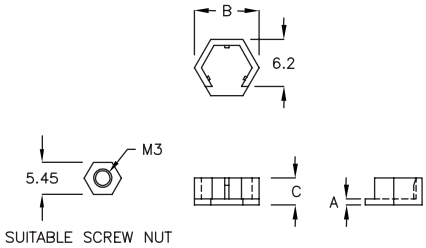


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| U-05M | 0.8 | 8.6 | 3.6 | 2000 |



## 华司 WASHER 8-26-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

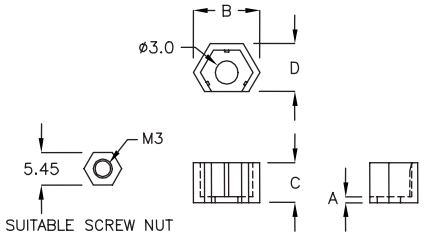


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| U-05J | 0.8 | 8.6 | 5.2 | 6.25 | 2000 |
| U-05Y | 0.8 | 7.8 | 4.0 | 5.8 | |
| U-5QF | 0.8 | 8.6 | 4.0 | 6.25 | |

## 华司 WASHER 8-26-3

- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK




| PART NO | MATERIAL | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| U-03D | N46 | 0.8 | 3.5 | 1.6 | ø3.5 | 2000 |
| U-03F | N46 | 0.8 | 3.8 | 2.2 | ø3.5 | |
| U-03L | N46 | 0.8 | 5.0 | 1.6 | ø3.5 | |
| U-03R | N46 | 0.8 | 2.5 | 2.2 | ø3.5 | |
| U-4RY | N66 | 0.8 | 4.0 | 3.5 | ø3.8 | |
| U-4XQ | PPS | 0.8 | 3.9 | 2.0 | ø3.5 | |
| U-5AB | N46 | 1.9 | 4.9 | 2.4 | ø3.5 | |
| U-5AF | N46 | 1.9 | 3.9 | 2.4 | ø3.5 | |
| U-5KW | N46 | 1.9 | 4.9 | 3.6 | ø5.0 | |



## 华司 WASHER 8-26-4

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK
- SUITABLE NUT: M3 NUT

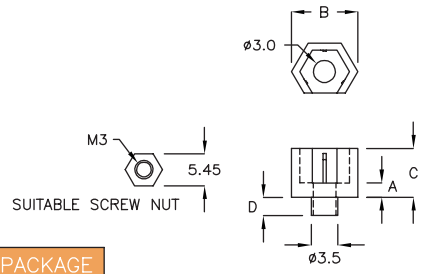


| PART NO | MATERIAL | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| U-5CG | N46 | 1.9 | 8.6 | 6.4 | 2.4 | 2000 |
| ★ U-5PG | PPS | 1.9 | 8.6 | 7.5 | 2.4 | |

## 华司 WASHER 8-26-5

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

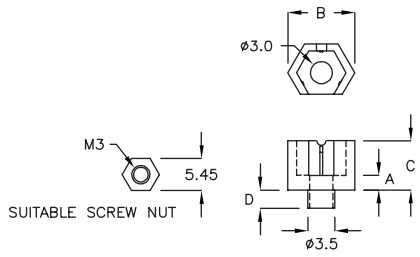


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| U-5NR | 1.9 | 8.6 | 6.0 | 2.2 | 2000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 华司 WASHER 8-27-1

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT







| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| U-05L | 0.8 | 8.6 | 5.0 | 1.6 | 2000 |
| U-05K | 0.8 | 8.6 | 5.2 | 2.2 | |
| U-05W | 0.8 | 8.6 | 4.0 | 1.6 | |
| U-5CF | 1.9 | 8.6 | 6.3 | 2.4 | |
| U-5CH | 0.8 | 8.6 | 5.2 | 1.6 | |



## 华司 WASHER 8-27-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- SUITABLE NUT: M3 NUT

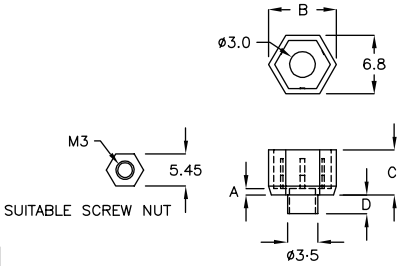


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| U-05P | 0.8 | 7.85 | 5.2 | 2.2 | 2000 |

## 华司 WASHER 8-27-3

- MATERIAL: ABS+PS
- COLOR: BLACK

NEW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ WS-1GN | 0.5 | ø5.5 | ø2.8 | 2000 |

## 华司 WASHER 8-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WS-3KP | 2.0 | ø6.0 | ø3.0 | 2000 |
| WS-3MD | 2.0 | ø6.0 | ø3.7 | |
| WS-3QR | 1.8 | ø5.8 | ø3.5 | |

## 华司 WASHER 8-27-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SHC-06 | 6.0 | ø6.5 | ø4.6 | ø3.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## O 型环 ORING — 8-28-1

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| OPW-7A | 1.5 | ø13.5 | ø7.2 | 1000 |
| OPW-9CD | 1.5 | ø15.5 | ø9.3 | |
| OPW-15D | 1.8 | ø21.4 | ø15.65 | |
| OPW-19M | 1.8 | ø26.7 | ø19.5 | |
| OPW-20 | 1.8 | ø28.2 | ø20.0 | |
| OPW-24A | 2.0 | ø31.5 | ø24.3 | |

## O 型环 ORING — 8-28-2

- MATERIAL: SILICONE
- COLOR: BLACK,ORANGE




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| OIL-02C | 1.0 | ø4.5 | ø2.5 | 5000 |
| OIL-10 | 1.5 | ø13.0 | ø10.0 | 2000 |

## 华司 WASHER — 8-28-3

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWX-11 | 1.5 | ø11.0 | ø5.8 | 1000 |
| WSR-11RM | 1.5 | ø18.0 | ø11.9 | 2500 |



## 华司 WASHER — 8-28-4

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSU-10 | 1.0 | ø10.0 | ø5.0 | 2000 |

## 华司 WASHER — 8-28-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MYC-18Y | 0.5 | ø18.7 | ø14.5 | 1000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 螺丝盖 SCREW COVER 8-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

美观保护螺丝
Better appearance and with Protection.
如有其他颜色需求,欢迎来电询问
If you have other color request, Kindly feel free to contact with us.

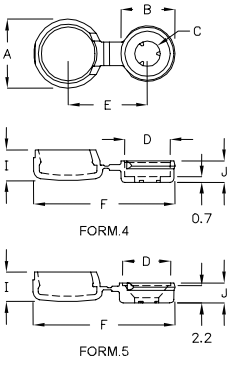


| PART NO | A | B | C | D | E | F | I | J | SUITABLE SCREW | | | | 配合件 FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | SCREW | FORM | G | H | | |
| M3P−8A | ø8.7 | ø6.7 | ø3.2 | ø5.7 | 10.0 | 17.9 | 3.9 | 2.7 | M3 | 1 | 5.5 | 2.0 | 4 | 1000 |
| M3T−10K | ø10.1 | ø8.1 | ø3.2 | ø7.1 | 11.4 | 20.7 | 3.9 | 2.7 | M3 | 2 | 6.9 | 1.9 | 4 | |
| M3F−9W | ø9.2 | ø7.2 | ø3.2 | ø6.2 | 10.5 | 18.9 | 4.1 | 3.0 | M3 | 3 | 6.0 | 1.8 | 5 | |
| M3Q−14K | ø13.1 | ø11.5 | ø6.3 | ø10.2 | 14.5 | 28.1 | 4.1 | 6.0 | M3 | 6 | 10.0 | 5.0 | 4 | |
| M4P−10A | ø10.2 | ø8.2 | ø4.2 | ø7.2 | 11.5 | 20.9 | 4.4 | 3.3 | M4 | 1 | 7.0 | 2.6 | 4 | |
| M4T−12K | ø12.6 | ø10.6 | ø4.2 | ø9.6 | 13.9 | 25.7 | 4.4 | 3.3 | M4 | 2 | 9.4 | 2.5 | 4 | |
| M4F−11W | ø11.2 | ø9.2 | ø4.2 | ø8.2 | 12.5 | 22.9 | 4.1 | 3.0 | M4 | 3 | 8.0 | 2.3 | 5 | |
| UN6K−10K | ø10.1 | ø8.1 | ø3.7 | ø7.1 | 11.4 | 20.6 | 3.9 | 2.8 | #6−32 | 1 | 6.9 | 2.1 | 4 | |
| UN6K−9D | ø9.8 | ø7.8 | ø3.7 | ø6.8 | 11.1 | 20.1 | 4.4 | 3.3 | #6−32 | 2 | 6.6 | 2.6 | 4 | |
| UN6K−10FQ | ø10.3 | ø8.3 | ø3.7 | ø7.3 | 11.6 | 21.1 | 4.1 | 3.0 | #6−32 | 3 | 7.1 | 2.1 | 5 | |

## 螺丝盖 SCREW COVER 8-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

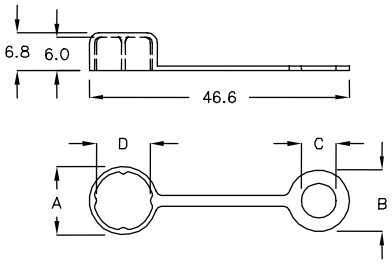


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| M3G−46A | ø12.2 | ø11.0 | ø6.2 | 9.6 | 500 |

## C型环 C RING 8-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| WCC−05 | 2.3 | ø6.55 | ø5.55 | 2.9 | 2000 |
| WCC−5A | 2.46 | ø6.2 | ø5.05 | 1.8 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 华司 WASHER 8-30-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WS-1BD | 1.0 | ø3.2 | ø1.6 | 2000 |
| WS-01N | 0.45 | ø3.9 | ø1.85 | |
| WS-2RK | 1.0 | ø4.0 | ø2.0 | |
| WS-2HR | 1.0 | ø4.1 | ø2.2 | |
| WS-0 | 0.4 | ø4.2 | ø2.5 | |
| WS-04C | 0.5 | ø4.5 | ø2.5 | |
| WS-4KT | 1.5 | ø4.9 | ø3.7 | |
| WS-1D | 1.0 | ø5.0 | ø2.7 | |
| WS-1F | 1.5 | ø5.0 | ø2.5 | |
| WS-2DC | 1.8 | ø5.0 | ø3.1 | |
| WS-1B | 0.5 | ø5.5 | ø2.5 | |
| WS-1C | 0.5 | ø5.5 | ø3.0 | |
| WS-2FA | 1.8 | ø5.5 | ø3.1 | |
| WS-3GK | 1.0 | ø5.6 | ø3.0 | |
| WS-3A | 1.4 | ø5.6 | ø2.9 | |
| WS-6NZ | 0.5 | ø6.0 | ø4.3 | |
| WS-01L | 0.8 | ø6.0 | ø3.1 | |
| WS-2K | 1.0 | ø6.0 | ø2.7 | |
| WS-5HY | 1.0 | ø6.2 | ø3.2 | |
| WS-06K | 1.5 | ø6.35 | ø3.3 | |
| WS-06A | 1.0 | ø6.5 | ø3.8 | |
| WS-06C | 1.35 | ø6.8 | ø4.9 | |
| WS-07H | 0.5 | ø7.0 | ø2.2 | |
| WS-1R | 0.6 | ø7.0 | ø4.6 | |
| WS-1M | 0.8 | ø7.0 | ø3.1 | |
| WS-02M | 1.0 | ø7.0 | ø3.2 | |
| WS-3SB | 1.0 | ø7.0 | ø3.5 | |
| WS-07F | 0.65 | ø7.5 | ø4.3 | |
| WS-07C | 1.55 | ø7.5 | ø5.1 | |
| WS-08F | 0.9 | ø7.8 | ø4.1 | |
| WS-4 | 0.8 | ø7.9 | ø4.0 | |
| WS-9 | 0.5 | ø8.0 | ø5.1 | |
| WS-23 | 0.6 | ø8.0 | ø1.6 | |
| WS-1S | 0.7 | ø8.0 | ø3.0 | |
| WS-8RM | 0.8 | ø8.0 | ø3.2 | |
| WS-6FP | 0.8 | ø8.0 | ø5.8 | |
| WS-1 | 1.0 | ø8.0 | ø3.2 | |
| WS-57 | 1.6 | ø8.0 | ø3.0 | |
| WS-9A | 2.0 | ø8.0 | ø5.1 | |
| WS-2 | 1.7 | ø8.1 | ø3.2 | |
| WS-8MK | 1.0 | ø8.2 | ø5.65 | |
| WS-24 | 0.8 | ø9.0 | ø4.0 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WS-9RC | 0.75 | ø9.0 | ø5.85 | 2000 |
| WS-9DK | 0.75 | ø9.0 | ø6.25 | |
| WS-9KR | 0.8 | ø9.0 | ø4.4 | |
| WS-4PS | 1.0 | ø9.0 | ø4.5 | |
| WS-06M | 1.5 | ø9.0 | ø5.5 | |
| WS-22 | 1.8 | ø9.0 | ø4.2 | |
| WS-5KL | 1.0 | ø9.5 | ø5.0 | |
| WS-7DM | 3.7 | ø9.6 | ø4.2 | |
| WS-5 | 3.0 | ø9.9 | ø4.0 | |
| WS-06D | 0.8 | ø10.0 | ø6.7 | |
| WS-10C | 1.0 | ø10.0 | ø3.1 | |
| WS-6 | 1.1 | ø10.0 | ø5.5 | |
| WS-3 | 1.2 | ø10.0 | ø4.2 | |
| WS-10F | 2.65 | ø10.0 | ø6.6 | |
| WS-10AC | 3.0 | ø10.0 | ø6.6 | |
| WS-7 | 3.5 | ø10.0 | ø6.0 | |
| WS-10 | 4.0 | ø10.0 | ø3.6 | 1000 |
| WS-10AH | 0.4 | ø10.2 | ø6.5 | 2000 |
| WS-11F | 1.0 | ø11.0 | ø4.1 | |
| WS-11MC | 1.5 | ø11.1 | ø5.2 | |
| WS-11KY | 2.0 | ø11.5 | ø4.5 | |
| WS-8 | 0.5 | ø12.0 | ø8.2 | |
| WS-12S | 1.0 | ø12.0 | ø3.1 | |
| WS-12FG | 1.0 | ø12.0 | ø7.4 | |
| WS-12A | 1.5 | ø12.0 | ø4.5 | |
| WS-12 | 1.2 | ø12.1 | ø6.4 | |
| WS-13 | 3.8 | ø12.6 | ø6.4 | 1000 |
| WS-13A | 4.2 | ø13.0 | ø3.6 | |
| WS-13C | 1.0 | ø13.0 | ø10.0 | 2000 |
| WS-14 | 1.0 | ø14.0 | ø6.5 | |
| WS-14F | 1.0 | ø14.0 | ø10.4 | |
| WS-56 | 1.6 | ø14.1 | ø8.2 | |
| WS-15 | 4.8 | ø14.7 | ø12.6 | 1000 |
| WS-16D | 0.8 | ø16.0 | ø9.7 | 2000 |
| WS-16A | 1.6 | ø16.0 | ø9.7 | |
| WS-16F | 1.6 | ø16.0 | ø8.4 | |
| WS-17 | 1.5 | ø17.0 | ø13.5 | |
| WS-18 | 0.8 | ø18.0 | ø4.2 | |
| WS-18QT | 1.4 | ø18.0 | ø8.1 | |
| WS-20 | 1.0 | ø20.0 | ø14.5 | 1000 |
| WS-20A | 2.0 | ø20.0 | ø10.5 | |
| WS-21 | 1.0 | ø21.0 | ø14.1 | |
| WS-22PM | 1.5 | ø22.0 | ø16.5 | |
| WS-26 | 1.5 | ø26.0 | ø20.5 | |
| WS-60 | 2.0 | ø60.0 | ø9.0 | 500 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-31-1

- MATERIAL: NYLON 6
- COLOR: NATURAL
- OTHER MATERIAL&THICKNESS
- AVAILABLE FOR OPTIONAL REQUEST
  ( 我司备有其他尺寸 , 欢迎来电洽询 )




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| NWT−01 | 0.5 | ø4.5 | ø2.1 | 5000 |
| NWT−02 | 0.5 | ø4.5 | ø2.6 | |
| NWT−03 | 0.5 | ø4.6 | ø2.5 | |
| NWT−04 | 0.5 | ø4.7 | ø2.6 | |
| NWT−05 | 0.5 | ø5.0 | ø2.2 | |
| NWT−06 | 0.5 | ø5.0 | ø2.5 | |
| NWT−07 | 0.5 | ø5.0 | ø2.6 | |
| NWT−08 | 0.5 | ø5.0 | ø3.0 | |
| NWT−09 | 0.5 | ø5.0 | ø3.1 | |
| NWT−10 | 0.5 | ø5.0 | ø3.2 | |
| NWT−11 | 0.5 | ø5.0 | ø3.5 | |
| NWT−13 | 0.5 | ø5.6 | ø4.8 | |
| NWT−14 | 0.5 | ø6.0 | ø2.1 | |
| NWT−15 | 0.5 | ø6.0 | ø3.1 | |
| NWT−16 | 0.5 | ø6.0 | ø3.2 | |
| NWT−17 | 0.5 | ø6.0 | ø3.6 | 5000 |
| NWT−18 | 0.5 | ø6.0 | ø4.1 | |
| NWT−19 | 0.5 | ø6.0 | ø4.3 | |
| NWT−21 | 0.5 | ø6.5 | ø2.98 | |
| NWT−22 | 0.5 | ø6.5 | ø3.5 | |
| NWT−23 | 0.5 | ø6.5 | ø4.1 | |
| NWT−24 | 0.5 | ø7.0 | ø2.5 | |
| NWT−25 | 0.5 | ø7.0 | ø4.2 | |
| NWT−26 | 0.5 | ø7.0 | ø5.1 | |
| NWT−27 | 0.5 | ø7.0 | ø3.1 | |
| NWT−28 | 0.5 | ø7.5 | ø4.8 | |
| NWT−29 | 0.5 | ø7.8 | ø3.2 | |
| NWT−30 | 0.5 | ø8.0 | ø3.1 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| NWT−31 | 0.5 | ø8.0 | ø4.1 | 5000 |
| NWT−32 | 0.5 | ø8.0 | ø5.0 | |
| NWT−33 | 0.5 | ø8.0 | ø5.1 | |
| NWT−34 | 0.5 | ø8.0 | ø6.0 | |
| NWT−36 | 0.5 | ø8.8 | ø4.0 | |
| NWT−37 | 0.5 | ø8.8 | ø5.2 | |
| NWT−38 | 0.5 | ø9.0 | ø4.5 | |
| NWT−39 | 0.5 | ø9.0 | ø6.1 | |
| NWT−40 | 0.5 | ø10.0 | ø3.1 | |
| NWT−41 | 0.5 | ø10.0 | ø4.1 | |
| NWT−42 | 0.5 | ø10.0 | ø5.1 | |
| NWT−43 | 0.5 | ø10.0 | ø5.2 | |
| NWT−44 | 0.5 | ø10.0 | ø5.5 | |
| NWT−45 | 0.5 | ø10.0 | ø6.1 | |
| NWT−46 | 0.5 | ø10.0 | ø6.4 | |
| NWT−47 | 0.5 | ø10.4 | ø7.2 | 5000 |
| NWT−48 | 0.5 | ø10.5 | ø6.6 | |
| NWT−49 | 0.5 | ø10.8 | ø7.2 | |
| NWT−50 | 0.5 | ø11.0 | ø5.0 | |
| NWT−51 | 0.5 | ø11.6 | ø7.6 | |
| NWT−52 | 0.5 | ø12.0 | ø3.6 | |
| NWT−53 | 0.5 | ø12.0 | ø5.2 | |
| NWT−54 | 0.5 | ø12.0 | ø6.0 | |
| NWT−55 | 0.5 | ø12.0 | ø7.3 | |
| NWT−56 | 0.5 | ø12.0 | ø8.0 | |
| NWT−58 | 0.5 | ø13.0 | ø6.5 | |
| NWT−59 | 0.5 | ø13.0 | ø7.95 | |
| NWT−60 | 0.5 | ø13.0 | ø8.0 | |
| NWT−99 | 0.5 | ø9.1 | ø4.0 | |

## 华司 WASHER 8-31-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| U−02A | 0.3 | ø7.0 | 2.3 | 2000 |

## 华司 WASHER 8-31-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL







| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| U−02F | 0.3 | ø7.0 | 1.9 | 2000 |
| U−03K | 0.8 | ø7.0 | 3.8 | |



提醒 : 本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWD-6K | 1.1 | ø14.3 | 3.65 | 1000 |



## 华司 WASHER 8-32-2

- MATERIAL: PPO(UL)
- FLAME CLASS: 94V-1
- COLOR: GRAY




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWJ-14Q | 2.0 | ø14.6 | 4.0 | 1000 |



## 华司 WASHER 8-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH M3 SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWD-3F | 0.6 | ø6.7 | 2.3 | 1000 |



## 华司 WASHER 8-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M3 SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWK-9 | 2.0 | ø10.0 | 9.0 | 1000 |



## 华司 WASHER 8-32-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | SCREW | PACKAGE |
|---|---|---|---|---|---|
| WSF-02 | 0.6 | ø4.5 | ø1.6 | M2x0.4 | 2000 |
| WSF-3 | 0.8 | ø8.3 | ø3.2 | #6-32 | |
| WSF-3A | 0.75 | ø6.7 | ø2.5 | M3x0.5 | |
| WSF-3D | 0.6 | ø5.0 | ø2.5 | M3x0.5 | |
| WSF-3GK | 0.6 | ø5.0 | ø2.4 | | |
| WSF-3M | 1.0 | ø8.0 | ø2.5 | M3x0.5 | |
| WSF-3S | 0.6 | ø8.3 | ø3.2 | #6-32 | |
| WSF-04 | 1.0 | ø12.5 | ø3.6 | M4x0.7 | |
| WSF-06 | 2.0 | ø12.0 | ø5.25 | | |
| WSF-6KT | 1.0 | ø6.3 | ø2.3 | | |
| WSF-10 | 0.7 | ø10.0 | ø5.2 | | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | SCREW | PACKAGE |
|---|---|---|---|---|---|
| WSF−09 | 0.6 | ø9.0 | ø4.2 | M5x0.8 | 2000 |

## 华司 WASHER 8-33-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| WS−5RM | 1.0 | ø5.5 | ø3.2 | M3 | 2000 |
| WS−5WK | 1.2 | ø5.5 | ø3.2 | | |
| WS−5YT | 1.8 | ø5.5 | ø3.2 | | |
| WS−6AT | 1.5 | ø6.35 | ø3.2 | | |
| WS−2T | 0.9 | ø6.5 | ø3.25 | | |
| WS−7RT | 0.8 | ø7.0 | ø3.2 | | |
| WS−7YM | 1.2 | ø7.0 | ø4.2 | M4 | |
| WS−7TH | 1.0 | ø7.0 | ø4.2 | | |
| WS−7AY | 1.5 | ø7.5 | ø4.2 | | |
| WS−7FT | 0.65 | ø7.5 | ø4.2 | | |
| WS−8WT | 0.8 | ø7.9 | ø4.2 | | |

| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| WS−8HT | 0.5 | ø8.0 | ø5.3 | M5 | 2000 |
| WS−8ST | 1.0 | ø8.0 | ø3.2 | M3 | |
| WS−8TQ | 2.0 | ø8.0 | ø3.2 | | |
| WS−3T | 1.2 | ø10.0 | ø4.2 | M4 | |
| WS−11KT | 1.0 | ø11.0 | ø4.2 | | |
| WS−11DF | 2.0 | ø11.0 | ø4.2 | | |
| WS−11QT | 2.0 | ø11.5 | ø4.2 | | |
| WS−12T | 1.0 | ø12.0 | ø3.2 | M3 | |
| WS−12CK | 2.0 | ø12.0 | ø3.2 | | |
| WS−4T | 3.0 | ø14.0 | ø4.2 | M4 | |
| WS−15T | 1.0 | ø15.0 | ø3.2 | M3 | |
| WS−15KR | 2.0 | ø15.0 | ø3.2 | | |

## 华司 WASHER 8-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| WRK−3C | 0.7 | ø4.6 | ø3.3 | M3 | 2000 |

## 华司 WASHER 8-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | USE SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| WRC−5Q | 0.8 | ø11.0 | ø6.6 | ø4.4 | — | 2000 |
| WRC−3BA | 1.0 | ø8.0 | ø3.5 | ø2.7 | M3 | |
| WRC−4GC | 0.8 | ø10.0 | ø4.5 | ø3.7 | M4 | |
| WRC−5DH | 1.0 | ø11.0 | ø5.35 | ø4.5 | M5 | |
| WRC−5MK | 1.0 | ø11.0 | ø5.5 | ø4.7 | M5 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-34-1

- MATERIAL: PE
- COLOR: NATURAL




| PART NO | A | B | C | D | USE SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| WRD-3K | 0.8 | ø10.0 | ø4.4 | ø3.2 | M4 | 2000 |
| WRD-5C | 1.2 | ø12.0 | ø6.4 | ø5.2 | M6 | |

## 华司 WASHER 8-34-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| WS-20T | 2.4 | ø8.0 | ø3.0 | M3 | 2000 |

## 华司 WASHER 8-34-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | USE SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| WSX-1A | 3.0 | ø5.0 | ø3.2 | ø1.8 | M1.6 | 2000 |

## 华司 WASHER 8-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| WS-4FT | 1.0 | ø7.0 | ø4.2 | M4 | 2000 |
| WS-4XT | 1.5 | ø7.0 | ø4.2 | | |
| WS-4BT | 2.0 | ø7.0 | ø4.2 | | |
| WS-5T | 0.8 | ø8.0 | ø5.2 | M5 | |
| WS-5WT | 1.0 | ø8.0 | ø5.2 | | |
| WS-5LT | 1.5 | ø8.0 | ø5.2 | | |
| WS-5BT | 2.0 | ø8.0 | ø5.2 | | |
| WS-6GT | 1.0 | ø9.0 | ø6.2 | M6 | |
| WS-6HT | 1.5 | ø9.0 | ø6.2 | | |
| WS-6PT | 2.0 | ø9.0 | ø6.2 | | |

## 华司 WASHER 8-34-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WRP-5LA | 5.5 | ø8.7 | ø5.8 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-35-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | USE SCREW | PACKAGE |
|---|---|---|---|---|---|
| WSH-08 | 0.5 | ø8.0 | 3.4 | #6-32 | 2000 |

## 华司 WASHER 8-35-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWD-3D | 2.0 | ø12.0 | ø3.2 | 1000 |

## 华司 WASHER 8-35-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WWK-11A | 2.25 | ø11.0 | ø2.2 | 2000 |

## 华司 WASHER 8-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWQ-2M | 2.5 | ø5.5 | ø4.1 | 1000 |

## 华司 WASHER 8-35-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSA-02 | 2.1 | ø20.0 | ø3.7 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-36-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WRB−3A | 1.9 | ø9.6 | ø4.2 | 2000 |
| WRB−3C | 1.9 | ø11.5 | ø4.2 | |

## 华司 WASHER 8-36-2

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WRF−02 | 2.0 | ø7.0 | ø4.2 | 1000 |

## 华司 WASHER 8-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW




| PART NO | A | B | C | D | USE SCREW | PACKAGE |
|---|---|---|---|---|---|---|
| UWM−03 | 2.5 | ø9.6 | ø6.3 | ø3.1 | M3 | 2000 |
| UWM−04 | 2.7 | ø11.6 | ø8.4 | ø4.1 | M4 | |
| UWM−05 | 3.2 | ø13.6 | ø10.4 | ø5.1 | M5 | |
| UWS−11 | 2.55 | ø11.0 | ø8.0 | ø3.9 | NO. 6−32UNC | |
| UWS−13 | 2.9 | ø13.0 | ø9.4 | ø4.4 | NO. 8−32UNC | |
| UWS−14 | 3.85 | ø14.7 | ø11.6 | ø5.0 | NO. 10−24UNC | 1000 |
| UWS−15 | 4.0 | ø15.4 | ø12.7 | ø5.8 | NO. 12−24UNC | |
| UWS−17 | 4.65 | ø17.3 | ø14.5 | ø6.5 | 1/4−20UNC | |

## 华司 WASHER 8-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSA−01 | 2.4 | ø11.5 | ø3.0 | 2000 |

## 固定座 MOUNT 8-36-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWF−3PQ | 3.6 | ø7.0 | ø5.4 | 2000 |
| UWF−05 | 5.0 | ø7.0 | ø5.3 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UWXC-12A | 2.2 | ø13.5 | ø12.7 | 1000 |



## 华司 WASHER 8-37-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSC-01 | 4.5 | ø15.0 | ø6.0 | 1000 |
| WSC-1A | 5.7 | ø15.0 | ø6.0 | |



## 华司 WASHER 8-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSC-30KP | 10.0 | ø30.0 | ø10.0 | 200 |



## 华司 WASHER 8-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSC-06 | 6.0 | ø14.0 | ø4.6 | 1000 |



## 华司 WASHER 8-37-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WWF-4K | 3.1 | ø12.0 | ø4.35 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-38-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSL-01 | 2.5 | ø10.0 | ø4.1 | ø8.1 | ø8.7 | 2000 |
| WSL-02 | 1.5 | ø7.0 | ø3.1 | ø5.1 | ø5.7 | |



## 华司 WASHER 8-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSB-01 | 5.0 | ø10.0 | ø5.4 | 1000 |



## 华司 WASHER 8-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSJ-01 | 3.4 | ø13.0 | ø6.3 | 2000 |



## 华司 WASHER 8-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MIA-03 | 9.0 | ø17.9 | ø8.1 | 3.0 | 500 |
| MIA-04 | 10.0 | ø17.9 | ø8.0 | 4.0 | |

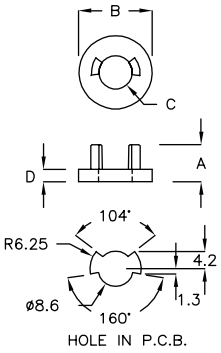

## 华司 WASHER 8-38-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WST-14 | 3.0 | ø14.0 | ø4.5 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| WSQ-01 | 10.0 | ø14.0 | ø3.2 | ø5.0 | ø12.0 | 2.8 | 1000 |
| WSQ-03 | 7.3 | ø7.0 | ø3.0 | ø3.5 | ø6.1 | 3.8 | |

## 华司 WASHER 8-39-2

- MATERIAL: POM
- FLAME CLASS: 94HB
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| WU-1 | 0.8 | 12.6 | ø5.9 | 11.5 | 2000 |
| WU-002 | 0.6 | 9.5 | ø4.1 | 8.9 | |

## 华司 WASHER 8-39-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WUS-1A | 5.5 | 5.84 | ø1.7 | 2000 |

## 华司 WASHER 8-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| WSM-01 | 10.8 | 8.0 | 3.3 | 2.9 | 2000 |

## 华司 WASHER 8-39-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| WSU-01 | 8.0 | 3.6 | ø3.3 | 1.6 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防震华司 SHOCK-ABSORB WASHER — 8-40-1

- MATERIAL: TPE
- COLOR: GRAY
- WITH M2.6 SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GSG-01 | ø9.6 | 1.75 | ø2.5 | 2000 |

## 防震华司 SHOCK-ABSORB WASHER — 8-40-2

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GSG-03 | ø8.6 | 3.0 | ø3.74 | 2000 |

## 华司 WASHER — 8-40-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| WSN-2A | ø6.3 | 2.6 | ø2.3 | ø4.3 | 2000 |

## 防震华司 SHOCK-ABSORB WASHER — 8-40-4

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | C | D HOLE IN CHASSIS | E | PACKAGE |
|---|---|---|---|---|---|---|
| GLH-2A | ø10.3 | 4.7 | ø5.5 | ø8.0 | 1.4 | 2000 |
| GLH-12MP | ø12.0 | 4.9 | ø6.2 | ø8.2 | 1.8 | |

## 防震华司 SHOCK-ABSORB WASHER — 8-40-5

- MATERIAL: TPE
- COLOR: BLACK







| PART NO | A | B | C | D HOLE IN CHASSIS | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| GLH-10CT | ø10.0 | 4.1 | ø4.55 | ø7.0 | 1.6 | 5.0 | 2000 |
| GLH-3WD | ø11.0 | 3.9 | ø6.4 | ø8.1 | 1.5 | 6.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防震华司 SHOCK-ABSORB WASHER — 8-41-1

- MATERIAL: TPE
- COLOR: BLACK







| PART NO | A | B | C | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| GQH−9AT | ø9.0 | 2.8 | ø3.9 | ø5.5 | 2000 |

## 防震华司 SHOCK-ABSORB WASHER — 8-41-2

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | C | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| GSQ−8AC | ø8.0 | 3.4 | ø3.9 | ø5.5 | 2000 |

## 防震华司 SHOCK-ABSORB WASHER — 8-41-3

- MATERIAL: TPE
- COLOR: BLACK







| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GSK−13A | ø13.0 | 9.35 | ø5.6 | 1000 |

## 防震华司 SHOCK-ABSORB WASHER — 8-41-4

- MATERIAL: TPR,TPE,SILICONE
- COLOR: BLACK




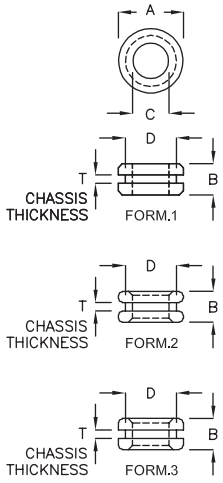


| PART NO | MATERIAL | A | B | C | D | E | H | T CHASSIS THICKNESS | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| WSS−02C | TPR | ø7.0 | 2.8 | ø3.9 | ø5.5 | 4.0 | 1.6 | 0.8 | 1 | |
| WSS−03A | SILICONE | ø7.0 | 3.4 | ø3.9 | ø5.5 | 4.0 | 1.6 | 0.8 | 2 | |
| WSS−3RK | SILICONE | ø8.2 | 3.8 | ø4.0 | ø6.0 | 4.0 | 2.0 | 0.8 | 3 | |
| WSS−07 | TPE | ø7.0 | 5.0 | ø3.9 | ø5.5 | 4.0 | 1.6 | 0.8 | 1 | 2000 |
| WSS−5GD | TPE | ø5.0 | 4.0 | ø2.5 | ø4.0 | 3.0 | 1.5 | 1.0 | 2 | |
| ★ WSS−7BH | TPE | ø7.0 | 5.3 | ø3.5 | ø5.2 | 3.5 | 1.5 | 0.8 | 1 | |
| WSS−10CQ | SILICONE | ø10.0 | 5.35 | ø4.0 | ø6.0 | 4.0 | 3.0 | 1.2 | 3 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防震华司 SHOCK-ABSORB WASHER —— 8-42-1

- MATERIAL: TPE
- COLOR: BLACK

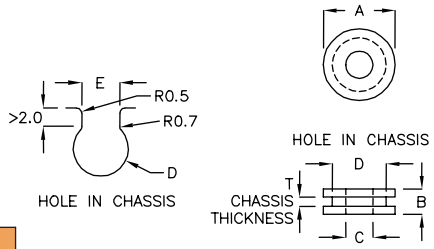


| PART NO | A | B | C | D HOLE IN CHASSIS | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ GSH−9C | ø9.6 | 2.8 | ø5.6 | ø7.6 | 6.6 | 0.8 | 1000 |
| GSH−12RT | ø12.0 | 6.0 | ø3.9 | ø7.5 | 6.5 | 1.0 | |
| GSH−12AP | ø12.0 | 9.0 | ø6.0 | ø9.0 | 8.0 | 1.0 | |
| GSH−12 | ø12.7 | 4.4 | ø4.8 | ø9.5 | 8.5 | 1.6 | |

## 防震华司 SHOCK-ABSORB WASHER —— 8-42-2

- MATERIAL: TPE
- COLOR: BLACK

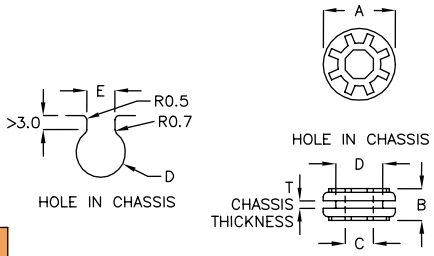


| PART NO | A | B | C | D HOLE IN CHASSIS | E | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| GSA−2C | ø16.0 | 7.0 | 6.3 | ø10.5 | 9.0 | 1.6 | 500 |
| GSA−2D | ø20.0 | 14.0 | 6.3 | ø14.7 | 13.2 | 1.6 | 200 |

## 防震华司 SHOCK-ABSORB WASHER —— 8-42-3

- MATERIAL: TPE
- COLOR: BLACK

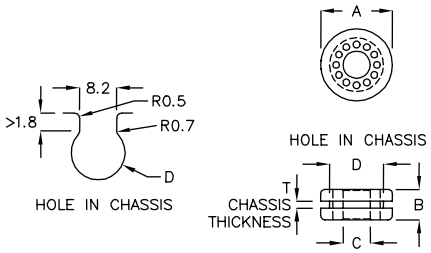


| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GSA−2H | ø12.7 | 5.4 | ø4.8 | ø9.2 | 1.0 | 1000 |

## 防震华司 SHOCK-ABSORB WASHER —— 8-42-4

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GSD−01 | ø18.8 | 9.7 | ø6.3 | ø14.4 | 1.4 | 200 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防震华司 SHOCK-ABSORB WASHER 8-43-1

- MATERIAL: TPE
- COLOR: BLACK

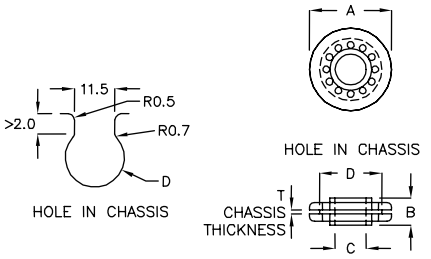


| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GSA-1A | ø16.5 | 5.45 | ø6.2 | ø12.5 | 0.85 | 500 |
| GSA-2A | ø16.5 | 6.5 | ø6.6 | ø12.5 | 1.6 | |



## 防震华司 SHOCK-ABSORB WASHER 8-43-2

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GSE-16A | ø16.5 | 6.5 | ø5.8 | ø12.5 | 1.6 | 500 |

## 防震华司 SHOCK-ABSORB WASHER 8-43-3

- MATERIAL: TPE
- COLOR: BLACK

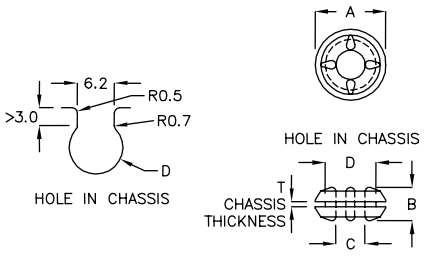


| PART NO | A | B | C | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GSA-03 | ø11.2 | 5.3 | ø4.6 | ø8.0 | 0.8 | 2000 |

## 防震华司 SHOCK-ABSORB WASHER 8-43-4

- MATERIAL: SILICONE
- COLOR: BLACK

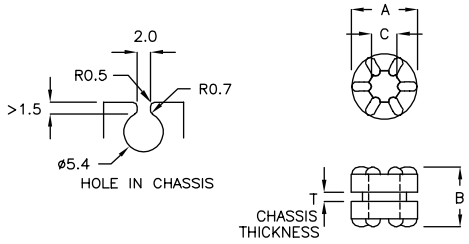


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| GSA-08 | ø8.6 | 7.8 | ø3.3 | 0.6~1.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防震华司 SHOCK-ABSORB WASHER —— 8-44-1

- MATERIAL: TPE,SILICONE
- COLOR: BLACK

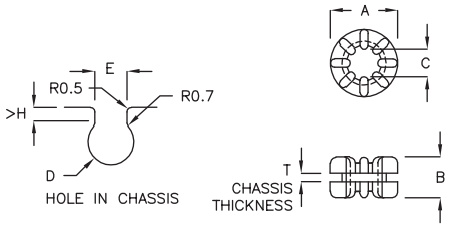


| PART NO | MATERIAL | A | B | C | D | E | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| GSA-7A | TPE | ø7.2 | 5.1 | ø4.2 | ø6.0 | 5.0 | 1.5 | 0.8 | 1000 |
| GSA-8LM | TPE | ø7.8 | 4.5 | ø4.0 | ø5.8 | 4.2 | 1.5 | 1.0 | 2000 |
| GSA-8QT | TPE | ø8.6 | 7.8 | ø3.3 | ø5.4 | 3.5 | 1.5 | 0.6~1.0 | |
| GSA-010 | TPE | ø9.6 | 5.8 | ø3.9 | ø6.3 | 5.0 | 1.8 | 1.2 | 1000 |
| GSA-09 | TPE | ø9.6 | 7.6 | ø4.0 | ø6.4 | 5.0 | 1.8 | 3.2 | |
| GSA-9KP | TPE | ø9.6 | 4.6 | ø4.3 | ø6.5 | 5.0 | 1.9 | 1.0 | |
| GSA-9SQ | TPE | ø9.6 | 5.8 | ø3.9 | ø6.3 | 5.0 | 4.5 | 0.8 | |
| GSA-10A | TPE | ø9.6 | 5.8 | ø3.9 | ø6.3 | 5.0 | 4.5 | 1.0 | |
| GSA-04 | SILICONE | ø14.3 | 7.95 | ø5.0 | ø9.5 | 7.5 | 3.0 | 1.0 | |
| GSA-14 | TPE | ø14.3 | 8.2 | ø4.7 | ø9.5 | 7.5 | 3.0 | 1.6 | |
| GSA-14A | TPE | ø14.3 | 9.5 | ø5.6 | ø9.5 | 7.5 | 3.0 | 3.2 | |

## 防震华司 SHOCK-ABSORB WASHER —— 8-44-2

- MATERIAL: TPE
- COLOR: BLACK

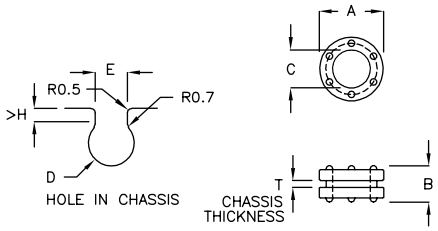


| PART NO | A | B | C | D | E | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| GSM-9F | ø9.5 | 5.4 | ø5.6 | ø7.5 | 6.1 | 1.8 | 1.0 | 1000 |

## 防震华司 SHOCK-ABSORB WASHER —— 8-44-3

- MATERIAL: TPE
- COLOR: BLACK

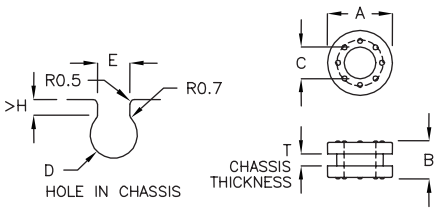


| PART NO | A | B | C | D | E | H | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| GSM-11K | ø11.5 | 6.8 | ø5.6 | ø8.4 | 7.0 | 2.8 | 2.0 | 500 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防震华司 SHOCK-ABSORB WASHER 8-45-1

- MATERIAL: TPE
- COLOR: BLACK

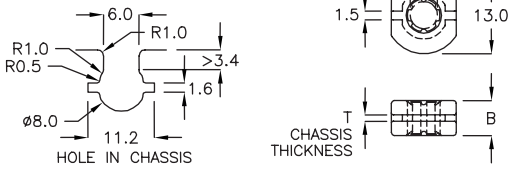


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| GSB-13K | 11.0 | 5.9 | ø4.6 | 1.0 | 1000 |

## 防震华司用螺丝 SCREW 8-45-2

- MATERIAL: STEEL PLATING NI
- COLOR: SILVER
- D: SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SWA-05 | 9.8 | 5.0 | ø4.4 | M3 | 2000 |
| SWA-5DA | 9.8 | 5.0 | ø4.4 | #6-32 | |
| SWA-5F | 11.0 | 5.0 | ø4.4 | M3 | |

A SSEMBLE WITH P.G PART GSA-010

## 防震华司用螺丝 SCREW 8-45-3

- MATERIAL: STEEL PLATING NI
- COLOR: SILVER
- D: SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| SWA-7A | 11.3 | 7.5 | ø5.4 | M3 | 1000 |

A SSEMBLE WITH P.G PART GSA-04

## 电晶体垫片 TRANSISTOR WASHER 8-45-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRC-201 | ø6.5 | 0.75 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体垫片 TRANSISTOR WASHER 8-46-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRC-202 | ø5.0 | 0.75 | 2000 |



## 电晶体垫片 TRANSISTOR WASHER 8-46-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TRC-301 | ø6.5 | 3.0 | 1.5 | 2000 |
| TRC-301M | ø6.5 | 1.6 | 1.0 | |



## 电晶体垫片 TRANSISTOR WASHER 8-46-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRC-301S | ø6.5 | 1.7 | 2000 |



## 电晶体垫片 TRANSISTOR WASHER 8-46-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRC-302 | ø6.0 | 5.0 | 2000 |



## 电晶体垫片 TRANSISTOR WASHER 8-46-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRC-501 | ø8.9 | 3.0 | 2000 |
| TRC-501A | ø8.9 | 4.5 | |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体垫片 TRANSISTOR WASHER 8-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRC-601 | ø12.0 | 1.2 | 2000 |



## 电晶体垫片 TRANSISTOR WASHER 8-47-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRA-3A | ø6.4 | 3.4 | 2000 |



## 热释电红外线感测器座 PIR HOLDER 8-47-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| TQJ-04 | ø11.0 | 500 |

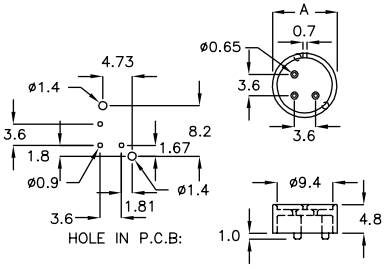

## 热释电红外线感测器座 PIR HOLDER 8-47-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TQP-10C | 10.7 | 6.15 | 2000 |



## 华司 WASHER 8-47-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSG-6C | ø12.0 | 1.2 | 3.1 | ø5.3 | ø4.3 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-48-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: POM(UL),TPE
- COLOR: NATURAL,BLACK




| PART NO | MATERIAL | COLOR | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| WSG-04 | N66 | NATURAL | ø5.6 | 0.6 | 0.8 | ø3.85 | ø2.9 | |
| WSG-9Q | N66 | NATURAL | ø7.2 | 0.7 | 1.0 | ø5.2 | ø3.2 | |
| WSG-9C | POM | NATURAL | ø9.0 | 1.5 | 1.0 | ø6.3 | ø4.5 | 2000 |
| WSG-01 | N66 | NATURAL | ø10.0 | 1.8 | 1.0 | ø5.0 | ø3.1 | |
| WSG-02 | TPE | BLACK | ø10.0 | 1.8 | 1.0 | ø5.5 | ø4.0 | |
| WSG-10BD | N66 | BLACK | ø10.0 | 2.0 | 1.2 | ø7.0 | ø4.3 | 1000 |
| WSG-11B | N66 | NATURAL | ø10.9 | 2.3 | 1.3 | ø6.8 | ø2.95 | |
| WSG-06 | N66 | NATURAL | ø12.0 | 3.0 | 3.2 | ø6.2 | ø3.0 | |
| WSG-6A | N66 | NATURAL | ø12.0 | 3.0 | 1.4 | ø8.0 | ø3.0 | |
| WSG-12CR | N66 | NATURAL | ø12.7 | 0.8 | 0.8 | ø6.2 | ø4.4 | 2000 |
| WSG-05 | N66 | NATURAL | ø12.85 | 0.8 | 1.6 | ø9.5 | ø6.4 | |
| WSG-07 | N66 | NATURAL | ø13.0 | 5.0 | 1.5 | ø8.2 | ø3.0 | |
| WSG-10M | N66 | NATURAL | ø13.0 | 2.4 | 1.7 | ø7.9 | ø6.6 | |

## 华司 WASHER 8-48-2

- MATERIAL: PPO(UL)
- FLAME CLASS: 94V-1
- COLOR: GRAY
- ADHESIVE TAPE: 3M




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSI-20P | ø20.0 | 3.35 | 2.65 | ø8.4 | ø6.4 | 1000 |



## 华司 WASHER 8-48-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSGT-10F | ø10.0 | 1.3 | 0.8 | 4.05 | ø3.45 | 1000 |

## 华司 WASHER 8-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSGB-20A | ø20.0 | 3.5 | 4.5 | ø15.8 | ø10.2 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER 8-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSG-03 | ø16.0 | 1.0 | 0.85 | ø11.0 | ø9.7 | 2000 |



## 华司 WASHER 8-49-2

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

| PART NO | A | D | E1 | E2 | PACKAGE |
|---|---|---|---|---|---|
| WSG-6F | ø12.55 | ø11.5 | ø9.3 | ø8.1 | 2000 |
| WSG-8A | ø12.35 | ø11.4 | ø9.35 | ø8.15 | |



## 华司 WASHER 8-49-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 821 | ø21.0 | 4.6 | 1.6 | 500 |



## 华司 WASHER 8-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WWA-01 | ø10.0 | 7.1 | 0.9 | ø6.6 | ø5.2 | 1000 |



## 华司 WASHER 8-49-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| WSE-01 | ø10.0 | 4.0 | 1.0 | ø5.0 | ø4.0 | 2000 |
| WSE-02 | ø15.8 | 3.8 | 1.5 | ø8.6 | ø6.5 | |
| WSE-03 | ø15.9 | 4.3 | 1.0 | ø8.6 | ø6.5 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 华司 WASHER — 8-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| ★ WSEA-04L | ø8.4 | 2.5 | 1.25 | ø4.85 | ø3.25 | 2000 |



## 华司 WASHER — 8-50-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- WITH COUNTERSUNK SCREW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WSNA-25K | ø25.3 | 3.95 | 2.5 | 500 |

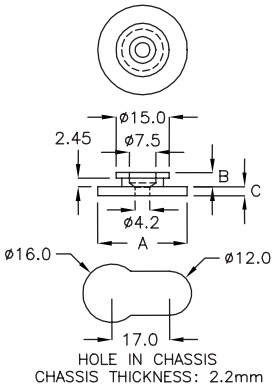

## 电感保护罩 INSULATED CAP — 8-50-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CAP-01 | 13.0 | ø13.0 | 500 |

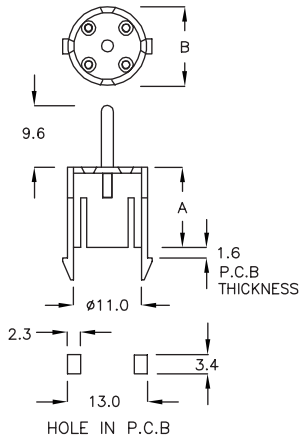

## 电晶体垫片 TRANSISTOR WASHER — 8-50-4

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 40M-2H | ø4.2 | 0.5 | 1.7 | ø2.9 | ø2.05 | 2000 |
| 40M-2FC | ø4.2 | 1.0 | 1.6 | ø2.9 | ø2.05 | |

## 电晶体垫片 TRANSISTOR WASHER — 8-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 60M-16 | ø8.5 | 4.35 | 1.6 | ø3.5 | ø3.0 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体垫片 TRANSISTOR WASHER 8-51-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| 807 | ø8.0 | 3.7 | 2.0 | 1.8 | 2000 |
| 807S | ø8.0 | 2.9 | 2.0 | 1.8 | |



## 电晶体垫片 TRANSISTOR WASHER 8-51-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| 60T-12 | ø6.4 | 2.0 | 1.2 | 3.7 | 3.0 | 3.76 | 2000 |
| 60T-20 | ø6.4 | 2.0 | 1.2 | 3.6 | 3.0 | 3.86 | |



## 电晶体垫片 TRANSISTOR WASHER 8-51-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 60K-29 | ø6.0 | 1.1 | 2.9 | ø3.8 | ø3.2 | 2000 |
| 60K-28C | ø6.0 | 1.0 | 2.8 | ø3.8 | ø3.2 | |
| 602-46-1 | ø6.1 | 1.6 | 1.4 | ø3.5 | ø3.0 | |



## 电晶体垫片 TRANSISTOR WASHER 8-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 603FK | ø6.0 | 0.8 | 2.8 | ø3.6 | ø3.1 | 2000 |



## 电晶体垫片 TRANSISTOR WASHER 8-51-5

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 603QT | ø4.4 | 1.5 | 0.5 | ø3.55 | ø2.95 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



# 电晶体垫片 TRANSISTOR WASHER 8-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- OPTIONAL MATERIAL:
- NYLON 46(UL), PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL, BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 601A | ø3.6 | 2.8 | 1.0 | ø3.0 | ø1.8 | 2000 |
| 601C | ø3.6 | 2.8 | 1.0 | ø3.0 | ø2.0 | |
| 601 | ø4.6 | 2.4 | 1.2 | ø3.0 | ø2.3 | |
| 603GK | ø4.7 | 3.25 | 0.7 | ø3.55 | ø3.0 | |
| 601W | ø5.0 | 1.0 | 0.8 | ø3.0 | ø2.0 | |
| 601M | ø5.0 | 1.7 | 1.0 | ø3.0 | ø2.2 | |
| 604PH | ø5.0 | 2.4 | 1.9 | ø3.1 | ø2.5 | |
| 602YH | ø5.0 | 1.6 | 1.3 | ø3.5 | ø3.0 | |
| 603NJ | ø5.0 | 2.0 | 1.9 | ø3.5 | ø3.0 | |
| 603QH | ø5.0 | 2.4 | 1.9 | ø3.5 | ø3.0 | |
| 601S | ø5.4 | 0.8 | 1.0 | ø3.4 | ø2.9 | |
| 601Q | ø5.5 | 2.16 | 1.04 | ø3.64 | ø2.56 | |
| 601R | ø5.7 | 1.75 | 0.95 | ø3.55 | ø2.95 | |
| 603 | ø5.9 | 2.2 | 1.9 | ø3.55 | ø2.95 | |
| 601J | ø6.0 | 0.9 | 2.5 | ø3.0 | ø2.2 | |
| 601H | ø6.0 | 4.0 | 1.5 | ø3.0 | ø2.5 | |
| 601D | ø6.0 | 4.5 | 1.0 | ø3.0 | ø2.5 | |
| 602HC | ø6.0 | 1.6 | 1.3 | ø3.5 | ø2.95 | |
| 603D | ø6.0 | 2.5 | 1.2 | ø3.5 | ø2.7 | |
| 604P | ø6.0 | 2.54 | 2.0 | ø3.5 | ø2.88 | |
| 605A | ø6.0 | 5.7 | 1.2 | ø3.5 | ø2.95 | |
| 602S | ø6.0 | 1.2 | 1.3 | ø3.55 | ø2.95 | |
| 602 | ø6.0 | 1.6 | 1.3 | ø3.55 | ø2.95 | |
| 602Y | ø6.0 | 1.6 | 1.3 | ø3.55 | ø3.0 | |
| 603L | ø6.0 | 2.0 | 2.0 | ø3.55 | ø2.95 | |
| 603M | ø6.0 | 2.3 | 1.8 | ø3.55 | ø2.95 | |
| 603P | ø6.0 | 2.3 | 1.8 | ø3.55 | ø3.0 | |
| 604S | ø6.0 | 3.1 | 1.5 | ø3.55 | ø2.95 | |
| 604 | ø6.0 | 3.2 | 2.0 | ø3.55 | ø2.95 | |
| 608L | ø6.0 | 7.7 | 1.0 | ø3.55 | ø2.95 | |
| 605U | ø6.0 | 1.5 | 0.5 | ø3.6 | ø3.0 | |
| 602L | ø6.0 | 1.5 | 1.5 | ø3.6 | ø3.0 | |

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 603AG | ø6.1 | 0.8 | 2.0 | ø3.55 | ø2.95 | 2000 |
| 602K | ø6.1 | 1.4 | 1.5 | ø3.55 | ø2.95 | |
| 602M | ø6.1 | 1.5 | 1.2 | ø3.55 | ø2.95 | |
| 603S | ø6.1 | 1.5 | 2.0 | ø3.55 | ø2.95 | |
| 603W | ø6.1 | 1.5 | 2.0 | ø3.55 | ø2.95 | |
| 603K | ø6.1 | 2.0 | 1.4 | ø3.55 | ø2.95 | |
| 603Y | ø6.1 | 2.25 | 2.0 | ø3.55 | ø2.95 | |
| 602MS | ø6.15 | 1.4 | 1.2 | ø3.55 | ø2.95 | |
| 602TK | ø6.2 | 1.2 | 1.0 | ø3.5 | ø2.9 | |
| 603MK | ø6.2 | 2.4 | 1.9 | ø3.5 | ø3.0 | |
| 602W | ø6.2 | 2.4 | 1.9 | ø3.5 | ø3.0 | |
| 604HQ | ø6.2 | 3.1 | 1.5 | ø3.5 | ø2.95 | |
| 602KD | ø6.2 | 0.6 | 1.2 | ø3.55 | ø2.95 | |
| 603U | ø6.2 | 3.0 | 1.9 | ø3.55 | ø3.0 | |
| 604V | ø6.2 | 3.1 | 1.5 | ø3.55 | ø2.95 | |
| 604C | ø6.2 | 3.6 | 1.2 | ø3.55 | ø2.95 | |
| 603A | ø6.2 | 2.9 | 1.9 | ø3.6 | ø2.95 | |
| 604K | ø6.22 | 3.1 | 1.02 | ø3.56 | ø2.95 | |
| 604M | ø6.3 | 2.6 | 2.0 | ø3.55 | ø2.95 | |
| 605AF | ø6.3 | 1.5 | 2.5 | ø3.9 | ø3.2 | |
| 605W | ø6.35 | 2.05 | 1.0 | ø4.1 | ø3.15 | |
| 605MF | ø6.35 | 2.05 | 1.02 | ø4.35 | ø3.08 | |
| 605N | ø6.4 | 2.0 | 1.2 | ø3.53 | ø3.0 | |
| 605T | ø6.4 | 3.0 | 1.5 | ø3.53 | ø3.0 | |
| 604L | ø6.4 | 2.0 | 1.3 | ø3.55 | ø2.95 | |
| 606S | ø6.5 | 1.7 | 2.5 | ø4.15 | ø3.2 | |
| 606 | ø6.5 | 1.7 | 3.0 | ø4.25 | ø3.2 | |
| 603T | ø7.0 | 2.4 | 1.3 | ø3.55 | ø3.0 | |
| 605S | ø7.9 | 1.5 | 1.0 | ø3.6 | ø3.0 | |
| 605 | ø8.0 | 5.7 | 1.2 | ø3.5 | ø2.95 | |
| 606A | ø8.0 | 6.3 | 1.2 | ø3.55 | ø2.9 | |
| 601F | ø8.0 | 3.9 | 0.5 | ø6.0 | ø3.5 | |
| 605K | ø10.0 | 5.7 | 2.2 | ø3.95 | ø2.95 | |
| 605F | ø12.0 | 5.7 | 2.7 | ø3.95 | ø2.95 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体垫片 TRANSISTOR WASHER 8-53-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- OPTIONAL MATERIAL:
  NYLON 46(UL), PPS(UL), PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL, BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 706A | ø7.0 | 2.5 | 1.0 | ø3.5 | ø3.1 | 2000 |
| 701 | ø7.0 | 4.4 | 2.0 | ø3.55 | ø2.95 | |
| 706C | ø7.0 | 1.67 | 1.06 | ø4.5 | ø2.35 | |
| 706D | ø7.0 | 1.67 | 0.81 | ø4.5 | ø2.35 | |
| 703 | ø7.0 | 2.5 | 2.0 | ø5.0 | ø2.95 | |
| 704A | ø7.0 | 3.0 | 1.0 | ø5.0 | ø4.0 | |
| 705 | ø7.0 | 4.0 | 1.0 | ø5.0 | ø4.0 | |
| 704 | ø7.0 | 5.8 | 2.0 | ø5.0 | ø3.0 | |
| 702A | ø7.11 | 0.8 | 1.2 | ø3.68 | ø3.0 | |
| 805 | ø7.8 | 3.65 | 1.2 | ø5.9 | ø3.1 | |
| 805A | ø7.9 | 2.5 | 1.2 | ø5.9 | ø3.2 | |
| 806H | ø8.0 | 2.7 | 1.3 | ø3.05 | ø2.5 | |
| 805C | ø8.0 | 1.2 | 4.0 | ø3.5 | ø3.0 | |
| 803A | ø8.0 | 2.4 | 1.3 | ø3.5 | ø2.95 | |
| 806F | ø8.0 | 2.7 | 1.3 | ø3.5 | ø2.5 | |
| 802 | ø8.0 | 2.5 | 2.0 | ø3.7 | ø2.95 | |
| 806 | ø8.0 | 1.9 | 1.45 | ø3.9 | ø3.2 | |
| 801A | ø8.0 | 0.9 | 2.0 | ø4.4 | ø3.2 | |
| 801C | ø8.0 | 0.9 | 2.0 | ø4.65 | ø4.0 | |
| 804A | ø8.0 | 5.1 | 1.0 | ø4.55 | ø3.65 | |
| 804C | ø8.0 | 0.9 | 3.2 | ø4.65 | ø3.1 | |
| 804 | ø8.0 | 3.0 | 3.2 | ø4.65 | ø3.1 | |
| 803 | ø8.1 | 2.7 | 1.2 | ø3.9 | ø3.0 | |
| 801 | ø8.1 | 0.8 | 1.0 | ø4.9 | ø3.1 | |

★

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| 805B | ø8.1 | 6.65 | 1.25 | ø6.0 | ø3.1 | 2000 |
| 808F | ø8.8 | 2.0 | 0.8 | ø5.0 | ø4.1 | |
| 807B | ø9.0 | 3.75 | 2.0 | ø6.0 | ø3.0 | |
| 808D | ø9.5 | 1.55 | 0.8 | ø4.95 | ø4.35 | |
| 808A | ø9.5 | 1.2 | 2.0 | ø6.2 | ø3.8 | |
| 808 | ø9.6 | 0.65 | 1.55 | ø6.0 | ø3.65 | |
| 809 | ø10.0 | 4.0 | 1.0 | ø5.0 | ø4.0 | |
| 809A | ø10.0 | 3.0 | 1.0 | ø5.0 | ø4.0 | |
| 811 | ø10.8 | 3.8 | 2.0 | ø7.9 | ø5.3 | |
| 811A | ø10.9 | 7.25 | 1.1 | ø5.0 | ø4.0 | |
| 813K | ø11.0 | 3.5 | 1.5 | ø6.9 | ø4.3 | |
| 812 | ø11.8 | 2.0 | 2.0 | ø5.9 | ø3.0 | |
| 803K | ø11.8 | 1.9 | 0.5 | ø6.0 | ø4.0 | |
| 812C | ø11.8 | 2.0 | 1.2 | ø5.9 | ø3.0 | |
| 812L | ø11.9 | 3.0 | 2.6 | ø7.9 | ø4.0 | 1000 |
| 812A | ø12.3 | 9.0 | 1.1 | ø5.3 | ø4.5 | |
| 812D | ø12.7 | 1.6 | 1.6 | ø7.96 | ø3.58 | |
| 713AN | ø13.0 | 2.9 | 3.0 | ø7.8 | ø4.1 | 2000 |
| 713BK | ø13.0 | 3.9 | 3.0 | ø7.8 | ø4.1 | |
| 713 | ø13.0 | 5.9 | 3.0 | ø7.8 | ø4.1 | |
| 814AT | ø14.0 | 14.7 | 1.3 | ø6.6 | ø5.1 | 500 |
| 814 | ø14.0 | 18.9 | 1.3 | ø6.6 | ø5.1 | |
| 817A | ø15.0 | 13.0 | 2.0 | ø9.95 | ø8.1 | |
| 815 | ø15.9 | 1.65 | 2.0 | ø5.9 | ø3.1 | |
| 901 | ø19.2 | 1.6 | 3.25 | ø12.7 | ø9.5 | |

## 电晶体垫片 TRANSISTOR WASHER 8-53-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| 603RA | ø5.0 | 2.4 | 1.9 | 2000 |






## 电晶体盖 TRANSISTOR COVER 8-53-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-19 | 29.5 | 7.5 | 3.3 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体盖 TRANSISTOR COVER 8-54-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HU-19A | 29.5 | 7.5 | 3.3 | 1000 |



## 电晶体盖 TRANSISTOR COVER 8-54-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | F | G | K | PACKAGE |
|---|---|---|---|---|---|---|---|
| HUK-01 | 19.0 | 7.0 | 3.4 | 2.0 | ø2.4 | 5.0 | 1000 |
| HUK-2A | 15.0 | 7.0 | 3.6 | 2.0 | ø3.2 | 5.5 | |



## 电晶体盖 TRANSISTOR COVER 8-54-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUK-7Y | 15.0 | 10.0 | 3.3 | 1000 |



## 电晶体盖 TRANSISTOR COVER 8-54-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HU-07T | 12.9 | 12.0 | 1000 |



## 光电耦合器保护盖 OPTICAL COUPLER COVER 8-54-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUJ-01 | 2.5 | 8.6 | 5.0 | 2000 |
| HUJ-1FD | 3.0 | 8.6 | 5.0 | |
| HUJ-2MK | 2.5 | 11.6 | 8.0 | |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 光电耦合器保护盖
## OPTICAL COUPLER COVER 8-55-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUJ-3RS | 2.5 | 10.6 | 1000 |






## 光电耦合器保护盖
## OPTICAL COUPLER COVER 8-55-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUJ-2A | 2.4 | 9.4 | 2000 |
| HUJ-2XY | 2.9 | 9.4 | |



## IC 保护盖 IC COVER 8-55-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MPT-7PN | 2.5 | 7.4 | 5.5 | 2000 |



## 光电耦合器保护盖
## OPTICAL COUPLER COVER 8-55-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HJA-2D | 2.5 | 8.6 | 2000 |






## IC 保护盖 IC COVER 8-55-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUJ-4HN | 2.2 | 13.9 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## IC 保护盖 IC COVER 8-56-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUJ-4QM | 2.2 | 8.0 | 1000 |



## IC 保护盖 IC COVER 8-56-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUJ-4CR | 2.2 | 9.5 | 1000 |

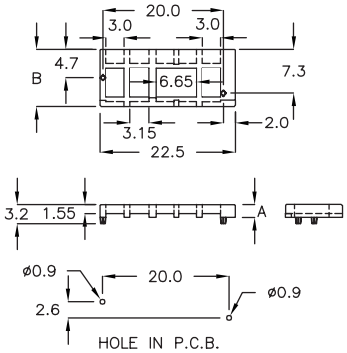

## IC 保护盖 IC COVER 8-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUT-2CD | 2.2 | 8.2 | 1000 |






## IC 保护盖 IC COVER 8-56-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ICC-16 | 16.0 | 12.2 | 1000 |






## IC 保护盖 IC COVER 8-56-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ICA-20A | 20.4 | 9.3 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## IC 保护盖 IC COVER 8-57-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HUQ-16 | 16.0 | 8.0 | 500 |



## 保护盖 HOLE PROTECTOR 8-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MPR-05 | 15.1 | 8.0 | 6.8 | 1000 |



## 电晶体座 TRANSISTOR HOUSING 8-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TRR-4A | 4.1 | 19.2 | 10.3 | 1000 |






## 电晶体座 TRANSISTOR HOUSING 8-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-01A | 3.0 | 5.0 | 7.0 | 2000 |






## 电晶体座 TRANSISTOR HOUSING 8-57-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-01 | 7.6 | 10.5 | 10.0 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体座 TRANSISTOR HOUSING 8-58-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-01C | 7.5 | 10.5 | 10.0 | 1000 |






## 电晶体座 TRANSISTOR HOUSING 8-58-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-01D | 6.1 | 9.0 | 10.5 | 1000 |






## 电晶体座 TRANSISTOR HOUSING 8-58-3

- MATERIAL: PBT,NYLON 66(UL)
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR
  ＊ FOR TO-247 TRANSISTOR

| PART NO | MATERIAL | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TR-01H | PBT V0 | 4.5 | 9.5 | 3.4 | 3.0 | 1.0 | 1.6 | 2000 |
| *TR-1MK | N66 V2 | 8.0 | 14.7 | 7.0 | 4.0 | 1.2 | 3.6 | |






## 电晶体座 TRANSISTOR HOUSING 8-58-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR-01F | 5.5 | 10.0 | 3.4 | 3.0 | 2000 |






## 电晶体座 TRANSISTOR HOUSING 8-58-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR-1YQ | 4.5 | 9.45 | 3.4 | 3.0 | 2000 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体座 TRANSISTOR HOUSING 8-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR
  ＊ FOR TO-3P TRANSISTOR




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR−02 | 5.0 | 10.0 | 2.6 | 4.0 | 2000 |
| *TR−02A | 5.0 | 15.0 | 5.75 | 4.0 | |
| TR−02C | 3.7 | 10.0 | 2.7 | 3.7 | |



## 电晶体座 TRANSISTOR HOUSING 8-59-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| TR−02D | 5.0 | 10.0 | 4.0 | 2000 |



## 电晶体座 TRANSISTOR HOUSING 8-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR−02F | 8.5 | 10.0 | 2.6 | 4.0 | 1000 |
| TR−02H | 9.5 | 10.0 | 2.6 | 4.0 | |

## 电晶体座 TRANSISTOR HOUSING 8-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR−2QM | 5.0 | 10.0 | 2.6 | 4.0 | 2000 |



## 电晶体座 TRANSISTOR HOUSING 8-59-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRZ−07 | 7.0 | 9.8 | 2.6 | 4.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体座 TRANSISTOR HOUSING 8-60-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR-2DC | 3.5 | 8.6 | 2.5 | 2.3 | 2000 |



## 电晶体座 TRANSISTOR HOUSING 8-60-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK
- FOR TO-247 TRANSISTOR

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR-2HK | 4.3 | 15.0 | 4.8 | 2.8 | 2000 |
| TR-2WS | 4.3 | 16.5 | 4.8 | 4.0 | |
| TR-11AM | 11.0 | 16.5 | 4.77 | 4.77 | 1000 |



## 电晶体座 TRANSISTOR HOUSING 8-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRK-2A | 2.8 | 6.5 | 1.5 | 3.0 | 2000 |






## 电晶体座 TRANSISTOR HOUSING 8-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRT-5CS | 5.5 | 5.7 | ø1.1 | 3.5 | 2000 |



## 电晶体座 TRANSISTOR HOUSING 8-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-220FP TRANSISTOR

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRW-4YL | 4.0 | 10.0 | 2.5 | 4.0 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体座 TRANSISTOR HOUSING 8-61-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-251 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TRY−1A | 0.8 | 14.0 | 7.4 | 1000 |



## 电晶体座 TRANSISTOR HOUSING 8-61-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR−20D | 4.0 | 20.0 | 5.2 | 6.5 | 1000 |



## 电晶体座 TRANSISTOR HOUSING 8-61-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR−22D | 3.0 | 22.0 | 5.35 | 5.0 | 1000 |






## 电晶体座 TRANSISTOR HOUSING 8-61-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRL−10 | 10.0 | 23.0 | 5.4 | 5.1 | 1000 |



## 电晶体座 TRANSISTOR HOUSING 8-61-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRN−9H | 8.5 | 21.3 | 5.44 | 5.08 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体座 TRANSISTOR HOUSING 8-62-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-247-4L-M TRANSISTOR




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TRNC−4A | 4.5 | 15.5 | 8.25 | 3.8 | 8.3 | 1000 |



## 电晶体座 TRANSISTOR HOUSING 8-62-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| QLL−16 | 7.0 | 8.0 | 16.0 | 13.5 | 2000 |

## 电晶体盖 TRANSISTOR COVER 8-62-3

- MATERIAL: NYLON 66+GF30%
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HUF−14 | 14.0 | 12.2 | 2.0 | 1000 |



## 电晶体盖 TRANSISTOR COVER 8-62-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR−03 | 16.0 | 12.8 | 12.5 | 500 |



## 电晶体盖 TRANSISTOR COVER 8-62-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| TR−03A | 16.6 | 7.1 | 10.4 | 5.4 | 8.5 | 7.4 | 500 |
| TR−03E | 14.0 | 7.1 | 10.4 | 4.2 | 8.4 | 7.8 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体盖 TRANSISTOR COVER 8-63-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-03P | 14.0 | 7.35 | 13.0 | 1000 |






## 电晶体盖 TRANSISTOR COVER 8-63-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| TR-03C | 14.0 | 7.1 | 10.4 | 8.4 | 7.8 | ø2.8 | 500 |
| TR-03D | 14.0 | 7.1 | 12.0 | 10.2 | 7.7 | ø3.4 | |
| TR-03L | 14.8 | 8.15 | 12.15 | 10.35 | 7.8 | ø3.1 | |



## 电晶体盖 TRANSISTOR COVER 8-63-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-03N | 14.2 | 8.15 | 12.15 | 500 |



## 电晶体盖 TRANSISTOR COVER 8-63-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-03F | 16.0 | 12.8 | 10.3 | 500 |






## 电晶体盖 TRANSISTOR COVER 8-63-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-03K | 21.55 | 14.1 | 10.8 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体盖 TRANSISTOR COVER 8-64-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | G | PACKAGE |
|---|---|---|---|---|---|
| TR-04A | 15.3 | 8.35 | 10.1 | ø3.7 | 1000 |
| TR-04H | 13.0 | 6.0 | 10.1 | ø3.2 | |



## 电晶体盖 TRANSISTOR COVER 8-64-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | G | PACKAGE |
|---|---|---|---|---|---|
| TR-4ND | 11.45 | 5.65 | 10.1 | ø3.2 | 1000 |

## 电晶体盖 TRANSISTOR COVER 8-64-3

- METAL MATERIAL: PHOSPHOR BRONZE
- PLASTIC MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-04 | 14.6 | 8.2 | 10.2 | 1000 |

## 电晶体盖 TRANSISTOR COVER 8-64-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

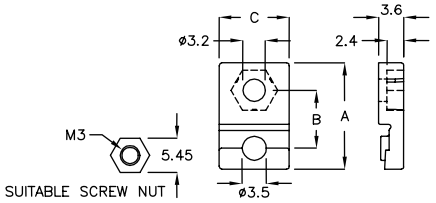


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-4GS | 15.3 | 8.35 | 10.1 | 1000 |
| TR-4YK | 14.3 | 7.4 | 10.1 | |

## 电晶体盖 TRANSISTOR COVER 8-64-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

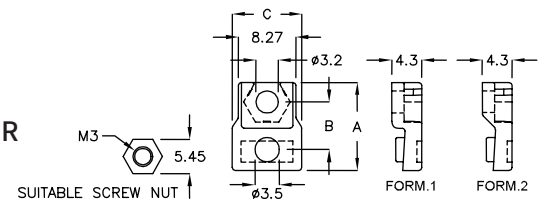


| PART NO | A | B | C | FORM | PACKAGE |
|---|---|---|---|---|---|
| TR-4LF | 12.65 | 6.85 | 10.0 | 1 | 1000 |
| TR-4JW | 12.65 | 6.85 | 10.0 | 2 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体盖 TRANSISTOR COVER 8-65-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

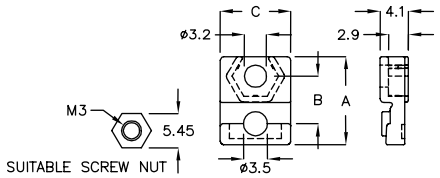


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR−4RL | 12.65 | 6.85 | 10.1 | 1000 |



## 电晶体盖 TRANSISTOR COVER 8-65-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TRE−4BJ | 12.65 | 6.85 | 10.1 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-65-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR−05 | 16.2 | 7.4 | 13.0 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-65-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| TR−06 | 16.2 | 7.65 | 13.1 | 10.3 | ø3.1 | ø3.4 | 200 |
| TR−06A | 16.1 | 7.75 | 13.2 | 10.6 | ø3.3 | ø3.5 | |
| TR−08 | 17.6 | 9.15 | 13.0 | 10.5 | ø3.1 | ø3.4 | |
| TR−08D | 19.2 | 10.75 | 13.0 | 10.5 | ø3.0 | ø3.4 | |

## 电晶体盖 TRANSISTOR COVER 8-65-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | E | F | PACKAGE |
|---|---|---|---|---|---|---|
| TR−06H | 14.3 | 8.3 | 12.6 | 10.3 | ø3.0 | 200 |
| TR−06J | 14.3 | 8.3 | 13.2 | 10.5 | ø3.2 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体盖 TRANSISTOR COVER 8-66-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-06K | 13.0 | 6.8 | 13.2 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-66-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-06D | 13.0 | 6.8 | 13.2 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-66-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-08C | 16.0 | 8.0 | 13.0 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-66-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-6AF | 13.0 | 6.8 | 13.2 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-66-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-8CF | 16.0 | 8.0 | 13.0 | 200 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体盖 TRANSISTOR COVER 8-67-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR
  ＊ FOR TO-3P TRANSISTOR




| PART NO | A | B | C | D | E | F | G | I | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| TR−09 | 22.9 | 9.3 | 12.9 | 9.4 | 10.4 | ø2.9 | ø3.5 | 7.8 | 200 |
| ＊TR−26 | 26.3 | 10.6 | 18.6 | 10.2 | 15.3 | ø3.6 | ø4.1 | 7.2 | |

## 电晶体盖 TRANSISTOR COVER 8-67-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR

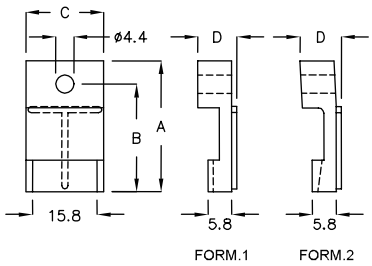


| PART NO | A | B | C | D | FORM | PACKAGE |
|---|---|---|---|---|---|---|
| TR−10 | 32.0 | 26.3 | 19.1 | 9.75 | 1 | 200 |
| TR−10KD | 32.0 | 26.3 | 19.1 | 10.0 | 2 | |

## 电晶体盖 TRANSISTOR COVER 8-67-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR−11 | 32.0 | 26.3 | 19.0 | 200 |

## 电晶体盖 TRANSISTOR COVER 8-67-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247 TRANSISTOR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR−20MK | 20.25 | 14.0 | 13.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体盖 TRANSISTOR COVER 8-68-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-21KP | 21.5 | 9.3 | 12.9 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-68-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-3P TRANSISTOR

| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TR-25 | 27.0 | 12.3 | 18.5 | 8.4 | 15.5 | 200 |
| TR-30 | 32.3 | 9.7 | 21.3 | 9.5 | 18.3 | |
| TR-30A | 33.2 | 12.3 | 21.3 | 9.5 | 18.3 | |



## 电晶体盖 TRANSISTOR COVER 8-68-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-31 | 25.0 | 14.65 | 25.1 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-68-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-31A | 20.0 | 13.55 | 25.4 | 200 |



## 电晶体盖 TRANSISTOR COVER 8-68-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-33MQ | 22.0 | 14.1 | 33.3 | 200 |

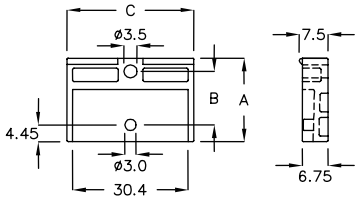






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电晶体盖 TRANSISTOR COVER 8-69-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | G | PACKAGE |
|---|---|---|---|---|---|
| TR-35 | 37.7 | 11.4 | 18.8 | ø3.6 | 200 |
| TR-35A | 37.7 | 11.4 | 18.8 | ø4.1 | |



## 电晶体盖 TRANSISTOR COVER 8-69-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TR-35C | 37.7 | 11.4 | 18.8 | 200 |






## 电晶体盖 TRANSISTOR COVER 8-69-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TRX-28K | 28.5 | 12.4 | 19.1 | 100 |



## 电晶体盖 TRANSISTOR COVER 8-69-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| TRM-01 | 32.0 | 25.5 | 16.0 | 4.7 | 6.2 | 3.2 | 3.2 | 500 |
| TRM-2A | 35.0 | 27.65 | 17.5 | 5.3 | 7.0 | 3.2 | 4.0 | |






## 电晶体座 TRANSISTOR HOUSING 8-69-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-220 TRANSISTOR

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRJ-25F | 25.4 | 15.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体座 TRANSISTOR HOUSING 8-70-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247 TRANSISTOR

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRJP-25BC | 25.4 | 12.5 | 500 |
| TRJP-36AK | 36.3 | 15.15 | |



## 电晶体座 TRANSISTOR HOUSING 8-70-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247-3 TRANSISTOR

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRJQ-25A | 25.4 | 9.5 | 500 |






## 电晶体座 TRANSISTOR HOUSING 8-70-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- FOR TO-247 TRANSISTOR

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TRJW-65C | 65.3 | 15.15 | 200 |

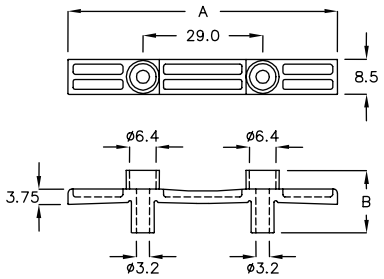

## 电晶体座 TRANSISTOR HOUSING 8-70-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TR-20 | 5.6 | 3.8 | 2.1 | 5.0 | 200 |
| TR-20A | 8.2 | 5.9 | 2.0 | 6.0 | |



## 电晶体座 TRANSISTOR HOUSING 8-70-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| TR-20B | 2.0 | 1.1 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 电晶体固定扣 TRANSISTOR CLAMP —— 8-71-1

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TRQ-4H | 13.75 | 6.0 | 6.3 | 4.5 | 11.5 | 1000 |
| TRQ-5CN | 12.6 | 8.0 | 7.5 | 5.7 | 10.0 | |
| TRQ-5ZL | 17.25 | 8.0 | 6.8 | 5.0 | 14.7 | |
| TRQ-10 | 12.5 | 8.0 | 7.0 | 5.2 | 10.0 | |
| TRQ-10A | 12.5 | 8.0 | 8.0 | 6.2 | 10.0 | |
| TRQ-10F | 12.5 | 8.0 | 7.3 | 5.5 | 10.0 | |
| TRQ-10W | 12.5 | 8.0 | 6.1 | 4.3 | 10.0 | |



## 电晶体固定扣 TRANSISTOR CLAMP —— 8-71-2

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TRQ-5K | 13.6 | 7.8 | 7.3 | 5.5 | 10.0 | 1000 |
| TRQ-5P | 12.6 | 7.8 | 7.3 | 5.5 | 9.0 | |
| TRQ-7A | 13.6 | 8.0 | 8.8 | 7.0 | 10.0 | |



## 电晶体固定扣 TRANSISTOR CLAMP —— 8-71-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TRQ-7DM | 20.4 | 10.0 | 9.0 | 7.0 | 18.1 | 1000 |



## 电晶体固定扣 TRANSISTOR CLAMP —— 8-71-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TRQ-7F | 21.9 | 10.0 | 9.0 | 7.0 | 18.2 | 1000 |



## 电晶体固定扣 TRANSISTOR CLAMP —— 8-71-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| TRQ-5JX | 6.8 | 4.5 | 6.6 | 5.0 | 1000 |
| TRQ-6MQ | 6.8 | 4.5 | 7.9 | 6.3 | |
| TRQ-7HL | 6.8 | 4.5 | 8.6 | 7.0 | |
| TRQ-7SK | 8.2 | 4.5 | 8.6 | 7.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 热收缩套管 HEAT SHRINKING TUBE — 8-72-1

- SIZE: Φ1.2~Φ50.8
- COLOR: BLACK
- LENGTH IS ACCORDING TO CUSTOMER'S DEMAND



## 矽胶片 SILICONE RUBBER — 8-72-2

- MATERIAL: SILICONE (UL)
- COLOR: GRAY
- FLAME CLASS: 94V-0
- THICKNESS: 0.3~0.8mm
- LENGTH IS ACCORDING TO CUSTOMER'S DEMAND




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TO-3P3A | 25.0 | 20.0 | 16.5 | 1000 |
| TO-2203A | 18.0 | 13.0 | 13.5 | |

## 矽胶套管 SILICONE RUBBER TUBE — 8-72-3

- MATERIAL: SILICONE(UL)
- FLAME CLASS: 94V-0
- COLOR: GRAY




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CST-1315 | 15.0 | ø13.2 | 0.45 | 1000 |
| CST-1925 | 25.0 | ø18.7 | 0.45 | 500 |

## 矽胶套管 SILICONE RUBBER TUBE — 8-72-4

- MATERIAL: SILICONE(UL)
- COLOR: GRAY
- FLAME CLASS: 94V-0
- ACCORDING TO CUSTOMER'S DEMAND




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| TO-220ST | 11.4 | 21.5 | 5.8 | 0.45 | 0.45 | 1000 |
| TO-220ST-B | 11.4 | 16.0 | 5.8 | 0.45 | 0.45 | |
| TO-3PST | 17.5 | 28.5 | 5.9 | 0.45 | 0.45 | |
| TO-4PST | 23.5 | 22.0 | 5.0 | 0.4 | 0.4 | |



## 陶瓷片 CERAMICS — 8-72-5

- MATERIAL: CERAMICS
- COLOR: NATURAL




| PART NO | A | B | C | D | T | PACKAGE |
|---|---|---|---|---|---|---|
| TQA-01 | 19.2 | 13.8 | 14.6 | ø3.7 | 2.0 | 1000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

09

# 腳墊,燙金腳墊,墊座
# PLASTIC RUBBER FOOT

## 脚垫 PLASTIC FOOT 9-2-1

- MALE MATERIA L: PP
- FEMALE MATERIAL: EVA
- COLOR: BLACK
- INCLUDE PIN
  * 附 PIN




| PART NO | A | B HOLE IN CHASSIS | C | D | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GL-13 | ø13.1 | ø5.0 | 4.6 | 9.0 | 1.0~2.0 | 500 |
| GL-16 | ø15.8 | ø5.0 | 4.5 | 8.8 | 1.0~2.0 | |
| GL-18 | ø19.9 | ø8.0 | 18.0 | 23.5 | 0.8~1.0 | |
| GL-18S | ø20.0 | ø8.0 | 18.0 | 21.9 | 0.8~1.0 | |
| GL-19S | ø19.4 | ø8.0 | 4.0 | 7.0 | 1.0~2.0 | |
| GL-19 | ø19.5 | ø8.0 | 5.0 | 10.4 | 1.0~2.5 | |
| GL-19M | ø19.8 | ø8.0 | 7.0 | 11.0 | 1.0~2.0 | |
| GL-19H | ø20.3 | ø8.0 | 10.2 | 15.7 | 1.0~2.5 | |
| GL-20H | ø20.0 | ø8.0 | 20.3 | 25.9 | 1.0~3.5 | 200 |
| GL-24 | ø24.0 | ø8.0 | 5.0 | 10.4 | 1.0~2.5 | 500 |
| GL-24L | ø24.0 | ø8.0 | 5.0 | 10.8 | 1.0~2.7 | |
| GL-24H | ø24.0 | ø8.0 | 10.5 | 15.8 | 1.0~2.5 | |
| GL-27C | ø27.0 | ø10.0 | 7.0 | 12.0 | 0.8~1.2 | 200 |
| GL-29 | ø28.6 | ø10.0 | 8.0 | 13.8 | 1.0~3.5 | 500 |
| GL-30 | ø29.5 | ø10.0 | 15.0 | 23.3 | 0.8~2.5 | 200 |
| GL-30PR | ø30.0 | ø8.0 | 3.5 | 7.5 | 0.8~1.0 | 500 |
| GL-32 | ø31.5 | ø10.0 | 7.8 | 13.6 | 1.0~3.5 | |
| GL-32S | ø32.0 | ø10.0 | 7.8 | 11.3 | 0.8~1.2 | 200 |

## 脚垫 PLASTIC FOOT 9-2-2

- MALE MATERIAL: PP
- FEMALE MATERIAL: EVA
- COLOR: BLACK
- INCLUDE PIN
  * 附 PIN




| PART NO | A | B HOLE IN CHASSIS | C | D | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| GL-20K | ø26.7 | ø7.8 | 16.0 | 21.0 | 0.8~1.4 | 200 |
| GL-20L | ø20.0 | ø8.0 | 12.0 | 18.0 | 0.8~1.8 | |
| GL-20P | ø19.5 | ø8.0 | 8.0 | 12.5 | 0.8~1.2 | 500 |
| GL-27 | ø27.0 | ø8.0 | 13.0 | 18.0 | 0.8~1.8 | 200 |
| GL-27F | ø26.7 | ø7.8 | 5.0 | 10.0 | 0.8~1.2 | |
| GL-27K | ø26.7 | ø7.8 | 10.0 | 15.0 | 0.8~1.2 | |
| GL-32D | ø33.0 | ø8.4 | 16.0 | 21.7 | 0.8~1.6 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 脚垫 PLASTIC FOOT 9-3-1

- MALE MATERIAL: NYLON 66(UL)
- FEMALE MATERIAL: TPR(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,GRAY
- INCLUDE PIN
  * 附 PIN




| PART NO | CHASSIS THICKNESS | A | B HOLE IN CHASSIS | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| GL-20M | 0.8 | ø20.0 | ø5.3 | 5.2 | 8.4 | 500 |

## 脚垫 PLASTIC FOOT 9-3-2

- MALE MATERIAL: PP
- FEMALE MATERIAL: EVA
- COLOR: BLACK,GRAY
- INCLUDE PIN
  * 附 PIN




| PART NO | CHASSIS THICKNESS | A | B HOLE IN CHASSIS | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| GL-23D | 0.8~1.6 | ø23.0 | ø8.2 | 15.0 | 20.5 | 200 |
| GL-23F | 0.8~1.6 | ø23.0 | ø8.0 | 23.0 | 28.5 | |

## 脚垫 PLASTIC FOOT 9-3-3

- MATERIAL: TPE(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- GL-12AK CAN BE USED WITH SR-3XL TO SANP IN

NEW




| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | GL-12AK | ø12.7 | ø3.05 | 5.3 | 3.2 | 1000 |

## 脚垫 PLASTIC FOOT 9-3-4

- MATERIAL: TPR(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- MUST BE FASTENED BY M3 SCREW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| GL-03 | ø15.0 | ø4.2 | 6.0 | 3.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 脚垫 PLASTIC FOOT 9-4-1

- MATERIAL: TPE
- COLOR: BLACK
- MUST BE FASTENED BY M3 SCREW
- GL-7 CAN BE USED WITH SR-5 TO SNAP IN




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| GL-2 | ø13.8 | ø3.2 | ø5.9 | 10.0 | 6.0 | 1000 |
| GL-2C | ø12.0 | ø3.5 | ø6.35 | 8.0 | 3.3 | |
| GL-4 | ø20.0 | ø3.4 | ø8.7 | 10.4 | 4.5 | 500 |
| GL-4D | ø20.0 | ø4.5 | ø8.8 | 10.4 | 4.6 | |
| GL-5 | ø28.0 | ø3.8 | ø8.2 | 19.8 | 13.8 | 100 |
| GL-6K | ø19.0 | ø3.8 | ø9.0 | 6.3 | 3.2 | 500 |
| GL-6S | ø18.2 | ø4.2 | ø9.0 | 7.8 | 3.8 | 1000 |
| GL-7 | ø14.7 | ø5.0 | ø9.0 | 6.0 | 2.2 | |
| GL-7S | ø14.7 | ø5.0 | ø9.0 | 5.0 | 2.2 | |
| ★ GL-22 | ø22.0 | ø4.5 | ø9.2 | 15.0 | 10.6 | 200 |

## 脚垫 PLASTIC FOOT 9-4-2

- MATERIAL: EVA
- COLOR: BLACK
- MUST BE FASTENED BY M3 SCREW




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| GL-4A | ø20.0 | ø4.2 | ø9.0 | 10.4 | 6.5 | 500 |
| GL-4L | ø19.7 | ø3.4 | ø8.7 | 12.6 | 6.8 | |
| GL-6 | ø18.6 | ø3.95 | ø8.8 | 6.4 | 3.3 | |
| GL-9 | ø25.0 | ø3.3 | ø9.0 | 6.4 | 3.4 | |
| GL-20 | ø20.0 | ø4.2 | ø9.2 | 20.0 | 14.0 | 200 |

## 烫金脚垫 HOT STAMPING FOOT 9-4-3

- MATERIAL: ABS+SPONGE
- COLOR: BLACK(ABS), BLACK+GOLD,BLACK+SILVER
- MUST BE FASTENED BY M3 SCREW




| PART NO | A | B | C | D | E HOT STAMPING | COLOR | PACKAGE |
|---|---|---|---|---|---|---|---|
| GLA-30C | ø30.2 | ø3.6 | ø8.1 | 9.3 | 6.4 | STAMPING GOLD | 100 |
| GLA-30F | ø30.0 | ø4.3 | ø11.5 | 6.0 | 4.0 | | |
| GLA-40F | ø40.0 | ø4.3 | ø11.5 | 8.0 | 4.5 | STAMPING SILIVER | |
| GLA-45F | ø44.8 | ø4.0 | ø10.3 | 10.9 | 5.8 | | |
| GLA-50F | ø50.0 | ø4.3 | ø11.5 | 13.5 | 8.0 | ABS BLACK | 50 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 烫金脚垫 HOT STAMPING FOOT 9-5-1

- MATERIAL: ABS+SPONGE
- COLOR: BLACK(ABS)
  BLACK+GOLD,BLACK+SILVER
- MUST BE FASTENED BY M3 SCREW




| PART NO | A | B | C | D | E HOT STAMPING | PACKAGE |
|---|---|---|---|---|---|---|
| GLA-40H | ø40.0 | ø4.3 | ø11.5 | 10.0 | 4.5 | 100 |



## 烫金脚垫 HOT STAMPING FOOT 9-5-2

- MATERIAL: ABS+SPONGE
- COLOR: BLACK(ABS)
  BLACK+GOLD,BLACK+SILVER
- MUST BE FASTENED BY M3 SCREW




| PART NO | A | B | C | D | E HOT STAMPING | COLOR | PACKAGE |
|---|---|---|---|---|---|---|---|
| GLA-45C | ø44.5 | ø4.0 | ø12.0 | 10.9 | 5.7 | STAMPING GOLD<br>STAMPING SILIVER<br>ABS BLACK | 50 |

## 脚垫 RUBBER FOOT 9-5-3

- PLASTIC MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- SOFT MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| WHT-6C | ø9.6 | ø5.3 | 6.8 | ø8.0 | 2000 |

## 脚垫 RUBBER FOOT 9-5-4

- PLASTIC MATERIAL: NYLON 66, NYLON 46(UL)
- FLAME CLASS: 94V-0
- SOFT MATERIAL: SILICONE
- COLOR: BLACK, GRAY




| PART NO | PLASTIC MATERIAL | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| WHT-6F | N66/BLACK | ø11.0 | ø8.0 | 4.15 | 2000 |
| | N66/GRAY | ø9.6 | ø7.9 | 4.55 | |
| | N46/BLACK | ø9.6 | ø8.0 | 4.55 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 脚垫 RUBBER FOOT 9-6-1

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | C | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|
| GLE-01 | ø20.0 | 8.5 | ø15.7 | 500 |
| GLE-02 | ø22.8 | 9.1 | ø20.0 | |
| GLE-03 | ø20.0 | 7.3 | ø15.7 | |

## 垫座 SILICONE RUBBER FOOT 9-6-2

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| GMC-3CD | ø12.0 | ø8.0 | 0.6 | 2000 |

## 垫座 SILICONE RUBBER FOOT 9-6-3

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| GMC-3RF | ø12.0 | ø8.0 | 1.2 | 2000 |

## 垫座 RUBBER FOOT 9-6-4

- MATERIAL: PU
- COLOR: BLACK




| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| LGA-01 | ø15.0 | ø9.7 | 8.0 | 5.9 | 500 |
| LGA-02 | ø15.0 | ø9.7 | 8.5 | 6.2 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-7-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| S0603 | ø6.3 | 3.0 | 3200 |
| S0702 | ø7.0 | 2.0 | 3000 |
| S0803D | ø8.0 | 3.5 | |
| S0904 | ø8.8 | 3.6 | 1000 |
| S0904MF | ø8.8 | 4.3 | |
| S1105 | ø10.7 | 5.2 | |
| S1106 | ø11.0 | 6.0 | |
| S1608 | ø15.7 | 8.0 | |

## 垫座 SILICONE RUBBER FOOT 9-7-2

- MATERIAL: SILICONE
- COLOR: BLACK,GRAY
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| S1303K | ø13.0 | 3.35 | 500 |
| S1303NH | ø13.0 | 3.55 | |

## 垫座 SILICONE RUBBER FOOT 9-7-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| U0802F | ø8.0 | 2.6 | 2000 |
| U0802KM | ø8.0 | 2.4 | 1000 |
| U1815 | ø18.0 | 14.5 | 500 |

## 垫座 SILICONE RUBBER FOOT 9-7-4

- MATERIAL: SILICONE
- COLOR: BLACK, WHITE
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| WRX−3C | ø5.0 | ø3.0 | 1.0 | 2000 |
| WRX−6MT | ø12.0 | ø6.0 | 2.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-8-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特别尺寸订购




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| R0301A | ø3.8 | 0.5 | |
| R0401 | ø4.0 | 1.0 | |
| R0402 | ø4.0 | 1.8 | |
| R0501 | ø4.8 | 1.0 | |
| R0501A | ø5.0 | 1.5 | |
| R0502 | ø5.0 | 1.8 | |
| R0502J | ø5.0 | 2.4 | |
| R0503A | ø5.0 | 3.5 | |
| R0601 | ø5.7 | 1.0 | |
| R0602 | ø6.0 | 1.5 | |
| R0602A | ø6.0 | 2.0 | |
| R0602C | ø6.0 | 2.5 | |
| R0603 | ø6.0 | 3.0 | 2000 |
| R0603S | ø6.4 | 2.6 | |
| R0702F | ø6.5 | 2.0 | |
| R0703A | ø6.5 | 3.2 | |
| R0701J | ø7.0 | 1.0 | |
| R0702C | ø7.0 | 2.0 | |
| R0702A | ø7.0 | 2.2 | |
| R0703 | ø7.0 | 3.0 | |
| R0701K | ø7.5 | 0.65 | |
| R0801C | ø8.0 | 0.7 | |
| R0801 | ø8.0 | 1.0 | |
| R0802H | ø8.0 | 1.5 | |
| R0802 | ø8.0 | 1.8 | |

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| R0802C | ø8.0 | 2.0 | |
| R0802P | ø8.0 | 2.2 | |
| R0803S | ø8.0 | 2.6 | |
| R0803C | ø8.0 | 3.0 | |
| R0803 | ø8.0 | 3.2 | |
| R0803F | ø8.0 | 3.4 | |
| R0803D | ø8.0 | 3.5 | |
| R0802L | ø8.2 | 2.0 | |
| R0802K | ø8.5 | 2.0 | |
| R0902C | ø9.0 | 2.0 | |
| R0901 | ø9.5 | 1.5 | |
| R0902A | ø9.5 | 2.0 | 2000 |
| R1001K | ø10.0 | 0.65 | |
| R1001 | ø10.0 | 1.0 | |
| R1002 | ø10.0 | 2.0 | |
| R1002C | ø10.0 | 2.5 | |
| R1003C | ø10.0 | 3.0 | |
| R1003A | ø10.0 | 3.3 | |
| R1202A | ø12.0 | 2.0 | |
| R1202D | ø12.0 | 2.5 | |
| R1202 | ø12.7 | 2.0 | |
| R1202C | ø12.7 | 2.5 | |
| R1501 | ø15.0 | 1.0 | |
| R1502C | ø15.0 | 2.0 | 500 |
| R2103 | ø21.0 | 3.0 | |
| R2802M | ø28.0 | 2.5 | |

## 垫座 SILICONE RUBBER FOOT 9-8-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特别尺寸订购




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| R0805 | ø8.2 | ø6.6 | 5.0 | |
| R0806A | ø8.0 | ø7.3 | 6.0 | |
| R0808 | ø8.0 | ø7.04 | 8.0 | 2000 |
| R0903 | ø9.5 | ø8.5 | 3.7 | |
| R0906C | ø9.5 | ø7.75 | 6.1 | |
| R1003 | ø10.9 | ø10.0 | 3.0 | |
| R1008 | ø10.0 | ø8.8 | 8.0 | 1000 |
| R1105 | ø10.9 | ø9.7 | 5.0 | |
| R1204A | ø11.7 | ø7.0 | 4.0 | 2000 |
| R1205 | ø12.0 | ø11.0 | 5.0 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| R1302A | ø12.7 | ø11.7 | 2.0 | |
| R1303 | ø12.6 | ø10.0 | 3.5 | 2000 |
| R1304 | ø12.7 | ø11.5 | 4.0 | |
| R1305 | ø12.7 | ø10.6 | 4.7 | |
| R1306 | ø12.7 | ø10.3 | 6.2 | 1000 |
| R1307A | ø12.7 | ø10.1 | 7.35 | |
| R1511 | ø15.0 | ø13.5 | 11.0 | |
| R1904 | ø19.0 | ø15.5 | 4.2 | 500 |
| R1907 | ø19.0 | ø17.0 | 7.0 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-9-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特别尺寸订购




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| R0401D | ø4.5 | ø4.0 | 1.7 | 2000 |
| R0402ADK | ø4.5 | ø4.0 | 2.5 | |
| R0404 | ø4.0 | ø3.7 | 4.5 | |
| R0502KM | ø5.0 | ø4.7 | 2.0 | |
| R0502LK | ø5.5 | ø5.2 | 2.2 | |
| R0504 | ø5.8 | ø5.4 | 4.0 | |
| R0603H | ø6.0 | ø5.5 | 3.0 | |
| R0603C | ø6.8 | ø6.6 | 3.1 | |
| R0605 | ø6.0 | ø5.7 | 5.2 | 1280 |
| R0703C | ø7.0 | ø6.8 | 3.2 | 2000 |
| ★ R0704H | ø7.0 | ø6.5 | 4.2 | |
| R0704K | ø7.0 | ø6.5 | 4.0 | |
| R0705A | ø7.0 | ø6.7 | 4.6 | |
| R0801LM | ø8.0 | ø7.4 | 1.8 | |
| R0802PQ | ø8.0 | ø7.5 | 2.0 | |
| R0803HD | ø8.0 | ø7.5 | 2.6 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| R0803GQ | ø8.0 | ø7.5 | 3.0 | 2000 |
| R0803MK | ø8.0 | ø7.7 | 3.5 | |
| R0804 | ø8.0 | ø7.8 | 3.7 | |
| R0804A | ø8.0 | ø7.8 | 4.5 | 1000 |
| R0804F | ø8.5 | ø8.0 | 4.0 | 2000 |
| R0903S | ø9.4 | ø9.0 | 3.2 | |
| R1004 | ø9.7 | ø9.4 | 4.2 | |
| R0910A | ø9.0 | ø8.8 | 10.2 | 500 |
| R1004C | ø10.5 | ø10.5 | 4.5 | |
| R1005D | ø10.0 | ø9.7 | 5.5 | 1000 |
| R1009A | ø10.0 | ø9.8 | 9.4 | 500 |
| R1011 | ø10.0 | ø9.0 | 11.5 | |
| R1505 | ø15.4 | ø14.9 | 5.1 | |
| R1507 | ø15.0 | ø14.4 | 7.0 | |
| R2210 | ø22.0 | ø21.7 | 10.4 | |

## 垫座 SILICONE RUBBER FOOT 9-9-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| RX0902 | ø9.0 | 2.0 | 2000 |
| RX1003 | ø10.0 | 3.0 | |
| RX1203 | ø12.0 | 3.0 | |
| RX1202 | ø12.5 | 2.0 | 1000 |
| RX1502 | ø15.0 | 2.0 | |
| RX2503 | ø25.0 | 3.0 | |

## 垫座 SILICONE RUBBER FOOT 9-9-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| C060301 | ø6.0 | ø3.0 | 1.0 | 2000 |
| C060302 | ø6.0 | ø3.0 | 2.0 | |
| C070301 | ø7.0 | ø3.0 | 1.0 | |
| C080401C | ø8.0 | ø4.7 | 0.9 | |
| C090202A | ø9.0 | ø2.5 | 2.5 | |
| C100501 | ø10.0 | ø5.0 | 1.0 | |
| C120206 | ø12.0 | ø6.0 | 2.5 | |
| C190603 | ø18.9 | ø5.6 | 2.54 | 1000 |
| C311303 | ø31.5 | ø13.0 | 3.0 | 50 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-10-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| L1193901M | 119.0 | 39.0 | 0.5 | 500 |

## 垫座 SILICONE RUBBER FOOT 9-10-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT
  *ACCEPTABLE FOR CUSTOMIZED REQUEST

◎ 我司可接受特别尺寸订购




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| L040401 | 4.0 | 4.0 | 1.0 | 2000 |
| L040402 | 4.0 | 4.0 | 2.0 | |
| L040402A | 4.0 | 4.0 | 2.5 | |
| L040403 | 4.0 | 4.0 | 3.0 | |
| L040404 | 4.0 | 4.0 | 4.0 | |
| L050302 | 5.0 | 3.0 | 2.5 | |
| L050501KM | 5.0 | 5.0 | 1.0 | |
| L050502 | 5.0 | 5.0 | 2.0 | |
| L050502C | 5.0 | 5.0 | 2.5 | |
| L050503 | 5.0 | 5.0 | 3.0 | |
| L050504 | 5.0 | 5.0 | 4.0 | |
| L050506 | 5.0 | 5.0 | 6.5 | |
| L060201C | 6.0 | 2.0 | 1.5 | |
| L060602D | 6.0 | 6.0 | 2.0 | |
| L060602A | 6.0 | 6.0 | 2.5 | |
| L060603 | 6.0 | 6.0 | 3.0 | |
| L060604 | 6.0 | 6.0 | 4.0 | |
| L070707 | 6.5 | 6.5 | 6.5 | |
| L080202C | 8.0 | 2.5 | 2.2 | |
| L080203 | 8.0 | 2.5 | 3.0 | |
| L080403 | 8.0 | 4.0 | 3.5 | |
| L080405 | 8.0 | 4.0 | 5.0 | |
| L080602A | 8.0 | 6.0 | 2.3 | |
| L080802 | 8.0 | 8.0 | 2.5 | |
| L080803 | 8.0 | 8.0 | 3.5 | |
| L080804 | 8.0 | 8.0 | 4.0 | |
| L080805 | 8.0 | 8.0 | 5.0 | |
| L080806 | 8.0 | 8.0 | 6.0 | |
| L080809 | 8.0 | 8.0 | 9.0 | |
| L080811 | 8.0 | 8.0 | 11.5 | |
| L100502A | 10.0 | 5.0 | 2.5 | |
| L100503A | 10.0 | 5.0 | 3.5 | |
| L100505 | 10.0 | 5.0 | 5.0 | |
| L100705 | 10.0 | 7.0 | 5.0 | |
| L100801A | 10.0 | 8.0 | 1.8 | |
| L100802 | 10.0 | 8.0 | 2.5 | |
| L100805 | 10.0 | 8.0 | 5.0 | |
| L101001 | 10.0 | 10.0 | 1.0 | |
| L101002 | 10.0 | 10.0 | 2.5 | |
| L101003A | 10.0 | 10.0 | 3.0 | |

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| L101003 | 10.0 | 10.0 | 3.5 | 2000 |
| L101004 | 10.0 | 10.0 | 4.0 | |
| L101004A | 10.0 | 10.0 | 4.6 | |
| L101005 | 10.0 | 10.0 | 5.0 | |
| L120802 | 12.0 | 8.0 | 2.5 | |
| L120803 | 12.0 | 8.0 | 3.5 | |
| L121003 | 12.0 | 10.0 | 3.5 | |
| L121202 | 12.0 | 12.0 | 2.5 | |
| L121203 | 12.0 | 12.0 | 3.5 | |
| L121204 | 12.0 | 12.0 | 4.0 | |
| L121205 | 12.0 | 12.0 | 5.0 | |
| L150508 | 15.0 | 5.0 | 0.8 | |
| L150603 | 15.0 | 6.0 | 3.0 | |
| L150803 | 15.0 | 8.0 | 3.0 | |
| L151005 | 15.0 | 10.0 | 5.0 | |
| L160805 | 16.0 | 8.0 | 5.0 | |
| L180802 | 18.0 | 8.0 | 2.5 | |
| L180803 | 18.0 | 8.0 | 3.5 | |
| L180804 | 18.0 | 8.0 | 4.0 | |
| L180805 | 18.0 | 8.0 | 5.0 | |
| L181003 | 18.0 | 10.0 | 3.5 | |
| L181004 | 18.0 | 10.0 | 4.0 | |
| L181005 | 18.0 | 10.0 | 5.0 | |
| L181202 | 18.0 | 12.0 | 2.5 | |
| L181204 | 18.0 | 12.0 | 4.0 | |
| L181205 | 18.0 | 12.0 | 5.0 | |
| L181802 | 18.0 | 18.0 | 2.5 | |
| L181803 | 18.0 | 18.0 | 3.5 | |
| L181804 | 18.0 | 18.0 | 4.0 | |
| L181805 | 18.0 | 18.0 | 5.0 | 1000 |
| L201002S | 20.0 | 10.0 | 2.5 | 500 |
| L201008 | 20.0 | 10.0 | 8.0 | |
| L251501 | 25.0 | 15.0 | 1.5 | |
| L281901M | 28.5 | 19.0 | 0.5 | |
| L303008 | 30.0 | 30.0 | 8.0 | |
| L351002 | 35.0 | 10.0 | 2.3 | |
| L400602A | 40.0 | 6.4 | 2.0 | |
| L454504 | 45.0 | 45.0 | 4.0 | |
| L602005 | 60.0 | 20.0 | 5.0 | |
| L18004003 | 180.0 | 40.0 | 3.0 | |
| L3300702A | 330.8 | 7.2 | 2.0 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-11-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| Q202008 | 20.4 | 20.4 | 8.0 | 500 |
| Q381015C | 38.0 | 10.5 | 14.5 | 200 |
| Q381410C | 38.0 | 14.5 | 10.5 | 500 |

## 垫座 SILICONE RUBBER FOOT 9-11-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| T110803 | 10.5 | 10.5 | 3.0 | 8.0 | 2000 |
| T130706 | 12.7 | 12.7 | 6.0 | 6.8 | |
| T130903 | 12.7 | 12.7 | 3.0 | 9.0 | |
| T131003 | 12.7 | 12.7 | 3.1 | 10.0 | |
| T202023 | 20.0 | 20.0 | 23.0 | 17.8 | 500 |
| T211308 | 20.5 | 20.5 | 7.6 | 12.3 | |

## 垫座 SILICONE RUBBER FOOT 9-11-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GLQ-2K | 18.4 | 6.4 | 2.0 | 2000 |
| GLQ-12 | 12.0 | 4.5 | 1.2 | |
| GLQ-16 | 16.0 | 8.0 | 2.0 | |
| GLQ-16A | 16.0 | 8.0 | 2.5 | |

## 垫座 SILICONE RUBBER FOOT 9-11-4

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GLQ-19 | 19.4 | 7.4 | 1.2 | 2000 |
| GLQ-3H | 26.8 | 12.8 | 3.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-12-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GLQ−13 | 13.0 | 6.0 | 2.0 | 2000 |
| GLQ−3K | 13.1 | 6.1 | 3.5 | 1000 |

## 垫座 SILICONE RUBBER FOOT 9-12-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GLQ−2J | 41.5 | 22.1 | 2.5 | 500 |

## 垫座 SILICONE RUBBER FOOT 9-12-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GLC−2A | 37.05 | 20.5 | 2.5 | 1000 |

## 垫座 SILICONE RUBBER FOOT 9-12-4

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| GTT−45 | 45.0 | 15.0 | 2.5 | 5.0 | 2000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 垫座 SILICONE RUBBER FOOT 9-13-1

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| GXA-01 | 20.0 | 10.0 | 1.5 | ø3.5 | 2000 |



## 垫座 SILICONE RUBBER FOOT 9-13-2

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GSP-24 | 24.0 | 24.0 | 0.6 | 500 |

## 垫座 SILICONE RUBBER FOOT 9-13-3

- MATERIAL: SILICONE
- COLOR: BLACK
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| LDA-3901XB | 39.6 | 39.6 | 1.9 | 400 |



## 垫座 SILICONE RUBBER FOOT 9-13-4

- MATERIAL: SILICONE
- COLOR: BLUE
- ADHESIVE TAPE: 3M or EQUIVALENT




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| GLD-21 | 21.0 | 21.0 | 0.5 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

10

# 拉柄
# CIRCUIT BOARD EJECTOR

## 把手盖 EJECTOR COVER 10-2-1

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: ORANGE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MKL-01 | 5.6 | 2.6 | 500 |



## 把手盖 EJECTOR COVER 10-2-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MKL-2A | 5.6 | 2.6 | 500 |



## 拉柄 CIRCUIT BOARD EJECTOR 10-2-3

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-10 | 200 |

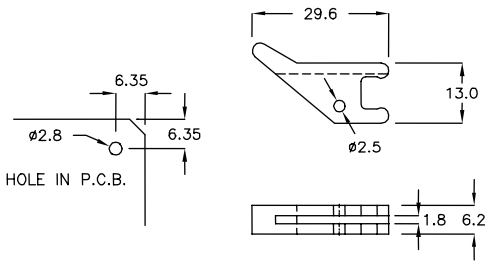




## 拉柄 CIRCUIT BOARD EJECTOR 10-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-15 | 200 |

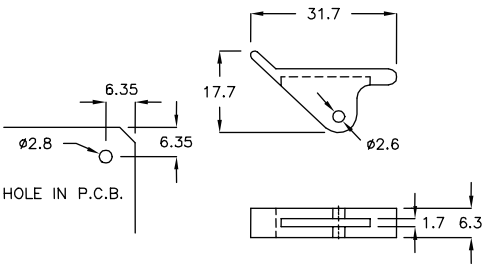




## 拉柄 CIRCUIT BOARD EJECTOR 10-2-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-20 | 200 |

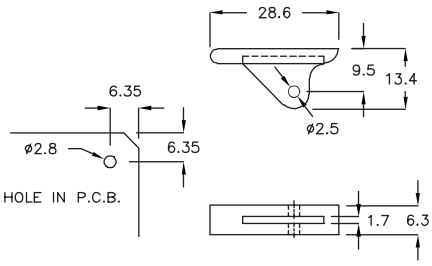






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 拉柄 CIRCUIT BOARD EJECTOR 10-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-25 | 200 |

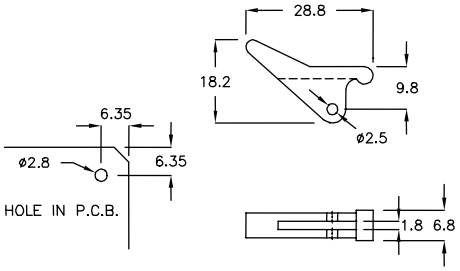

## 拉柄 CIRCUIT BOARD EJECTOR 10-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-30 | 200 |

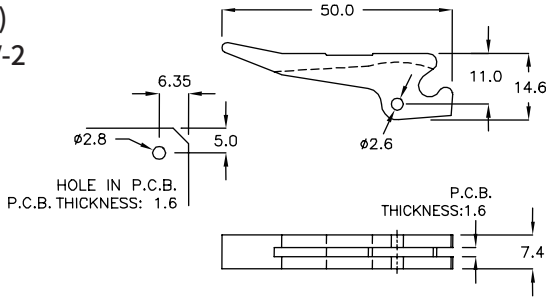




## 拉柄 CIRCUIT BOARD EJECTOR 10-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-31 | 200 |

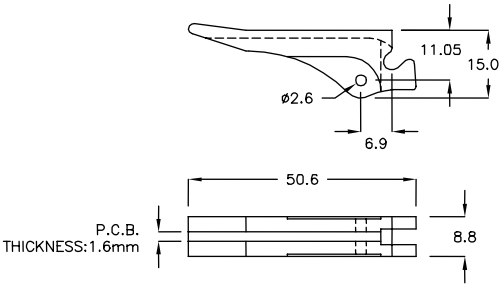




## 拉柄 CIRCUIT BOARD EJECTOR 10-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-31C | 200 |

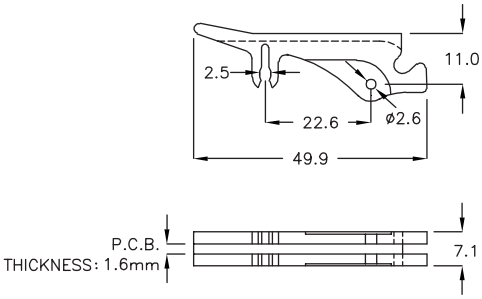




## 拉柄 CIRCUIT BOARD EJECTOR 10-3-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-32 | 200 |

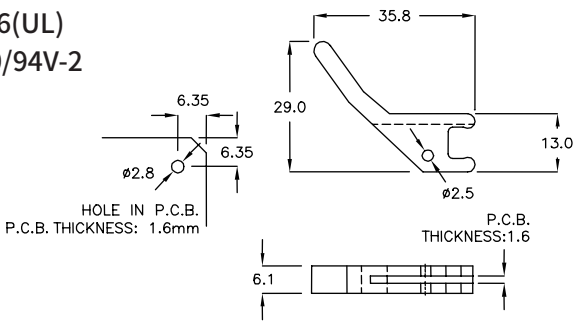




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 拉柄 CIRCUIT BOARD EJECTOR 10-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | PACKAGE |
|---|---|
| CP-33 | 500 |

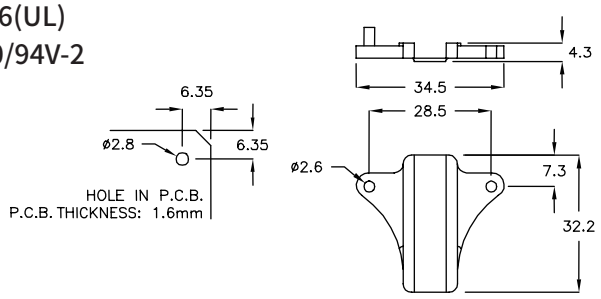

## 拉柄 CIRCUIT BOARD EJECTOR 10-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-034 | 200 |



## 拉柄 CIRCUIT BOARD EJECTOR 10-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-35 | 200 |






## 拉柄 CIRCUIT BOARD EJECTOR 10-4-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-36 | 200 |

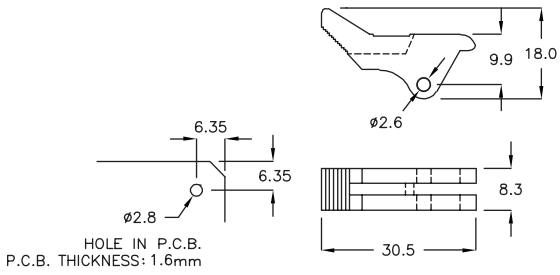




## 拉柄 CIRCUIT BOARD EJECTOR 10-4-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-37 | 200 |

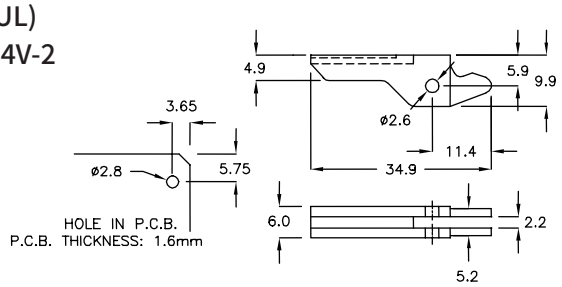




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 拉柄 CIRCUIT BOARD EJECTOR 10-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
  *WITH PIN
  附 PIN

| PART NO | PACKAGE |
|---|---|
| CP-39 | 200 |

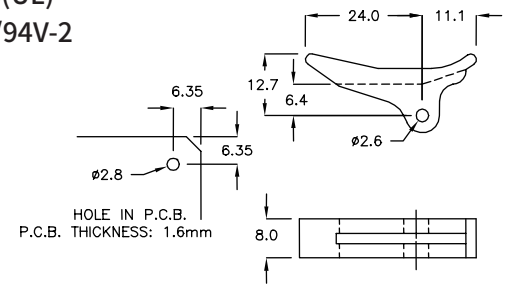




## 拉柄 CIRCUIT BOARD EJECTOR 10-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | PACKAGE |
|---|---|
| CP-50D | 200 |

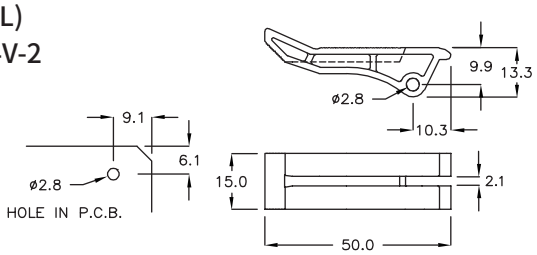




## 把手盖 EJECTOR COVER 10-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M2 TAPPING SCREW

| PART NO | A | PACKAGE |
|---|---|---|
| MHLG-11A | 9.0 | 500 |



## 拉柄 CIRCUIT BOARD EJECTOR 10-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | PACKAGE |
|---|---|
| CP-50 | 100 |

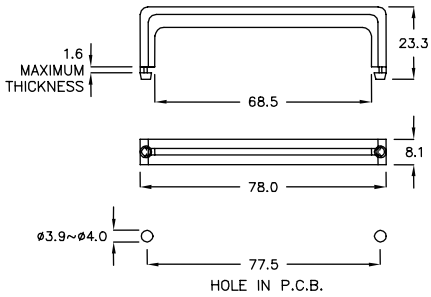

## 拉柄 CIRCUIT BOARD EJECTOR 10-5-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | PACKAGE |
|---|---|
| CP-60 | 100 |

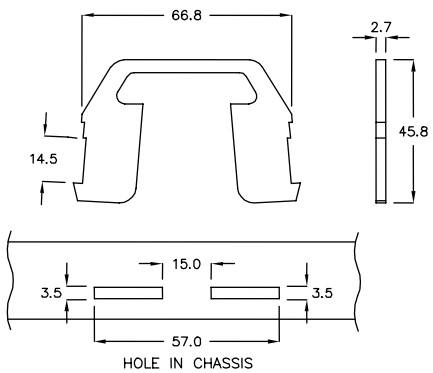




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

11

# 導槽
# P.C.B GUIDE RAIL

## 印刷电路板导槽 PCB GUIDE RAIL 11-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

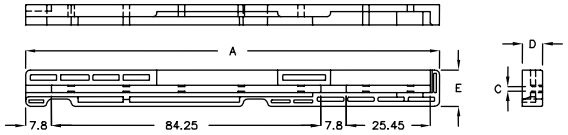


| PART NO | A | C | D | E | PACKAGE |
|---|---|---|---|---|---|
| CG-128YD | 128.0 | 1.6 | 6.1 | 11.0 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL 11-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3x6 FLAT HEAD SCREW

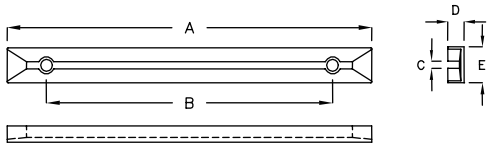


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| CG-9 | 89.0 | 64.5 | 1.9 | 4.5 | 9.8 | 100 |
| CG-9AS | 100.0 | 77.4 | 2.2 | 7.1 | 10.0 | |
| CG-9L | 91.0 | 67.0 | 1.9 | 8.8 | 9.2 | |
| CG-12 | 119.0 | 94.5 | 1.6 | 4.5 | 9.8 | |
| CG-12F | 119.0 | 94.5 | 1.9 | 4.5 | 9.8 | |
| CG-14 | 139.8 | 114.5 | 1.9 | 4.3 | 9.7 | |
| CG-16 | 158.7 | 135.0 | 1.9 | 4.3 | 9.7 | |
| CG-18 | 180.0 | 150.0 | 3.5 | 9.0 | 12.0 | |

## 印刷电路板导槽 PCB GUIDE RAIL 11-2-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

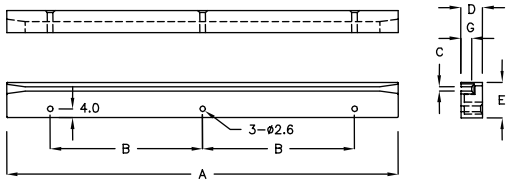


| PART NO | A | B | C | D | E | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| CF-180 | 180.5 | 70.0 | 2.0 | 10.0 | 16.0 | 5.0 | 50 |

## 印刷电路板导槽 PCB GUIDE RAIL 11-2-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

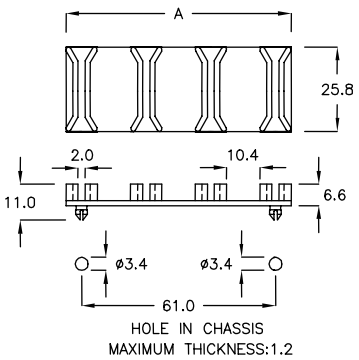


| PART NO | A | PACKAGE |
|---|---|---|
| CG-2Ax4 | 70.5 | 50 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL — 11-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

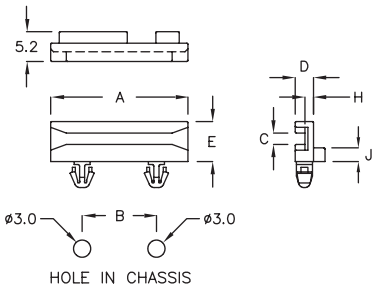


| | PART NO | A | B | C | D | E | H | J | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| | CG-24AF | 24.0 | 13.0 | 2.0 | 3.2 | 7.0 | 1.5 | 2.4 | 1.6 | 500 |
| ★ | CG-24HD | 24.0 | 13.0 | 2.0 | 3.2 | 7.0 | 1.5 | 2.0 | 1.6 | |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

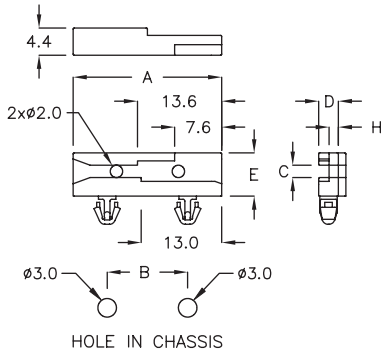


| | PART NO | A | B | C | D | E | H | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| ★ | CG-24TC | 24.0 | 13.0 | 2.0 | 3.2 | 7.0 | 1.5 | 1.6 | 500 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

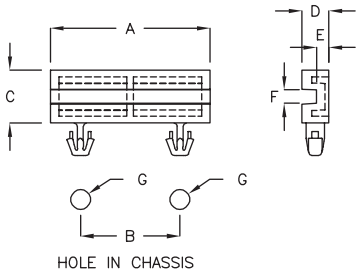


| PART NO | A | B | C | D | E | F | G | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-24RM | 24.0 | 15.0 | 7.8 | 4.0 | 1.8 | 2.0 | ø3.0 | 2.0 | 500 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

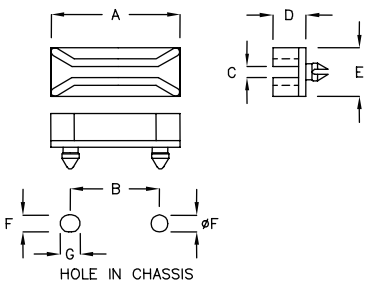


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-2A | 26.0 | 18.0 | 1.9 | 6.8 | 9.7 | 3.4 | 4.0 | 1.2 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL 11-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

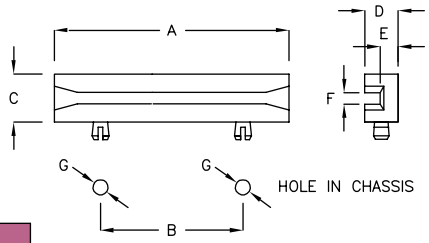


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-4A | 38.3 | 20.2 | 9.3 | 6.5 | 3.5 | 2.3 | ø3.0 | 1.2 | 500 |



## 印刷电路板导槽 PCB GUIDE RAIL 11-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

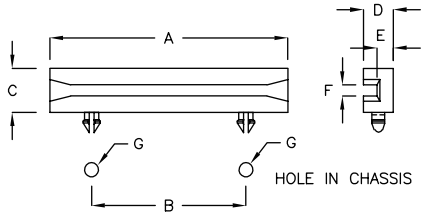


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-04E | 38.3 | 20.0 | 9.3 | 6.5 | 3.5 | 1.8 | ø3.5 | 1.6 | 500 |
| CG-04C | 38.3 | 20.2 | 9.3 | 6.5 | 3.5 | 2.3 | ø3.2 | 1.6 | |
| CG-04H | 50.0 | 40.0 | 7.0 | 6.0 | 3.0 | 2.0 | ø3.2 | 1.6 | 200 |
| CG-08C | 80.5 | 60.0 | 9.4 | 6.4 | 3.4 | 2.3 | ø3.2 | 1.6 | 100 |
| CG-08D | 80.5 | 60.0 | 8.0 | 6.0 | 3.0 | 2.0 | ø3.2 | 1.6 | |
| CG-08H | 80.5 | 60.0 | 8.0 | 6.0 | 3.0 | 2.0 | ø3.2 | 2.6 | |

## 印刷电路板导槽 PCB GUIDE RAIL 11-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

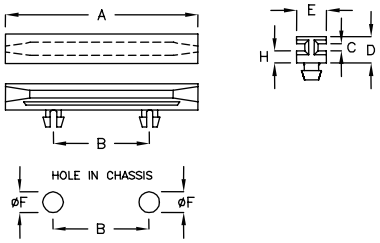


| PART NO | A | B | C | D | E | F | H | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-5D | 50.8 | 25.4 | 2.0 | 7.0 | 7.9 | 4.4 | 3.2 | 1.6 | 200 |



## 印刷电路板导槽 PCB GUIDE RAIL 11-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

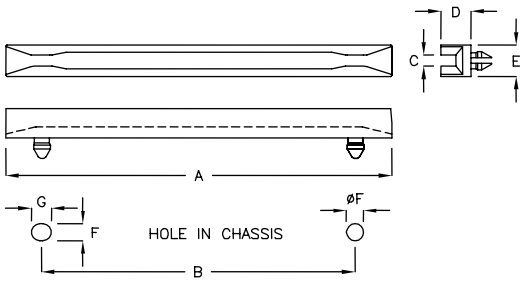


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-06A | 76.8 | 62.5 | 2.2 | 5.9 | 6.3 | 3.4 | 4.0 | 1.0 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

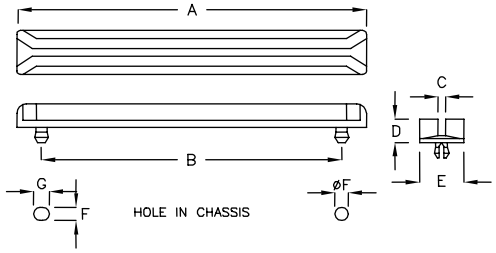


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-9B | 89.2 | 76.85 | 1.9 | 6.0 | 11.3 | 3.4 | 4.0 | 1.2 | 100 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

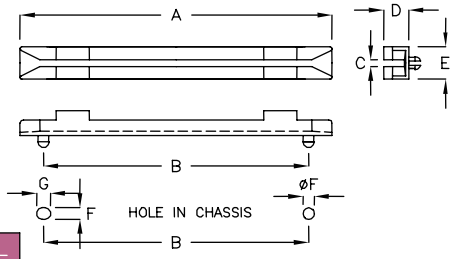


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-9AW | 89.7 | 76.7 | 1.9 | 11.6 | 9.7 | 3.4 | 4.0 | 1.2 | 100 |
| CG-9D | 89.7 | 76.8 | 1.9 | 7.1 | 9.5 | 3.4 | 4.0 | 1.2 | |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

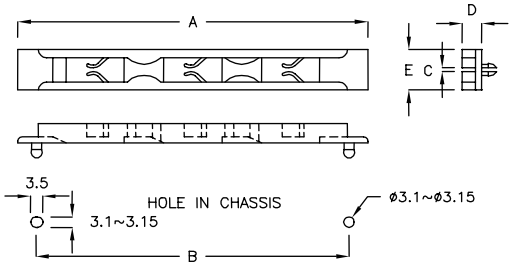


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-10B | 102.8 | 91.9 | 1.1 | 5.6 | 11.9 | 2.3 | 100 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

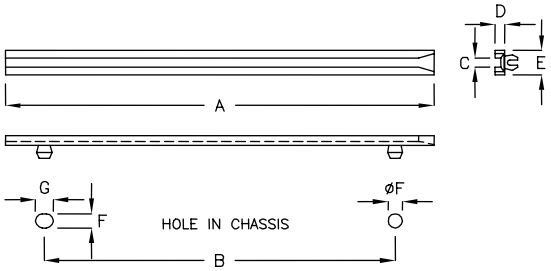


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-14C | 140.2 | 114.8 | 2.0 | 3.2 | 8.0 | 4.7 | 5.9 | 1.2 | 100 |
| CG-14D | 140.2 | 114.8 | 3.0 | 3.2 | 8.0 | 4.7 | 5.9 | 1.7 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL 11-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

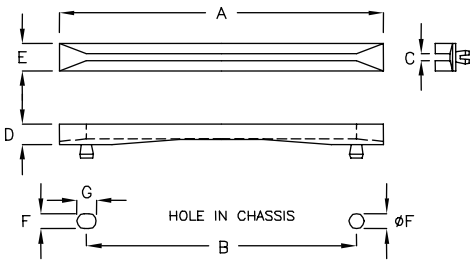


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-7B | 76.2 | 63.5 | 1.9 | 4.8 | 6.4 | 3.2 | 4.1 | 1.3 | 100 |



## 印刷电路板导槽 PCB GUIDE RAIL 11-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

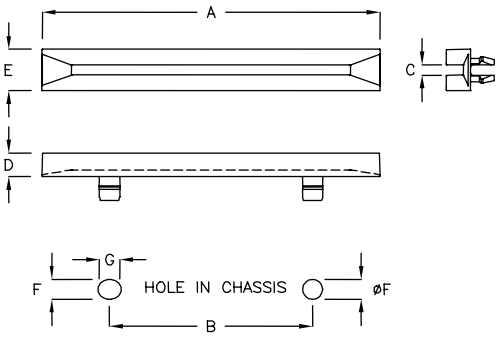


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-06H | 63.5 | 38.1 | 1.9 | 4.5 | 7.9 | 4.6 | 5.0 | 1.6 | 200 |
| CG-6J | 63.5 | 38.1 | 2.3 | 2.8 | 4.6 | 3.4 | 4.0 | 1.0 | |
| CG-5QT | 63.5 | 38.1 | 2.3 | 6.4 | 6.4 | 4.5 | 5.1 | 1.0 | |

## 印刷电路板导槽 PCB GUIDE RAIL 11-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

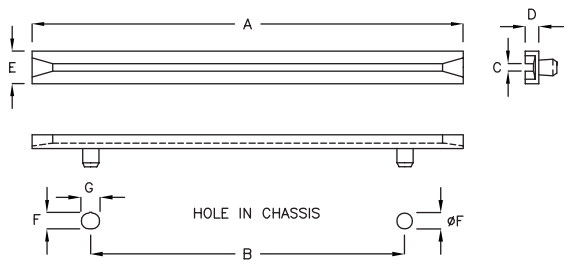


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-10N | 101.6 | 88.9 | 1.9 | 4.4 | 6.4 | 3.2 | 4.0 | 1.1 | 100 |
| CG-16N | 164.1 | 152.4 | 2.0 | 4.4 | 6.5 | 3.2 | 3.9 | 1.1 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL — 11-7-1

- MATERIAL: NYLON 66(UL), ABS+PC
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

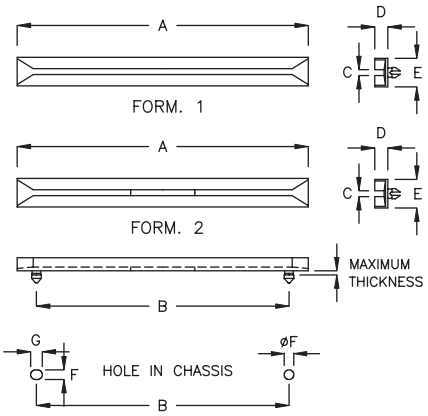


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | FORM | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| CG-3A | 38.0 | 25.4 | 1.9 | 4.6 | 9.6 | 3.4 | 4.0 | 1.2 | 1 | N66 | 500 |
| CG-5A | 50.8 | 38.0 | 2.3 | 4.6 | 9.6 | 3.4 | 4.0 | 1.1 | 1 | N66 | 200 |
| CG-7A | 76.6 | 63.5 | 2.2 | 4.6 | 10.0 | 3.4 | 4.0 | 1.2 | 1 | N66 | 100 |
| CG-7C | 76.6 | 63.5 | 2.1 | 4.1 | 10.0 | 3.4 | 4.0 | 1.2 | 1 | | |
| CG-9A | 89.7 | 76.7 | 1.9 | 4.5 | 9.7 | 3.4 | 4.0 | 1.2 | 2 | | |
| CG-9F | 89.2 | 76.7 | 2.3 | 4.4 | 6.4 | 3.4 | 4.0 | 1.2 | 1 | | |
| CG-10A | 102.1 | 89.5 | 2.2 | 4.6 | 6.3 | 3.4 | 4.0 | 1.2 | 1 | | |
| CG-10M | 100.0 | 70.0 | 2.0 | 4.3 | 7.5 | 4.8 | 6.0 | 1.1 | 1 | N66 | 100 |
| CG-10P | 100.0 | 70.0 | 2.0 | 4.3 | 7.5 | 4.8 | 6.4 | 1.2 | 1 | | |
| CG-12D | 114.3 | 88.9 | 1.9 | 6.4 | 6.4 | 4.8 | 5.5 | 1.2 | 1 | | |
| CG-13A | 127.0 | 101.6 | 2.3 | 4.6 | 6.4 | 3.4 | 4.0 | 1.5 | 1 | | |
| CG-13C | 110.0 | 101.6 | 2.3 | 4.6 | 6.4 | 3.4 | 4.0 | 1.2 | 1 | | |
| CG-14A | 136.0 | 114.5 | 2.2 | 4.6 | 6.3 | 3.4 | 4.0 | 1.5 | 1 | | |
| CG-15C | 153.8 | 141.6 | 2.1 | 4.8 | 6.5 | 3.4 | 4.0 | 1.2 | 1 | | |
| CG-18A | 181.1 | 161.3 | 2.0 | 4.6 | 6.5 | 3.4 | 4.6 | 1.2 | 1 | | |
| CG-19A | 191.1 | 177.0 | 2.0 | 5.5 | 6.4 | 3.4 | 4.0 | 1.2 | 1 | | |
| CG-21A | 217.8 | 205.0 | 2.0 | 4.6 | 6.6 | 3.4 | 4.0 | 1.0 | 1 | | |
| CG-21B | 218.7 | 205.0 | 2.2 | 7.7 | 6.6 | 3.4 | 4.0 | 1.2 | 1 | | |
| ★ CG-30PC | 30.0 | 20.0 | 2.8 | 6.3 | 8.0 | 3.5 | 3.5 | 0.8 | 1 | ABS+PC | 500 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

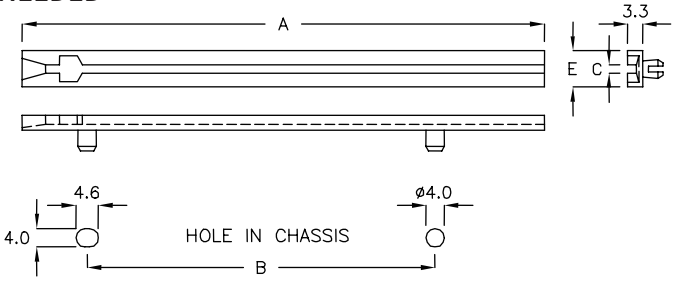


| PART NO | A | B | C | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CG-11A | 115.5 | 77.1 | 2.0 | 7.9 | 1.2 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

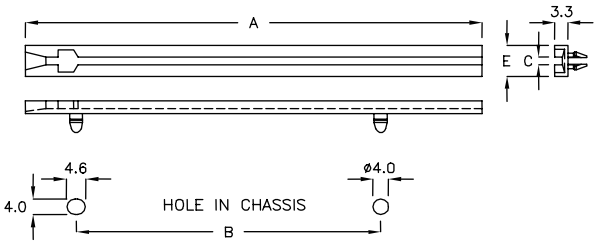


| PART NO | A | B | C | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CG−11F | 115.5 | 77.1 | 1.9 | 7.9 | 1.4 | 100 |
| CG−92TK | 92.0 | 67.4 | 1.9 | 7.9 | 1.4 | |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

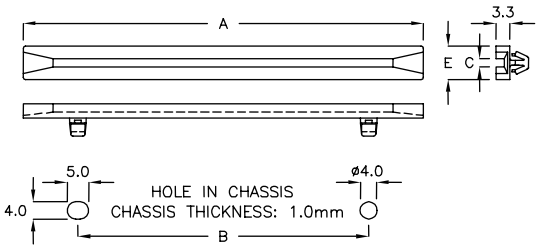


| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| CG−92FM | 92.8 | 67.4 | 1.9 | 7.9 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

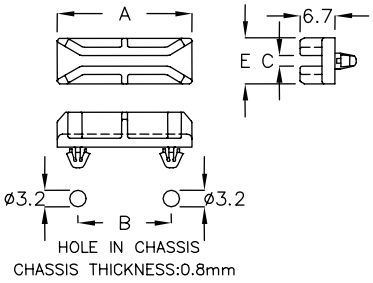


| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| CG−2RQ | 25.8 | 17.9 | 2.0 | 8.7 | 500 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

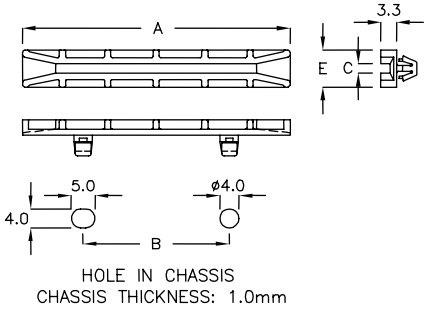


| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| CG−56FY | 56.0 | 30.6 | 2.0 | 7.8 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL 11-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

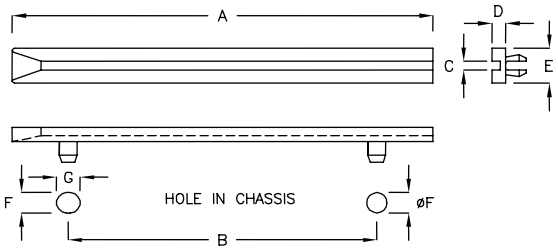


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-20A | 203.2 | 177.8 | 2.0 | 3.2 | 7.9 | 4.6 | 5.4 | 1.7 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL 11-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

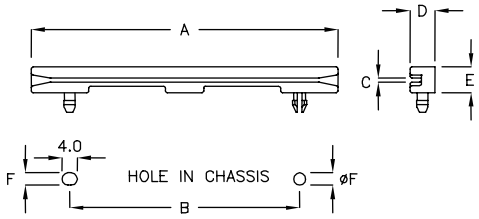


| PART NO | A | B | C | D | E | F | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CG-08K | 80.0 | 60.0 | 1.1 | 6.5 | 6.7 | 3.2 | 2.0 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL 11-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

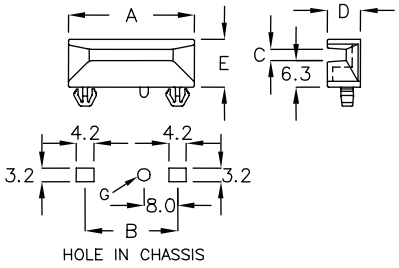


| PART NO | A | B | C | D | E | G | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CG-3WX | 30.0 | 22.0 | 2.7 | 8.0 | 11.3 | ø3.0 | 0.8 | 500 |



## 印刷电路板导槽 PCB GUIDE RAIL 11-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED




| PART NO | A | B | C | D | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CGD-1KF | 10.0 | 5.0 | 1.7 | 5.0 | 1.6 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL —— 11-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

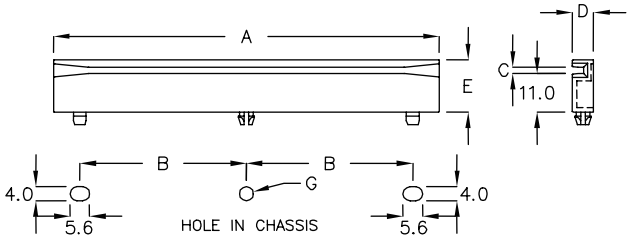


| PART NO | A | B | C | D | E | G | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CG-11K | 110.0 | 47.5 | 1.8 | 6.0 | 14.9 | ø4.0 | 1.2 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL —— 11-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

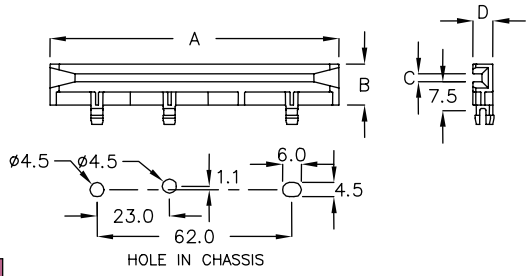


| PART NO | A | B | C | D | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CGU-92F | 92.0 | 13.2 | 2.5 | 6.4 | 3.0 | 100 |



## 印刷电路板导槽 PCB GUIDE RAIL —— 11-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

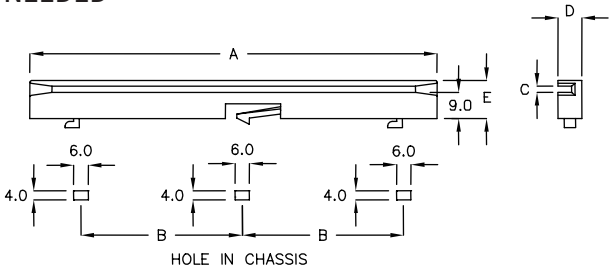


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-16C | 190.0 | 80.0 | 2.0 | 6.4 | 13.1 | 1.0 | 100 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

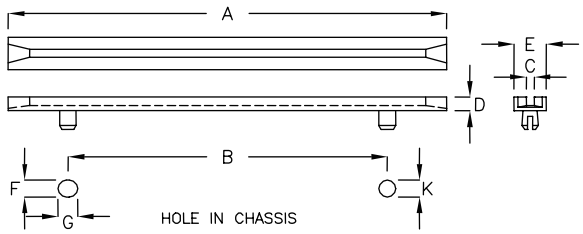


| PART NO | A | B | C | D | E | F | G | K | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| CG-45RK | 45.0 | 23.0 | 1.9 | 3.3 | 7.9 | ø4.5 | 5.1 | ø4.6 | 1.4~1.6 | 200 |
| CG-5C | 63.5 | 38.1 | 2.3 | 6.4 | 6.4 | ø4.5 | 5.1 | ø4.5 | 1.2~1.6 | |
| CG-6F | 63.5 | 38.1 | 1.9 | 4.5 | 7.9 | ø4.6 | 5.0 | ø4.6 | 1.2~1.6 | |
| CG-08L | 88.9 | 63.5 | 1.9 | 4.5 | 7.9 | ø4.6 | 5.0 | ø4.6 | 1.4~1.6 | 100 |
| CG-88D | 88.9 | 63.5 | 1.9 | 3.3 | 7.9 | ø4.5 | 5.1 | ø4.6 | 1.4~1.6 | |
| CG-9AL | 89.1 | 77.4 | 2.2 | 7.1 | 10.0 | ø3.4 | 4.0 | ø3.4 | 1.6 | |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

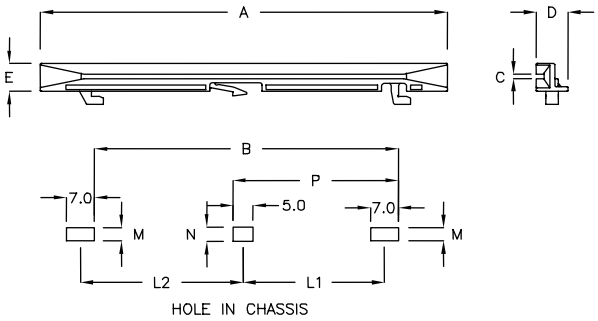


| PART NO | A | B | C | D | E | M | N | P | L1 | L2 | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| CG-8M | 81.0 | 65.4 | 2.0 | 8.0 | 10.65 | 5.65 | 5.65 | 33.0 | 27.0 | 38.4 | 1.0 | 100 |
| CG-10Q | 101.6 | 75.9 | 1.2 | 7.9 | 7.0 | 3.3 | 3.6 | 41.3 | 35.3 | 40.6 | 1.0 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

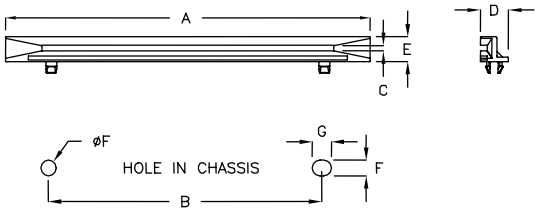


| PART NO | A | B | C | D | E | F | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CG-10K | 101.6 | 76.2 | 1.2 | 7.9 | 7.0 | 4.4 | 5.4 | 1.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL —— 11-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

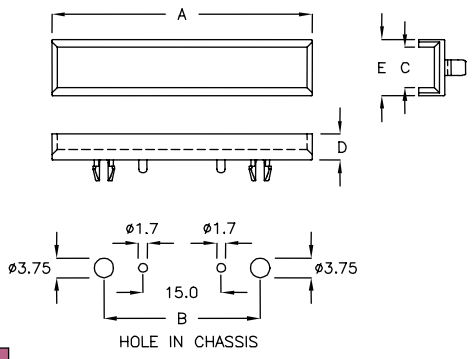


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-5K | 50.0 | 30.0 | 7.75 | 5.0 | 10.75 | 1.0 | 200 |

## 印刷电路板导槽 PCB GUIDE RAIL —— 11-12-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

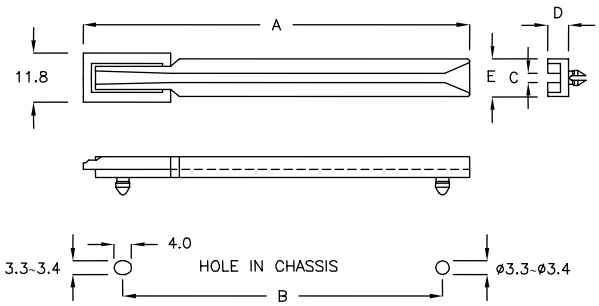


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-09H | 92.7 | 76.7 | 2.2 | 5.0 | 9.0 | 1.2 | 100 |
| CG-09J | 99.5 | 76.7 | 2.2 | 5.0 | 9.0 | 1.2 | |
| CG-09C | 72.6 | 50.0 | 1.9 | 5.0 | 9.0 | 1.0 | |

## 印刷电路板导槽 PCB GUIDE RAIL —— 11-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

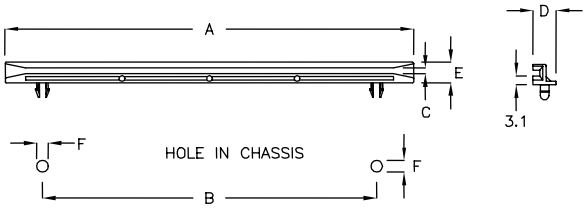


| PART NO | A | B | C | D | E | F | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| CG-14H | 140.0 | 114.5 | 1.9 | 8.0 | 7.0 | ø4.4 | 1.5 | 100 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

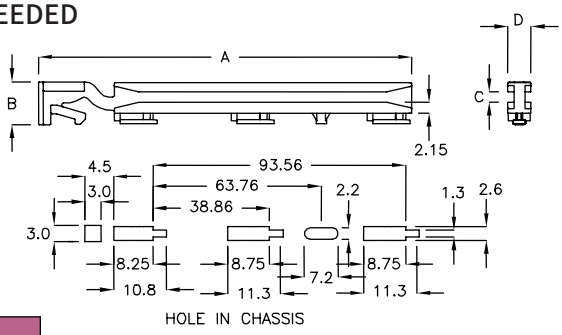


| PART NO | A | B | C | D | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CGL-116JS | 116.9 | 8.0 | 2.0 | 4.5 | 0.8 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-13-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

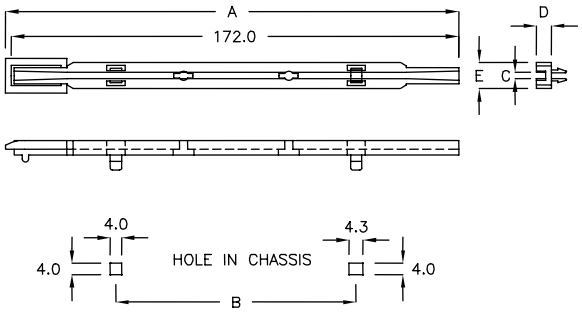


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-17A | 175.0 | 102.0 | 2.2 | 5.0 | 9.0 | 1.6 | 100 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

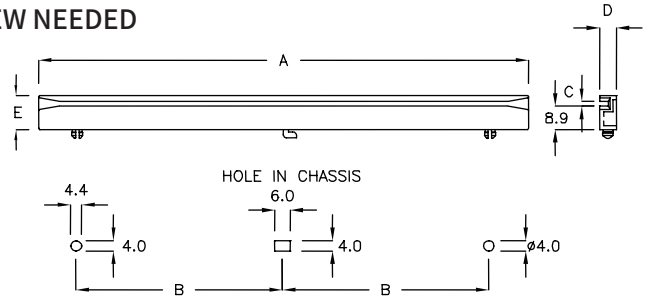


| PART NO | A | B | C | D | E | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-19C | 190.0 | 80.0 | 2.0 | 6.4 | 13.1 | 1.1 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

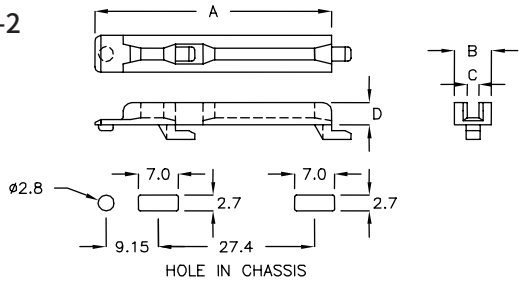


| PART NO | A | B | C | D | CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CG-04FN | 41.5 | 6.5 | 2.0 | 4.0 | 0.8 | 200 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

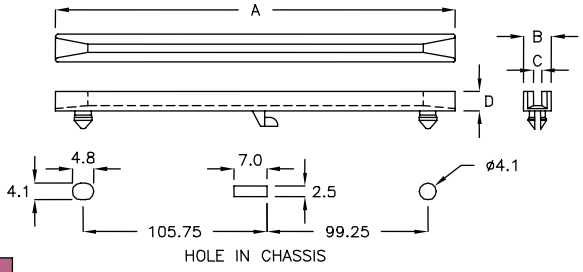


| PART NO | A | B | C | D | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CG-21C | 218.0 | 6.6 | 1.85 | 4.7 | 1.5 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

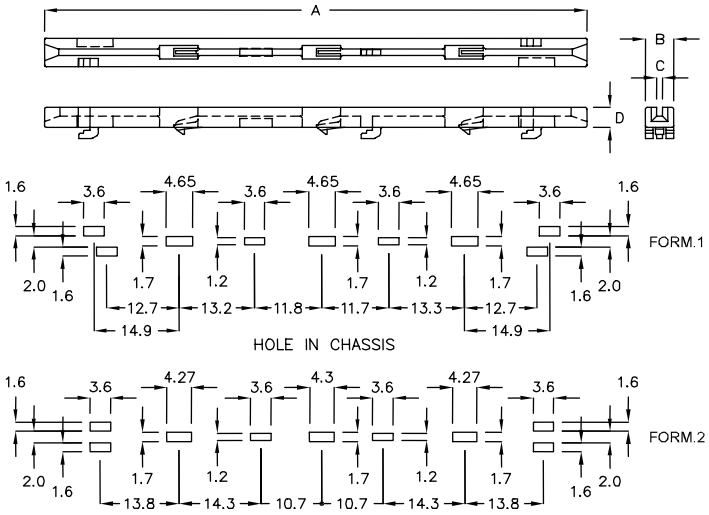


| PART NO | A | B | C | D | CHASSIS THICKNESS | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| CGJ-95RY | 95.0 | 5.0 | 1.1 | 3.5 | 0.5 | 1 | 100 |
| | | | | | 0.8~1.0 | 2 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL — 11-15-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

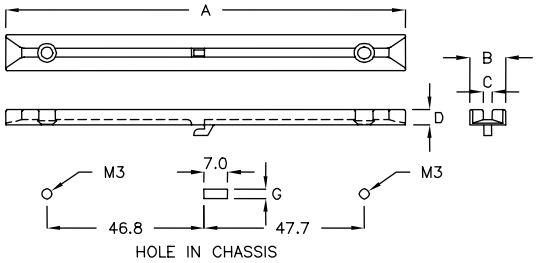


| PART NO | A | B | C | D | G | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| CG-12AT | 119.0 | 10.8 | 2.6 | 4.5 | 2.1 | 1.0 | 100 |
| CG-12BG | 119.0 | 10.8 | 3.2 | 4.5 | 2.7 | 1.0 | |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

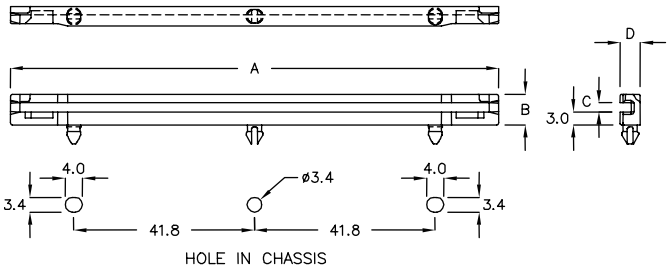


| PART NO | A | B | C | D | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CGT-113F | 113.0 | 7.1 | 2.1 | 4.6 | 1.6 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-15-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

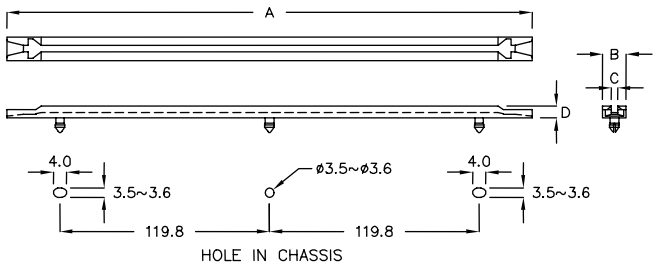


| PART NO | A | B | C | D | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| CG-28A | 280.0 | 9.0 | 2.35 | 4.5 | 1.7 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL — 11-16-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

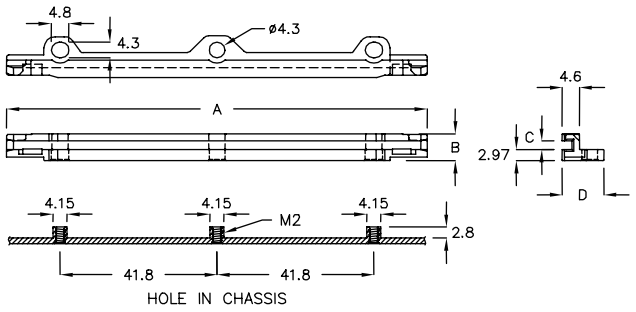


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CGW-112A | 112.0 | 7.16 | 2.25 | 11.1 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-16-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

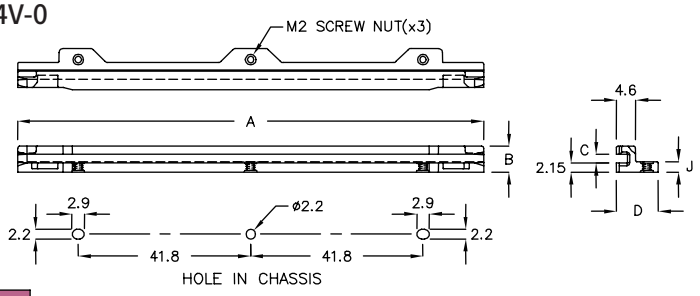


| PART NO | A | B | C | D | J | PACKAGE |
|---|---|---|---|---|---|---|
| CGZ-113AT | 113.0 | 6.25 | 2.1 | 10.1 | 2.0 | 100 |
| CGZ-113K | 113.0 | 6.25 | 2.1 | 10.1 | 2.5 | |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-16-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

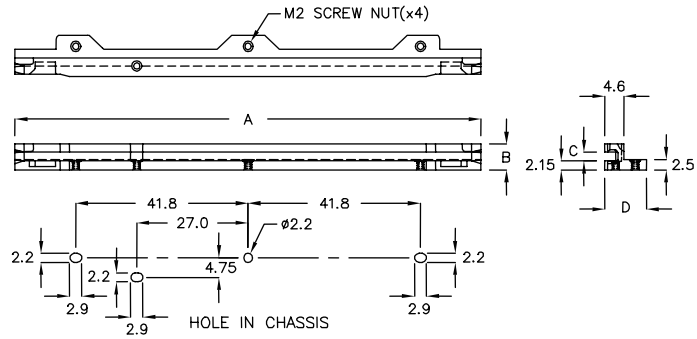


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| CGZ-113NR | 113.0 | 6.25 | 2.1 | 10.1 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-16-4

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

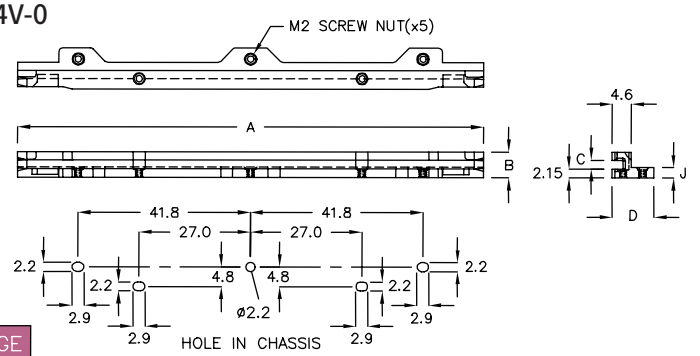


| PART NO | A | B | C | D | J | PACKAGE |
|---|---|---|---|---|---|---|
| CGZ-113TY | 113.0 | 6.25 | 2.1 | 10.1 | 2.0 | 100 |
| CGZ-113FL | 113.0 | 6.25 | 2.1 | 10.1 | 2.5 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-17-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

NEW

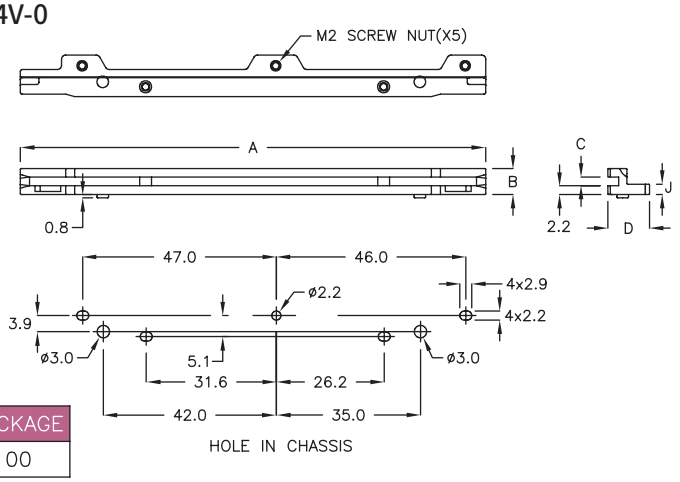


| | PART NO | A | B | C | D | J | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ | CGZ−113DK | 113.0 | 6.3 | 2.1 | 10.1 | 2.5 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-17-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

NEW

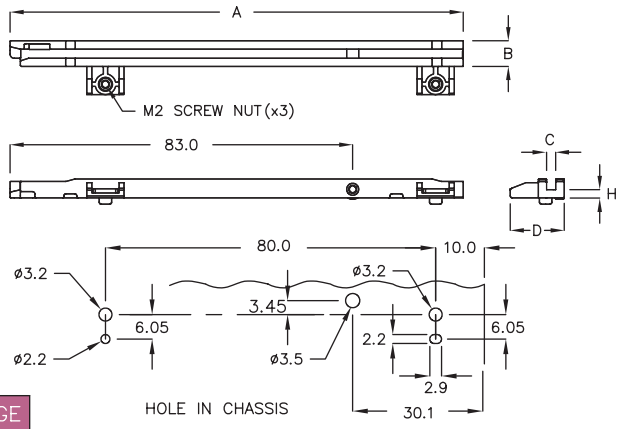


| | PART NO | A | B | C | D | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ | CGZA−109R | 109.8 | 6.25 | 2.2 | 13.05 | 2.0 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-17-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

NEW

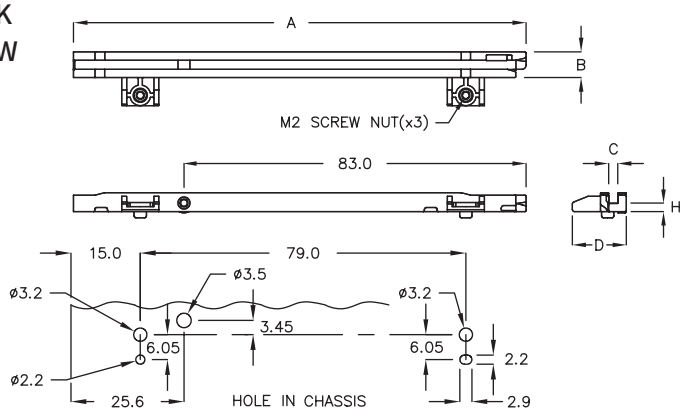


| | PART NO | A | B | C | D | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ | CGZA−109L | 109.8 | 6.25 | 2.2 | 13.05 | 2.0 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL — 11-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- NO EXTRA SCREW NEEDED

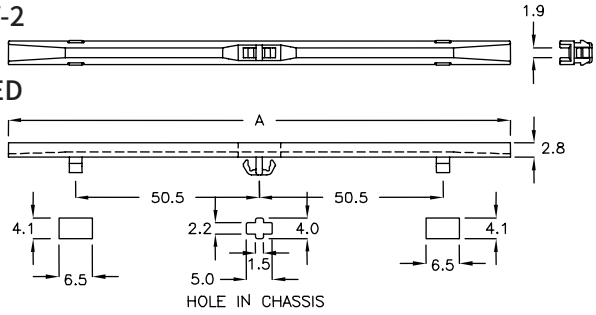


| PART NO | A | MAXIMUM THICKNESS | PACKAGE |
|---|---|---|---|
| CGB−127 | 127.0 | 1.0 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-18-2

- MATERIAL: NYLON 66(UL), ABS+PC(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK, BLUE
- USE M3 SCREW

NEW

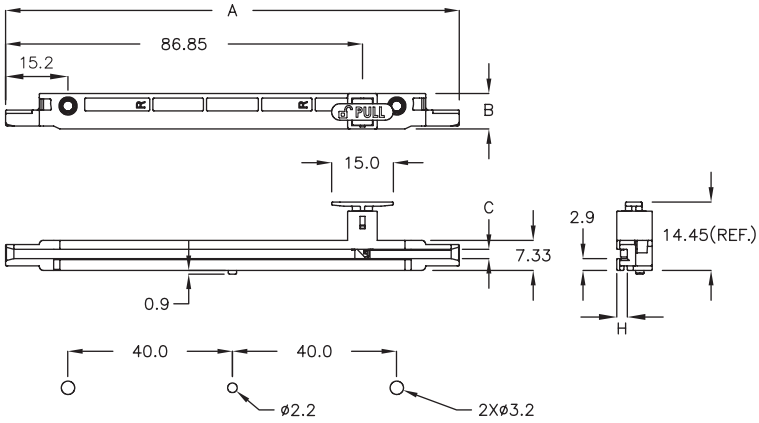


| | PART NO | A | B | C | H | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | CGZF−110R | 110.4 | 8.65 | 2.25 | 2.6 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-18-3

- MATERIAL: NYLON 66(UL), ABS+PC(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK, BLUE
- USE M3 SCREW

NEW

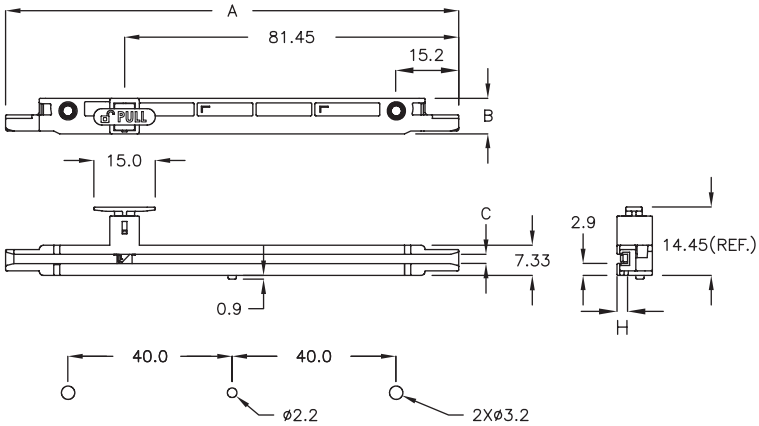


| | PART NO | A | B | C | H | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | CGZH−110L | 110.4 | 8.65 | 2.25 | 2.6 | 100 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 印刷电路板导槽 PCB GUIDE RAIL — 11-19-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK, BLUE
- USE M3 SCREW

NEW

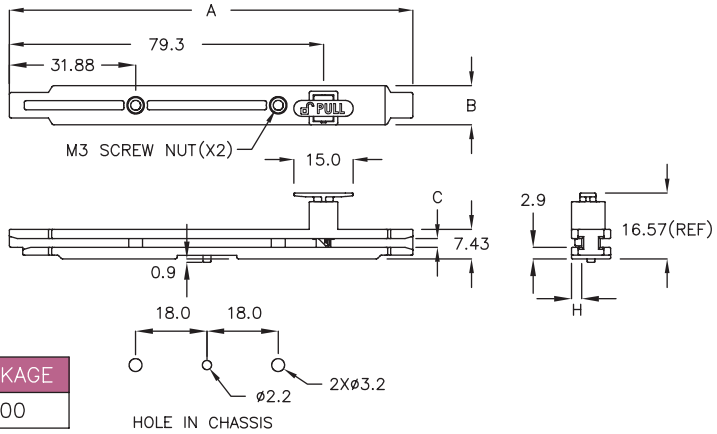


| PART NO | A | B | C | H | PACKAGE |
|---|---|---|---|---|---|
| ★ CGZD−102 | 101.9 | 9.9 | 2.25 | 2.59 | 100 |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-19-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

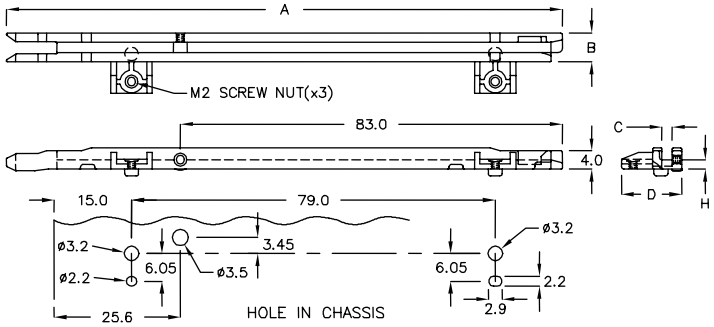


| PART NO | A | B | C | D | H | PACKAGE |
|---|---|---|---|---|---|---|
| CGZA−120L | 120.7 | 6.25 | 2.2 | 13.05 | 2.0 | 100 |
| CGZA−126L | 126.3 | 6.25 | 2.2 | 13.05 | 2.0 | |

## 印刷电路板导槽 PCB GUIDE RAIL — 11-19-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M2 SCREW

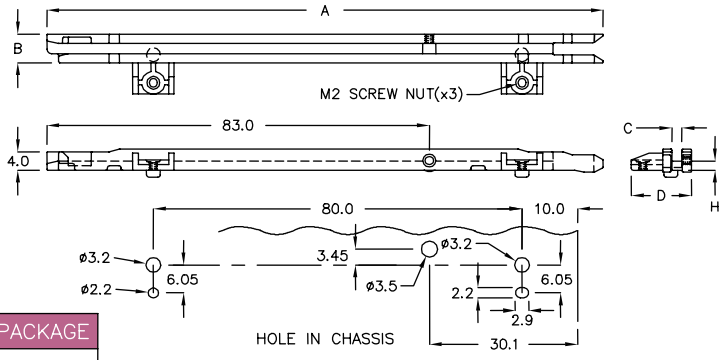


| PART NO | A | B | C | D | H | PACKAGE |
|---|---|---|---|---|---|---|
| CGZA−120R | 120.7 | 6.25 | 2.2 | 13.05 | 2.0 | 100 |
| CGZA−126R | 126.3 | 6.25 | 2.2 | 13.05 | 2.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL —— 11-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| CGM-47 | 47.0 | 200 |

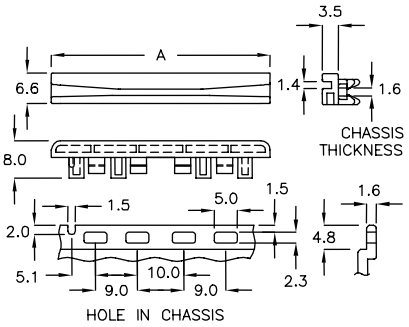

## 印刷电路板导槽 PCB GUIDE RAIL —— 11-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| CGM-47SJ | 47.0 | 200 |

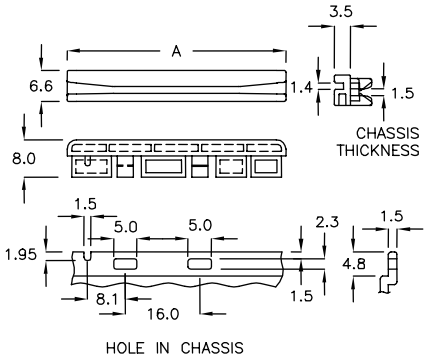




## 印刷电路板导槽 PCB GUIDE RAIL —— 11-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| CGM-47YK | 47.0 | 200 |

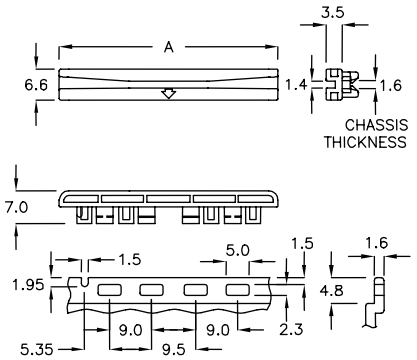




## 印刷电路板导槽 PCB GUIDE RAIL —— 11-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| CGM-47DK | 47.0 | 200 |

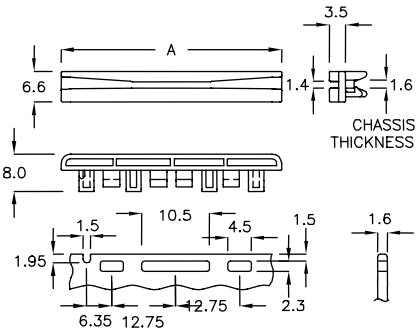






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 印刷电路板导槽 PCB GUIDE RAIL — 11-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

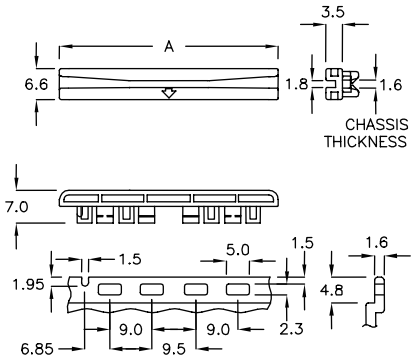


| PART NO | A | PACKAGE |
|---|---|---|
| CGM−50RT | 50.0 | 200 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

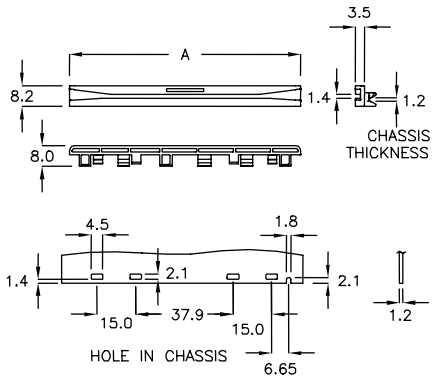


| PART NO | A | PACKAGE |
|---|---|---|
| CGM−90 | 90.0 | 200 |



## 印刷电路板导槽 PCB GUIDE RAIL — 11-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

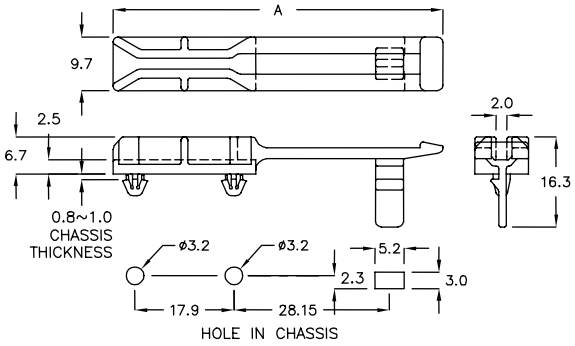


| PART NO | A | PACKAGE |
|---|---|---|
| CGH−60PL | 59.7 | 200 |

## 直立式导槽 PCB GUIDE RAIL — 11-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- NO EXTRA SCREW NEEDED

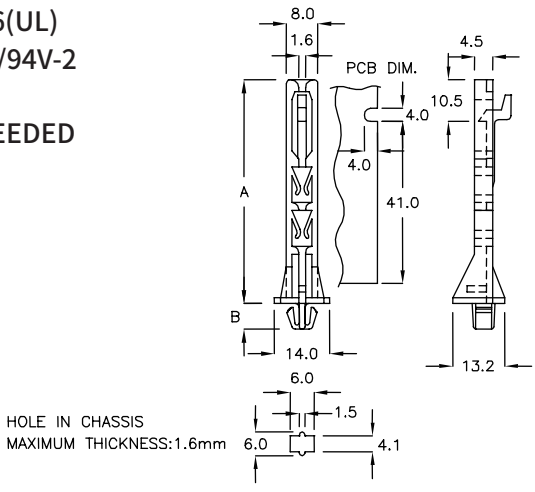


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCG−5 | 56.5 | 6.5 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 直立式导槽 PCB GUIDE RAIL — 11-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: WHITE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCG-9 | 89.2 | 77.2 | 50 |
| HCG-13 | 130.0 | 118.5 | |




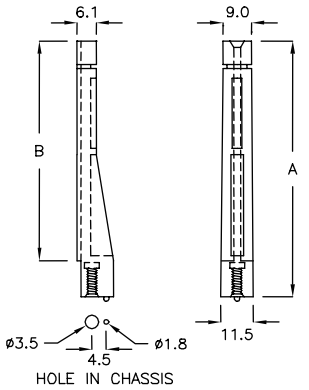


## 直立式导槽 PCB GUIDE RAIL — 11-22-2



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3x8 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCG-74A | 74.2 | 62.2 | 200 |

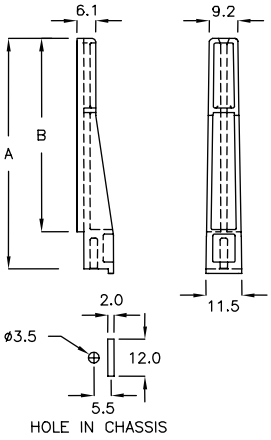


## 直立式导槽 PCB GUIDE RAIL — 11-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3x10 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCG-10 | 105.0 | 92.0 | 200 |

ASSEMBLE WITH P.G PART CG-10B

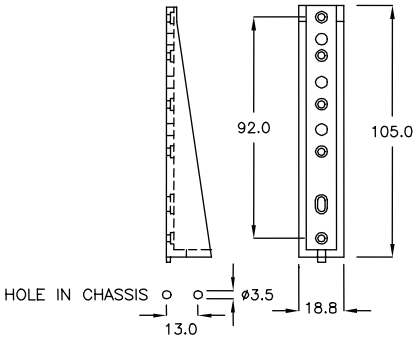


## 直立式导槽 PCB GUIDE RAIL — 11-22-4

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| | PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ | HCGT-20K | 20.4 | 2.7 | 200 |
| ★ | HCGT-25C | 20.4 | 3.6 | |




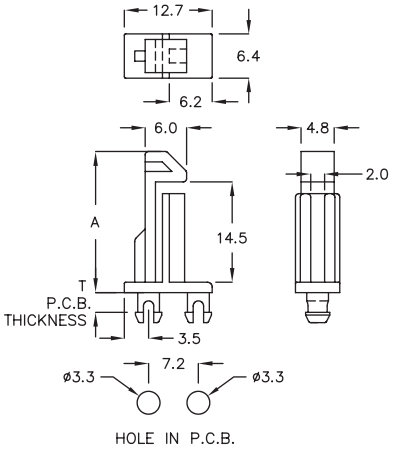




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

12

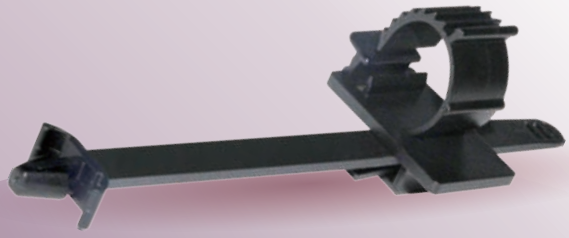

# 束线带
# CABLE TIES

## 电线束线带 CABLE TIE 12-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

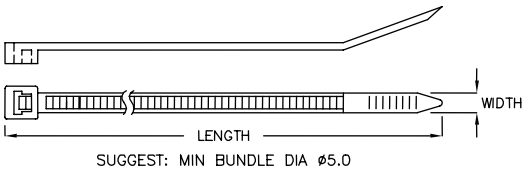

SUGGEST: MIN BUNDLE DIA ø5.0

E101675

| PART NO | APPROX LENGTH mm(in) | APPROX WIDTH mm(in) | MAX BUNDLE DIA mm(in) | MIN. LOOP TENSILE STRENGTH kgs(Lbs) | PACKAGE |
|---|---|---|---|---|---|
| YJ-80 | 80(3.15") | 2.2(0.08") | 17(0.67") | 8(18) | 1000 |
| YJ-90 | 90(3.54") | 2.5(0.10") | 21(0.83") | | |
| YJ-98 | 98(3.86") | | 22(0.87") | | |
| YJ-100 | 100(4.00") | | 23(0.91") | | |
| YJ-115 | 115(4.53") | 4.8(0.19") | 29(1.15") | 23(50) | 500 |
| YJ-120 | 120(4.72") | 2.5(0.10") | 30(1.18") | 8(18) | 1000 |
| YJ-140 | 140(5.50") | 4.8(0.19") | 34(1.34") | 23(50) | 500 |
| YJ-142 | 142(5.59") | 3.6(0.14") | | 18(40) | |
| YJ-142S | 142(5.59") | 2.5(0.10") | 36(1.42") | 8(18) | 1000 |
| YJ-160 | 160(6.30") | | 42(1.66") | | |
| YJ-203 | 203(8.00") | 3.6(0.14") | 55(2.17") | 18(40) | 500 |
| YJ-203S | 203(8.00") | 2.5(0.10") | 56(2.21") | 8(18) | 1000 |

## 电线束线带 SCREW-ON CABLE TIE 12-2-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



SUGGEST: MIN BUNDLE DIA ø10.0

| PART NO | APPROX LENGTH mm(in) | APPROX WIDTH mm(in) | MAX BUNDLE DIA mm(in) | A | PACKAGE |
|---|---|---|---|---|---|
| YJ-156 | 156(6.14") | 3.6(0.14") | 34(1.33") | ø4.3 | 500 |
| YJ-205 | 205(8.00") | 4.8(0.19") | 51(2.01") | ø5.5 | |

## 把手座 HANDLE MOUNTING PLATE 12-2-3

- MATERIAL: PE
- COLOR: BLACK

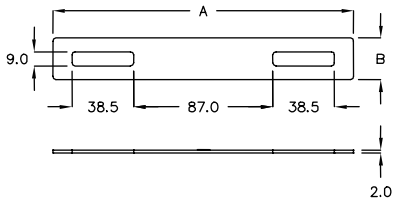


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSTH-188F | 188.0 | 26.0 | 100 |

CAN BE USED AN OPTION P.G PART BST-07



## 纸箱把手 PULLER 12-2-4

- MATERIAL: PE
- COLOR: WHITE

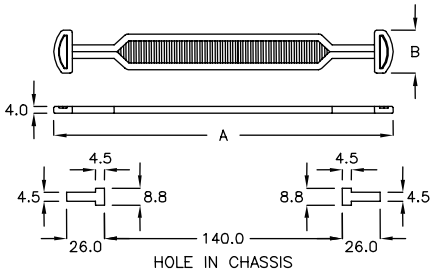


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BST-07 | 198.0 | 25.4 | 200 |

CAN BE USED AN OPTION P.G PART BSTH-188F





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手 PULLER 12-3-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

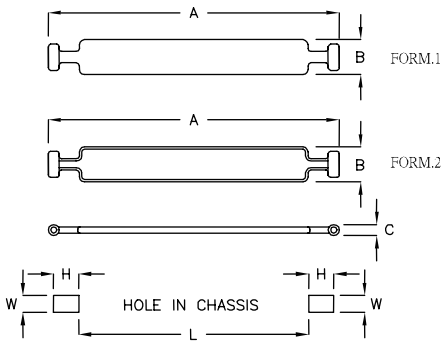


| PART NO | A | B | C | H | W | L | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| BST−60A | 60.6 | 9.4 | ø2.3 | 8.0 | 3.7 | 30.0 | 1 | 1000 |
| BST−70 | 70.0 | 8.0 | ø2.0 | 7.0 | 4.0 | 46.0 | 1 | 500 |
| BST−8D | 79.8 | 9.4 | ø2.3 | 15.0 | 3.7 | 46.0 | 1 | |
| BST−9A | 90.5 | 9.4 | ø2.3 | 7.0 | 3.8 | 60.5 | 2 | |
| BST−120 | 120.0 | 11.9 | ø2.3 | 9.2 | 6.0 | 80.0 | 2 | |

## 把手 PULLER 12-3-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

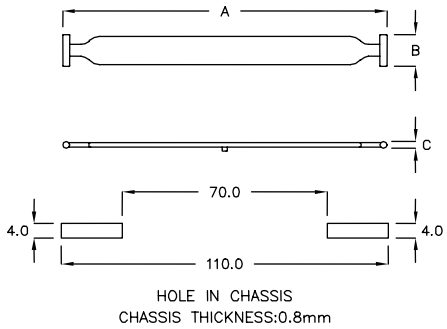


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BSX−110K | 110.6 | 9.0 | ø2.0 | 500 |



## 把手 PULLER 12-3-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

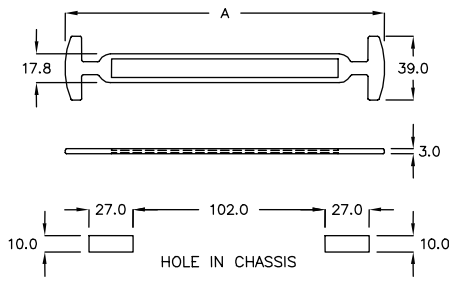


| PART NO | A | PACKAGE |
|---|---|---|
| BST−180Q | 180.0 | 200 |

## 固定座 MOUNTING 12-3-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M4 SCREW

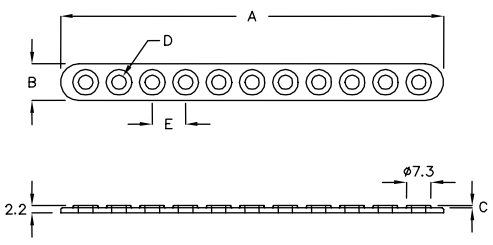


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| BSW−115 | 115.0 | 11.0 | 0.7 | ø4.3×11 | 10.0×10 | 500 |
| BSW−155 | 155.0 | 11.0 | 0.7 | ø4.3×15 | 10.0×14 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNTING 12-4-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M4 SCREW

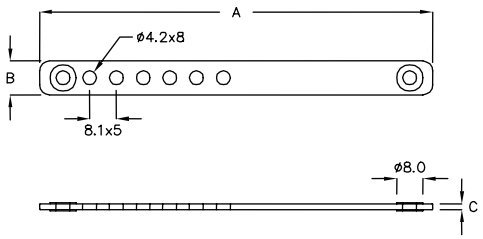


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BSW-119 | 118.8 | 10.2 | 1.7 | 500 |

## 固定座 MOUNTING 12-4-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M4 SCREW

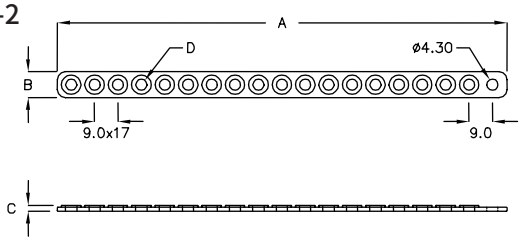


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| BSW-172 | 172.7 | 10.0 | 2.2 | ø4.3x18 | 500 |

## 束线固定座 MOUNTING 12-4-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YAD-01 | 17.2 | 5.0 | 4.0 | YJ-80, YJ-90, YJ-98<br>YJ-100, YJ-120, YJ-142S<br>YJ-160, YJ-203S | 2000 |

ASSEMBLE WITH P.G PART YJ-SERIES
MUST BE ASSEMBLED WITH CABLE TIE, WIDTH UP TO 2.6mm

## 电源线固定带 CABLE TIE 12-4-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| PSA-01 | 45.0 | 20.0 | 11.9 | 1.2 | 500 |

ASSEMBLE WITH P.G PART PSA-02





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定带 CABLE TIE 12-5-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

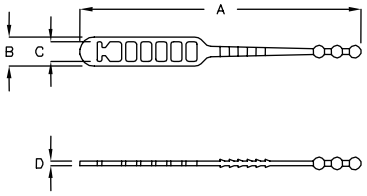


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| PSA-02 | 78.25 | 8.0 | 5.6 | 1.2 | 500 |

ASSEMBLE WITH P.G PART PSA-01

## 电源线固定带 CABLE TIE 12-5-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

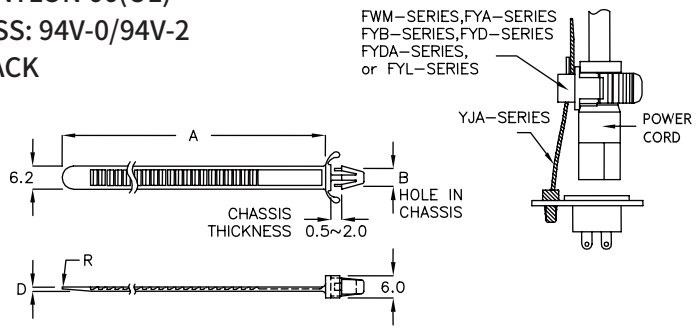


| PART NO | A | B HOLE IN CHASSIS | D | R | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| YJA-85 | 85.0 | ø5.0 | 1.2 | R0.1 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 100 |
| YJA-85KT | 85.0 | ø5.0 | 1.2 | R0.4 | | |
| YJA-85PD | 85.0 | ø5.0 | 1.5 | R0.1 | FWM-11PH, FWM-15PD | |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES,
FYD-SERIES, FYDA-SERIES or FYL-SERIES

## 电源线固定带 CABLE TIE 12-5-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

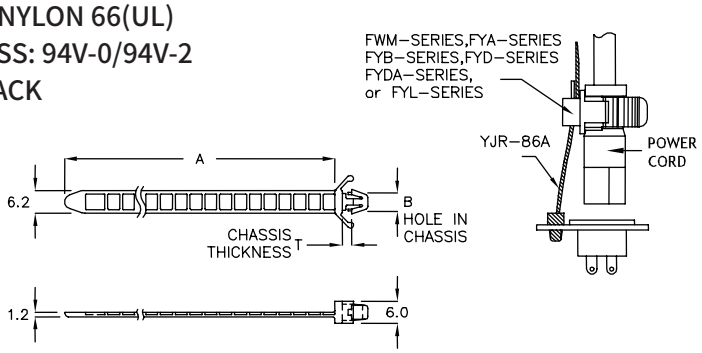


| PART NO | A | B HOLE IN CHASSIS | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJR-86A | 86.75 | ø5.0 | 0.8~2.0 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 100 |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES,
FYD-SERIES, FYDA-SERIES or FYL-SERIES




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定带 CABLE TIE 12-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

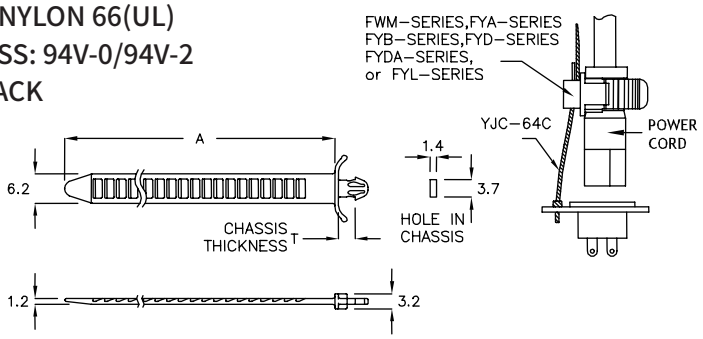


| PART NO | A | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YJC-64C | 64.2 | 1.8~2.8 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 500 |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES

## 电源线固定带 CABLE TIE 12-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

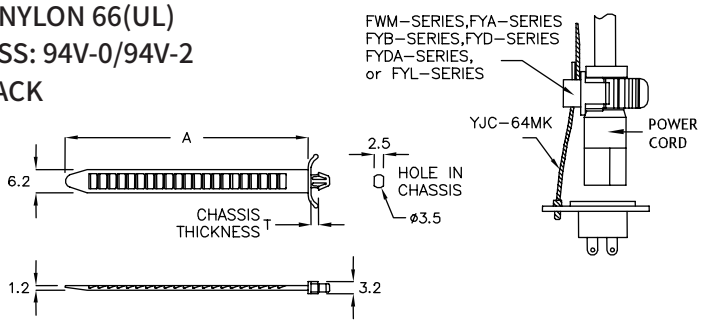


| PART NO | A | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YJC-64MK | 64.2 | 1.0~1.4 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 500 |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES

## 电源线固定带 CABLE TIE 12-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

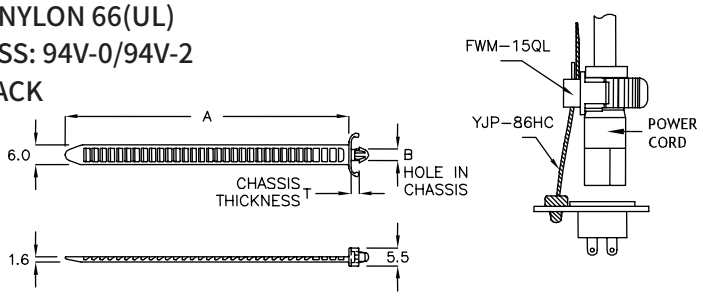


| PART NO | A | B HOLE IN CHASSIS | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJP-86HC | 86.74 | ø3.5 | 0.8~2.0 | FWM-15QL | 100 |

ASSEMBLE WITH P.G PART FWM-15QL





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定带 CABLE TIE 12-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

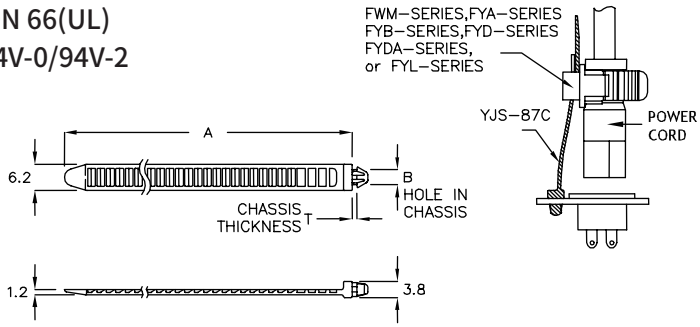


| PART NO | A | B HOLE IN CHASSIS | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJS–87C | 89.0 | ø3.5 | 0.8 | FWM–7GQ, FWM–8K<br>FWM–11A, FWM–11KN<br>FWM–15A, FWM–19M<br>FYA–15KC, FYA–15TR<br>FYB–15NK, FYD–13K<br>FYDA–13C, FYL–17C | 100 |

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES

## 电源线固定带 CABLE TIE 12-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

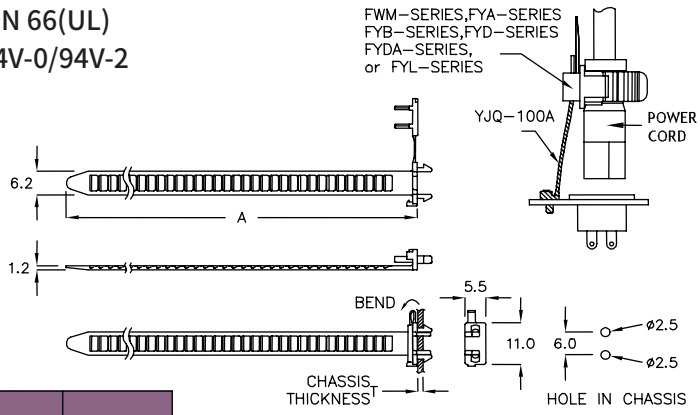


| PART NO | A | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YJQ–100A | 100.0 | 1.6 | FWM–7GQ, FWM–8K<br>FWM–11A, FWM–11KN<br>FWM–15A, FWM–19M<br>FYA–15KC, FYA–15TR<br>FYB–15NK, FYD–13K<br>FYDA–13C, FYL–17C | 100 |

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES

## 电源线固定带 CABLE TIE 12-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

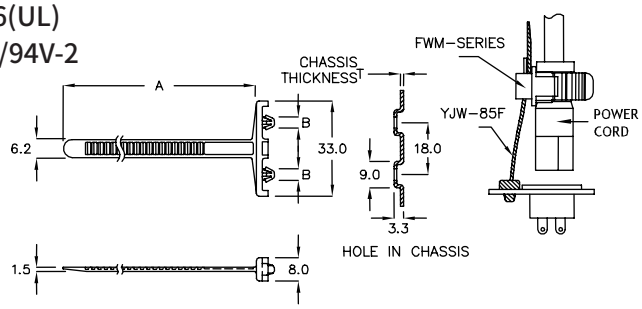


| PART NO | A | B HOLE IN CHASSIS | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJW–85F | 85.0 | ø4.0 | 1.0 | FWM–11PH, FWM–15PD | 100 |

ASSEMBLE WITH P.G PART FWM–SERIES



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定带 CABLE TIE 12-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

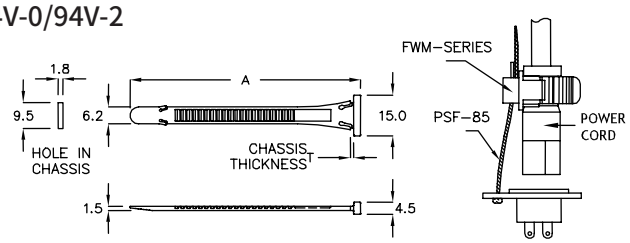


| PART NO | A | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| PSF–85 | 85.0 | 0.8 | FWM–11PH, FWM–15PD | 500 |

ASSEMBLE WITH P.G PART FWM–SERIES

## 电源线固定带 CABLE TIE 12-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

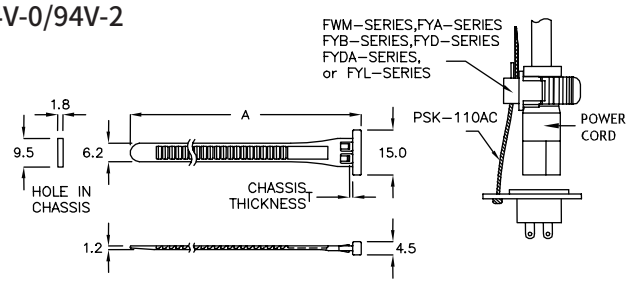


| PART NO | A | T CHASSIS THICKNESS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| PSK–110AC | 110.0 | 0.8 | FWM–7GQ, FWM–8K<br>FWM–11A, FWM–11KN<br>FWM–15A, FWM–19M<br>FYA–15KC, FYA–15TR<br>FYB–15NK, FYD–13K<br>FYDA–13C, FYL–17C | 500 |

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES

## 电源线固定带 CABLE TIE 12-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

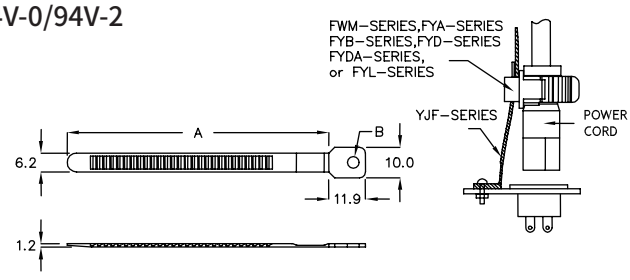


| PART NO | A | B | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YJF–94 | 85.0 | ø3.8 | FWM–7GQ, FWM–8K<br>FWM–11A, FWM–11KN<br>FWM–15A, FWM–19M<br>FYA–15KC, FYA–15TR<br>FYB–15NK, FYD–13K<br>FYDA–13C, FYL–17C | 100 |
| YJF–116KH | 105.0 | ø6.0 | | |

ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定带 CABLE TIE 12-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

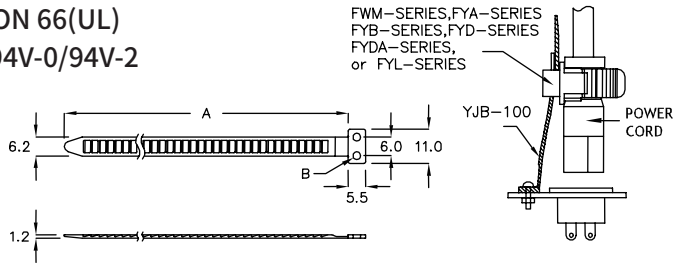


| PART NO | A | B | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YJB-100 | 100.0 | ø2.5 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 100 |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES

## 电源线固定带 CABLE TIE 12-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

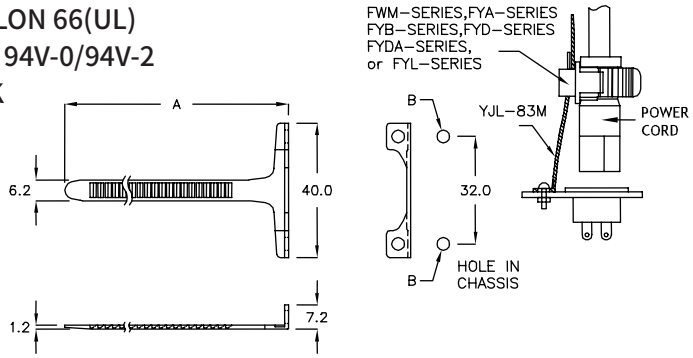


| PART NO | A | B HOLE IN CHASSIS | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|
| YJL-83M | 83.5 | ø3.5 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 100 |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES

## 电源线固定带 CABLE TIE 12-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

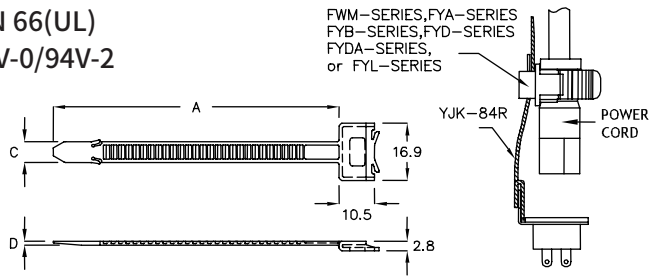





| PART NO | A | C | D | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJK-84R | 84.6 | 6.2 | 1.2 | FWM-7GQ, FWM-8K<br>FWM-11A, FWM-11KN<br>FWM-15A, FWM-19M<br>FYA-15KC, FYA-15TR<br>FYB-15NK, FYD-13K<br>FYDA-13C, FYL-17C | 100 |

ASSEMBLE WITH P.G PART FWM-SERIES, FYA-SERIES, FYB-SERIES, FYD-SERIES, FYDA-SERIES or FYL-SERIES



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定带 CABLE TIE — 12-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

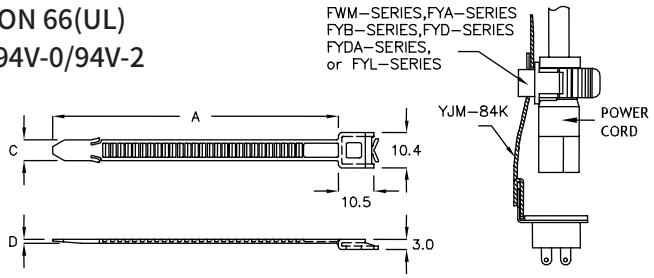


| PART NO | A | C | D | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJM–84K | 84.6 | 6.2 | 1.2 | FWM–7GQ, FWM–8K<br>FWM–11A, FWM–11KN<br>FWM–15A, FWM–19M<br>FYA–15KC, FYA–15TR<br>FYB–15NK, FYD–13K<br>FYDA–13C, FYL–17C | 100 |




ASSEMBLE WITH P.G PART FWM–SERIES, FYA–SERIES, FYB–SERIES, FYD–SERIES, FYDA–SERIES or FYL–SERIES

## 电源线固定带 CABLE TIE — 12-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

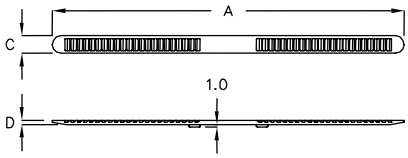


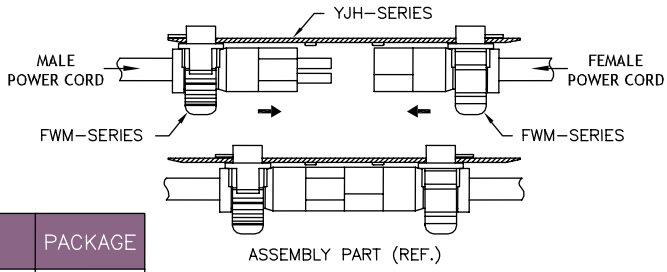


| PART NO | A | C | D | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|
| YJH–125 | 125.0 | 6.2 | 1.5 | FWM–11PH, FWM–15PD<br>FWM–26SA | 100 |
| YJH–180HG | 180.0 | 6.2 | 1.5 | | |

ASSEMBLE WITH P.G PART FWM–SERIES

## 电源线固定座 POWER CORD MOUNTING — 12-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

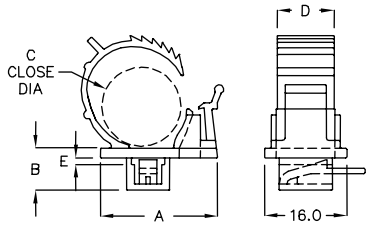


| PART NO | A | B | C CLOSE DIA | D | E | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|
| FYB–15NK | 22.7 | 8.1 | ø11.5~ø15.3 | 11.0 | 1.3 | YJA–85, YJA–85KT, YJB–100<br>YJC–64C, YJC–64MK, YJF–94<br>YJF–116KH, YJK–84R, YJL–83M<br>YJM–84K, YJQ–100A, YJR–86A<br>YJS–87C, PSK–110AC | 100 |

ASSEMBLE WITH P.G PART YJA–SERIES, YJB–SERIES, YJC–SERIES, YJF–SERIES, YJK–SERIES, YJL–SERIES, YJM–SERIES, YJQ–SERIES, YJR–SERIES, YJS–SERIES or PSK–SERIES





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定座 POWER CORD MOUNTING — 12-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C CLOSE DIA | D | E | R | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| FWM−7GQ | 18.0 | 8.1 | ø5.0~ø6.5 | 11.0 | 1.3 | R0.1 | YJA−85, YJA−85KT YJB−100, YJC−64C YJC−64MK, YJF−94 YJF−116KH, YJK−84R YJL−83M, YJM−84K YJQ−100A, YJR−86A YJS−87C, PSK−110AC | 100 |
| FWM−8K | 18.0 | 8.1 | ø7.2~ø8.3 | | | | | |
| FWM−11A | 25.0 | 8.3 | ø8.0~ø11.0 | | | | | |
| FWM−11KN | 25.0 | 8.3 | ø8.0~ø11.0 | 11.0 | 1.3 | R0.2 | | |
| FWM−15A | 24.7 | 8.1 | ø11.5~ø15.3 | 11.0 | 1.3 | R0.1 | | |
| FWM−19M | 28.3 | 8.3 | ø15.3~ø19.0 | | | | | |
| FWM−11PH | 25.0 | 8.3 | ø8.0~ø11.0 | 11.0 | 1.6 | R0.1 | YJA−85PD, YJH−125 YJH−180HG, YJW−85F PSF−85 | |
| FWM−15PD | 24.8 | 8.1 | ø11.5~ø15.3 | | | | | |

ASSEMBLE WITH P.G PART YJA−SERIES, YJB−SERIES, YJC−SERIES, YJF−SERIES, YJH−SERIES, YJK−SERIES, YJL−SERIES, YJM−SERIES, YJQ−SERIES, YJR−SERIES, YJS−SERIES, YJW−SERIES or PSK−SERIES

## 电源线固定座 POWER CORD MOUNTING — 12-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

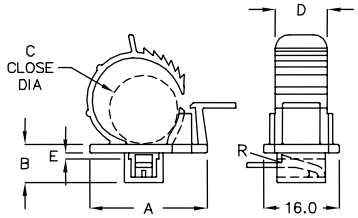


| PART NO | A | B | C CLOSE DIA | D | E | R | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| FWM−15QL | 20.5 | 8.3 | ø11.5~ø15.3 | 11.0 | 1.3 | R0.1 | YJP−86HC | 100 |
| FYA−15KC | 24.8 | 8.1 | ø11.5~ø15.3 | 11.0 | 1.35 | R0.2 | YJA−85, YJA−85KT, YJB−100 YJC−64C, YJC−64MK, YJF−94 YJF−116KH, YJK−84R, YJL−83M YJM−84K, YJQ−100A, YJR−86A YJS−87C, PSK−110AC | |
| FYA−15TR | 24.8 | 8.1 | ø11.5~ø15.3 | 11.0 | 1.3 | R0.1 | | |

ASSEMBLE WITH P.G PART YJA−SERIES, YJB−SERIES, YJC−SERIES, YJF−SERIES, YJK−SERIES, YJL−SERIES, YJM−SERIES, YJP−SERIES, YJQ−SERIES, YJR−SERIES, YJS−SERIES or PSK−SERIES

## 电源线固定座 POWER CORD MOUNTING — 12-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

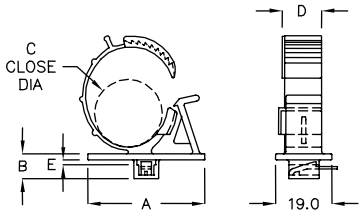


| PART NO | A | B | C CLOSE DIA | D | E | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|
| FWM−26SA | 39.9 | 8.5 | ø21.0~ø26.5 | 13.3 | 1.65 | YJA−85PD, YJH−125 YJH−180HG, YJW−85F PSF−85 | 100 |

ASSEMBLE WITH P.G PART YJA−SERIES, YJH−SERIES, YJW−SERIES, PSF−SERIES



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源线固定座 POWER CORD MOUNTING — 12-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

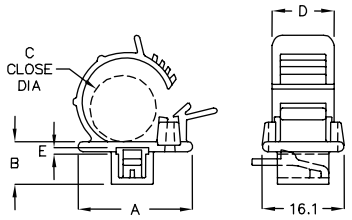


| PART NO | A | B | C CLOSE DIA | D | E | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|---|
| FYD−13K | 22.5 | 8.4 | ø11.0~ø13.0 | 12.1 | 1.3 | YJA−85, YJA−85KT, YJB−100 YJC−64C, YJC−64MK, YJF−94 YJF−116KH, YJK−84R, YJL−83M YJM−84K, YJQ−100A, YJR−86A YJS−87C, PSK−110AC | 100 |
| FYDA−13C | 22.5 | 8.45 | ø11.0~ø13.0 | 12.0 | 1.35 | | |

ASSEMBLE WITH P.G PART YJA−SERIES, YJB−SERIES, YJC−SERIES, YJF−SERIES, YJK−SERIES, YJL−SERIES, YJM−SERIES, YJQ−SERIES, YJR−SERIES, YJS−SERIES or PSK−SERIES

## 电源线固定座 POWER CORD MOUNTING — 12-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | C CLOSE DIA | D | E | ASSEMBLE WITH P.G. PART | PACKAGE |
|---|---|---|---|---|---|---|
| FYL−17C | 31.1 | ø15.0~ø17.0 | 11.0 | 1.35 | YJA−85, YJA−85KT, YJB−100 YJC−64C, YJC−64MK, YJF−94 YJF−116KH, YJK−84R, YJL−83M YJM−84K, YJQ−100A, YJR−86A YJS−87C, PSK−110AC | 100 |

ASSEMBLE WITH P.G PART YJA−SERIES, YJB−SERIES, YJC−SERIES, YJF−SERIES, YJK−SERIES, YJL−SERIES, YJM−SERIES, YJQ−SERIES, YJR−SERIES, YJS−SERIES or PSK−SERIES

## 电源线固定座 POWER CORD MOUNTING — 12-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 SCREW

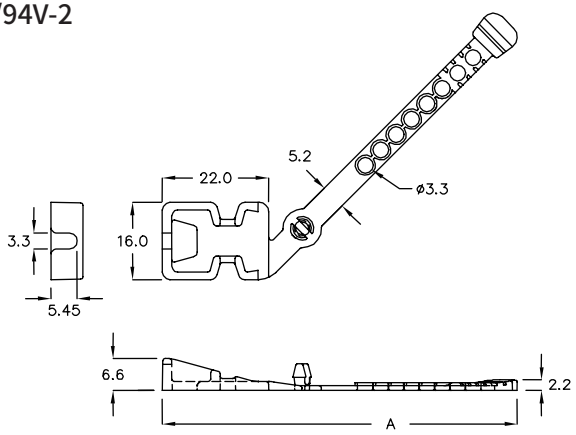


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| YAT−83A | 83.06 | ø8.0~ø16.0 | 100 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线束线带 MOUNTING CABLE TIE 12-13-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

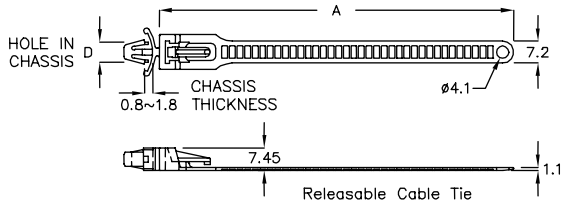


| PART NO | A | D HOLE IN CHASSIS | APPROX LENGTH | APPROX WIDTH | MAX BUNDLE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| YAA-118 | 117.4 | ø6.5 | 129(5.08") | 7.2(0.284") | 28.5(1.125") | 100 |
| YAA-150 | 150.0 | ø3.8 | 160(6.30") | 7.2(0.284") | 40.0(1.575") | |



## 电线束线带 MOUNTING CABLE TIE 12-13-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

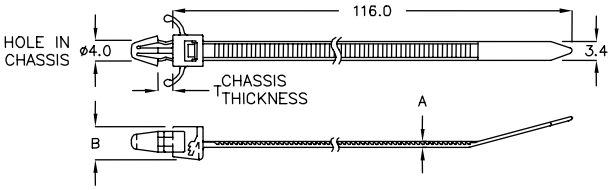


| PART NO | A | B | T CHASSIS THICKNESS | APPROX LENGTH | APPROX WIDTH | MAX BUNDLE DIA | PACKAGE |
|---|---|---|---|---|---|---|---|
| YJ-123 | 1.1 | 6.8 | 0.8~2.0 | 123(4.84") | 3.4(0.13") | 25.4(1.00") | 500 |
| YJ-123TK | 1.3 | 6.0 | 2.0~2.5 | 123(4.84") | 3.4(0.13") | 25.4(1.00") | |



## 电源线固定带 CABLE TIE 12-13-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

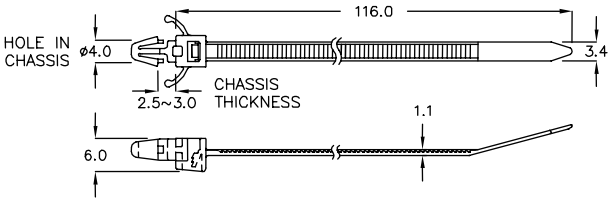


| PART NO | APPROX LENGTH | APPROX WIDTH | MAX BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| YJ-123HR | 123.6(4.86") | 3.4(0.13") | 25.4(1.00") | 500 |



## 电线束线带 MOUNTING CABLE TIE 12-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

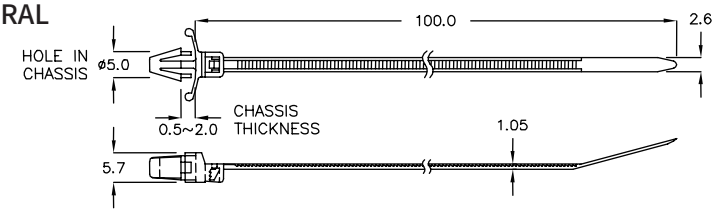


| PART NO | APPROX LENGTH | APPROX WIDTH | MAX BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| YJ-99T | 108(4.25") | 2.6(0.10") | 22.0(0.86") | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线束线带 MOUNTING CABLE TIE 12-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

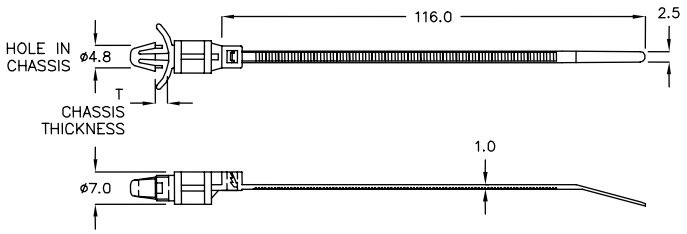


| PART NO | APPROX LENGTH | APPROX WIDTH | MAX BUNDLE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| YJ-138T | 114.8(4.52") | 2.5(0.10") | 25.4(1.00") | 0.6~2.0 | 500 |



## 电线束线带 MARKER TIE 12-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

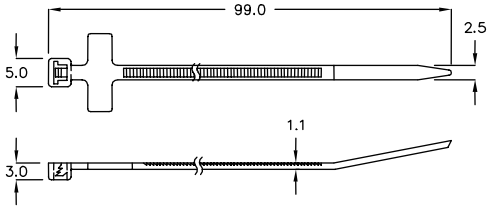


| PART NO | APPROX LENGTH | APPROX WIDTH | MAX BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| MCT-98 | 99(3.86") | 2.5(0.10") | 21.0(0.81") | 500 |

## 电线束线带 MOUNTING CABLE TIE 12-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

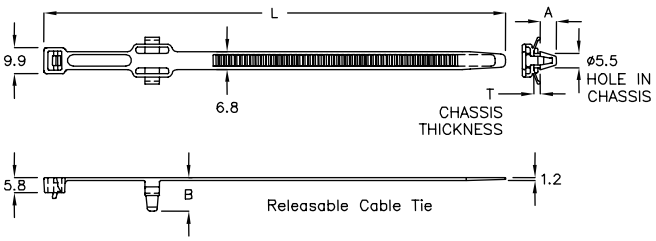


| PART NO | A | B | L | APPROX WIDTH | MAX BUNDLE DIA | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| YAM-180MQ | 6.0 | 12.8 | 180(7.09") | 6.8(0.268") | 45.0(1.772") | 0.5~2.0 | 200 |
| YAM-180RC | 5.1 | 12.4 | 180(7.09") | 6.8(0.268") | 45.0(1.772") | 2.3~2.5 | |

## 电源收线固定带 STRAP TIE 12-14-4

- MATERIAL: PE
- COLOR: NATURAL,BLACK

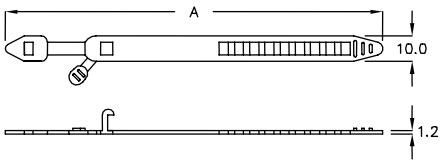


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST-1 | 138.8 | ø10.0~ø27.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源收线固定带 STRAP TIE 12-15-1

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| BST-2 | 103.6 | 200 |

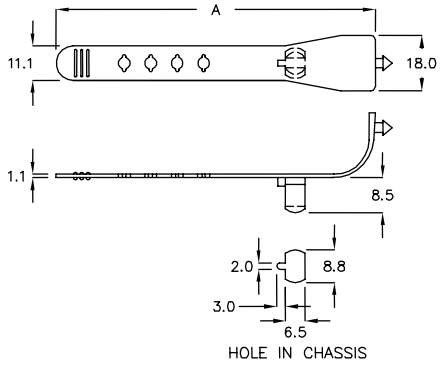

## 电源收线固定带 STRAP TIE 12-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: NATURAL, BLACK

| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST-3 | 129.0 | ø15.0~ø35.0 | 500 |

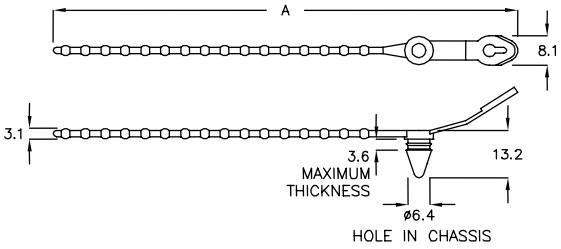

## 电源收线固定带 STRAP TIE 12-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST-128 | 128.3 | ø15.0~ø33.0 | 500 |

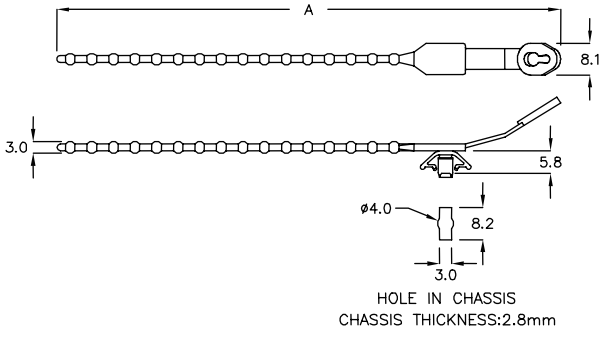

## 电源收线固定带 STRAP TIE 12-15-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK

| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST-129 | 129.0 | ø15.0~ø35.0 | 500 |

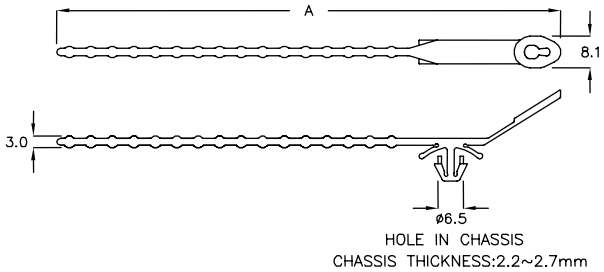




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源收线固定带 STRAP TIE 12-16-1

- MATERIAL: PE
- COLOR: BLACK

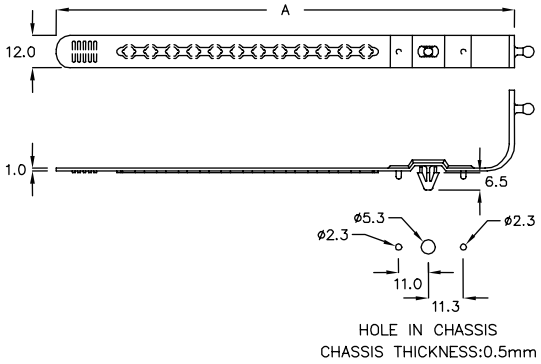


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST−170C | 170.0 | ø30.0~ø44.0 | 100 |

## 电源收线固定带 STRAP TIE 12-16-2

- MATERIAL: PE
- COLOR: BLACK

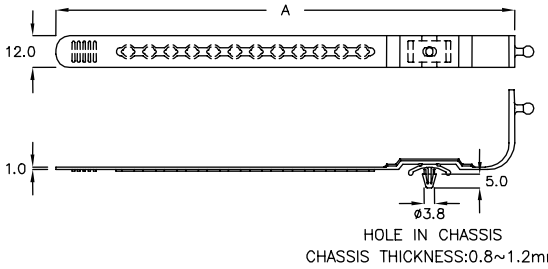


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST−172CF | 172.0 | ø30.0~ø44.0 | 200 |

## 电源收线固定带 STRAP TIE 12-16-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

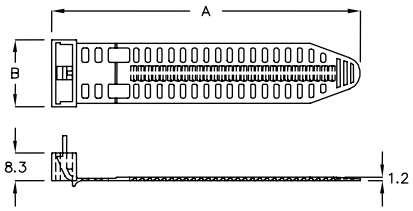


| PART NO | A | B | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| YJD−85H | 92.5 | 20.1 | ø9.0~ø19.0 | 100 |

## 电源收线固定带 STRAP TIE 12-16-4

- MATERIAL: PE
- COLOR: BLACK

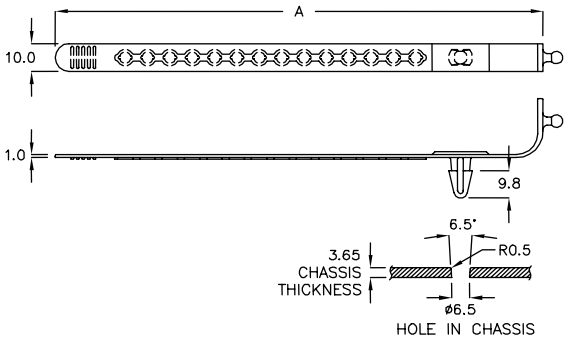


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST−174A | 174.5 | ø25.0~ø44.0 | 100 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源收线固定带 STRAP TIE 12-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

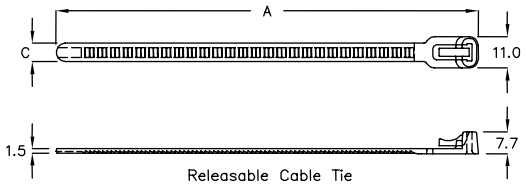


| PART NO | A | C | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| YAK−148 | 148.0 | 7.5 | ø8.0~ø36.0 | 500 |
| YAK−196A | 196.4 | 5.5 | ø8.0~ø50.0 | |

## 电源收线固定带 STRAP TIE 12-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

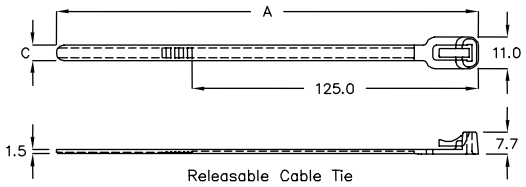


| PART NO | A | C | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| YAKS−196 | 196.4 | 5.5 | ø33.0~ø35.0 | 500 |

## 电源收线固定带 STRAP TIE 12-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: NATURAL
- 按下杠杆即可解开，可重复使用

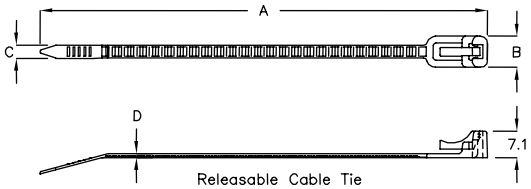


| PART NO | A | B | C | D | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| YJG−120 | 120.0 | 8.4 | 3.5 | 1.1 | ø5.0~ø25.0 | 500 |
| YJG−260 | 260.0 | 9.0 | 4.0 | 1.3 | ø8.0~ø70.0 | |

## 电源收线固定带 STRAP TIE 12-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK

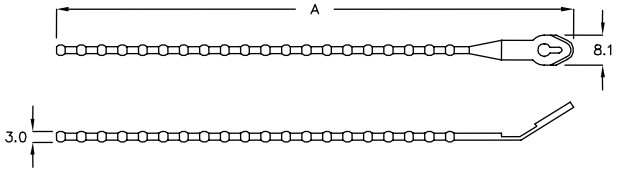


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST−3A | 142.0 | ø5.5~ø39.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源收线固定带 STRAP TIE 12-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0 / 94V-2
- COLOR: BLACK

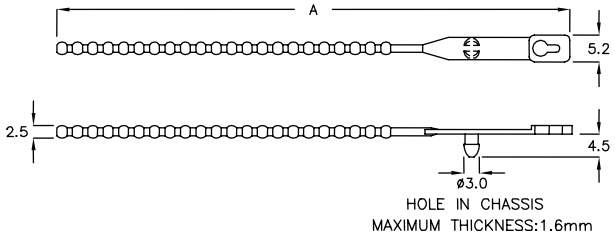


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST−5 | 103.0 | ø9.5~ø27.0 | 500 |

## 活动束线带 MOVABLE TIE 12-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK

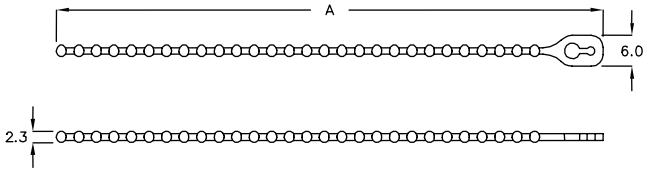


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BST−6C | 70.0 | ø6.0~ø17.0 | 500 |
| BST−6HJ | 88.0 | ø6.0~ø20.0 | |
| BST−6A | 106.0 | ø6.0~ø27.0 | |

## 活动束线带 STRAP TIE 12-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

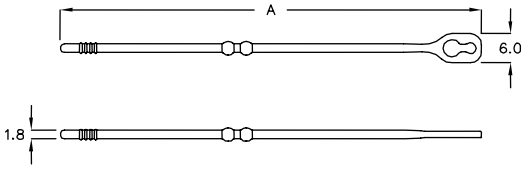


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BXR−86 | 86.0 | ø13.0 | 500 |

## 活动束线带 STRAP TIE 12-18-4

- ATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

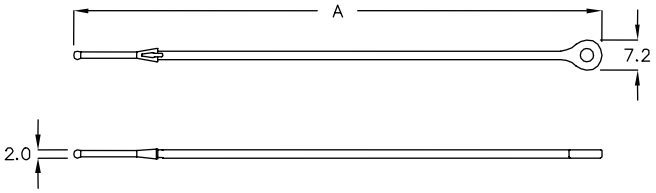


| PART NO | A | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|
| BFN−102 | 125.6 | ø30.0 | 500 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 活动束线带 STRAP TIE 12-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

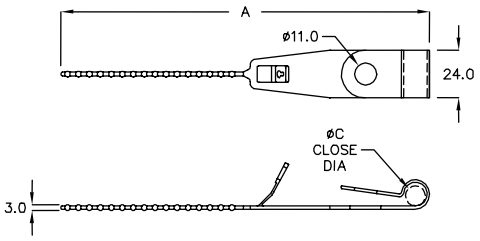


| PART NO | A | C CLOSE DIA | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| BST-185P | 185.0 | ø10.0 | ø15.4~ø32.4 | 10 |

## 电源收线固定带 STRAP TIE 12-19-2

- MATERIAL: PE
- COLOR: NATURAL,BLACK

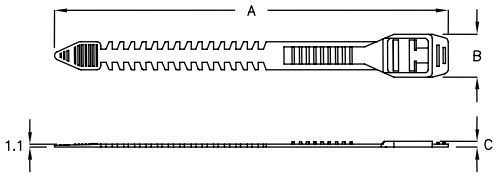


| PART NO | A | B | C | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|---|
| LST-6 | 141.5 | 15.5 | 2.05 | ø16.0~ø34.0 | 500 |
| LST-8 | 158.5 | 15.8 | 2.5 | ø26.0~ø38.0 | 100 |

## 电源收线固定带 STRAP TIE 12-19-3

- MATERIAL: PE
- COLOR: NATURAL,BLACK

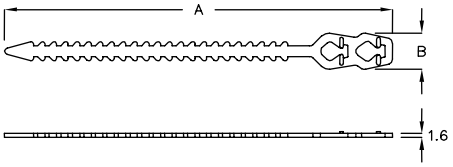


| PART NO | A | B | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|
| LST-10 | 208.0 | 14.6 | ø5.0~ø47.0 | 500 |

## 电源收线固定带 STRAP TIE 12-19-4

- COLOR: NATURAL,BLACK

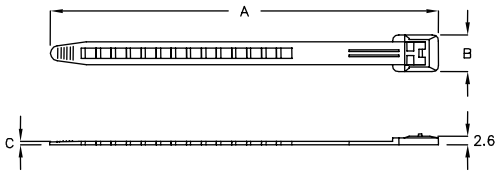


| PART NO | MATERIAL | A | B | C | SUITABLE BUNDLE DIA | PACKAGE |
|---|---|---|---|---|---|---|
| PST-1 | N66 | 125.0 | 13.0 | 1.6 | ø15.0~ø33.0 | 500 |
| PST-2A | N66/PE | 151.5 | 14.5 | 1.4 | ø15.0~ø39.0 | |
| PST-5 | PE | 180.4 | 14.5 | 1.5 | ø15.5~ø47.5 | |
| PST-6 | PE | 209.0 | 14.5 | 1.5 | ø20.0~ø55.0 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 活动束线带 STRAP TIE — 12-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

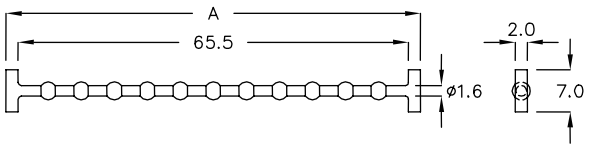


| PART NO | A | PACKAGE |
|---|---|---|
| BST−4 | 69.5 | 1000 |

## 把手 PULLER — 12-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

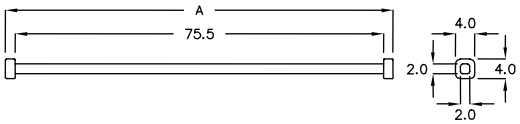


| PART NO | A | PACKAGE |
|---|---|---|
| BSQ−75A | 79.5 | 2000 |



## 打包扣 PACKING FASTENER — 12-20-3

- MATERIAL: PP
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| PF−1 | 60.8 | 200 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 13

## 其他塑胶制品

## HANDLE
## HOUSING
## COVER

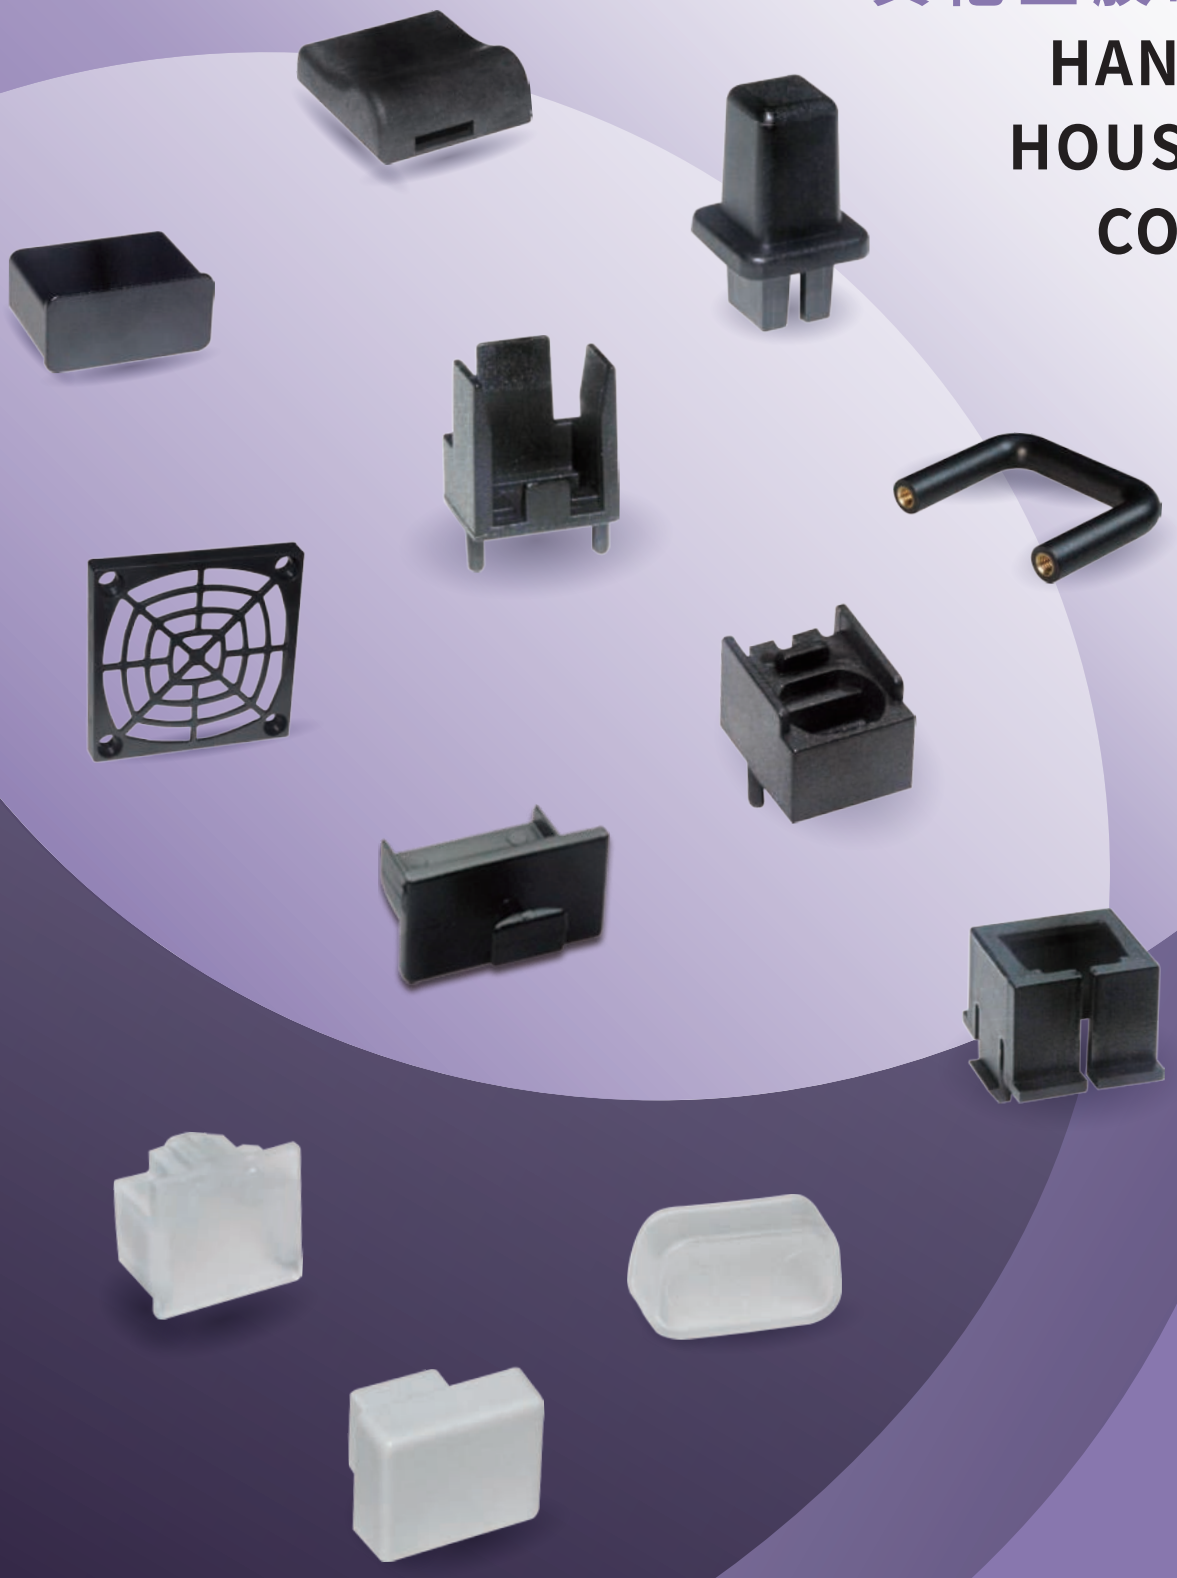

## 把手 HANDLE 13-2-1

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSA-38 | 44.55 | 36.7 | 200 |



## 把手 HANDLE 13-2-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3.5 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSA-64 | 70.4 | 31.6 | 200 |

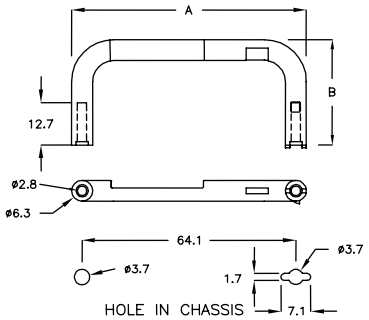

## 把手 HANDLE 13-2-3

- MATERIAL: ABS+PC, PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- MATERIAL: BRASS

| PART NO | MATERIAL | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| BWK-32PM | ABS+PC | 38.3 | 29.3 | 32.0 | ø6.3 | 200 |
| BWK-45DK | PC | 52.3 | 22.5 | 45.3 | ø7.0 | |
| BWK-51CT | ABS+PC | 57.3 | 32.0 | 51.0 | ø6.3 | |



## 把手 HANDLE 13-2-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- MATERIAL: BRASS

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSG-30MF | 37.2 | 27.0 | 200 |



## 把手 HANDLE 13-2-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSC-33 | 52.0 | 22.0 | 200 |

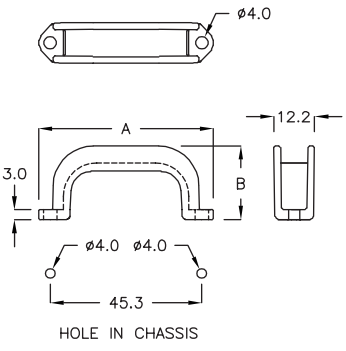







提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手 HANDLE 13-3-1

- MATERIAL: PC(UL)
- COLOR: GREEN
- USE M3 SCREW

NEW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ BSHC−32 | 40.0 | 22.7 | 200 |



## 把手 HANDLE 13-3-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3.5x8 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BWN−26 | 33.0 | 35.0 | 200 |



## 把手 HANDLE 13-3-3

- MATERIAL: PC(UL)
- COLOR: NATURAL
- USE M3 SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSA−32A | 38.0 | 34.7 | 200 |



## 把手 HANDLE 13-3-4

- MATERIAL: PC(UL)
- COLOR: NATURAL
- USE M3 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSA−32HC | 38.0 | 35.0 | 200 |



## 把手 HANDLE 13-3-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL
- USE M3.5x8 TAPPING SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSA−46K | 55.4 | 32.7 | 200 |

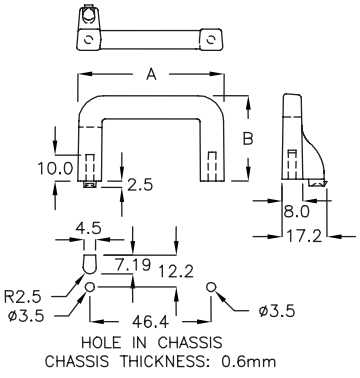




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手 HANDLE 13-4-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE: M3.5 TAPPING SCREW

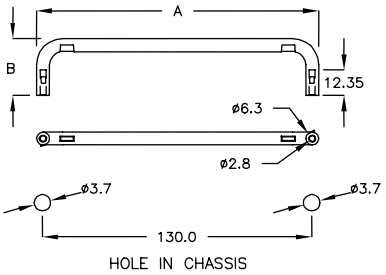


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BSA−130 | 136.3 | 27.65 | 100 |

## 把手 HANDLE 13-4-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3 TAPPING SCREW

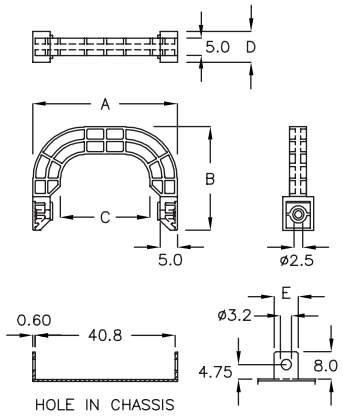


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| BWA−36 | 42.0 | 30.25 | 26.0 | 9.3 | 7.1 | 200 |
| BWA−40H | 42.0 | 20.0 | 30.0 | 10.0 | 6.8 | |

## 把手 HANDLE 13-4-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3x4 TAPPING SCREW

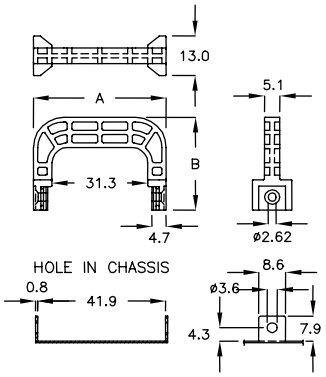


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BWH−43A | 43.5 | 30.65 | 200 |

## 把手 HANDLE 13-4-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M3x4 TAPPING SCREW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BWF−40GP | 41.6 | 30.0 | 7.25 | 200 |
| BWF−40TS | 41.6 | 30.0 | 6.85 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手 HANDLE 13-5-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- USE M4 SELF TAPPING SCREW or M3 SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| BWD-47 | 51.0 | 30.5 | 200 |

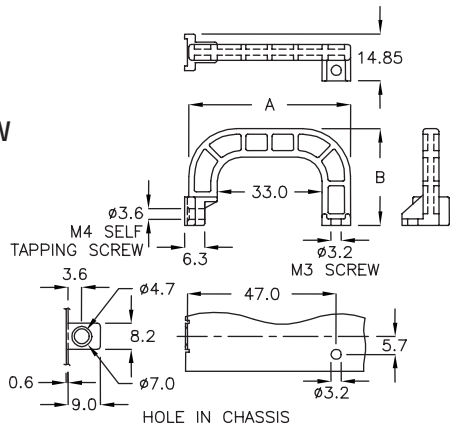




## 把手 HANDLE 13-5-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLUE
- SCREW: M3 TAPPING SCREW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BJA-13K | 13.3 | 21.0 | 3.2 | 100 |

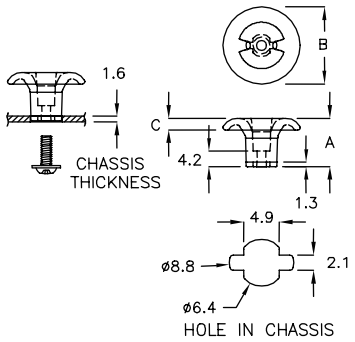

## 把手 HANDLE 13-5-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLUE
- USE M3 TAPPING SCREW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| BJA-30C | 30.2 | 12.9 | 30.9 | 100 |



## IR 座 IR RECEIVER HOUSING 13-5-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| CDS-1A | 7.5 | 9.6 | 14.4 | 10.4 | 12.0 | ø0.8 | 500 |
| CDS-1C | 6.6 | 8.6 | 14.4 | 9.3 | 10.4 | ø1.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## IR 座 IR RECEIVER HOUSING 13-6-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | D | E | F | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| CDS-2A | 1.5 | 3.5 | 3.8 | 4.0 | 5.5 | 6.0 | 500 |
| CDS-2M | 1.5 | 3.5 | 3.8 | 4.0 | 5.5 | 6.0 | |
| CDS-4G | 4.5 | 6.5 | 3.8 | 4.0 | 8.5 | 6.0 | |
| CDS-4WP | 4.15 | 6.5 | 5.0 | 4.35 | 8.5 | 6.0 | |
| CDS-5F | 4.5 | 6.5 | 3.8 | 3.5 | 8.0 | 6.0 | |
| CDS-07 | 7.0 | 9.0 | 3.8 | 4.0 | 11.0 | 6.0 | |
| CDS-10A | 10.0 | 12.0 | 3.8 | 4.0 | 14.0 | 6.0 | |
| CDS-13A | 13.7 | 15.7 | 3.8 | 4.0 | 17.7 | 5.3 | |
| CDS-13DF | 13.35 | 15.7 | 5.0 | 4.35 | 17.7 | 5.3 | |



## IR 座 IR RECEIVER HOUSING 13-6-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

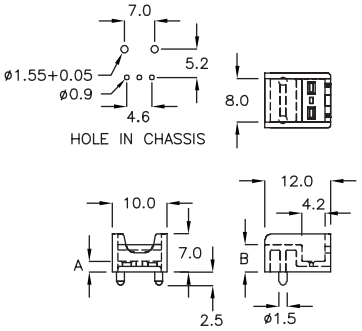


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-2D | 2.0 | 5.0 | 500 |



## IR 座 IR RECEIVER HOUSING 13-6-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | F | PACKAGE |
|---|---|---|---|---|
| CDS-7A | 7.0 | 9.0 | 11.0 | 500 |



## IR 座 IR RECEIVER HOUSING 13-6-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | F | PACKAGE |
|---|---|---|---|---|
| CDS-7B | 7.0 | 9.0 | 11.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## IR 座　IR RECEIVER HOUSING　13-7-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

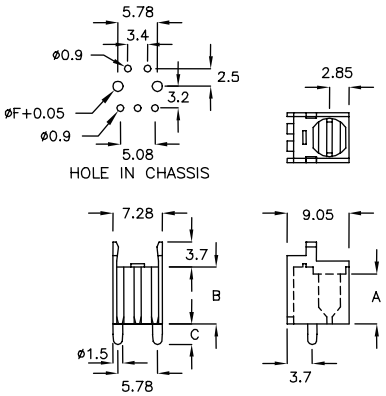


| PART NO | A | B | C | F | PACKAGE |
|---|---|---|---|---|---|
| CDS-04 | 3.0 | 4.0 | 3.0 | 1.55 | 1000 |
| CDS-4H | 3.0 | 4.0 | 1.4 | 1.55 | 500 |
| CDS-8A | 6.6 | 7.6 | 3.0 | 1.60 | |
| CDS-12 | 10.9 | 11.9 | 3.0 | 1.55 | |



## IR 座　IR RECEIVER HOUSING　13-7-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

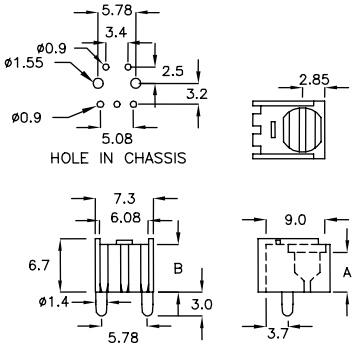


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-6A | 5.0 | 6.0 | 500 |



## IR 座　IR RECEIVER HOUSING　13-7-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

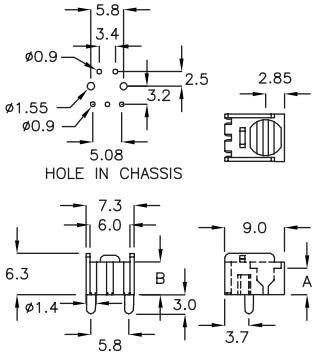


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-4D | 4.0 | 5.0 | 1000 |



## IR 座　IR RECEIVER HOUSING　13-7-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

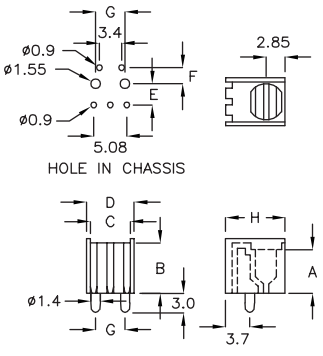


| PART NO | A | B | C | D | E | F | G | H | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| CDS-03 | 2.0 | 3.0 | 7.7 | 8.9 | 3.2 | 4.5 | 5.78 | 11.5 | 500 |
| CDS-6C | 5.0 | 6.0 | 6.1 | 7.3 | 3.2 | 2.5 | 4.5 | 9.05 | |
| CDS-6D | 5.0 | 6.0 | 6.1 | 7.3 | 3.2 | 2.5 | 4.5 | 9.05 | |
| CDS-8C | 5.0 | 8.0 | 6.1 | 7.3 | 3.2 | 2.5 | 4.5 | 9.05 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## IR 座 IR RECEIVER HOUSING 13-8-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CDS-6J | 5.0 | 6.0 | 9.05 | 500 |

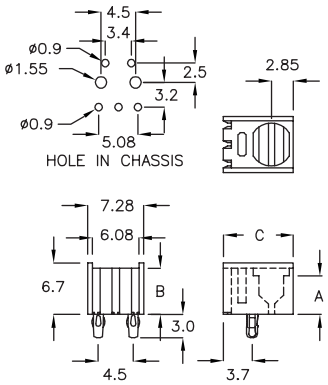

## IR 座 IR RECEIVER HOUSING 13-8-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CDS-13 | 13.0 | 9.05 | 500 |

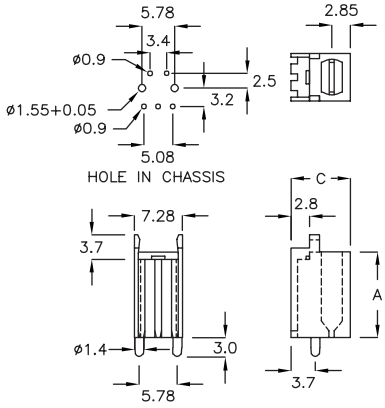

## IR 座 IR RECEIVER HOUSING 13-8-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CDS-10C | 9.6 | 10.6 | 9.05 | 500 |

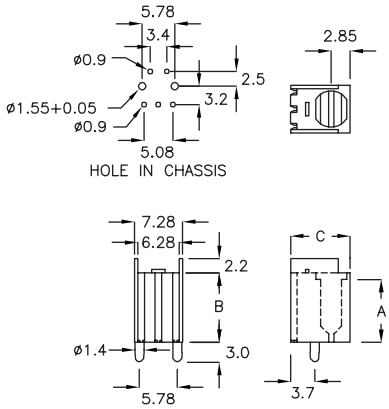

## IR 座 IR RECEIVER HOUSING 13-8-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CDS-11A | 12.4 | 10.0 | 500 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## IR 座 IR RECEIVER HOUSING 13-9-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-2C | 2.0 | 7.0 | 1000 |
| CDS-2F | 5.0 | 10.0 | |



## IR 座 IR RECEIVER HOUSING 13-9-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | C | PACKAGE |
|---|---|---|---|
| CDS-10D | 10.1 | 9.04 | 500 |

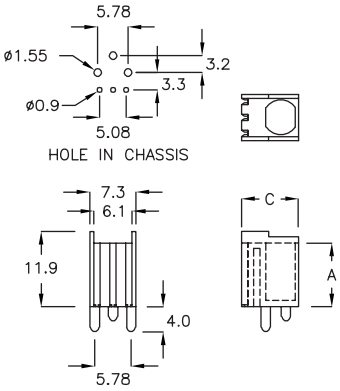

## IR 座 IR RECEIVER HOUSING 13-9-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-6K | 6.1 | 10.3 | 500 |
| CDS-10F | 10.1 | 14.3 | |
| CDS-11K | 11.6 | 15.8 | |

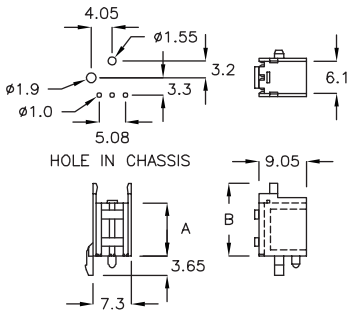

## IR 座 IR RECEIVER HOUSING 13-9-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-2H | 2.6 | 8.0 | 1000 |



## IR 座 IR RECEIVER HOUSING 13-9-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | L | PACKAGE |
|---|---|---|---|---|
| CDS-4C | 2.85 | 4.15 | 11.1 | 1000 |
| CDS-5DM | 4.45 | 5.75 | 12.6 | |

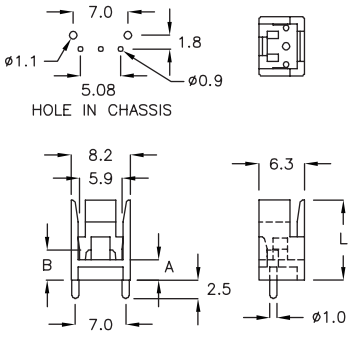




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## IR 座 IR RECEIVER HOUSING 13-10-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | L | PACKAGE |
|---|---|---|---|
| CDS-1J | 1.3 | 8.9 | 1000 |
| CDS-8DQ | 8.3 | 15.9 | 500 |

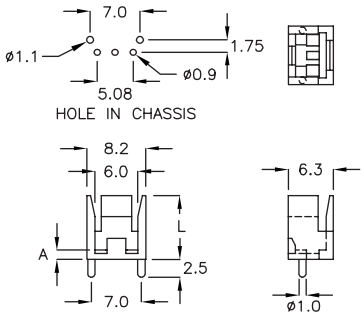

## IR 座 IR RECEIVER HOUSING 13-10-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CDS-1F | 1.0 | 2000 |



## IR 座 IR RECEIVER HOUSING 13-10-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| CDS-2J | 1.5 | 3.5 | 500 |

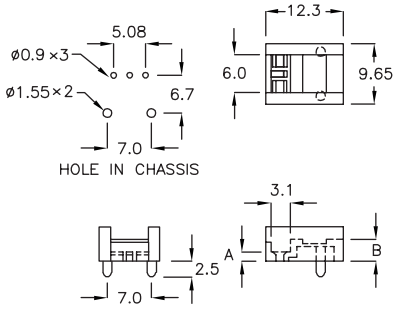




## IR 座 IR RECEIVER HOUSING 13-10-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CDS-2PS | 2.3 | 1000 |

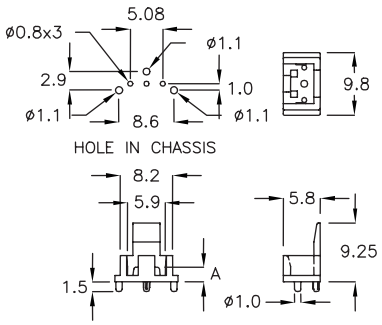




## IR 座 IR RECEIVER HOUSING 13-10-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CDS-2K | 2.3 | 1000 |

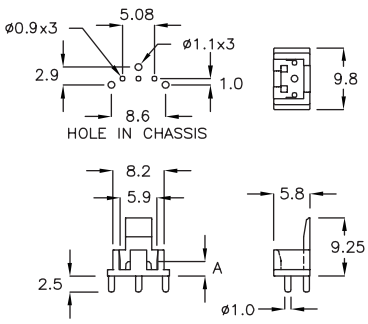







提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## IR 座 IR RECEIVER HOUSING 13-11-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CDS-2L | 1.7 | 500 |



## IR 座 IR RECEIVER HOUSING 13-11-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CDS-4F | 5.08 | ø1.5 | 3.5 | 1000 |



## IR 座 IR RECEIVER HOUSING 13-11-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CDS-1TR | 9.8 | 1000 |



## IR 座 IR RECEIVER HOUSING 13-11-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CDY-7M | 7.0 | 1.6 | 200 |




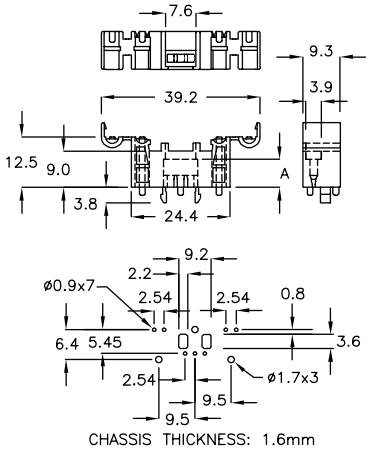




## IR 座 IR RECEIVER HOUSING 13-11-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CDA-08 | 8.0 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 HOLDER 13-12-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| CDT-4A | 5.65 | 1.6 | 1000 |



## IR 座 IR RECEIVER HOUSING 13-12-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| EED-3A | 1.2 | 3.3 | 2000 |



## 风扇罩 FAN COVER 13-12-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| NBB-03 | 60.0 | 100 |

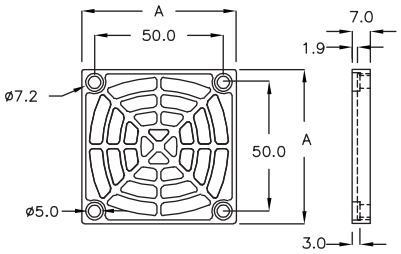

## 风扇罩 FAN COVER 13-12-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NBB-04 | 79.5 | ø4.3 | 50 |



## 风扇罩 FAN COVER 13-12-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| NBR-40A | 40.0 | ø3.5 | 5.0 | 200 |

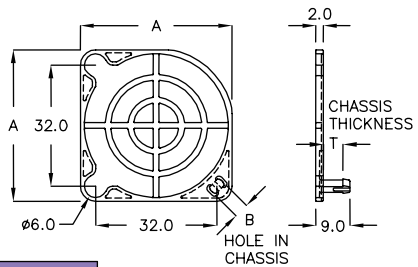







提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 风扇罩 FAN COVER 13-13-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

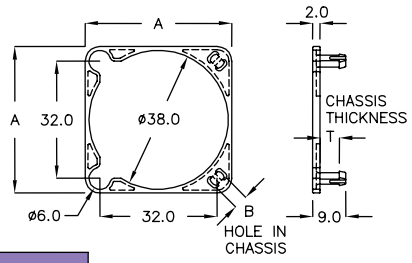


| PART NO | A | B HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| NBT-40 | 40.0 | ø3.5 | 5.0 | 100 |

## 风扇罩 FAN COVER 13-13-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

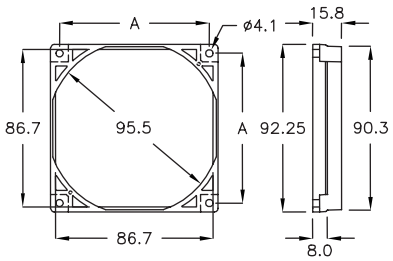


| PART NO | A | PACKAGE |
|---|---|---|
| NBC-01 | 82.5 | 20 |

## 风扇罩 FAN COVER 13-13-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| NBC-80 | 80.0 | 20 |

## 电线固定座 WIRE MOUNT 13-13-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FBA-7A | 9.1 | 7.25 | 1000 |

## 风扇电源座 MOUNT 13-13-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HFC-01 | 11.1 | 7.7 | 8.8 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 HOUSING 13-14-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PH-5 | 20.2 | 3.2 | 500 |






## 固定座 HOUSING 13-14-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PH-6 | 36.0 | 3.4 | 500 |



## 防震座 ANTI-SHOCK HOUSING 13-14-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CQ-010 | ø3.0 | 1.6 | 10.5 | 1000 |
| CQ-008 | ø3.0 | 1.6 | 8.0 | |
| CQ-10NR | ø2.0 | 1.6 | 10.5 | |



## 防震座 ANTI-SHOCK HOUSING 13-14-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CQ-015 | ø3.5 | 1.2 | 15.0 | 1000 |
| CQ-15A | ø4.0 | 1.6 | 15.0 | |
| CQ-15C | ø3.5 | 1.4 | 15.0 | |
| CQ-15D | ø4.0 | 1.7 | 15.0 | |
| CQ-017 | ø3.5 | 1.2 | 17.0 | |



## 防震座 ANTI-SHOCK HOUSING 13-14-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| CQ-08A | ø3.0 | 1.1~1.6 | 8.05 | 1000 |









提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定夹 CLIP — 13-15-1

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HP−6 | 8.0 | 22.0 | 7.0 | 1000 |



## CCD 座 CCD HOUSING — 13-15-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MDV−01 | 4.15 | 17.7 | 9.6 | 2000 |



## 固定座 MOUNT — 13-15-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MJB−27A | 27.35 | 9.85 | 12.1 | 500 |



## 电池端子保护座 CONNECTOR PROTECT HOUSING — 13-15-4

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MD−16S | 11.2 | 9.0 | 8.8 | 500 |
| MD−017 | 13.5 | 10.8 | 10.5 | |



## 电池端子保护座 CONNECTOR PROTECT HOUSING — 13-15-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MD−16A | 11.4 | 9.0 | 9.1 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电池端子保护座
## CONNECTOR PROTECT HOUSING — 13-16-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR
- ADHESIVE TAPE: 3M

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MD-020 | 9.3 | 7.0 | 6.9 | 500 |






## 保护盖 HOLE PROTECTOR — 13-16-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: CLEAR

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MVA-01 | 10.2 | 7.4 | 6.65 | 500 |



## 固定座 MOUNT — 13-16-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MDJ-01 | 17.0 | 15.5 | 14.0 | 17.5 | 200 |
| MDJ-02 | 12.6 | 11.1 | 9.6 | 17.2 | 500 |



## 固定座 MOUNT — 13-16-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MDA-01 | 10.0 | 3.0 | ø8.0 | 1000 |
| MDA-02 | 10.0 | 1.6 | ø8.0 | |



## 固定座 MOUNT — 13-16-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MDA-7BC | 7.2 | 1.2 | ø7.0 | 1000 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-17-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MDB-01 | 20.0 | 10.0 | 1000 |



## 固定座 MOUNT 13-17-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MDB-02 | 20.0 | 4.0 | 500 |
| MDB-04 | 16.0 | 4.0 | |
| MDB-05 | 15.0 | 3.2 | 1000 |



## 固定座 MOUNT 13-17-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| UW-1 | 7.0 | ø11.5 | ø8.8 | ø10.5 | ø7.2 | ø6.8 | 1000 |
| UW-1K | 6.6 | ø11.0 | ø7.5 | ø10.0 | ø5.45 | ø5.05 | |
| UW-1Y | 6.6 | ø8.8 | ø7.55 | ø7.8 | ø5.45 | ø5.05 | 2000 |



## 固定座 MOUNT 13-17-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UW-6F | 4.0 | ø8.4 | ø7.4 | 1000 |



## 固定座 MOUNT 13-17-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| UW-1S | 4.2 | ø9.1 | ø6.85 | 1000 |
| UW-01C | 6.35 | ø5.8 | ø4.8 | |
| UW-01M | 4.3 | ø9.2 | ø6.7 | |
| UW-01J | 6.7 | ø11.2 | ø7.2 | |
| UW-4TM | 4.35 | ø6.2 | ø5.0 | 2000 |
| UW-8MK | 8.0 | ø7.0 | ø5.4 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-18-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| UW-01A | 4.8 | ø9.1 | 1000 |



## 固定座 MOUNT 13-18-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | øB | øC | PACKAGE |
|---|---|---|---|---|
| UW-01D | 3.0 | 6.1 | 4.5 | 1000 |
| UW-02A | 4.2 | 9.2 | 7.1 | |
| UW-04A | 5.0 | 9.2 | 6.4 | |
| UW-08A | 8.2 | 9.0 | 7.0 | |
| UW-8CD | 8.2 | 9.0 | 6.8 | |



## 固定座 MOUNT 13-18-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| UW-01G | 3.0 | ø7.0 | 1000 |



## 固定座 MOUNT 13-18-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MTH-05 | 3.9 | 10.3 | 1000 |



## 固定座 MOUNT 13-18-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MTN-3H | 4.15 | 4.45 | 2000 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-19-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MTJ-02 | 2.0 | 2.0 | ø0.8 | 2000 |
| MTJ-3A | 1.55 | 2.54 | ø0.8 | |
| MTJ-3HD | 3.5 | 2.0 | ø0.7 | |

## 固定座 MOUNT 13-19-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MDK-01 | 12.8 | 1.15 | 9.5 | 17.6 | 500 |
| MDK-03 | 12.8 | 1.3 | 11.0 | 17.6 | |
| MDK-04 | 13.0 | 1.9 | 10.5 | 17.6 | |
| MDK-05 | 10.8 | 1.5 | 10.5 | 15.6 | |



## 固定座 MOUNT 13-19-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| MDK-02 | 12.8 | 6.9 | 1000 |

## 散热片固定座 HEAT SINK MOUNT 13-19-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| DAP-1A | 5.4 | 3.0 | 2000 |

## 固定座 MOUNT 13-19-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DAB-01 | 19.5 | 6.0 | 10.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 固定座 MOUNT 13-20-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DAB−02 | 17.0 | 6.6 | 10.0 | 500 |






## 固定座 MOUNT 13-20-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DAB−3A | 12.0 | 6.6 | 10.0 | 500 |



## 固定座 MOUNT 13-20-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MAH−6A | 8.2 | 2.9 | 2000 |

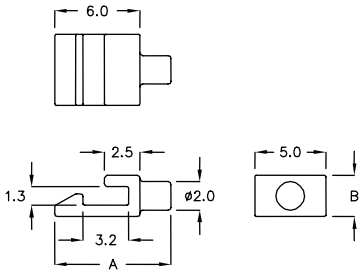




## 散热片固定座 HEAT SINK MOUNT 13-20-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A CHASSIS THICKNESS | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| UBA−3A | 0.8 | 1.6 | 2000 |

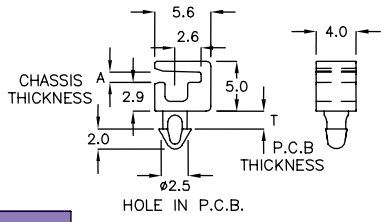

## 固定座 MOUNT 13-20-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A CHASSIS THICKNESS | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| MTQ−2A | 0.8 | 1.6 | 2000 |

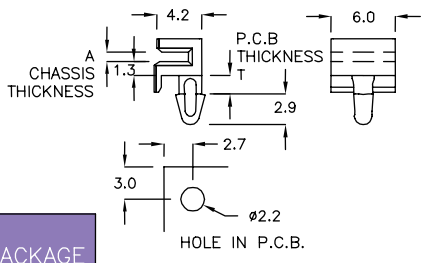







提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 固定座 MOUNT 13-21-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| MRA−6C | 5.2 | 1.6 | 2000 |

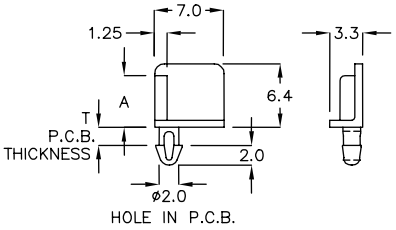

## 固定座 MOUNT 13-21-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

| PART NO | A | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| ★ MRA−8D | 8.2 | 1.2 | 2000 |

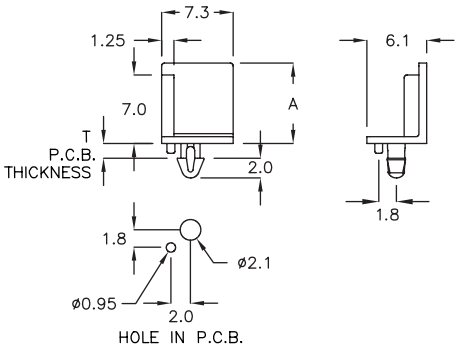

## 固定座 MOUNT 13-21-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| MFG−21HC | 7.4 | 2.0 | 200 |

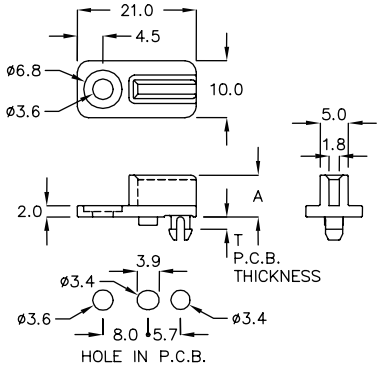

## 固定座 MOUNT 13-21-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|
| MFG−22TK | 7.5 | 1.6 | 500 |

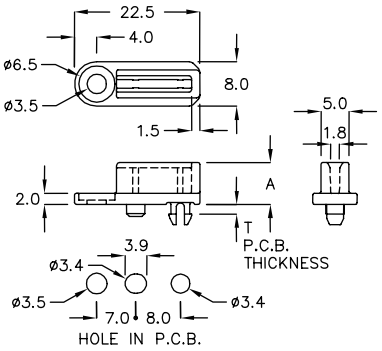

## 固定座 MOUNT 13-21-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MDL−01 | 2.75 | 0.8 | 1.6 | 2000 |

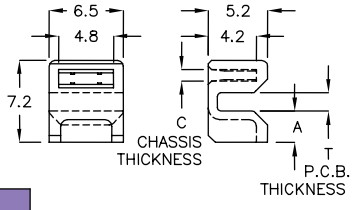




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-22-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




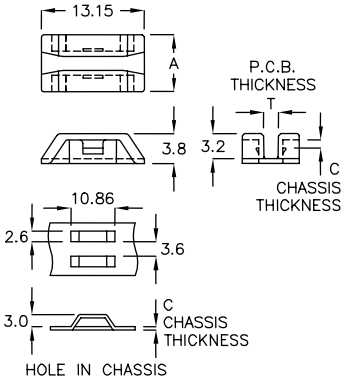


| PART NO | A | C CHASSIS THICKNESS | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MTB-13A | 7.3 | 0.8 | 1.6 | 2000 |



## 固定座 MOUNT 13-22-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MGM-11 | 11.0 | 8.3 | 1.6 | 500 |
| MGM-11SK | 11.0 | 8.8 | 1.6 | |

## 固定座 MOUNT 13-22-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

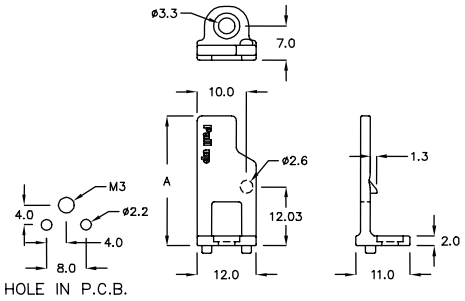


| PART NO | A | PACKAGE |
|---|---|---|
| MGMB-28 | 26.5 | 500 |

## 固定座 MOUNT 13-22-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

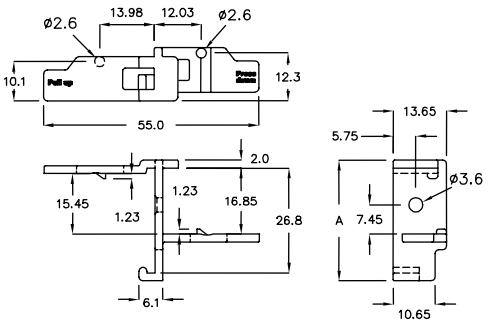


| PART NO | A | PACKAGE |
|---|---|---|
| MGMA-30 | 30.8 | 500 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-23-1

- FLAME CLASS: 94V-0
- COLOR: BLACK
- MATERIAL: BRASS




| PART NO | MATERIAL | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| LCM3−20 | ABS | 20.0 | 21.0 | 10.1 | M3 | ø7.1 | 500 |
| LCM5−20 | PBT | 20.0 | 26.0 | 12.5 | M5 | ø10.0 | |

## 固定座 MOUNT 13-23-2

- MATERIAL: NYLON 66+30%FRP(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MGZ−18 | 16.0 | 18.0 | 11.0 | ø4.2 | 500 |

## 固定座 MOUNT 13-23-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MWZ−12A | 8.15 | 12.1 | 6.8 | ø4.7 | 500 |

## 固定座 MOUNT 13-23-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMW−7 | 6.9 | 2.0 | 500 |

## 固定座 MOUNT 13-23-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MGL−04 | 4.0 | 3.8 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-24-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MGF-01 | 8.75 | 1.5 | 0.7 | 500 |



## 固定座 MOUNT 13-24-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MGF-14 | 7.25 | 1.5 | 0.6 | 500 |



## 固定座 MOUNT 13-24-3

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| PED-01 | 7.5 | 3.0 | 2.2 | 1000 |






## 固定座 MOUNT 13-24-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | PACKAGE |
|---|---|---|
| MML-11A | 12.4 | 500 |



## 固定座 MOUNT 13-24-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- ADHESIVE TAPE: 3M

| PART NO | A | PACKAGE |
|---|---|---|
| MMR-11A | 12.4 | 500 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-25-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MWC−05 | 9.0 | 5.0 | 1.6 | 1000 |



## 固定座 MOUNT 13-25-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HPA−16K | 16.6 | 3.1 | 500 |






## 支撑柱 CHIP SUPPORT 13-25-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: DEXERIALS or EQUIVALENT

| PART NO | A | FORM | PACKAGE |
|---|---|---|---|
| DPM−02T | 2.5 | 1 | 5000 |
| DPM−3AT | 2.5 | 2 | |






## 支撑柱 CHIP SUPPORT 13-25-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: DEXERIALS or EQUIVALENT

| PART NO | A | FORM | PACKAGE |
|---|---|---|---|
| DPS−2CK | 2.2 | 1 | 5000 |
| DPS−3FQ | 2.2 | 2 | |






## 固定座 MOUNT 13-25-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M3 TAPPING SCREW







| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MGK−18F | 18.7 | 2.0 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-26-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MGKH-18 | 9.4 | 18.4 | 500 |



## 喇叭座 SPEAKER HOUSING 13-26-2

- MATERIAL: POM
- COLOR: WHITE

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| SP-2866 | 28.5 | 66.0 | 200 |



## 电线固定扣 CABLE CLAMP 13-26-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LQC-02 | 4.2 | 4.4 | 500 |



## P.C. 板固定扣 P.C.B. HINGE 13-26-4

- MATERIAL: PP
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| BH-5 | 24.2 | 1000 |

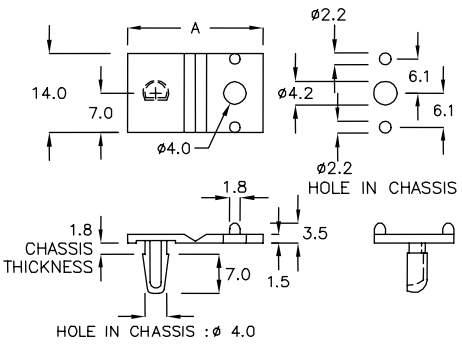

## P.C. 板固定扣 P.C.B. HINGE 13-26-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| BH-6 | 25.3 | 500 |

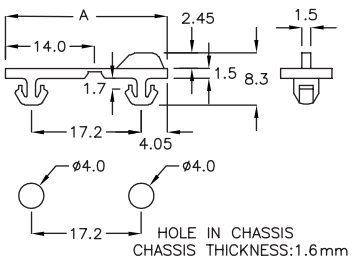






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## P.C. 板固定扣　P.C.B. HINGE　13-27-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

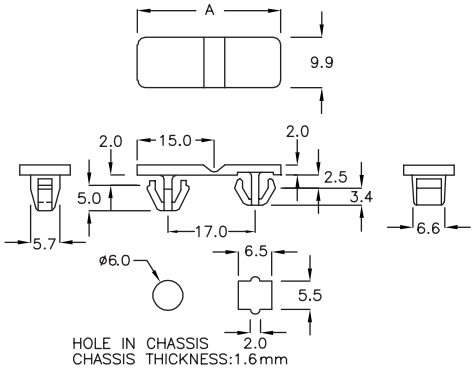


| PART NO | A | PACKAGE |
|---|---|---|
| BH-7 | 28.0 | 500 |

## 固定扣　CANOE CLIP　13-27-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DCQ-01 | 21.9 | 12.8 | 7.8 | 500 |

## 固定座　MOUNT　13-27-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE

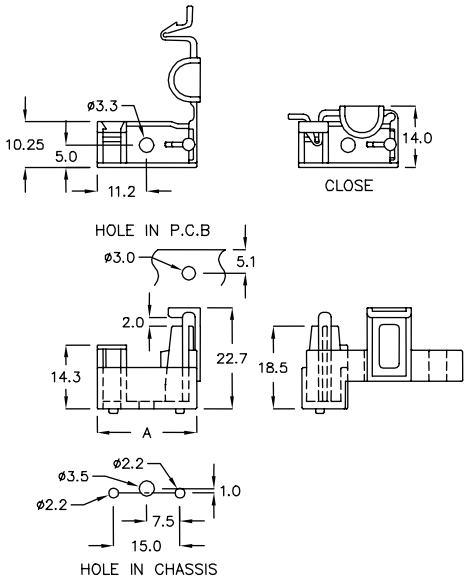


| PART NO | A | PACKAGE |
|---|---|---|
| FTHM-22AW | 22.5 | 100 |



## 固定座　MOUNT　13-27-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-2
- COLOR: BLUE

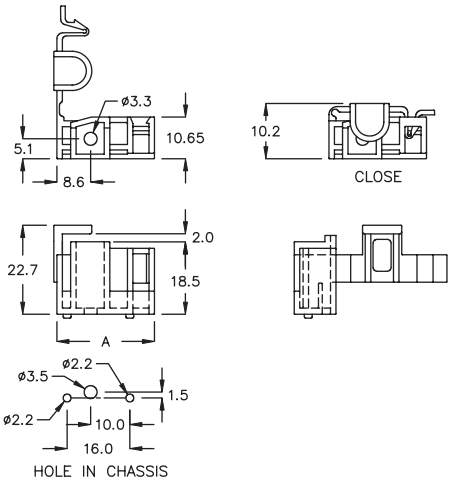


| PART NO | A | PACKAGE |
|---|---|---|
| FTHM-24RK | 24.9 | 100 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 螺丝固定座 WALL INSERT 13-28-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

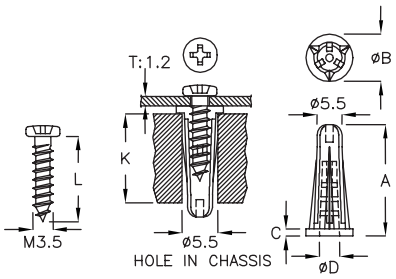


| PART NO | A | B | C | D | K CHASSIS THICKNESS | L SCREW LENGTH | PACKAGE |
|---|---|---|---|---|---|---|---|
| MHW-01 | 18.7 | 7.9 | 1.2 | 3.4 | >22.0 | 12.0 | 1000 |
| MHW-02 | 22.0 | 8.2 | 1.0 | 4.6 | >25.0 | 14.0 | |
| MHW-03 | 22.3 | 8.0 | 1.0 | 3.8 | >25.0 | 14.0 | |
| MHW-04 | 33.0 | 8.0 | 1.0 | 3.5 | >35.0 | 20.0 | |

## 螺丝固定座 WALL INSERT 13-28-2

- MATERIAL: PE
- COLOR: NATURAL




| PART NO | A | B | C | D | HOLE IN CHASSIS | CHASSIS THICKNESS | TAPPING SCREW | SCREW LENGTH | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| MHM-30 | 30.0 | 9.0 | 2.2 | 2.9 | ø6.7 | 33.0 | M4 | 12.0 | 500 |

## 螺丝固定座 WALL INSERT 13-28-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: GRAY

NEW




| | PART NO | A | B | C | D | HOLE IN CHASSIS | CHASSIS THICKNESS | TAPPING SCREW | SCREW LENGTH | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|
| ★ | MHMK-31C | 31.8 | ø10.9 | 0.9 | ø6.4 | ø8.5 | 33.0 | M6 | 25.4 | 500 |



## 固定座 EDGE CONNECT BASE 13-28-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MH-4 | 8.7 | 6.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 固定座 EDGE CONNECT BASE 13-29-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MH−5 | 10.0 | 10.0 | 1000 |



## 固定座 EDGE CONNECT BASE 13-29-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH COUNTERSUNK SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MH−05C | 7.2 | 10.0 | 1000 |






## 固定座 EDGE CONNECT BASE 13-29-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MH−6 | 13.4 | 10.0 | 11.5 | 500 |






## 固定座 EDGE CONNECT BASE 13-29-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MH−6A | 14.0 | 8.75 | 7.5 | 6.5 | 500 |



## 固定座 MOUNT 13-29-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MH−13AK | 13.8 | 9.9 | 500 |

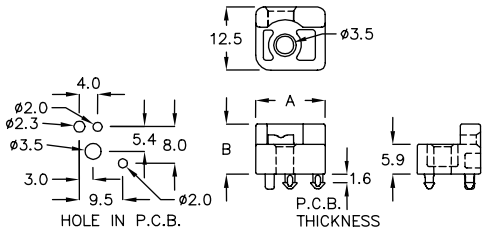





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-30-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- ADHESIVE TAPE: EQUIALENT

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MRN-21KG | 21.0 | 13.9 | 500 |

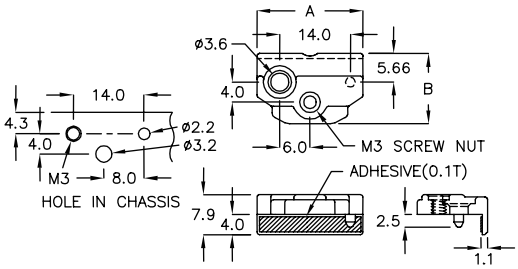

## 固定座 MOUNT 13-30-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK
- ADHESIVE TAPE: EQUIALENT

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MRN-21YL | 21.0 | 13.9 | 500 |

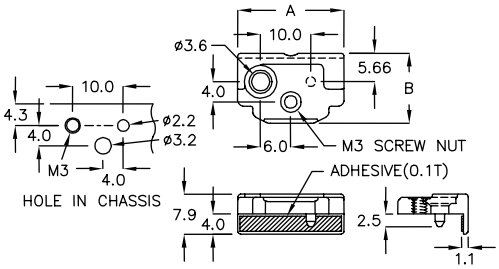

## 固定座 EDGE CONNECT BASE 13-30-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MMX-15F | 13.0 | 15.0 | 9.0 | 200 |



## 散热片护套 HEAT SINK COVER 13-30-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDA-01 | 38.5 | 13.3 | 18.0 | 200 |



## 保护盖 INSULATION CAP 13-30-5

- MATERIAL: PP(UL)
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HD-12S | ø12.0 | ø5.2 | 4.63 | 2000 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 保护罩 INSULATION CAP — 13-31-1

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| HD-27MQ | 27.0 | 17.5 | 20.4 | 10.9 | 3.43 | 1200 |
| HD-34 | 33.4 | 19.1 | 27.3 | 13.0 | 2.3 | 840 |
| HD-35FC | 35.3 | 21.5 | 28.4 | 14.9 | 5.13 | 840 |
| HD-52 | 51.7 | 28.0 | 44.0 | 20.0 | 3.0 | 450 |

## 保护罩 INSULATION CAP — 13-31-2

- MATERIAL: PP(UL)
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HD-24C | ø24.0 | ø18.0 | 2.3 | 990 |
| HD-26 | ø26.0 | ø19.7 | 2.3 | |
| HD-31A | ø31.6 | ø21.3 | 2.8 | 690 |
| HD-31CD | ø31.6 | ø21.3 | 3.2 | |

## 固定座 MOUNT — 13-31-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| D-0710 | 10.8 | 6.5 | 7.0 | 1000 |



## 固定座 MOUNT — 13-31-4

- MATERIAL: PBT
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MJC-13 | 13.9 | 10.0 | 7.5 | 1.45 | 500 |
| MJC-15 | 15.5 | 10.0 | 7.5 | 3.0 | |

## 固定座 MOUNT — 13-31-5

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

NEW




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| ★ MJKT-30 | 21.55 | 30.0 | 17.5 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 保险丝盒 FUSE BOX 13-32-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MFH-50 | 48.2 | 51.0 | 500 |

## 保险丝盖 FUSE COVER 13-32-2

- MATERIAL: PVC
- COLOR: NATURAL

E122477(S)




| PART NO | A | B | C | D | E | UL | PACKAGE |
|---|---|---|---|---|---|---|---|
| FH-1 | 19.8 | 22.6 | 5.6 | 8.4 | 11.0 | UL | 1000 |
| FH-1L | 22.0 | 24.0 | 6.0 | 8.0 | 11.0 | UL | |
| FH-1S | 18.0 | 20.5 | 5.3 | 7.8 | 10.0 | UL | |
| FH-3 | 31.6 | 33.6 | 9.5 | 12.0 | 13.0 | UL | 500 |
| FH-3A | 31.0 | 33.6 | 8.1 | 10.5 | 11.5 | UL | |
| FH-13 | 12.2 | 14.2 | 4.7 | 6.7 | 9.0 | UL | 1000 |

## 开关延长盖 SWITCH EXTENDING COVER — 13-32-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HSA-01 | 3.8 | 3.0 | ø3.4 | 1000 |

## 开关延长盖 SWITCH EXTENDING COVER — 13-32-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HS-5A | 5.6 | 1.0 | ø9.5 | 1000 |

## 开关延长盖 SWITCH EXTENDING COVER — 13-32-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HS-5K | 5.6 | 1.0 | ø9.5 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开关延长盖 SWITCH EXTENDING COVER — 13-33-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HS-1 | 5.5 | 3.5 | 4.0 | 3.2 | 2000 |
| HS-01A | 4.7 | 3.45 | 5.25 | 3.2 | |
| HS-1S | 4.7 | 3.45 | 5.25 | 3.3 | |
| HS-2 | 6.5 | 4.5 | 5.0 | 2.8 | |
| HS-2H | 4.4 | 3.0 | 5.0 | 2.7 | |

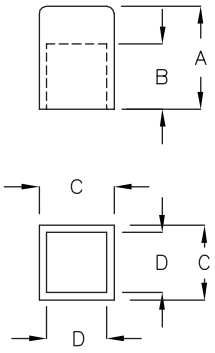

## 开关延长盖 SWITCH EXTENDING COVER — 13-33-2

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: BLACK

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| HS-009 | 8.8 | 2.0 | 3.0 | 2000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-33-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| HS-1C | 9.6 | 2.0 | 3.0 | 2000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-33-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,NATURAL

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| HS-06C | 5.5 | 1.9 | 3.0 | 2000 |






## 开关延长盖 SWITCH EXTENDING COVER — 13-33-5

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: NATURAL

| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| HSQ-7C | 7.3 | 2.8 | 2.8 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开关延长盖 SWITCH EXTENDING COVER — 13-34-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | HS-7KC | 7.5 | 2.8 | 2.45 | 2.4 | 2000 |

## 开关延长盖 SWITCH EXTENDING COVER — 13-34-2

- COLOR: NATURAL,BLACK




| PART NO | MATERIAL | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|---|
| HS-09C | ABS V0 | 9.0 | 4.0 | 2.8 | 2.6 | ø5.0 | 2000 |
| HS-09D | N66 V2 | 9.0 | 3.0 | 2.5 | 2.15 | ø4.6 | |



## 开关延长盖 SWITCH EXTENDING COVER — 13-34-3

- COLOR: NATURAL,BLACK




| PART NO | MATERIAL | A | B | C | E | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| HS-10C | ABS HB | 9.9 | 4.2 | ø3.2 | ø8.0 | 1 | 1000 |
| HS-12A | ABS HB | 12.0 | 4.2 | ø3.3 | ø8.0 | 1 | |
| HS-14A | ABS HB | 14.0 | 4.2 | ø3.4 | ø8.0 | 1 | |
| HS-16FA | N66 V2 | 16.5 | 7.0 | ø3.45 | ø6.3 | 2 | |
| HS-18 | N66 V2 | 18.0 | 7.0 | ø3.45 | ø6.3 | 2 | |

## 开关延长盖 SWITCH EXTENDING COVER — 13-34-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HS-6F | 6.0 | 2.8 | 2.3 | 2000 |
| HS-6M | 6.5 | 2.8 | 2.4 | |
| HS-7K | 7.5 | 2.8 | 2.4 | |
| HS-8HY | 8.0 | 2.8 | 2.4 | |
| HS-8MA | 8.5 | 2.8 | 2.4 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开关延长盖 SWITCH EXTENDING COVER — 13-35-1

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: BLACK

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HS-15 | 9.9 | 4.55 | ø3.7 | 1000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-35-2

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: WHITE,NATURAL

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HS-16 | 5.5 | 3.0 | 2.28 | 2000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-35-3

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: NATURAL

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HSM-5K | 5.7 | 2.8 | 2.3 | 2000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-35-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HS-05S | 11.8 | 14.2 | 1000 |
| HS-5 | 15.8 | 14.2 | |



## 开关延长盖 SWITCH EXTENDING COVER — 13-35-5

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: GRAY

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HS-6 | 10.2 | 10.8 | 12.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 开关延长盖 SWITCH EXTENDING COVER — 13-36-1

- MATERIAL: ABS
- FLAME CLASS: 94V-0
- COLOR: GRAY

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HS-06A | 10.3 | 10.8 | 12.2 | 500 |






## 开关延长盖 SWITCH EXTENDING COVER — 13-36-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HS-007 | 6.3 | 1.2 | 1000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-36-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HS-07A | 9.5 | 2.5 | 1000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-36-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HS-04 | 15.5 | 10.5 | 1000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-36-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HS-008 | 4.0 | ø5.5 | 2000 |
| HS-012 | 6.3 | ø5.5 | |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开关延长盖 SWITCH EXTENDING COVER — 13-37-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HS-4CF | 4.0 | 2000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-37-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HSD-01 | 7.8 | 5.3 | 2.0 | 2.0 | 2000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-37-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| DAH-9H | 9.5 | 1000 |



## 开关延长盖 SWITCH EXTENDING COVER — 13-37-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HSL-11A | 11.8 | ø8.5 | ø4.1 | 1000 |
| HSL-11SP | 11.8 | ø7.5 | ø3.3 | |



## 开关延长盖 SWITCH EXTENDING COVER — 13-37-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | D | PACKAGE |
|---|---|---|---|---|
| HSW-13FH | 7.7 | ø4.0 | 3.0 | 1000 |

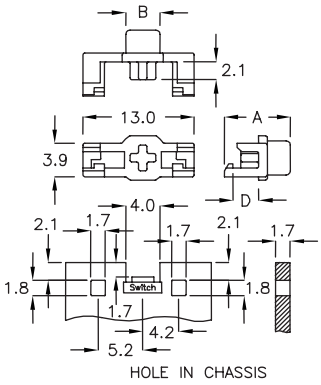




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开关座 PUSH SWITCH HOLDER 13-38-1

- MATERIAL: ABS
- FLAME CLASS: 94HB
- COLOR: BLACK

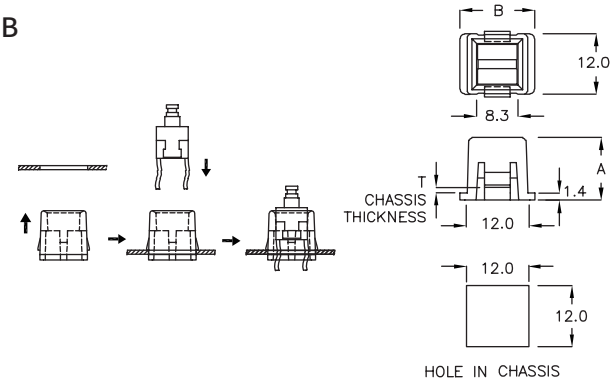


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| HS-08A | 12.4 | 14.8 | 0.8 | 1000 |

## 开关座 PUSH SWITCH HOLDER 13-38-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

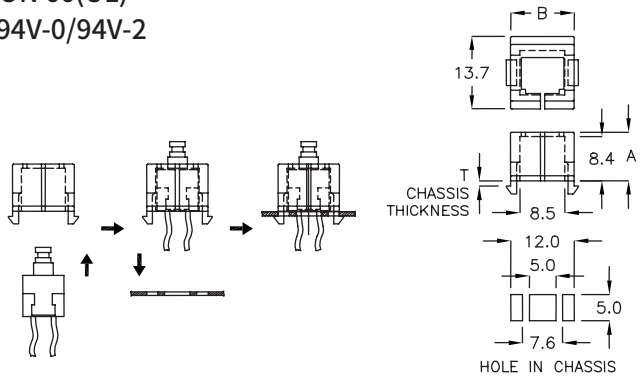


| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| HS-11 | 9.2 | 11.95 | 0.8 | 500 |

## 开关座 SWITCH HOLDER 13-38-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

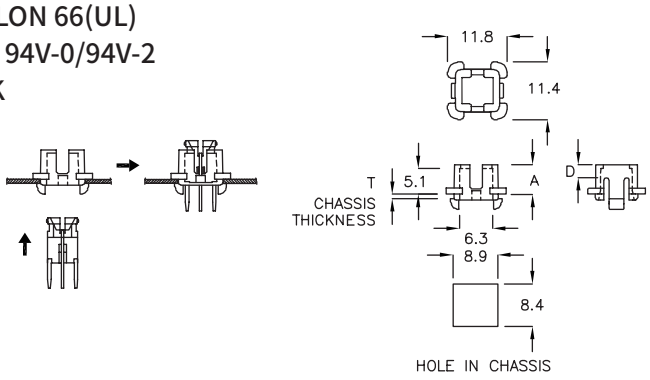


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| HSF-01 | 5.8 | 2.5 | 0.8 | 1000 |

## 开关座 SWITCH HOLDER 13-38-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

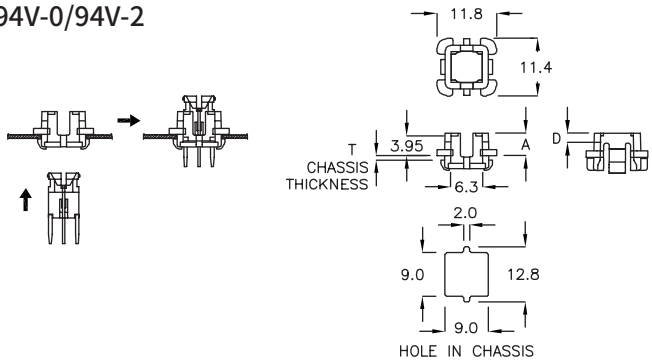


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| HSF-02 | 4.5 | 1.8 | 0.8 | 1000 |
| HSF-2KD | 4.5 | 1.8 | 0.6 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 开关座 SWITCH HOLDER 13-39-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

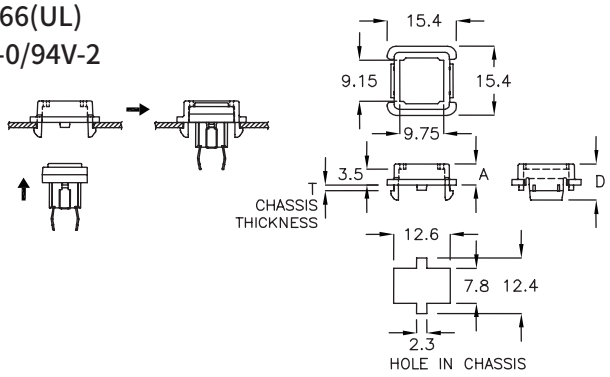


| PART NO | A | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| HSF−4WR | 4.7 | 8.05 | 1.2 | 1000 |

## 电源开关座 SWITCH COVER 13-39-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

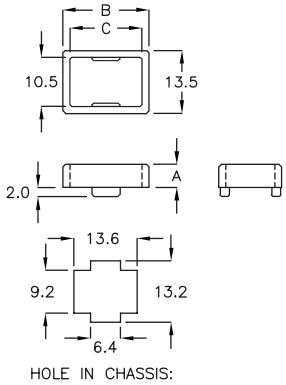


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCA−15D | 5.0 | 18.5 | 15.5 | 500 |

## 电源开关座 SWITCH COVER 13-39-3

- MATERIAL: ABS
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HCA−18 | 9.0 | 26.1 | 18.8 | 16.4 | 500 |

## 电源开关座 SWITCH COVER 13-39-4

- MATERIAL: NYLON 66(UL)
- FLAME CALSS: 94V-0/94V-2
- COLOR: BLACK

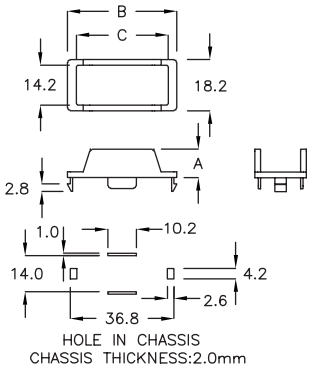


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCA−32 | 10.0 | 38.6 | 32.4 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电源开关座 SWITCH COVER 13-40-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCA-21K | 6.5 | 25.5 | 21.5 | 500 |



## 把手盖 EJECTOR COVER 13-40-2

- MATERIAL: ABS+PC
- COLOR: GREEN
- USE M2x6 COUNTERSUNK SCREW

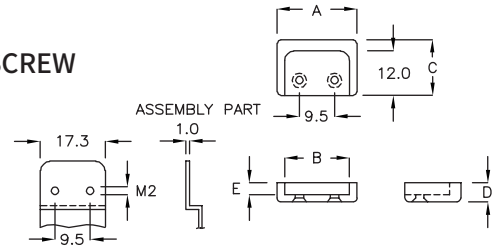


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MHL-21 | 21.5 | 17.5 | 15.0 | 4.6 | 2.6 | 500 |

## 把手盖 EJECTOR COVER 13-40-3

- MATERIAL: ABS+PC
- COLOR: GREEN
- USE M2x6 COUNTERSUNK SCREW

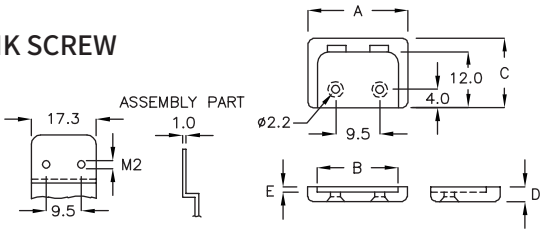


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MHL-03 | 21.5 | 17.5 | 15.0 | 7.8 | 5.8 | 500 |
| MHL-14 | 21.5 | 17.5 | 15.0 | 3.2 | 1.2 | |

## 把手盖 EJECTOR COVER 13-40-4

- MATERIAL: ABS+PC
- COLOR: GREEN
- USE M2x6 COUNTERSUNK SCREW

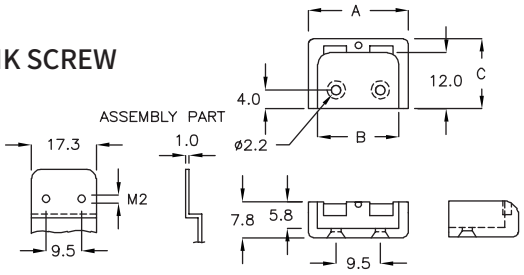


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL-20 | 21.5 | 17.5 | 15.0 | 500 |

## 把手盖 EJECTOR COVER 13-40-5

- MATERIAL: TPR
- FLAME CLASS: 94V-0
- COLOR: BLACK

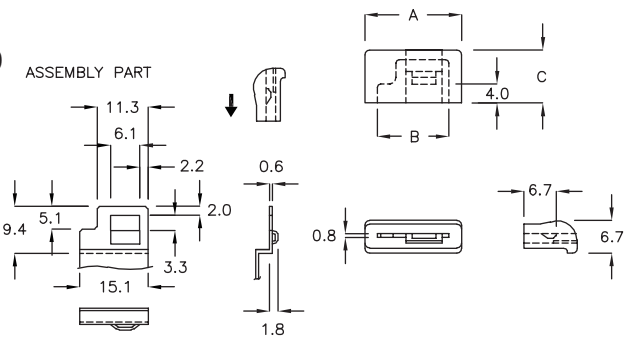


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL-06 | 20.0 | 14.8 | 11.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-41-1

- COLOR: BLACK

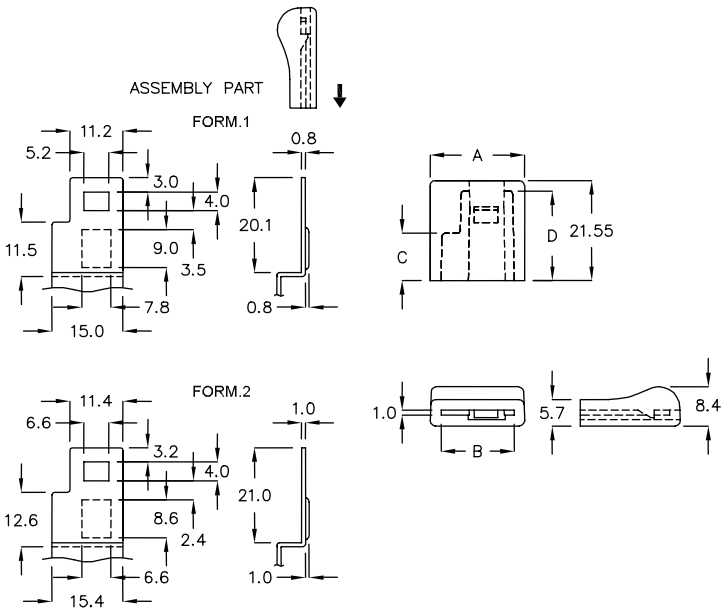


| PART NO | MATERIAL | A | B | C | D | FORM | PACKAGE |
|---|---|---|---|---|---|---|---|
| MHL-05 | TPR | 20.35 | 15.75 | 10.16 | 19.3 | 1 | 500 |
| MHL-5CN | TPR | 20.4 | 15.8 | 10.16 | 19.3 | 2 | |
| MHL-5DM | TPR | 20.35 | 15.4 | 10.16 | 19.3 | 1 | |
| MHL-5FG | TPE | 20.34 | 15.75 | 10.6 | 20.5 | 2 | |

## 把手盖 EJECTOR COVER 13-41-2

- MATERIAL: TPR
- COLOR: GREEN

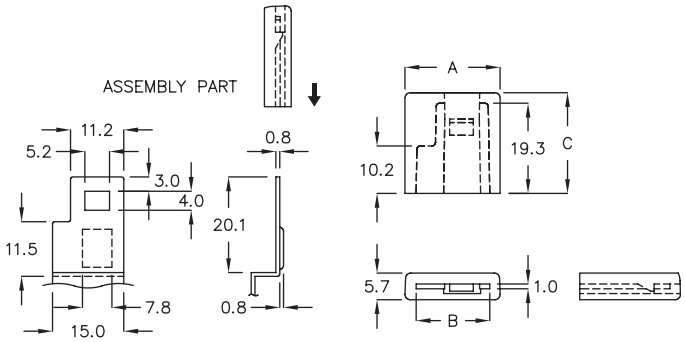


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL-08 | 20.3 | 15.75 | 21.6 | 500 |

## 把手盖 EJECTOR COVER 13-41-3

- MATERIAL: TPR
- COLOR: ORANGE

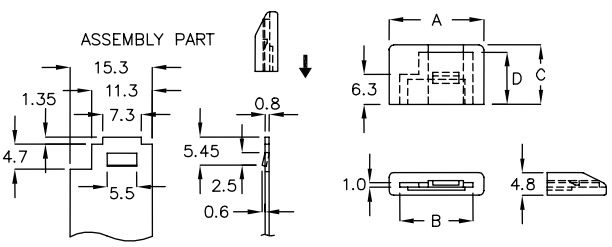


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-15 | 20.0 | 15.5 | 12.5 | 11.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-42-1

- MATERIAL: TPE
- COLOR: ORANGE

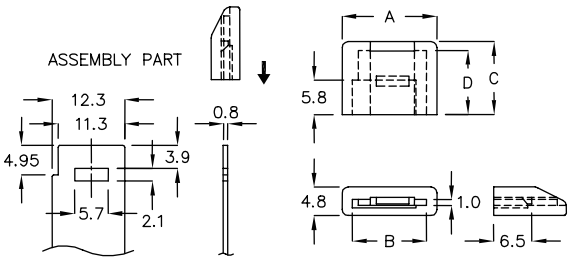


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-16KM | 16.0 | 12.5 | 12.3 | 10.8 | 500 |

## 把手盖 EJECTOR COVER 13-42-2

- MATERIAL: TPR
- COLOR: BLACK

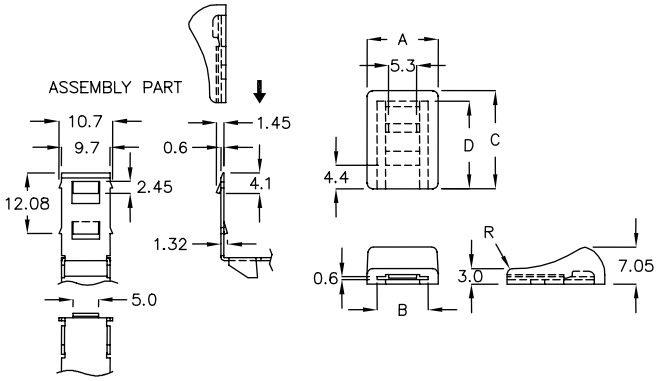


| PART NO | A | B | C | D | R | PACKAGE |
|---|---|---|---|---|---|---|
| MHL-04 | 13.5 | 9.7 | 18.6 | 16.6 | 1.0 | 500 |
| MHL-04TC | 13.5 | 9.7 | 18.6 | 16.6 | 0.5 | |

## 把手盖 EJECTOR COVER 13-42-3

- MATERIAL: TPR
- COLOR: ORANGE

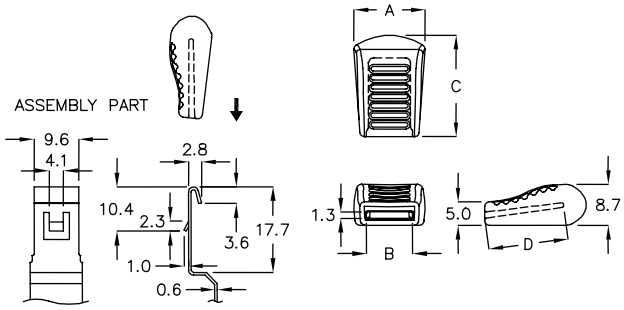


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-10 | 15.0 | 9.9 | 21.7 | 17.1 | 500 |

## 把手盖 EJECTOR COVER 13-42-4

- MATERIAL: TPE
- COLOR: BLACK

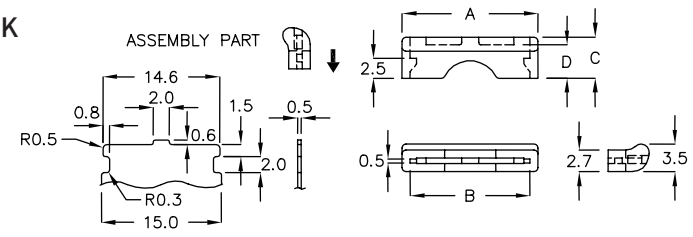


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-15AP | 17.0 | 15.0 | 5.15 | 4.2 | 500 |

## 把手盖 EJECTOR COVER 13-42-5

- MATERIAL: TPR
- COLOR: BLACK

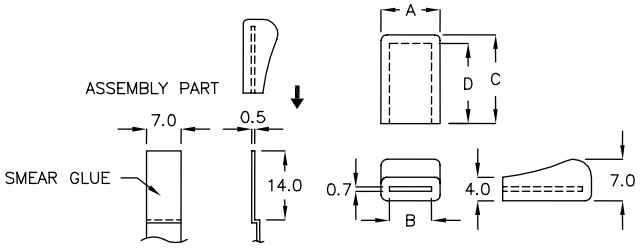


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-11 | 10.0 | 7.1 | 15.0 | 13.5 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-43-1

- MATERIAL: TPE
- COLOR: RED

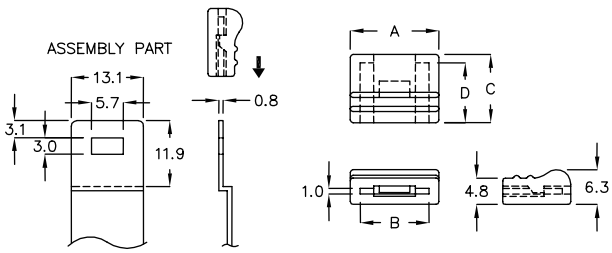


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-12DC | 16.0 | 12.5 | 12.3 | 10.8 | 500 |

## 把手盖 EJECTOR COVER 13-43-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

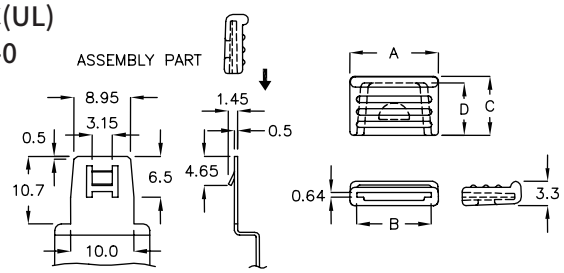


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-8QM | 12.0 | 9.94 | 8.0 | 7.1 | 500 |

## 把手盖 EJECTOR COVER 13-43-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLUE

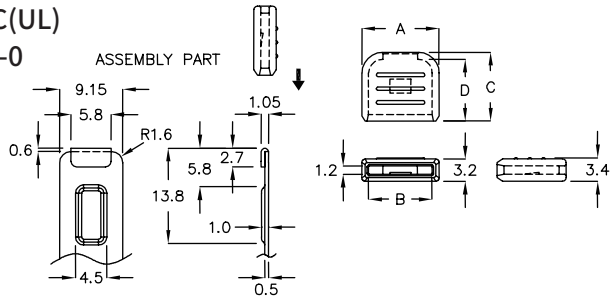


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-11FT | 11.2 | 9.2 | 10.0 | 9.0 | 1000 |

## 把手盖 EJECTOR COVER 13-43-4

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK,RED

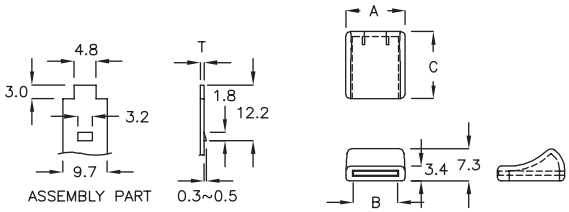


| PART NO | A | B | C | T | PACKAGE |
|---|---|---|---|---|---|
| MHL-15KD | 13.5 | 10.0 | 15.2 | 1.0 | 1000 |
| MHL-19 | 13.5 | 10.0 | 15.2 | 0.8 | |

## 把手盖 EJECTOR COVER 13-43-5

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GREEN

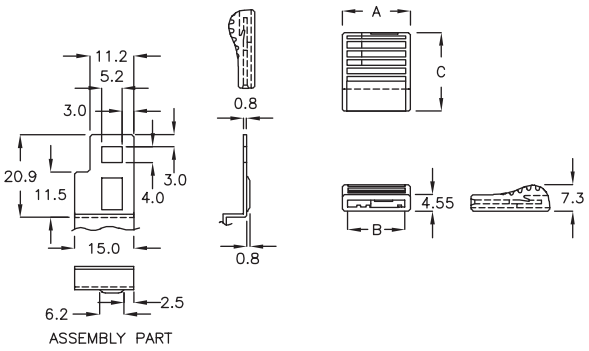


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL-23 | 18.7 | 16.2 | 21.5 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-44-1

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GRAY

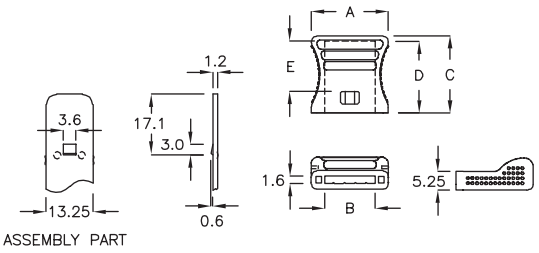


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MHL−21FS | 21.6 | 14.2 | 21.6 | 19.8 | 13.7 | 500 |

## 把手盖 EJECTOR COVER 13-44-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

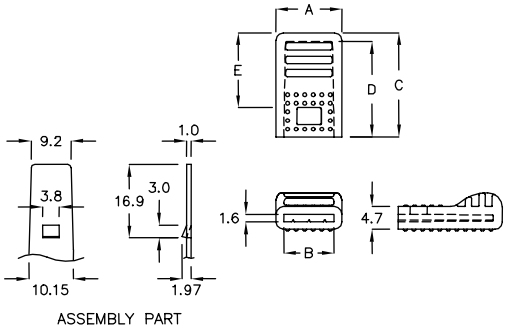


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MHL−21KQ | 13.7 | 10.45 | 21.6 | 19.7 | 13.6 | 500 |

## 把手盖 EJECTOR COVER 13-44-3

- MATERIAL: TPE
- COLOR: BLACK

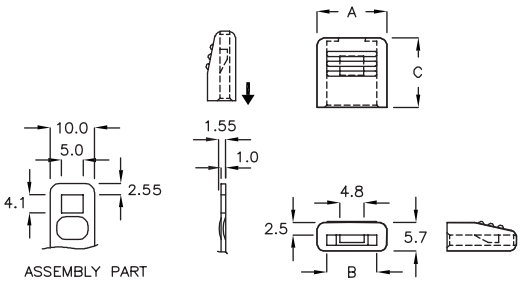


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL−25 | 14.0 | 10.0 | 13.9 | 1000 |

## 把手盖 EJECTOR COVER 13-44-4

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLACK

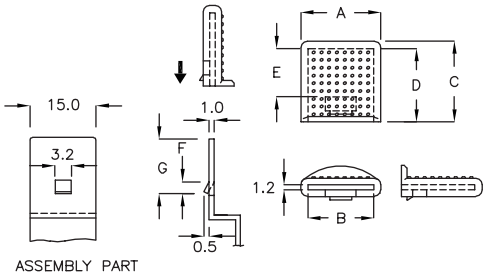


| PART NO | A | B | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| MHL−13 | 18.3 | 15.1 | 18.5 | 16.7 | 11.2 | 3.0 | 14.0 | 500 |
| MHL−13A | 18.3 | 15.2 | 18.5 | 17.2 | 10.9 | 3.3 | 14.5 | |

## 把手盖 EJECTOR COVER 13-44-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

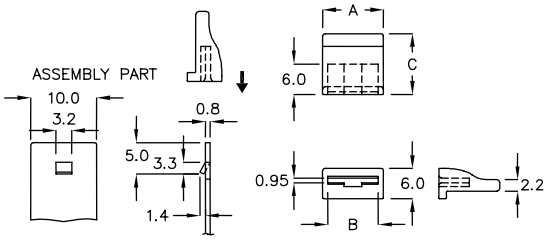


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL−12 | 12.0 | 10.0 | 12.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 把手盖 EJECTOR COVER 13-45-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: RED

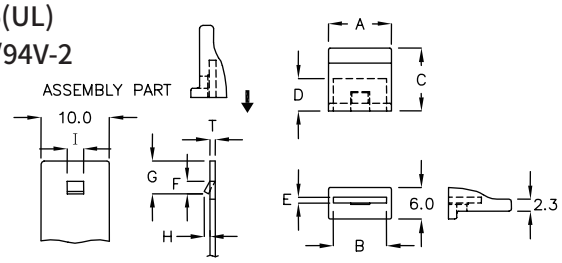


| PART NO | A | B | C | D | E | F | G | H | I | T | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| MHL-12DT | 12.0 | 10.1 | 12.0 | 7.0 | 0.9 | 3.3 | 5.3 | 2.2 | 3.2 | 0.8 | 500 |
| MHL-12KF | 12.0 | 10.0 | 12.0 | 6.2 | 1.0 | 2.0 | 4.6 | 0.5 | 2.8 | 1.0 | |



## 把手盖 EJECTOR COVER 13-45-2

- MATERIAL: TPE
- FLAME CLASS: 94V-0
- COLOR: GREEN

NEW

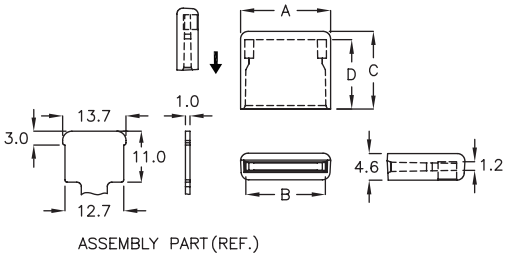


| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | MHL-13MR | 15.6 | 13.7 | 13.4 | 12.0 | 500 |

## 把手盖 EJECTOR COVER 13-45-3

- MATERIAL: ABS+PS
- FLAME CLASS: 94V-0
- COLOR: BLACK

NEW

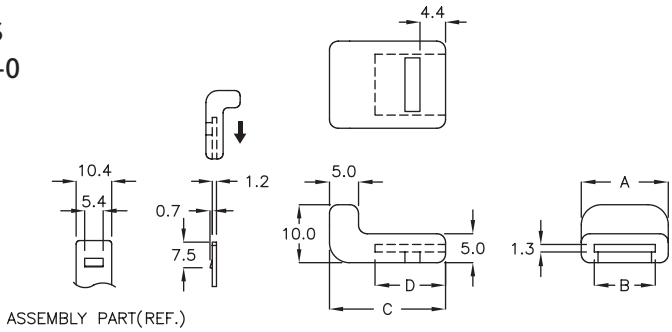


| | PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | MHL-15CL | 15.0 | 10.5 | 20.0 | 12.15 | 1000 |

## 把手盖 EJECTOR COVER 13-45-4

- MATERIAL: ABS+PC(UL)
- COLOR: GRAY

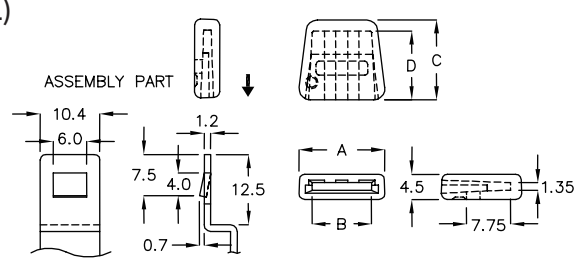


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-14ST | 15.2 | 10.5 | 14.2 | 12.2 | 500 |

## 把手盖 EJECTOR COVER 13-45-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK,BLUE

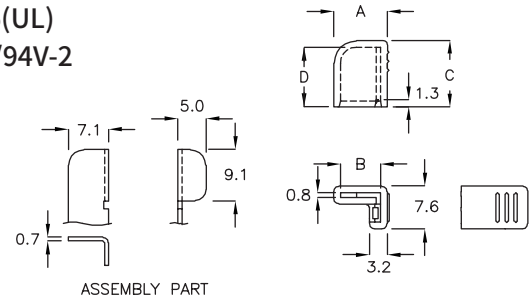


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-16 | 9.5 | 7.1 | 11.7 | 10.5 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-46-1

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: RED

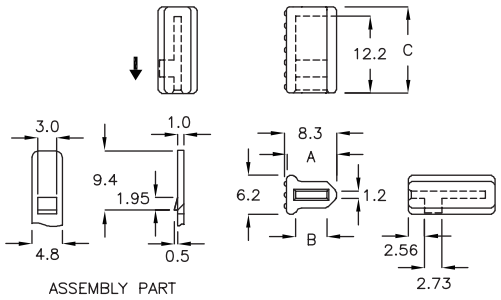


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL−17 | 8.0 | 5.0 | 13.7 | 500 |



## 把手盖 EJECTOR COVER 13-46-2

- MATERIAL: ABS+PC(UL)
- COLOR: GREEN,BLUE

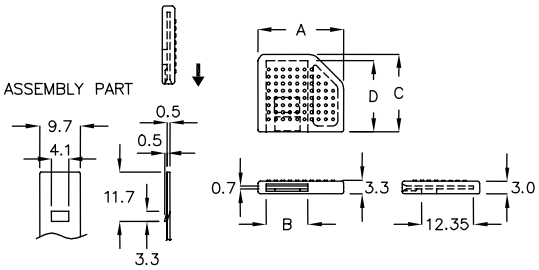


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL−18FR | 20.4 | 9.9 | 18.5 | 17.0 | 500 |

## 把手盖 EJECTOR COVER 13-46-3

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: GRAY

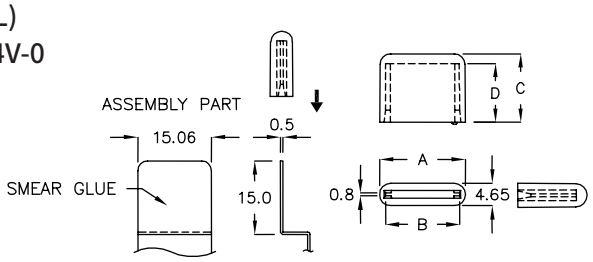


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL−18 | 17.6 | 15.0 | 14.2 | 12.0 | 1000 |

## 把手盖 EJECTOR COVER 13-46-4

- MATERIAL: ABS+PC(UL)
- COLOR: BLUE

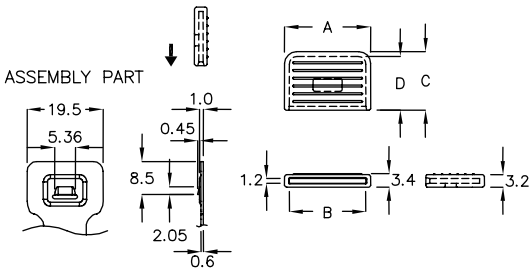


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL−19TD | 22.0 | 19.6 | 15.0 | 13.8 | 1000 |



## 把手盖 EJECTOR COVER 13-46-5

- MATERIAL: TPR
- COLOR: BLACK

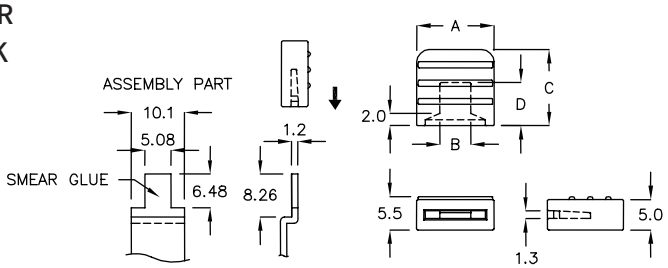


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL−22 | 12.7 | 4.8 | 12.5 | 7.1 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-47-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

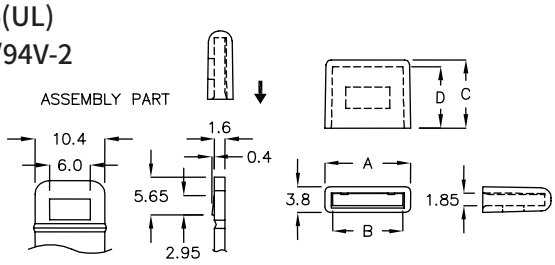


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-12YW | 12.7 | 10.8 | 10.15 | 9.05 | 500 |

## 把手盖 EJECTOR COVER 13-47-2

- MATERIAL: ABS+PC(UL)
- COLOR: RED

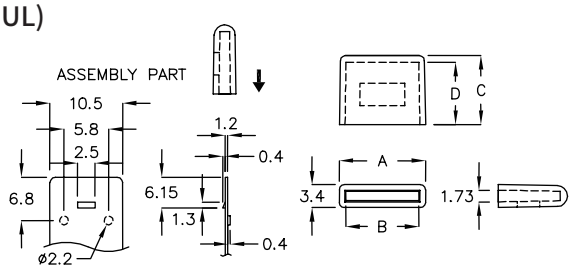


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-24 | 12.7 | 10.7 | 10.16 | 9.1 | 1000 |

## 把手盖 EJECTOR COVER 13-47-3

- MATERIAL: ABS+PC
- COLOR: BLUE

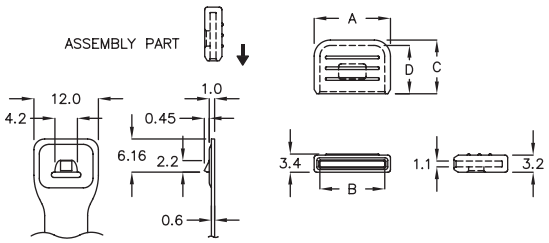


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-14JP | 14.2 | 12.1 | 10.0 | 9.0 | 500 |

## 把手盖 EJECTOR COVER 13-47-4

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: RED

NEW

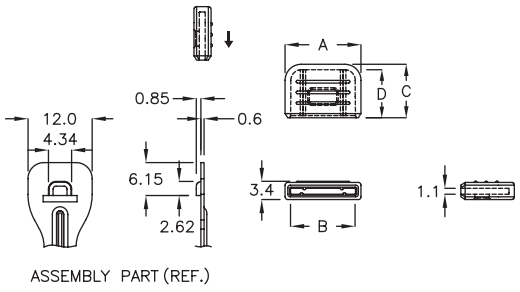


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ★ MHL-14KP | 14.2 | 12.0 | 10.0 | 9.0 | 500 |

## 把手盖 EJECTOR COVER 13-47-5

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GREEN

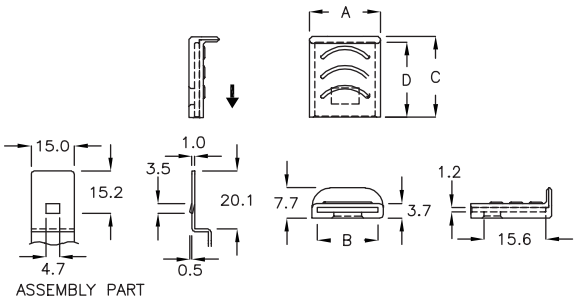


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL-18CL | 18.0 | 15.3 | 20.5 | 19.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 把手盖 EJECTOR COVER 13-48-1

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: GREEN,BLACK,BLUE

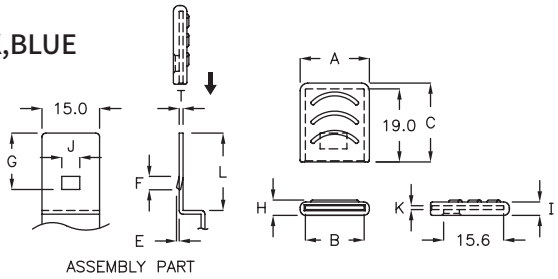


| | PART NO | A | B | C | E | F | G | H | I | J | K | L | T | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ★ | MHL−24AT | 18.0 | 15.3 | 20.5 | 0.5 | 3.5 | 15.2 | 4.7 | 4.4 | 4.7 | 1.4 | 20.1 | 1.2 | 500 |
| | MHL−24QM | 18.0 | 15.3 | 20.5 | 0.5 | 3.5 | 15.2 | 4.0 | 3.7 | 4.7 | 1.2 | 20.1 | 1.0 | |
| | MHL−24RK | 18.0 | 15.3 | 20.5 | 0.5 | 3.4 | 15.4 | 4.5 | 4.0 | 4.1 | 1.0 | 20.3 | 0.8 | |
| | MHL−24SY | 18.3 | 15.1 | 20.7 | 0.5 | 3.4 | 15.4 | 4.6 | 4.1 | 4.1 | 1.05 | 20.3 | 0.8 | |
| | MHL−24TL | 18.0 | 15.3 | 20.5 | 0.7 | 3.6 | 15.6 | 4.7 | 4.2 | 3.5 | 1.2 | 20.0 | 1.0 | |

## 把手盖 EJECTOR COVER 13-48-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: BLUE

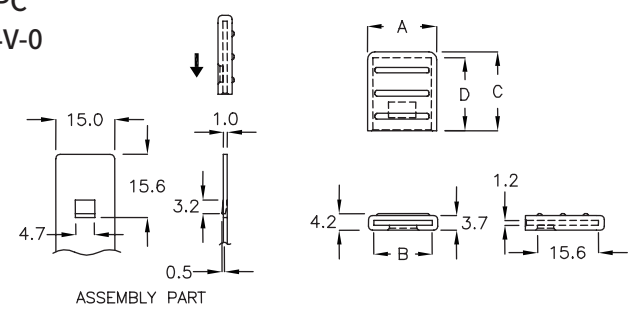


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL−18DF | 18.0 | 15.2 | 20.5 | 19.0 | 500 |



## 把手盖 EJECTOR COVER 13-48-3

- MATERIAL: PC(UL)
- COLOR: ORANGE
- USE M2.5 COUNTERSUNK SCREW

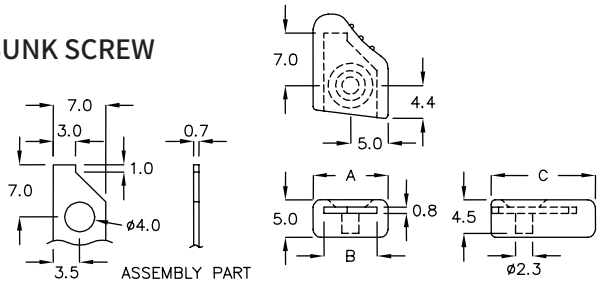


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHL−10KF | 10.0 | 7.1 | 13.9 | 500 |

## 把手盖 EJECTOR COVER 13-48-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

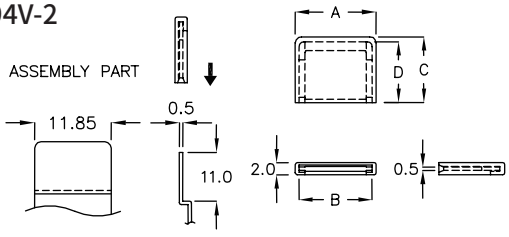


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MHL−13CK | 13.3 | 12.1 | 10.85 | 10.05 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 把手盖 EJECTOR COVER 13-49-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLUE
- USE M2 TAPPING SCREW




| PART NO | A | PACKAGE |
|---|---|---|
| MHLF−15A | 15.2 | 500 |



## 把手盖 EJECTOR COVER 13-49-2

- MATERIAL: ABS+PC
- FLAME CLASS: 94V-0
- COLOR: GREEN
- MATERIAL: SUS301
- COLOR: NATURAL

铁件为客戶提供，我司协助包埋射出
( 此为客制品，欢迎提供铁件，我司协助包埋 )

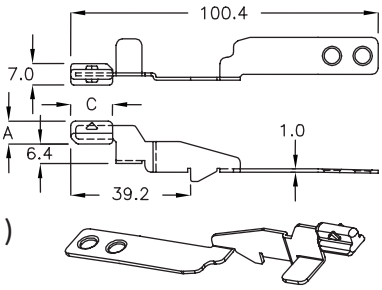


| PART NO | A | C | PACKAGE |
|---|---|---|---|
| MHLA−14GP | 7.5 | 13.7 | 50 |



## E3.S 防尘盖 E3.S COVER 13-49-3

- MATERIAL: ABS+PC
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| E3S−22A | 22.2 | 7.1 | 500 |



## SATA 防尘盖 SATA DUST COVER 13-49-4

- MATERIAL: NYLON 66(UL)
- FLAME CALSS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HTD−20A | 22.2 | 5.4 | 3.6 | 1000 |



## SATA 防尘盖 SATA DUST COVER 13-49-5

- MATERIAL: NYLON 66(UL)
- FLAME CALSS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| HC−21 | 23.4 | 21.6 | 8.2 | 6.4 | 9.0 | 8.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## SATA 防尘盖 SATA DUST COVER — 13-50-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| HC−21F | 23.9 | 22.0 | 10.0 | 6.6 | 9.3 | 8.3 | 500 |
| HC−21H | 23.0 | 21.1 | 10.4 | 6.5 | 9.1 | 8.1 | |

## SATA 防尘盖 SATA DUST COVER — 13-50-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC−27A | 26.7 | 24.7 | 13.0 | 8.6 | 500 |



## SATA 防尘盖 SATA DUST COVER — 13-50-3

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HCQ−22KR | 22.5 | 20.5 | 12.0 | 7.0 | 500 |

## SATA 防尘盖 SATA DUST COVER — 13-50-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC−27C | 26.8 | 24.4 | 12.0 | 8.0 | 500 |

## 网通光纤接头防尘盖 TRANSPORTER COVER — 13-50-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK







| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HB−01 | 9.0 | ø15.0 | 5.5 | ø9.8 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 网通光纤接头防尘盖
## TRANSPORTER COVER — 13-51-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HB−02 | 9.0 | ø15.0 | 5.5 | ø10.7 | 1000 |

## PS/2 防尘盖 PS/2 DUST COVER — 13-51-2

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HB−03 | 10.4 | ø10.5 | 1000 |

## BNC 防尘盖 BNC DUST COVER — 13-51-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HBK−8D | 7.6 | ø10.5 | 500 |

## AVI 端子防尘盖 DUST COVER — 13-51-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| AVI−01 | 6.0 | ø10.6 | 1000 |

## 音源孔插头盖
## AUDIO SOURCE HOLE COVER — 13-51-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | T CHASSIS THICKNESS | D HOLE IN CHASSIS | PACKAGE |
|---|---|---|---|---|---|
| MBJ−3A | 15.3 | ø7.9 | >8.8 | ø3.6~ø3.65 | 2000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 插头盖 DC COVER 13-52-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DCC-5JA | 7.9 | ø6.9 | 2000 |



## 插头盖 DC COVER 13-52-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DCJ-5GK | 7.9 | ø6.9 | 2000 |



## 插头盖 DC COVER 13-52-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DCC-7AK | 10.0 | ø9.5 | 2000 |



## 固定座 MOUNT 13-52-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DHD-01 | 12.8 | 12.0 | 500 |

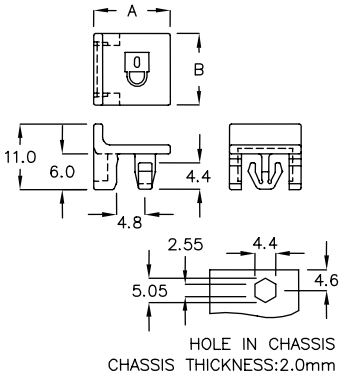

## 防尘盖 DUST COVER 13-52-5

- COLOR: NATURAL,BLACK




| PART NO | MATERIAL | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|---|
| HC-5 | N66 | ø8.0 | 5.2 | 4.7 | ø6.5 | 2000 |
| HC-5S | N66 | ø8.0 | 3.0 | 2.6 | ø6.5 | |
| HC-6 | TPE | ø8.0 | 8.5 | 7.4 | ø6.0 | 1000 |
| HC-6DP | TPE | ø8.0 | 5.4 | 4.3 | ø6.0 | |
| HC-8 | N66 | ø10.7 | 8.2 | 6.8 | ø8.0 | |
| HC-9 | TPE | ø11.0 | 9.7 | 8.7 | ø9.0 | |
| HC-10 | N66 | ø12.0 | 9.2 | 8.0 | ø10.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER — 13-53-1

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| VCK-5A | ø6.6 | 8.1 | 7.1 | ø4.8 | 2000 |
| VCK-7K | ø7.7 | 12.0 | 11.5 | ø6.7 | 1000 |
| VCK-8D | ø9.6 | 12.0 | 11.5 | ø8.6 | |

## K-LOCK 防尘盖 K-LOCK COVER — 13-53-2

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | E | PACKAGE |
|---|---|---|---|---|
| NEF-9DL | 9.3 | 3.2 | 7.4 | 2000 |
| NEF-9WS | 9.3 | 3.0 | 7.0 | |



## SFP 防尘盖 SFP CONNECTOR COVER — 13-53-3

- MATERIAL: PE
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| NEP-01 | 14.5 | 9.0 | 6.9 | 500 |
| NEP-1QM | 14.0 | 8.9 | 6.8 | |



## MINI SAS 防尘盖 MINI SAS CONNECTOR COVER — 13-53-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | C | PACKAGE |
|---|---|---|---|
| NSA-10C | 10.85 | 7.0 | 500 |

## QSFP 防尘盖 QSFP CONNECTOR COVER — 13-53-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| NEC-18 | 18.6 | 8.85 | 7.6 | 500 |
| NEC-18GD | 18.6 | 8.35 | 7.6 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## QSFP 防尘盖
## QSFP CONNECTOR COVER — 13-54-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| | PART NO | A | C | PACKAGE |
|---|---|---|---|---|
| ★ | NEM−18 | 18.6 | 10.1 | 500 |



## ELSFP 防尘盖
## ELSFP CONNECTOR COVER — 13-54-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| | PART NO | A | C | PACKAGE |
|---|---|---|---|---|
| ★ | NEC−22FP | 23.6 | 7.6 | 500 |



## SFP 防尘盖
## SFP CONNECTOR COVER — 13-54-3

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| NEK−14 | 14.6 | 500 |



## MINI SII 插头盖 MINI SII COVER — 13-54-4

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| NEY−01 | 19.2 | 500 |






## MINI SII 插头盖 MINI SII COVER — 13-54-5

- MATERIAL: PP
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| NEY−2A | 17.8 | 500 |

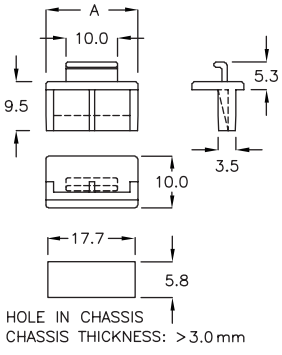







提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 防尘盖 DUST COVER 13-55-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HBC−14CK | 14.5 | 1000 |



## 防尘盖 DUST COVER 13-55-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HBC−14FM | 14.5 | 1000 |



## 防尘盖 POWER CONNECTOR COVER 13-55-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HBF−01 | 20.5 | 1000 |



## MCIO 防尘盖
## MCIO CONNECTOR COVER 13-55-4

- MATERIAL: ABS+PC
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCKA−27 | 27.0 | 7.8 | 500 |

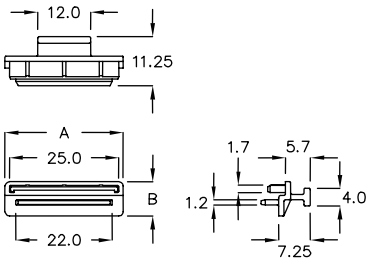




## 防尘盖 DUST COVER 13-55-5

- MATERIAL: ABS+PC
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCKB−4A | 7.0 | 5.0 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER — 13-56-1

- MATERIAL: ABS+PC
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCKC-8A | 11.0 | 6.0 | 500 |






## SLIM SAS X4 防尘盖
## SLIM SAS X4 CONNECTOR COVER — 13-56-2

- MATERIAL: ABS+PC
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCKF-12 | 12.7 | 12.0 | 6.5 | 500 |



## 防尘盖 DUST COVER — 13-56-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HCL-5M | 7.0 | 1000 |



## 防尘盖 DUST COVER — 13-56-4

- MATERIAL: TPE
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HCW-6T | 9.0 | 1000 |



## 防尘盖 DUST COVER — 13-56-5

- MATERIAL: ABS+PC
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| HCZ-5A | 5.6 | 1000 |









提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER 13-57-1

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| NER-30A | 32.5 | 500 |



## 防尘盖 DUST COVER 13-57-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| CFP-41A | 41.7 | 200 |



## 防尘盖 DUST COVER 13-57-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| HBA-01 | ø18.0 | 1000 |




HOLE IN CHASSIS: ø13.5
CHASSIS THICKNESS: >2.0mm

## 防尘盖 DUST COVER 13-57-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| HKA-20A | 25.0 | 200 |



## 防尘盖 VCP CAP 13-57-5

- MATERIAL: PVC
- COLOR: BLACK

| PART NO | A | B | L | C | PACKAGE |
|---|---|---|---|---|---|
| VCQ-7A | 7.4 | 9.0 | 12.8 | 1.0 | 1000 |
| VCQ-08 | 8.3 | 1.0 | 8.0 | 0.8 | 2000 |
| VCQ-9A | 9.6 | 4.5 | 16.0 | 1.2 | 1000 |
| VCQ-10 | 10.1 | 1.0 | 7.0 | 1.0 | |
| VCQ-12 | 12.0 | 4.7 | 10.0 | 1.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 VCP CAP — 13-58-1

- MATERIAL: PVC
- COLOR: BLACK,RED,WHITE,BLUE,YELLOW,GREEN
- UL STANDARD ALSO AVAILABLE




| PART NO | A | L | C | PACKAGE |
|---|---|---|---|---|
| VCP−3.2 | 3.2 | 13.0 | 0.8 | 2000 |
| VCP−4.0 | 4.0 | 8.0 | 0.8 | 1000 |
| VCP−4.8 | 4.8 | 13.0 | 0.8 | |
| VCP−5.7 | 5.7 | 13.0 | 1.0 | |
| VCP−6.5 | 6.5 | 13.0 | 1.0 | |
| VCP−7.6 | 7.6 | 8.0 | 1.0 | |
| VCP−8.0 | 8.0 | 10.0 | 1.0 | |
| VCP−9.5 | 9.4 | 16.0 | 1.0 | |
| VCP−9.5A | 9.5 | 13.0 | 1.0 | |
| VCP−11 | 11.4 | 20.0 | 1.2 | |
| VCP−12 | 12.0 | 16.0 | 1.2 | 500 |
| VCP−14 | 14.0 | 35.0 | 1.2 | |
| VCP−18 | 18.0 | 13.0 | 1.2 | |
| VCP−18C | 18.0 | 18.0 | 1.2 | |

## 插头盖 HOUSING COVER — 13-58-2

- MATERIAL: PP
- COLOR: NATURAL




| PART NO | A | B | C | D | E | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|---|---|
| HC−0 | 18.1 | 9.2 | 7.85 | 6.5 | 5.7 | 9 PIN FEMALE | 500 |
| HC−1 | 26.0 | 9.2 | 7.85 | 6.5 | 5.7 | 15 PIN FEMALE | |
| HC−2 | 20.0 | 11.0 | 9.2 | 7.2 | 6.1 | 9 PIN MALE | |
| HC−15 | 39.8 | 9.2 | 7.85 | 6.5 | 5.7 | 25 PIN FEMALE | |
| HC−16 | 42.0 | 10.9 | 9.1 | 7.3 | 6.3 | 25 PIN MALE | 200 |

## 插头盖 HOUSING COVER — 13-58-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|---|---|
| HC−15QC | 40.05 | 9.4 | 7.75 | 6.6 | 5.6 | 25 PIN FEMALE | 500 |

## 插头盖 HOUSING COVER — 13-58-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|
| HCM−19J | 19.6 | 11.1 | 9.4 | 9 PIN MALE | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 插头盖 HOUSING COVER 13-59-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|
| HC−1A | 26.5 | 9.7 | 8.1 | 15 PIN FEMALE | 500 |

## DVI 防尘盖 DVI COVER 13-59-2

- MATERIAL: PE
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HC−1PZ | 25.85 | 9.25 | 7.65 | 500 |

## 插头盖 HOUSING COVER 13-59-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|
| HCM−26F | 26.5 | 9.7 | 8.1 | 15 PIN FEMALE | 500 |

## 插头盖 HOUSING COVER 13-59-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | F | G | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| HC−02A | 17.8 | 9.7 | 8.3 | 6.5 | 5.7 | 10.7 | 16.4 | 9 PIN FEMALE | 500 |
| HC−02C | 18.4 | 10.0 | 8.0 | 6.1 | 5.0 | 11.2 | 16.4 | 9 PIN FEMALE | |
| HC−2FH | 19.6 | 11.1 | 9.3 | 7.0 | 6.0 | 12.5 | 17.8 | 9 PIN MALE | |

## 插头盖 HOUSING COVER 13-59-5

- MATERIAL: PP
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC−12A | 15.2 | 7.6 | 5.3 | 4.3 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 插头盖 HOUSING COVER — 13-60-1

- MATERIAL: PE
- COLOR: NATURAL




| PART NO | A | B | C | D | E | F | SUITABLE SOCKET | PACKAGE |
|---|---|---|---|---|---|---|---|---|
| HC-2RF | 18.0 | 9.4 | 7.8 | 7.7 | 5.2 | 10.1 | 9 PIN FEMALE | 500 |

## PDU-C14 防尘盖
## PDU-C14 CONNECTOR COVER — 13-60-2

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDZ-23C | 34.6 | 23.0 | 15.4 | 200 |



## PDU-C13 防尘盖
## PDU-C13 CONNECTOR COVER — 13-60-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| | PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|---|
| ★ | HDZA-23A | 35.0 | 23.8 | 12.0 | 1000 |

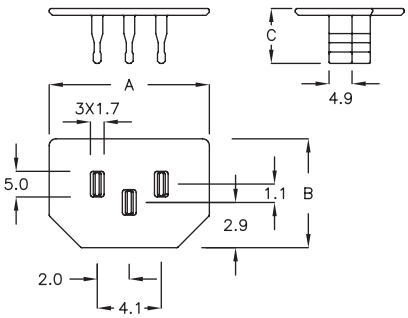

## 插头盖 HOUSING COVER — 13-60-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

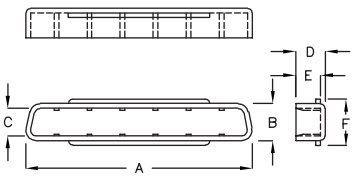


| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| HC-17 | 48.0 | 7.9 | 5.9 | 6.3 | 5.3 | 9.9 | 200 |
| HC-18 | 58.0 | 10.4 | 8.4 | 6.8 | 5.8 | 12.4 | |

## 防尘盖 DUST COVER — 13-60-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC-28 | 28.2 | 5.7 | 3.6 | 7.7 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## DVI 防尘盖 DVI COVER 13-61-1

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| HC−24 | 40.1 | 9.8 | 5.7 | 32.6 | 2.5 | ø3.4 | 500 |

## DVI 防尘盖 DVI COVER 13-61-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC−24A | 40.0 | 9.8 | 3.3 | 32.5 | 500 |

## MDR 防尘盖 MDR DUST COVER 13-61-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC−28DX | 28.4 | 8.1 | 6.5 | 6.5 | 500 |

## VGA 插头盖 VGA COVER 13-61-4

- MATERIAL: ABS(UL),NYLON 66(UL)
- FLAME CLASS: 94HB,94V-0
- COLOR: BLACK




| PART NO | MATERIAL | A | B | PACKAGE |
|---|---|---|---|---|
| HDD−2A | ABS HB | 34.0 | 19.3 | 200 |
| HDE−2A | N66 V0 | 34.0 | 13.5 | |



## PLUG 防尘盖 PLUG DUST COVER 13-61-5

- MATERIAL: PE
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HDK−34 | 34.0 | 13.0 | 15.2 | 19.1 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER 13-62-1

- MATERIAL: PP(UL)
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCWT-37KF | 29.4 | 22.0 | 200 |



## 防尘盖 DUST COVER 13-62-2

- MATERIAL: PP(UL)
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCWT-41BQ | 32.7 | 35.0 | 100 |



## QPI 防尘盖 QPI DUST COVER 13-62-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| QPI-57A | 57.1 | 26.6 | 12.3 | 500 |



## 插头盖 HOUSING COVER 13-62-4

- MATERIAL: PP
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HC-049 | 49.0 | 8.0 | 200 |



## 插头盖 HOUSING COVER 13-62-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HC-51 | 22.3 | 8.1 | 6.2 | 5.0 | 500 |








提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 插头盖 HOUSING COVER 13-63-1

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HC-5C | 17.3 | 14.0 | 2000 |






## 插头盖 HOUSING COVER 13-63-2

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HC-5D | 12.0 | 9.9 | 2000 |



## 插头盖 PS-2 COVER 13-63-3

- MATERIAL: PP(UL)
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HC-5A | 14.0 | 9.1 | 2000 |



## 防尘盖 DUST COVER 13-63-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| HCR-20 | 20.0 | 1.0 | 0.8 | 2000 |
| HCR-20CL | 20.0 | 0.8 | 1.0 | |



## 保护盖 HOLE PROTECT COVER 13-63-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| BHR-21A | 20.8 | 0.8 | 1000 |

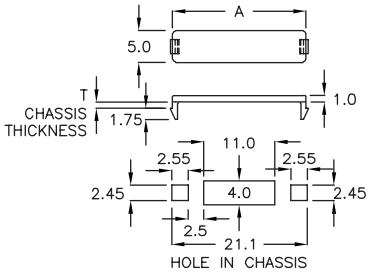




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER 13-64-1

- MATERIAL: TPR(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

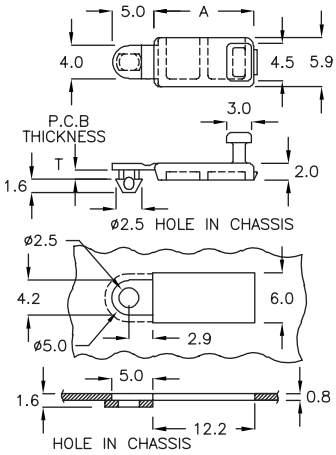


| PART NO | A | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|
| HCD-01 | 12.0 | 0.8 | 1000 |



## 防尘盖 DUST COVER 13-64-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| HCP-24D | 19.8 | 0.8 | 1000 |

## 固定座 MOUNT 13-64-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| HCP-55F | 50.5 | 0.8 | 200 |

## 防尘盖 DUST COVER 13-64-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

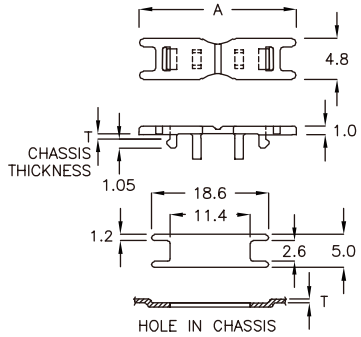


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| HCR-18K | 18.4 | 0.8 | 2000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER 13-65-1

- MATERIAL: TPE
- COLOR: GRAY

| PART NO | A | PACKAGE |
|---|---|---|
| HCX-15A | 15.5 | 1000 |

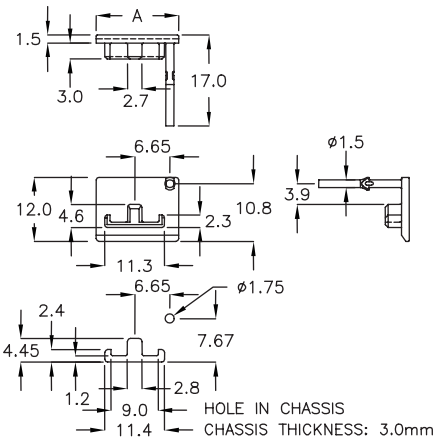




## 防尘盖 DUST COVER 13-65-2

- MATERIAL: PE
- COLOR: YELLOW

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCS-22 | 22.0 | 20.0 | 10.9 | 1000 |



## 防尘盖 DUST COVER 13-65-3

- MATERIAL: PE
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCS-15KN | 15.3 | 13.5 | 10.0 | 1000 |



## 保护罩 INSULATION CAP 13-65-4

- MATERIAL: TPE
- FLAME CLASS:94V-0
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDL-10C | ø10.7 | 4.2 | 5.2 | 1000 |



## 保护盖 PROTECT COVER 13-65-5

- MATERIAL: PE
- COLOR: BLACK

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDT-30 | 32.6 | 16.3 | 5.6 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 保护罩 INSULATION CAP 13-66-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDQ-5C | 14.8 | 5.6 | 13.3 | 1000 |

## 保护盖 PROTECT COVER 13-66-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDTC-17K | ø13.0 | 16.7 | 17.7 | 200 |

## 保护盖 INSULATION CAP 13-66-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

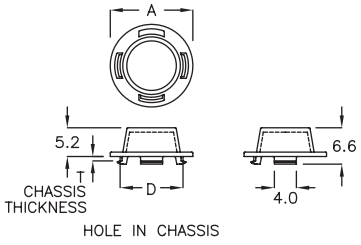


| PART NO | A | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ HDJ-15 | ø15.0 | ø11.5 | 0.7 | 200 |

## 保护盖 INSULATION CAP 13-66-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

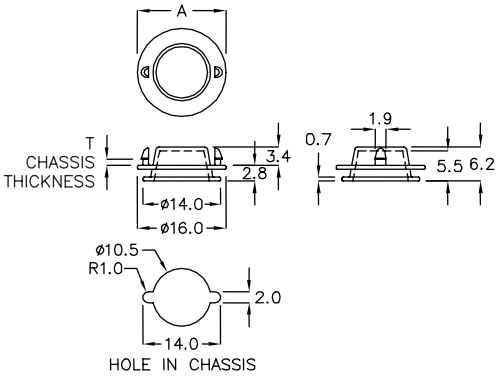


| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| HDU-16A | ø16.0 | 1.0 | 500 |

## 光纤插头盖 TRANSPORTER COVER 13-66-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HF-01 | 6.0 | 3.8 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 光纤插头盖 TRANSPORTER COVER — 13-67-1

- MATERIAL: TPE
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HFK−01 | 14.1 | 10.0 | 7.5 | 19.6 | 500 |



## 插头盖 COVER — 13-67-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HCK−7A | 12.0 | 8.6 | 3.3 | 9.6 | 500 |

## 插头盖 SATA DUST COVER — 13-67-3

- MATERIAL: PE
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HTA−10A | 12.8 | 5.5 | 3.4 | 7.6 | 1000 |

## 固定座 MOUNT — 13-67-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | øB | C | PACKAGE |
|---|---|---|---|---|
| PEB−01 | 4.3 | 25.3 | 7.3 | 1000 |

## USB 插头盖 USB COVER — 13-67-5

- MATERIAL: PP
- COLOR: NATURAL

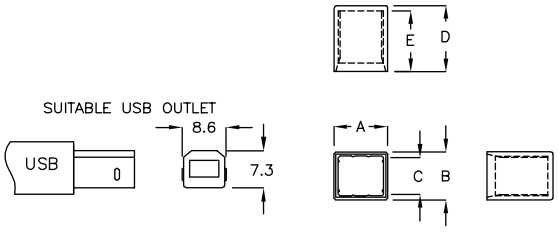


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB−01 | 10.6 | 9.5 | 7.35 | 13.0 | 12.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## USB 插头盖 USB COVER — 13-68-1

- MATERIAL: PP
- COLOR: NATURAL

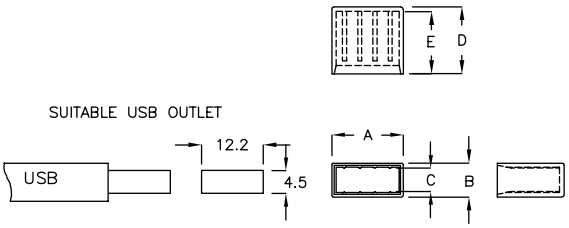


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-02 | 14.15 | 6.8 | 4.55 | 13.2 | 12.2 | 1000 |

## USB 插头盖 USB COVER — 13-68-2

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-03 | 15.5 | 7.8 | 4.1 | 13.2 | 8.0 | 1000 |

## USB 插头盖 USB COVER — 13-68-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-3GJ | 13.0 | 7.0 | 3.75 | 16.2 | 9.0 | 1000 |

## USB 插头盖 USB COVER — 13-68-4

- MATERIAL: PP
- COLOR: NATURAL,BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-3A | 15.5 | 7.8 | 4.1 | 9.5 | 8.0 | 500 |



## MICRO USB 插头盖 MICRO USB COVER — 13-68-5

- MATERIAL: TPE(UL)
- FLAME CLASS:94V-0
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USB-6AK | 9.0 | 5.5 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## USB 插头盖 USB COVER — 13-69-1

- MATERIAL: PP
- COLOR: NATURAL,BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-3FK | 15.6 | 7.2 | 3.85 | 15.5 | 13.5 | 500 |

## USB 3.0 插头盖 MICRO USB 3.0 COVER — 13-69-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USB-3HQ | 15.0 | 5.5 | 500 |

## USB 3.0 插头盖 MICRO USB 3.0 COVER — 13-69-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USB-3RT | 12.1 | 4.8 | 500 |

## TYPE-C 插头盖 TYPE-C COVER — 13-69-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USB-3WP | 12.0 | 6.4 | 500 |



## TYPE-C 插头盖 TYPE-C COVER — 13-69-5

- MATERIAL: PE
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| USB-3GT | 10.5 | 5.5 | 2.3 | 2000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## TYPE-C 插头盖 TYPE-C COVER 13-70-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| USB-3KN | 10.5 | 5.5 | 2.3 | 500 |

## TYPE-C 插头盖 TYPE-C COVER 13-70-2

- MATERIAL: PE
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| USB-3QA | 10.5 | 5.5 | 2.5 | 2000 |

## USB1394 插头盖 USB COVER 13-70-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USB-04 | 11.0 | 10.3 | 1000 |

## USB 插头盖 USB COVER 13-70-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-05 | 17.8 | 19.0 | 15.0 | 17.0 | 15.5 | 500 |

## MINI USB 插头盖 USB COVER 13-70-5

- MATERIAL: PE
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| USB-06 | 9.5 | 4.8 | 1.0 | 7.2 | 5.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## MINI USB 插头盖 USB COVER 13-71-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL,BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USB-9MT | 10.0 | 6.0 | 1000 |

## USB 插头盖 USB COVER 13-71-2

- MATERIAL: PP
- COLOR: BLACK

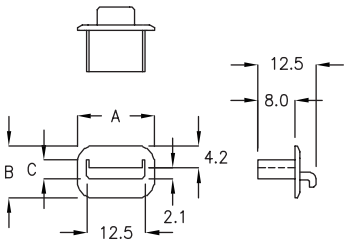


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| USB-07 | 16.5 | 10.0 | 3.7 | 2000 |

## USB1394 保护盖 USB COVER 13-71-3

- MATERIAL: PE
- COLOR: BLACK




| PART NO | A | B | C | D | E | F | PACKAGE |
|---|---|---|---|---|---|---|---|
| USF-01 | 13.2 | 8.5 | 6.0 | 8.9 | 7.3 | 1.8 | 2000 |
| USF-02 | 13.2 | 8.5 | 6.0 | 8.9 | 7.3 | 1.0 | |



## USB1394 保护盖 USB COVER 13-71-4

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| USF-03 | 16.0 | 10.8 | 6.0 | 2000 |

## USB 保护盖 USB COVER 13-71-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USJ-2JM | 15.6 | 16.3 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## USB 保护盖 USB COVER — 13-72-1

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| USQ-15C | 7.7 | 7.4 | 500 |



## 保护盖 GPS COVER — 13-72-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| LHZ-21K | 21.5 | 7.17 | 500 |

## 电源插座保护盖 SOCKET COVER — 13-72-3

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDB-01 | ø25.0 | 5.5 | 14.0 | 200 |

## 电源插座防尘盖 DUST COVER — 13-72-4

- MATERIAL: TPE(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HDY-16A | 24.3 | 16.0 | 500 |

## HDMI 插头盖 HDMI COVER — 13-72-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

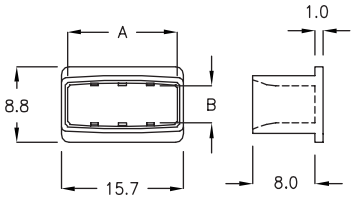


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DMI-01 | 14.2 | 4.2 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## HDMI 插头盖 HDMI COVER 13-73-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

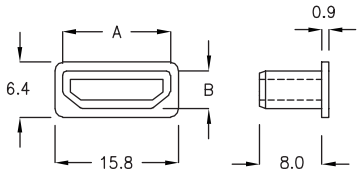


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DMI-02 | 13.8 | 4.4 | 1000 |

## HDMI 插头盖 HDMI COVER 13-73-2

- MATERIAL: PE
- COLOR: NATURAL,BLACK




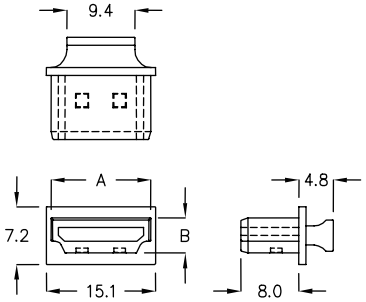


| PART NO | A | B | FORM | PACKAGE |
|---|---|---|---|---|
| DMI-2C | 13.8 | 4.4 | 1 | 1000 |
| DMI-2P | 13.8 | 4.4 | 2 | |



## HDMI 插头盖 HDMI COVER 13-73-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DMI-2TA | 15.5 | 4.4 | 1000 |

## HDMI 插头盖 HDMI COVER 13-73-4

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DMI-3K | 13.9 | 4.4 | 1000 |

## DVI 插头盖 DVI COVER 13-73-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DVI-01 | 25.1 | 8.5 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## DVI 插头盖 DVI COVER 13-74-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DVI-02 | 23.9 | 8.0 | 500 |



## DVI 插头盖 DVI COVER 13-74-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DVI-2WT | 23.8 | 7.8 | 500 |

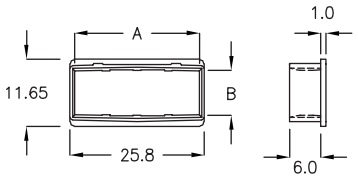

## RJ45 插头盖 RJ45 COVER 13-74-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NET-1QH | 11.9 | 9.4 | 500 |






## RJ45 插头盖 RJ45 COVER 13-74-4

- MATERIAL: PP
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NEX-01 | 11.9 | 9.4 | 500 |

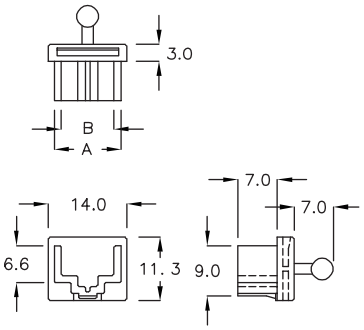




## RJ45 插头盖 RJ45 COVER 13-74-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- MATERIAL: TPE
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | C | D | E | F | G | MATERIAL | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| NEX-02 | 12.1 | 9.5 | 14.1 | 11.6 | 6.4 | 6.0 | 1.2 | N66 | 500 |
| NEX-3K | 11.9 | 9.0 | 17.6 | 13.25 | 6.4 | 6.0 | 1.2 | N66 | |
| NEX-4KJ | 12.0 | 9.5 | 13.5 | 11.6 | 6.4 | 6.0 | 1.2 | TPE | |
| NEX-5FT | 12.0 | 9.4 | 12.0 | 11.3 | 5.2 | 8.0 | 1.0 | N66 | |

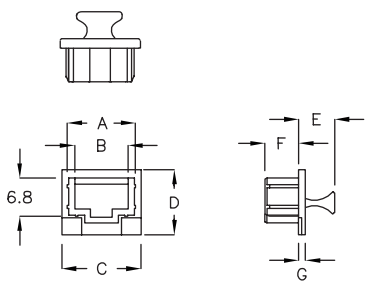






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## RJ45 插头盖 RJ45 COVER — 13-75-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NET−2FM | 12.0 | 9.4 | 500 |

## RJ12 插头盖 RJ12 COVER — 13-75-2

- MATERIAL: PP
- COLOR: BLACK,NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NET−02 | 10.0 | 8.2 | 500 |

## RJ12 插头盖 RJ12 COVER — 13-75-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NET−2HK | 10.0 | 8.0 | 500 |



## RJ12 插头盖 RJ12 COVER — 13-75-4

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| NET−02A | 9.8 | 8.0 | 500 |



## PCIEX1 插头盖 PCIEX1 COVER — 13-75-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PCIE−1A | 20.5 | 9.0 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## RJ11 防尘盖 RJ11 COVER — 13-76-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| RJ-12 | 7.75 | 6.2 | 1000 |

## MICRO FIT 防尘盖 MICRO FIT COVER — 13-76-2

- MATERIAL: ABS+PC
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| NEG-12K | 9.0 | 1000 |

## 电源连接座插头盖 CONNECTOR COVER — 13-76-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| NES-4A | 7.7 | 500 |

## 电源连接座插头盖 CONNECTOR COVER — 13-76-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| NEA-12J | 8.35 | 500 |



## 电源连接座插头盖 CONNECTOR COVER — 13-76-5

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| NES-14A | 12.04 | 500 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 防尘盖 DUST COVER — 13-77-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| | PART NO | A | B | D HOLE IN CHASSIS | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| ★ | HCXK-15C | 15.1 | 14.2 | ø2.5 | 1.2~1.6 | 200 |

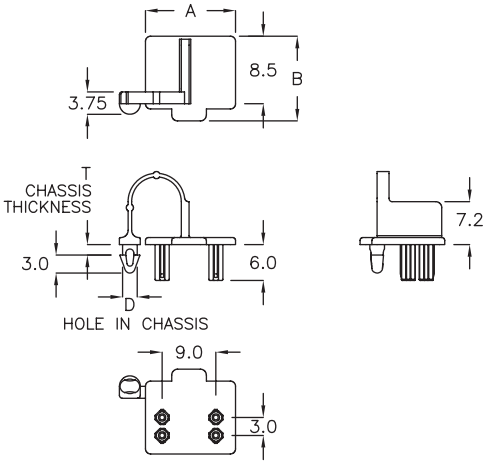

## 电源连接座插头盖 CONNECTOR COVER — 13-77-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | PACKAGE |
|---|---|---|
| NES-18C | 16.3 | 500 |

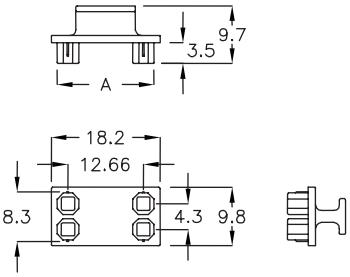




## 电源连接座插头盖 CONNECTOR COVER — 13-77-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| NEQ-34K | 28.7 | 500 |

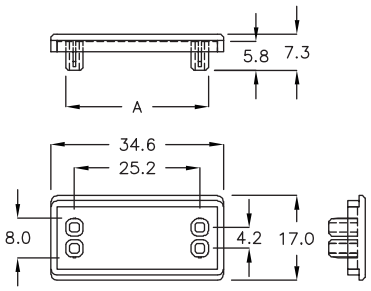

## DP 防尘盖 DP COVER — 13-77-4

- MATERIAL: PE
- COLOR: NATURAL

| PART NO | A | PACKAGE |
|---|---|---|
| DP-2KT | 15.9 | 1000 |



## DP 防尘盖 DP COVER — 13-77-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW

| | PART NO | A | B | PACKAGE |
|---|---|---|---|---|
| ★ | DP-1KT | 15.9 | 5.55 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## DP 防尘盖 DP COVER — 13-78-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DP-01 | 15.9 | 1000 |

## DP 防尘盖 DP COVER — 13-78-2

- MATERIAL: PP
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DP-3F | 16.0 | 1000 |

## PCIE 防尘盖 PCI EXPRESS COVER — 13-78-3

- MATERIAL: PE
- COLOR: BLACK

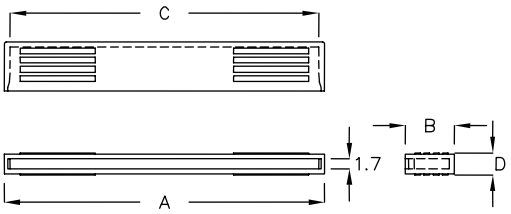


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| HCS-44AT | 44.0 | 8.0 | 41.8 | 4.0 | 500 |
| HCS-55FN | 55.4 | 8.6 | 53.2 | 3.8 | |

## PCIE 防尘盖 PCI EXPRESSx16 COVER — 13-78-4

- MATERIAL: PE
- COLOR: NATURAL

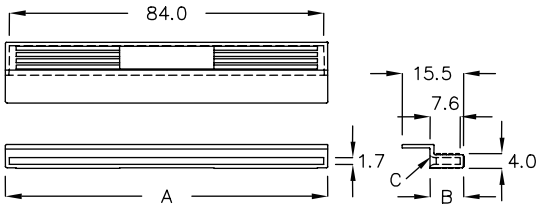


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HCS-86FQ | 86.0 | 8.5 | — | 200 |
| HCS-86HX | 86.0 | 8.5 | 1.0 | |

## SC 型光纤盖组合 OPTICAL FIBER COVER — 13-78-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: GREEN




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| FIB-13-NOH | 9.4 | 12.9 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 光纤保护盖 OPTICAL FIBER COVER — 13-79-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MNA−11C | 9.5 | 14.6 | 2000 |

## 防尘盖 DUST COVER — 13-79-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MNW−9A | 6.6 | 9.0 | 1000 |

## 音频插座固定座 Φ3.5 AUDIO MOUNT — 13-79-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

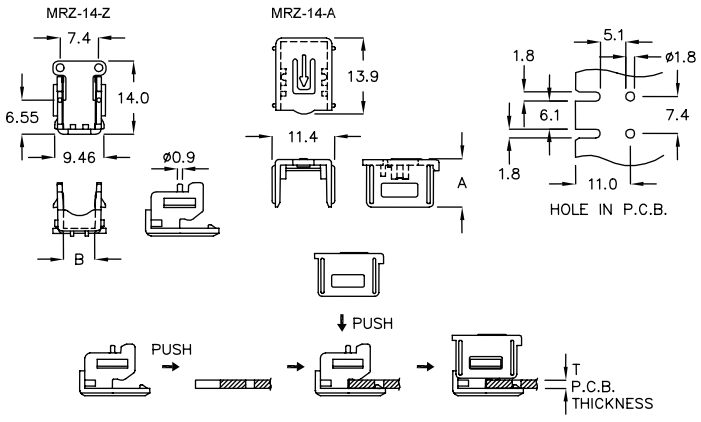


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MRZ−14 | 8.6 | 6.0 | 1.65 | 1000 |

## TYPE-C 固定座 MOUNT — 13-79-4

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MIR−14 | 6.3 | 14.0 | 7.4 | 200 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## MICRO-FIT 固定座
## MICRO-FIT CONNECTOR HOLDER —— 13-80-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

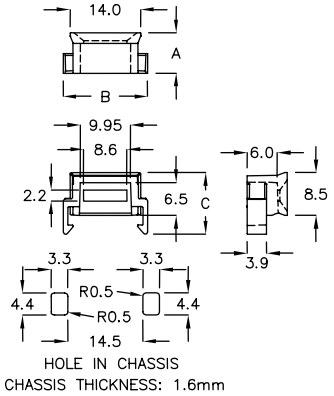


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MJQB-18AT | 8.0 | 16.7 | 12.2 | 500 |

## SD 卡保护座 SD CARD SOCKET COVER —— 13-80-2

- MATERIAL: ABS(UL)
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| SDH-01 | 32.0 | 24.0 | 500 |

## 连接器固定座 CONNECTOR MOUNT —— 13-80-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

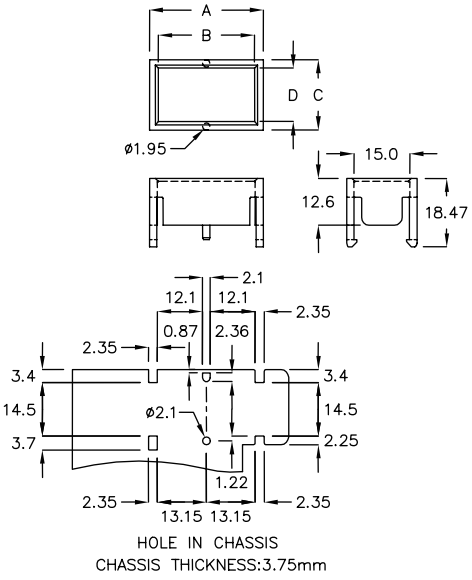


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MNK-30YM | 30.6 | 25.8 | 18.9 | 14.4 | 200 |

## 连接器固定座 CONNECTOR MOUNT —— 13-80-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

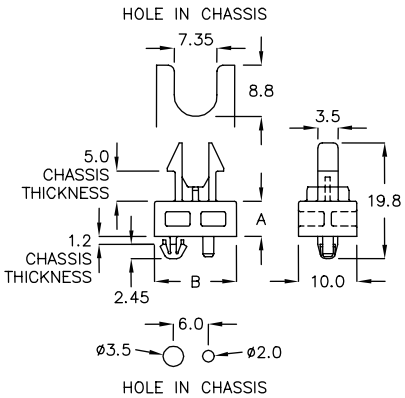


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MTQA-6KF | 6.0 | 14.0 | 1000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT — 13-81-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

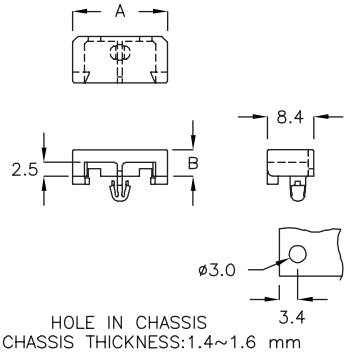


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MRQ-14M | 17.3 | 4.8 | 1000 |

## 固定座 MOUNT — 13-81-2

- MATERIAL: PP
- COLOR: BLACK

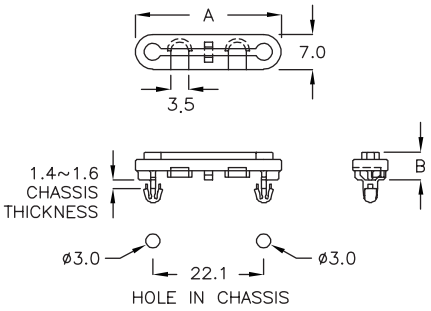


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MRQ-29 | 29.1 | 5.6 | 1000 |

## 固定座 MOUNT — 13-81-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 SCREW

NEW

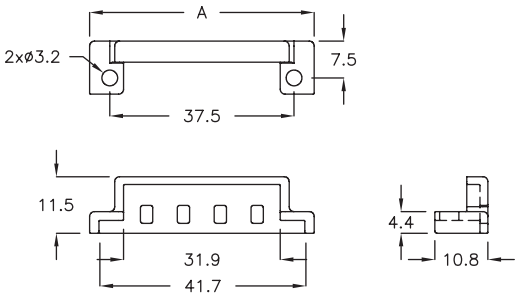


| PART NO | A | PACKAGE |
|---|---|---|
| ★ MHTK-45A | 45.7 | 500 |



## 网通卡固定座 MOUNT — 13-81-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 SCREW

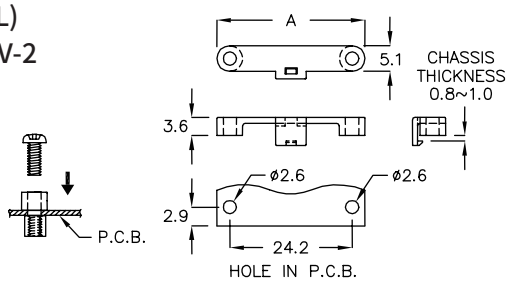


| PART NO | A | PACKAGE |
|---|---|---|
| MRR-29 | 29.3 | 2000 |

## 网通卡固定座 MOUNT — 13-81-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- USE M2.5 SCREW

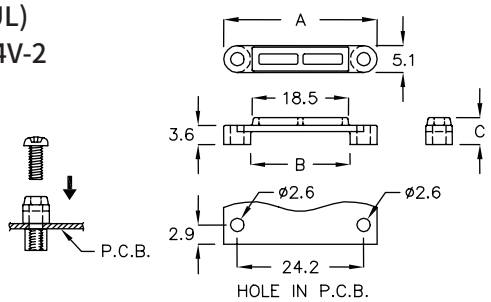


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MRR-29AK | 29.3 | 19.1 | 5.1 | 2000 |
| MRR-29HC | 29.3 | 20.1 | 4.4 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## M.2 卡固定座 MOUNT — 13-82-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

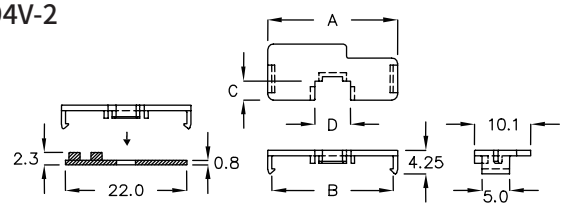


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MRH−23FC | 23.4 | 21.9 | 3.4 | 6.4 | 2000 |

## M.2 卡固定座 MOUNT — 13-82-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MRH−23AC | 23.6 | 21.8 | 2.4 | 6.4 | 5.7 | 2000 |
| ★ MRH−23AM | 23.6 | 22.0 | 2.4 | 6.4 | 5.9 | |
| MRH−23TG | 23.6 | 21.9 | 2.4 | 5.0 | 5.7 | |
| MRH−23SK | 23.6 | 21.9 | 3.4 | 6.4 | 5.7 | |

## M.2 卡固定座 MOUNT — 13-82-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MRHA−23BT | 24.9 | 22.0 | 5.0 | 6.4 | 6.0 | 2000 |

## M.2 卡固定座 MOUNT — 13-82-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| ★ MRH−23CL | 23.7 | 22.0 | 3.9 | 6.4 | 6.7 | 2000 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## M.2 卡固定座 MOUNT — 13-83-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MRH−31FC | 31.6 | 29.9 | 2.4 | 5.0 | 5.25 | 2000 |

## M.2 卡固定座 MOUNT — 13-83-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MRH−31KS | 31.6 | 29.9 | 2.4 | 5.0 | 4.35 | 2000 |

## M.2 卡固定座 MOUNT — 13-83-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS:94V-0/94V-2
- COLOR: BLACK

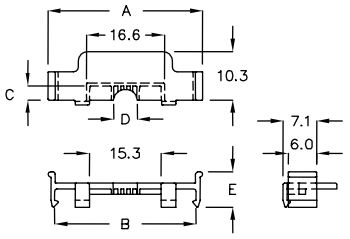


| PART NO | A | B | C | D | E | PACKAGE |
|---|---|---|---|---|---|---|
| MRM−31FQ | 32.9 | 30.1 | 3.0 | 5.17 | 7.55 | 1000 |

## M.2 卡固定座 MOUNT — 13-83-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

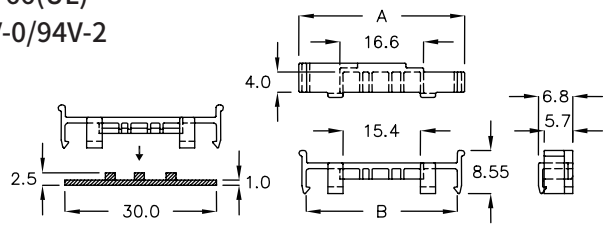


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MRM−31C | 32.9 | 30.1 | 1000 |



## 固定座 MOUNT — 13-83-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE:3M

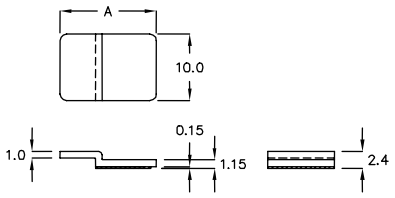


| PART NO | A | PACKAGE |
|---|---|---|
| MRU−14A | 14.5 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## M.2 卡固定座 MOUNT 13-84-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

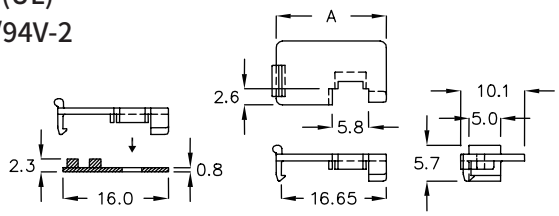


| PART NO | A | PACKAGE |
|---|---|---|
| MRX−16D | 17.5 | 2000 |



## M.2 卡固定座 MOUNT 13-84-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

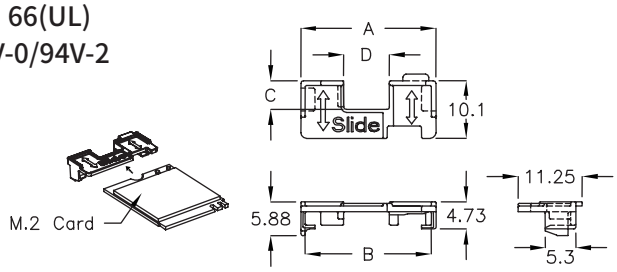


| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MRY−23CL | 23.6 | 22.05 | 5.05 | 8.0 | 2000 |



## 固定座 MOUNT 13-84-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| CGR−52A | 52.7 | 200 |

## 固定座 MOUNT 13-84-4

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: BLACK

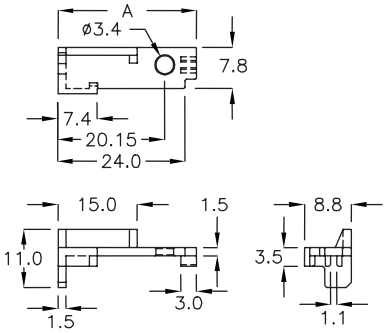


| PART NO | A | PACKAGE |
|---|---|---|
| MJGP−26K | 26.15 | 200 |

## 固定座 HOUSING 13-84-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

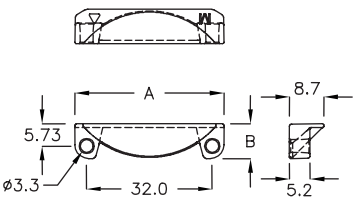


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MLW−38HC | 38.0 | 9.0 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-85-1

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| UAC−12B | 11.0 | 12.55 | 500 |



## 固定座 MOUNT 13-85-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| HPM−56A | 60.2 | 200 |



## 固定座 MOUNT 13-85-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

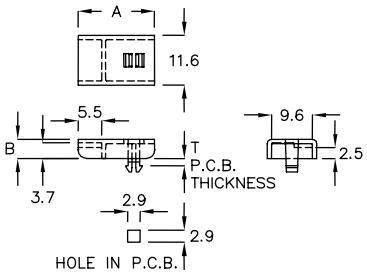


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MMF−01 | 18.0 | 4.5 | 1.4~1.6 | 1000 |



## 固定座 MOUNT 13-85-4

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

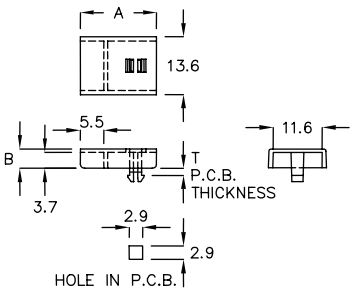


| PART NO | A | B | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| MMF−1K | 18.0 | 4.5 | 1.4~1.6 | 1000 |

## 固定座 MOUNT 13-85-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

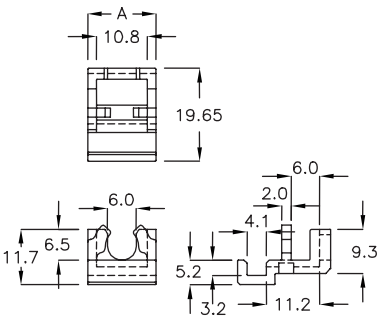


| PART NO | A | PACKAGE |
|---|---|---|
| MMFA−20T | 14.4 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT — 13-86-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MRAT−15M | 36.65 | 31.9 | 100 |

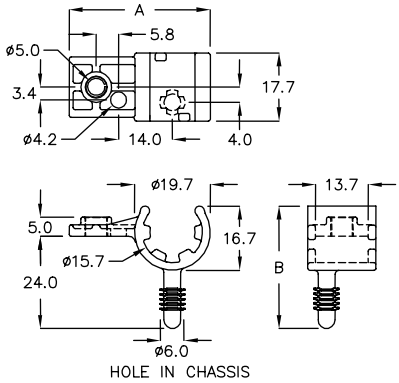




## 固定座 MOUNT — 13-86-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MGL−26A | 26.1 | 17.7 | 500 |



## 固定座 MOUNT — 13-86-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMS−20 | 8.4 | 20.0 | 1000 |






## 保护盖 HOLE PROTECTOR — 13-86-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MHY−01 | ø16.0 | 1.5 | 6.3 | 1000 |






## 固定座 MOUNT — 13-86-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK
- WITH M3 COUNTERSUNK SCREW

NEW

| PART NO | A | B | C | D | T P.C.B THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|
| ★ CNZA−8C | 8.2 | 28.85 | 30.0 | 20.0 | 3.09 | 500 |

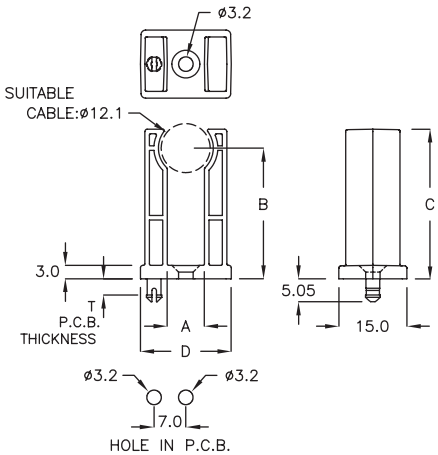






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT — 13-87-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL
- WITH M2 COUNTERSUNK SCREW




| PART NO | A | PACKAGE |
|---|---|---|
| MMCA−14A | 17.5 | 500 |



## 固定座 MOUNT — 13-87-2

- MATERIAL: ABS(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL
- ADHESIVE TAPE: 3M




| PART NO | A | PACKAGE |
|---|---|---|
| MZT−25 | 25.0 | 1000 |

## 塞头 HOLE PLUG — 13-87-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| P−1 | ø12.5 | 2.0 | 1000 |

## 定位销 PIN PLANAR LOCATOR — 13-87-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| P−5 | ø8.5 | 12.0 | 1000 |

## 保护盖 PIN HEADER PROTECTOR — 13-87-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MGX−6AK | 4.95 | 2.35 | 0.56 | 3.3 | 2000 |
| MGX−6BM | 7.5 | 2.35 | 0.56 | 5.84 | |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 保护盖 PIN HEADER PROTECTOR — 13-88-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MGX-6CR | 6.0 | 3.4 | 1.6 | 2000 |

## 保护盖 PIN HEADER PROTECTOR — 13-88-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MGX-7BL | 12.6 | 4.6 | 7.5 | 2000 |

## 保护盖 PIN HEADER PROTECTOR — 13-88-3

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MGX-8CK | 8.5 | 3.0 | 8.5 | 2000 |

## 保护盖 PIN HEADER PROTECTOR — 13-88-4

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MGX-8MS | 12.5 | 4.35 | 8.1 | 2000 |

## 保护盖 PIN HEADER PROTECTOR — 13-88-5

- MATERIAL: PBT(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

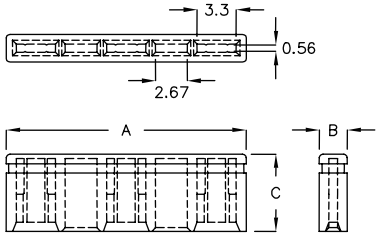


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MGX-20FT | 20.2 | 2.35 | 6.5 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 保护盖 HOLE PROTECTOR 13-89-1

- MATERIAL: PP(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

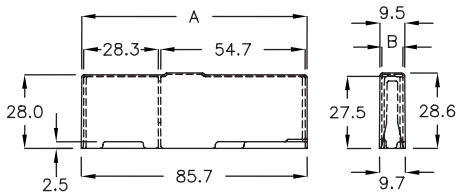


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| DXGF-85KB | 85.5 | 7.9 | 100 |

## 保护盖 HOLE PROTECT COVER 13-89-2

- MATERIAL: PC(UL)
- COLOR: BLACK

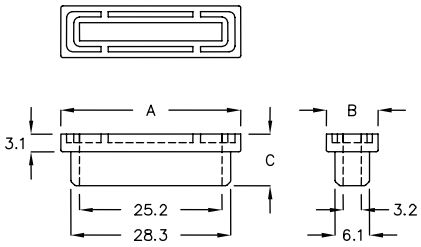


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MDC-31A | 31.8 | 9.1 | 9.1 | 500 |

## 保护盖 HOLE PROTECTOR 13-89-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

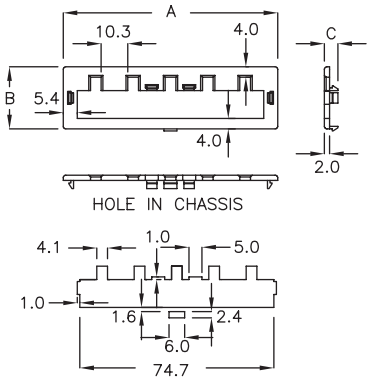


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MPR-01 | 82.6 | 23.9 | 5.2 | 100 |

## 记忆卡保护盖 MEMORY CARD COVER 13-89-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

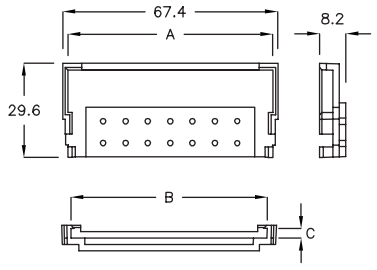


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| VFA-02 | 64.5 | 61.5 | 3.1 | 100 |

## 提把 HANDLE 13-89-5

- MATERIAL: ABS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




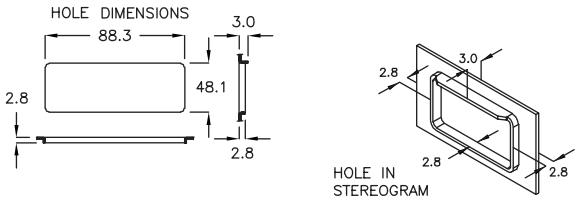


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MKP-91 | 92.3 | 52.3 | 41.7 | 50 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 纸箱固定座 CARTON BOX HANDLE — 13-90-1

- MATERIAL: PP
- COLOR: NATURAL

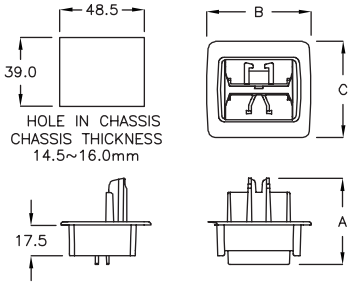


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MKK-82A | 50.0 | 59.0 | 54.0 | 50 |

## 纸箱固定座 CARTON BOX HANDLE — 13-90-2

- MATERIAL: PP
- COLOR: NATURAL

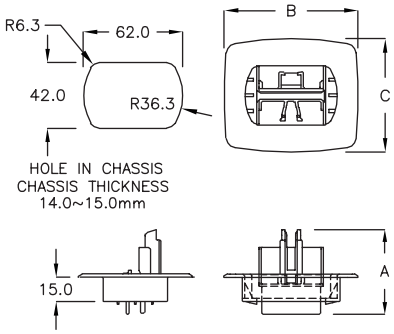


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MKK-81DZ | 51.2 | 81.0 | 69.0 | 50 |

## 纸箱固定座 CARTON BOX HANDLE — 13-90-3

- MATERIAL: PP
- COLOR: NATURAL

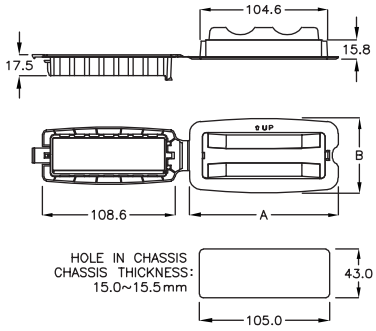


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MKK-92 | 122.0 | 62.0 | 10 |



## 保护盖 COVER — 13-90-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

NEW

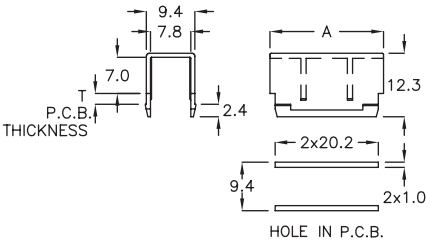


| | PART NO | A | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|
| ★ | LHP-22 | 22.0 | 2.0 | 500 |

## 端子座保护盖 TERMINAL COVER — 13-90-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

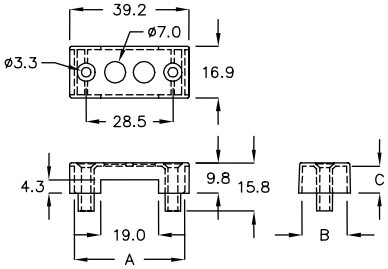


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MD-39 | 36.2 | 14.9 | 8.8 | 100 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 端子座保护盖 TERMINAL COVER — 13-91-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

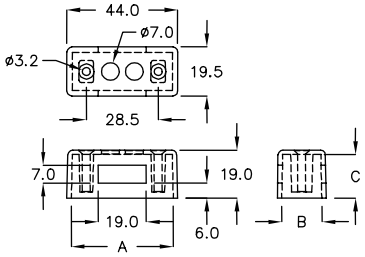


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MD-44 | 40.4 | 15.9 | 17.2 | 100 |



## 端子座保护盖 TERMINAL COVER — 13-91-2

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

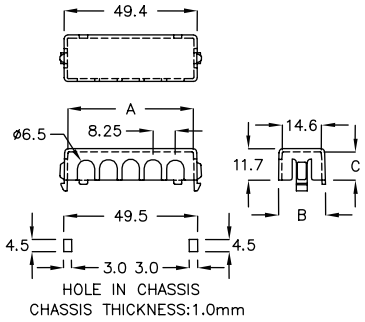


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MDW-49A | 46.6 | 17.4 | 10.5 | 100 |



## 端子座保护盖 DC CONNECTOR COVER — 13-91-3

- MATERIAL: PC(UL)
- COLOR: CLEAR




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| HDP-01 | 27.1 | 23.9 | 14.0 | 200 |



## 端子固定座 MOUNT — 13-91-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| TGB-25K | 25.0 | 12.0 | 8.0 | 500 |

## 插头绝缘套 SOCKET INSULATOR HOLDER - 13-91-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

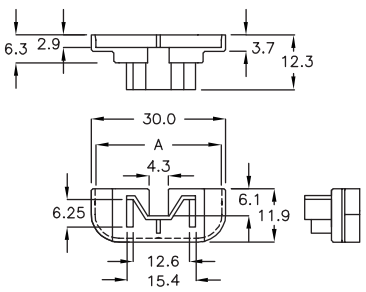


| PART NO | A | PACKAGE |
|---|---|---|
| MTY-01 | 28.0 | 200 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 插头绝缘套 SOCKET INSULATOR HOLDER - 13-92-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| MTY-3F | 26.7 | 200 |

## 固定座 MOUNT 13-92-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| MPG-15A | 15.7 | 500 |

## 固定座 MOUNT 13-92-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| MPG-15WF | 15.7 | 500 |



## 固定座 MOUNT 13-92-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| MWJ-16 | 16.0 | 1000 |

## 销 PIN 13-92-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| PIN-13 | 13.0 | ø2.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定带 STRAP TIE 13-93-1



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

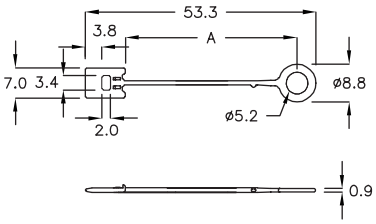


| PART NO | A | PACKAGE |
|---|---|---|
| BFA–40 | 39.6 | 500 |

## 固定带 STRAP TIE 13-93-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | PACKAGE |
|---|---|---|
| TPW–40A | 40.5 | 2000 |

## 固定座 MOUNT 13-93-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MMJA–22A | 19.2 | 22.3 | 200 |

## 固定座 MOUNT 13-93-4



- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB–03 | 15.0 | 3.0 | 1000 |

## 固定座 MOUNT 13-93-5



- MATERIAL: PC(UL)
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB–12FC | 7.5 | 2.3 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 固定座 MOUNT 13-94-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−3A | 11.0 | 3.0 | 500 |



## 固定座 MOUNT 13-94-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−8ST | 9.2 | 2.7 | 1000 |

## 固定座 MOUNT 13-94-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL, BLACK




| PART NO | A | B | C | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|
| MPB−9FT | 9.0 | 2.0 | 9.0 | 4.65 | 9.5 | 1.1 | 1000 |
| MPB−10GK | 10.0 | 2.0 | 9.7 | 4.2 | 10.2 | 1.0 | |



## 固定座 MOUNT 13-94-4

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−4A | 30.2 | 2.95 | 500 |

## 固定座 MOUNT 13-94-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−15GK | 13.6 | 2.2 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-95-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−18MD | 21.4 | 0.45 | 500 |

## 固定座 MOUNT 13-95-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−18PQ | 21.4 | 0.45 | 500 |

## 固定座 MOUNT 13-95-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

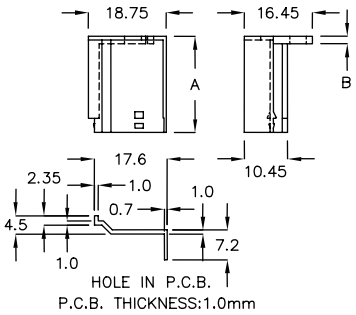


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−18CR | 23.2 | 1.8 | 500 |



## 固定座 MOUNT 13-95-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−29LY | 9.2 | 2.7 | 500 |



## 固定座 MOUNT 13-95-5

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−30KM | 9.2 | 2.7 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-96-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

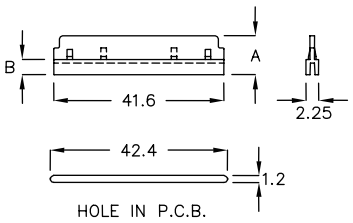


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MPB−42QW | 6.8 | 2.7 | 500 |

## 固定座 MOUNT 13-96-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| MPB−21HT | 8.5 | 2.9 | 20.9 | 6.5 | 1000 |

## 固定座 MOUNT 13-96-3

- COLOR: NATURAL




| PART NO | MATERIAL | A | B | C | D | E | F | G | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| MPB−27SQ | N66 94V−0 | 8.25 | 2.15 | 27.6 | 4.9 | 29.5 | 22.3 | 4.6 | 500 |
| MPB−30J | N66 94V−0 | 11.55 | 2.95 | 30.8 | 4.8 | 32.4 | 24.6 | 4.9 | |
| MPB−32HW | N66 94V−0 | 9.05 | 2.95 | 32.8 | 4.9 | 33.0 | 25.8 | 4.6 | |
| MPB−32K | N66+30%FRP | 11.55 | 2.95 | 32.8 | 4.9 | 33.0 | 25.8 | 4.6 | |



## 固定座 MOUNT 13-96-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MPB−11TN | 7.2 | 2.8 | 12.0 | 1.6 | 1000 |
| MPB−11GL | 14.0 | 2.8 | 12.0 | 1.6 | 500 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-97-1

MPB-15M
- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

MPB-23R/MPB-23KD
- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK




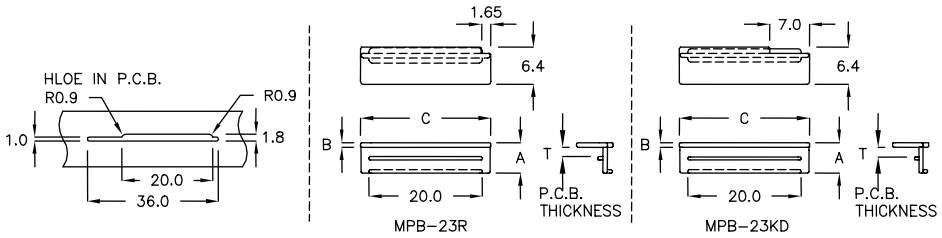


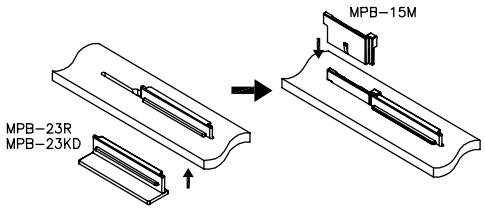


| PART NO | A | B | C | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MPB–15M | 7.4 | 2.8 | 15.0 | 1.6 | 1000 |
| MPB–23R | 5.3 | 0.8 | 23.0 | 1.6 | 500 |
| MPB–23KD | 5.3 | 0.8 | 23.0 | 1.6 | |

## 固定座 MOUNT 13-97-2

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

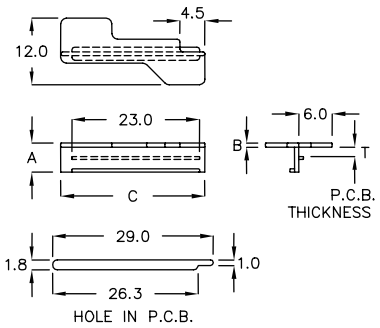


| PART NO | A | B | C | T P.C.B. THICKNESS | PACKAGE |
|---|---|---|---|---|---|
| MPB–26CK | 5.3 | 0.7 | 26.0 | 1.6 | 500 |



## 固定座 MOUNT 13-97-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MPB–35TK | 21.1 | 0.8 | 33.5 | 500 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-98-1

- MATERIAL: PC(UL)
- COLOR: BLACK
- ADHESIVE TAPE: JUSTAPE




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HCHA-18M | 4.8 | 0.9 | 1000 |

## 固定座 MOUNT 13-98-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

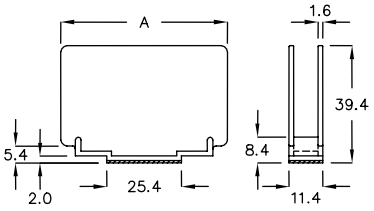


| PART NO | A | PACKAGE |
|---|---|---|
| MPBH-56K | 56.5 | 100 |

## 固定座 MOUNT 13-98-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

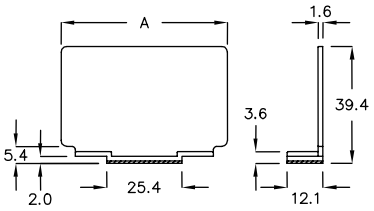


| PART NO | A | PACKAGE |
|---|---|---|
| MPBL-56A | 56.5 | 100 |

## 固定座 MOUNT 13-98-4

- MATERIAL: ABS+PC
- COLOR: BLACK
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ★ MPBL-54B | 54.5 | 2.0 | 9.8 | 9.5 | 100 |
| ★ MPBL-54E | 54.5 | 2.0 | 9.8 | 4.5 | |

## 固定座 MOUNT 13-98-5

- MATERIAL: ABS+PC
- COLOR: BLACK
- ADHESIVE TAPE: 3M

NEW




| PART NO | A | B | C | D | PACKAGE |
|---|---|---|---|---|---|
| ★ MPBL-54C | 54.5 | 10.5 | 9.8 | 18.0 | 100 |
| ★ MPBL-54D | 54.5 | 5.5 | 9.0 | 13.0 | |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT 13-99-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- ADHESIVE TAPE: 3M

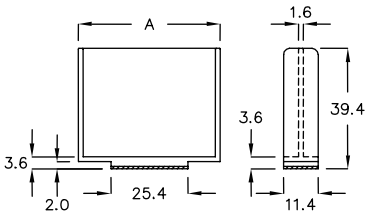


| PART NO | A | PACKAGE |
|---|---|---|
| MPBT-46C | 46.8 | 100 |

## 固定座 MOUNT 13-99-2

- MATERIAL: POM(UL)
- FLAME CLASS: 94HB
- COLOR: NATURAL

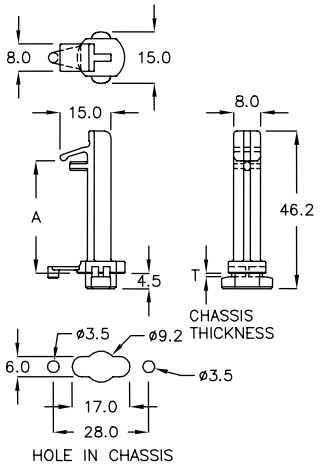


INSERT WITH 90 DEGREE ANGLE AND PRESS DOWN

| PART NO | A | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|
| MGS-46CH | 32.9 | 1.0 | 100 |

## PIN 固定座 PIN MOUNT 13-99-3

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DC-01 | 2.7 | 500 |

## PIN 固定座 PIN MOUNT 13-99-4

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DC-02 | 2.7 | 500 |

## PIN 固定座 PIN MOUNT 13-99-5

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

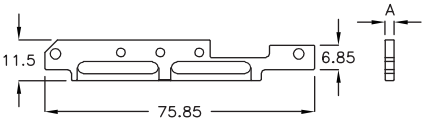


| PART NO | A | PACKAGE |
|---|---|---|
| DC-2Q | 2.6 | 200 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## PIN 固定座 PIN MOUNT — 13-100-1

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DC−2RM | 2.7 | 200 |

## PIN 固定座 PIN MOUNT — 13-100-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DC−3F | 2.6 | 200 |

## PIN 固定座 PIN MOUNT — 13-100-3

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

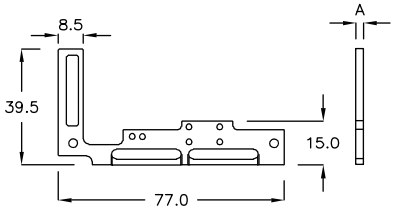


| PART NO | A | PACKAGE |
|---|---|---|
| DC−2H | 2.6 | 200 |

## PIN 固定座 PIN MOUNT — 13-100-4

- MATERIAL: PPS
- FLAME CLASS: 94V-0
- COLOR: BLACK

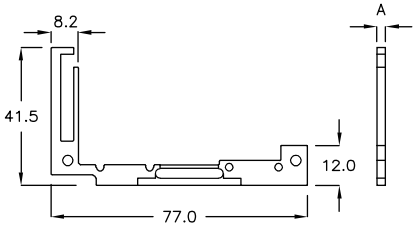


| PART NO | A | PACKAGE |
|---|---|---|
| DC−4LS | 2.7 | 200 |

## PIN 固定座 PIN MOUNT — 13-100-5

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

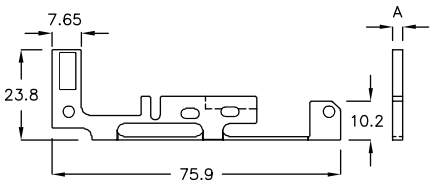


| PART NO | A | PACKAGE |
|---|---|---|
| DC−4QF | 2.6 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## PIN 固定座 PIN MOUNT — 13-101-1

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK

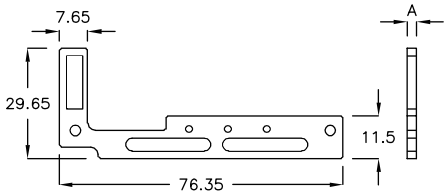


| PART NO | A | PACKAGE |
|---|---|---|
| DC-4RK | 2.6 | 200 |

## PIN 固定座 PIN MOUNT — 13-101-2

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

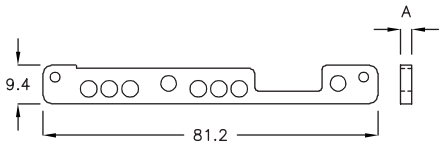


| PART NO | A | PACKAGE |
|---|---|---|
| DC-5MA | 2.7 | 200 |

## PIN 固定座 PIN MOUNT — 13-101-3

- MATERIAL: NYLON 66+30%FRP
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DC-6CN | 2.7 | 200 |

## PIN 固定座 PIN MOUNT — 13-101-4

- MATERIAL: NYLON 46(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

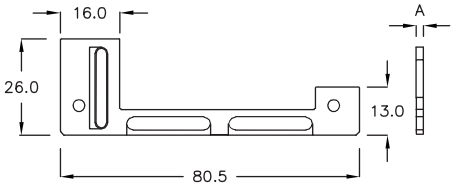


| PART NO | A | PACKAGE |
|---|---|---|
| DC-7XK | 2.6 | 200 |

## 灯管固定座 LAMP SADDLE — 13-101-5

- MATERIAL: PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL

NEW

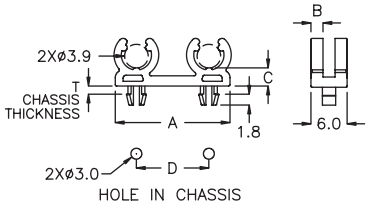


| | PART NO | A | B | C | D | T CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|---|---|---|
| ★ | FQA-19 | 19.0 | 2.0 | 3.0 | 12.0 | 1.25 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 灯帽 LAMP TUBE CAP 13-102-1

- MATERIAL: PC
- FLAME CLASS: 94V-0
- COLOR: WHITE




| FOR T9 LAMP | | | | |
|---|---|---|---|---|
| PART NO | A | B | C | PACKAGE |
| T9A-3C | 20.0 | 18.8 | 7.1 | 100 |

## 垫圈 GASKET 13-102-2

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK

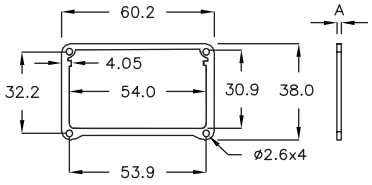


| PART NO | A | PACKAGE |
|---|---|---|
| LRA-60 | 1.7 | 500 |

## 垫片 SILICONE PAD 13-102-3

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK

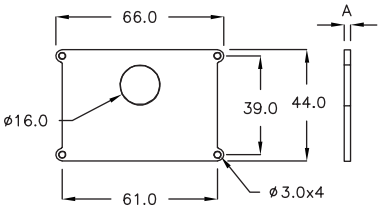


| PART NO | A | PACKAGE |
|---|---|---|
| GCA-66 | 0.8 | 200 |

## 胶条 SILICONE TIE 13-102-4

- MATERIAL: SILICONE
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| LPL-2D | ø1.0 | 500 |

## 固定座 MOUNT 13-102-5

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: NATURAL,BLACK

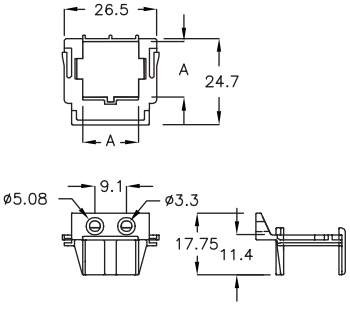


| PART NO | A | PACKAGE |
|---|---|---|
| MPW-24Q | 16.0 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT — 13-103-1

- MATERIAL: PPS(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK

NEW




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| ★ MDD-20A | 20.4 | 8.6 | 500 |

## 固定座 MOUNT — 13-103-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MDD-21H | 21.5 | 19.0 | 1.5 | 500 |

## 防尘盖 COVER — 13-103-3

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| DUA-103C | 84.4 | 103.2 | 97.0 | 20 |
| DUA-105K | 84.4 | 105.2 | 98.9 | |

## 固定座 MOUNT — 13-103-4

- MATERIAL: ABS+PC(UL)
- FLAMECLASS: 94V-0
- COLOR: BLACK

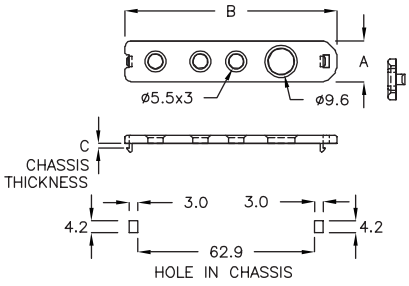


| PART NO | A | B | C CHASSIS THICKNESS | PACKAGE |
|---|---|---|---|---|
| MGW-75 | 14.6 | 75.0 | 1.6 | 100 |

## 固定带 STRAP MOUNT — 13-103-5

- MATERIAL: SILICONE
- FLAME CLASS: 94V-0
- COLOR: BLACK




| PART NO | A | PACKAGE |
|---|---|---|
| DHM-25A | 16.7 | 1000 |




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 固定座 MOUNT — 13-104-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL



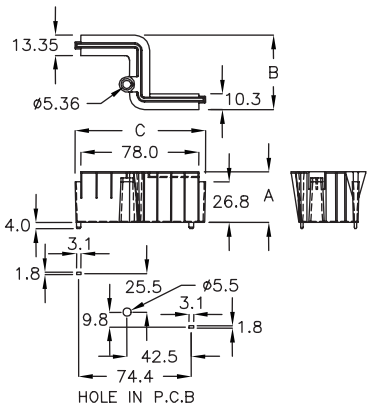


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| MPV-86GT | 33.5 | 49.15 | 86.25 | 50 |

## 电源保护盖 COVER — 13-104-2

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

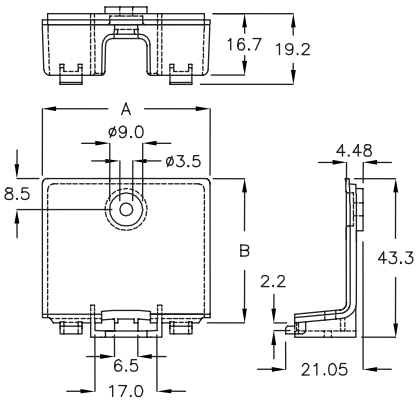


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MXF-44GN | 45.7 | 39.35 | 20 |

## 电源保护盖 COVER — 13-104-3

- MATERIAL: ABS+PC(UL)
- FLAME CLASS: 94V-0
- COLOR: BLACK

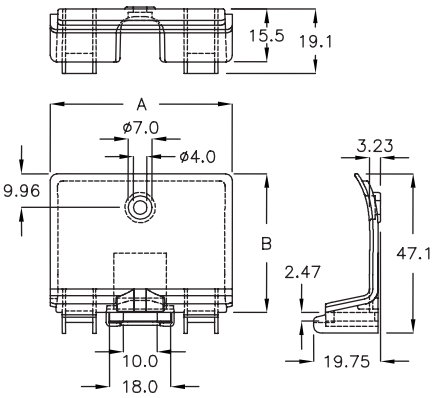


| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MXF-53TK | 53.7 | 41.0 | 20 |

## 光纤固定座 OPTICAL FIBER MOUNT — 13-104-4

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: NATURAL

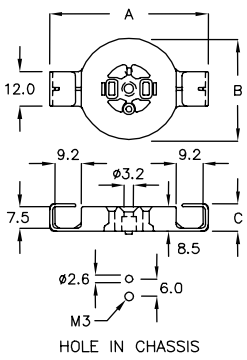


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| VVC-55F | 54.8 | ø35.0 | 9.5 | 200 |






提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## CPU 插座盖 CPU SOCKET COVER — 13-105-1

- MATERIAL: PC(UL)
- COLOR: BLACK

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| HFX-61CP | 61.0 | 44.0 | 100 |

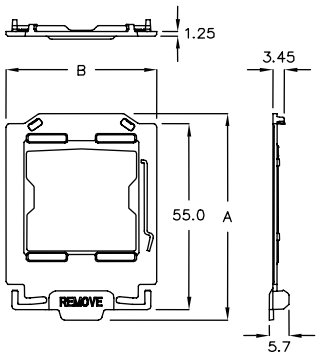

## 电池盒 BATTERY BRACKET — 13-105-2

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK
- USE M3 SCREW

| PART NO | A | B | PACKAGE |
|---|---|---|---|
| MVJ-65H | 73.5 | 55.8 | 50 |

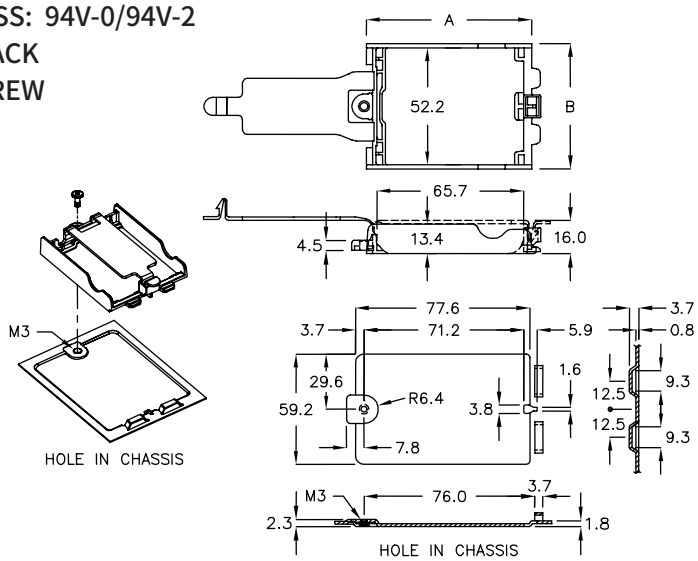




提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

# 14

## 五金
## WIRE CLIPS, TEST PIN

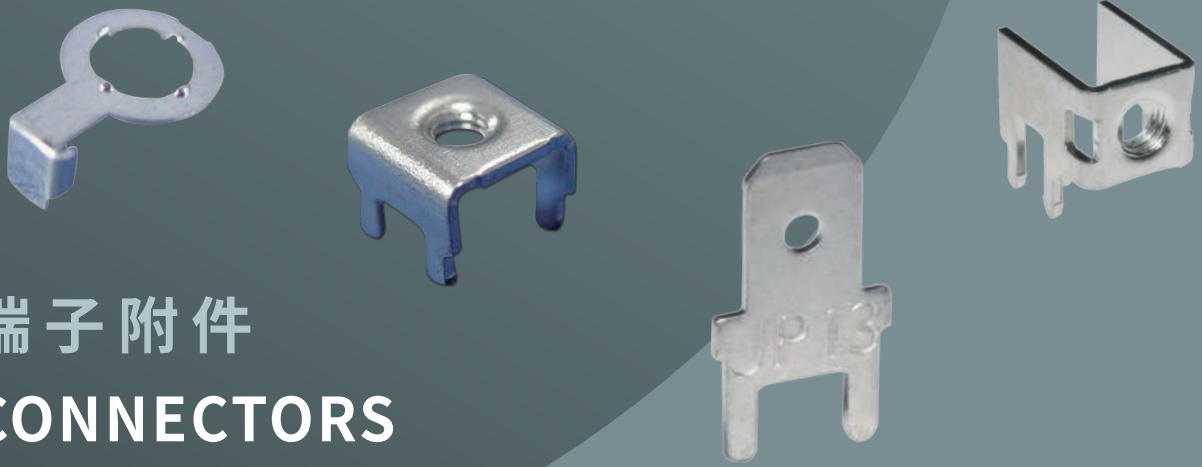

## 端子附件
## CONNECTORS

## 端子隔离座 CONNECTOR SADDLE 14-2-1

- MATERIAL: NYLON 66(UL)
- FLAME CLASS: 94V-0/94V-2
- COLOR: BLACK




| PART NO | A | B | PACKAGE |
|---|---|---|---|
| P-2 | 8.7 | 3.5 | 1000 |
| P-2C | 8.7 | 4.5 | |
| P-2KT | 8.7 | 6.0 | |

TO BE USED WITH P.G. PART JH-8



## 测试点 TEST PIN 14-2-2

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- COLOR: GOLD
- HOLE IN P.C.B.: Φ0.9~Φ1.0




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| JT-0 | 9.5 | 8.1 | ø2.8 | 1000 |
| JT-1S | 10.65 | 8.75 | ø3.8 | |



## 测试点 TEST PIN 14-2-3

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- PLASTIC MATERIAL: PBT
- COLOR: RED,YELLOW,GREEN BLUE,BLACK,WHITE
- HOLE IN P.C.B.: Φ0.9~Φ1.0




| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| JT-1P | 5.0~6.0 | ø3.1 | 2.2 | 1000 |

## 测试点 TEST PIN 14-2-4

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- PLASTIC MATERIAL: PBT
- COLOR: GOLD,YELLOW
- HOLE IN P.C.B.: Φ0.9~Φ1.0




| PART NO | A | C | D | PACKAGE |
|---|---|---|---|---|
| JT-1Q | 3.6~4.0 | ø3.1 | 3.3 | 1000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 测试点 TEST PIN 14-3-1

- MATERIAL: PHOSPHOR BRONZE WIRE
- PLATING: GOLD
- COLOR: GOLD
- HOLE IN P.C.B.: Φ0.9~Φ1.0




| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| JT−1N | 10.2 | 8.55 | ø3.3 | 1000 |

## 测试点 TEST PIN 14-3-2

- MATERIAL: BRASS
- PLATING: GOLD
- COLOR: GOLD




| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| JT−8 | 7.9 | 4.7 | ø2.2 | ø2.5 | ø1.0 | 1000 |

## 测试点 TEST PIN 14-3-3

- MATERIAL: BRASS
- PLATING: GOLD
- COLOR: GOLD




| PART NO | A | B | C | D | F | PACKAGE |
|---|---|---|---|---|---|---|
| JT−13 | 13.0 | 3.45 | ø2.2 | ø2.5 | ø0.9 | 1000 |

## 测试点 TEST PIN 14-3-4

- MATERIAL: BRASS
- PLATING: TIN




| PART NO | A | B | C | D | E | F HOLE IN P.C.B. | PACKAGE |
|---|---|---|---|---|---|---|---|
| JT−08D | 8.5 | 2.0 | ø1.0 | ø1.8 | 2.0 | ø1.05 | 1000 |
| JT−9A | 9.5 | 1.0 | ø1.0 | ø1.8 | 5.0 | ø1.05 | |
| JT−9DM | 9.0 | 2.5 | ø2.0 | ø2.8 | 2.0 | ø2.05 | |
| JT−10 | 10.0 | 2.0 | ø1.04 | ø1.8 | 4.5 | ø1.05 | |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 端子 CONNECTOR 14-4-1

- MATERIAL: BRASS
- PLATING: TIN

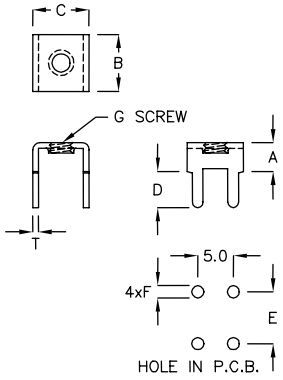


| PART NO | A | B | C | D | E | F | G SCREW | T | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| JH-4A | 4.0 | 7.9 | 7.9 | 2.5 | 7.2 | ø1.75 | M3 | 0.8 | 500 |
| JH-4 | 4.0 | 7.9 | 7.9 | 5.0 | 7.2 | ø1.75 | M3 | 0.8 | |
| JH-4L | 8.5 | 9.2 | 11.2 | 4.0 | 10.1 | ø1.8 | M4 | 1.0 | 200 |
| JH-04K | 8.5 | 9.0 | 11.1 | 4.0 | 10.15 | ø1.8 | M5 | 1.0 | |
| JH-5 | 5.0 | 9.2 | 11.2 | 4.0 | 10.15 | ø1.85 | M4 | 1.0 | 500 |



## 端子 CONNECTOR 14-4-2

- MATERIAL: BRASS
- PLATING: TIN
- C: SCREW

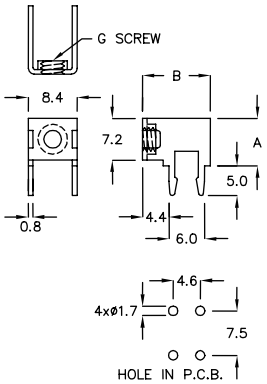


| PART NO | A | B | G SCREW | PACKAGE |
|---|---|---|---|---|
| JH-8 | 8.0 | 11.4 | M4 | 500 |
| JH-8M3 | 8.0 | 11.4 | M3 | |

TO BE USED WITH P.G. PART P-2



## 端子 CONNECTOR 14-4-3

- MATERIAL: BRASS
- PLATING: TIN




| PART NO | A | F | T | PACKAGE |
|---|---|---|---|---|
| JP-13T | 13.1 | ø1.4 | 0.8 | 2000 |



## 端子 CONNECTOR 14-4-4

- MATERIAL: BRASS
- PLATING: TIN




| PART NO | A | T | PACKAGE |
|---|---|---|---|
| JP-14A | 14.1 | 0.5 | 2000 |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.



## 端子 CONNECTOR 14-5-1

- MATERIAL: BRASS
- PLATING: TIN




| PART NO | A | B | D | E | F | G | H | T | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| JP−14B | 13.7 | 10.2 | ø1.7 | 5.0 | ø1.48 | 8.2 | 6.3 | 0.8 | 2000 |
| JP−14C | 14.1 | 10.7 | ø1.8 | 5.0 | ø1.43 | 8.6 | 6.3 | 0.8 | |
| JP−16B | 16.2 | 12.2 | ø1.6 | 5.0 | ø1.38 | 8.8 | 6.3 | 0.8 | |



## 端子 CONNECTOR 14-5-2

- MATERIAL: BRASS
- PLATING: TIN




| PART NO | A | B | D | E | F | G | H | T | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| JP−14P | 14.1 | 10.6 | ø1.8 | 5.0 | ø1.5 | 8.5 | 6.4 | 0.8 | 1000 |



## 端子 CONNECTOR 14-5-3

- MATERIAL: BRASS
- PLATING: TIN




| PART NO | A | B | D | F | G | H | PACKAGE |
|---|---|---|---|---|---|---|---|
| JP−14 | 14.0 | 10.2 | ø2.0 | ø1.35~ø1.4 | 8.0 | 6.4 | 2000 |
| JP−16A | 16.3 | 12.3 | ø1.6 | ø1.7 | 9.0 | 6.5 | |



## 端子 CONNECTOR 14-5-4

- MATERIAL: BRASS
- PLATING: TIN

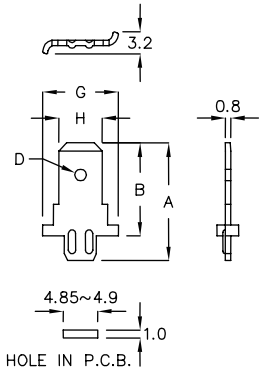


| PART NO | A | B | D | G | H | PACKAGE |
|---|---|---|---|---|---|---|
| JP−16D | 16.35 | 12.75 | ø1.7 | 11.1 | 6.4 | 2000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 电线固定片 LOCKING CABLE CLIP — 14-6-1

- MATERIAL: SPTE+HEAT SHRINKING TUBE
  or SECC+ HEAT SHRINKING TUBE
- COLOR: BLACK

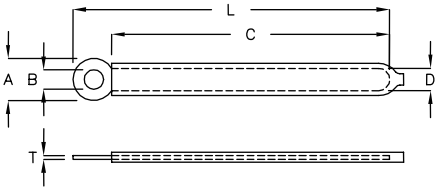


| PART NO | A | B | C | D | L | T | PACKAGE |
|---|---|---|---|---|---|---|---|
| WC−1A | 7.6 | 3.1 | 27.5 | 1.6 | 35.6 | 0.3 | 1000 |
| WC−1AM | 5.6 | 2.8 | 30.1 | 1.7 | 35.6 | 0.6 | |
| WC−1AL | 7.6 | 3.1 | 27.5 | 1.6 | 35.6 | 0.6 | |
| WC−1 | 8.0 | 3.4 | 33.5 | 4.0 | 41.0 | 0.3 | |
| WC−2 | 8.0 | 3.4 | 48.2 | 4.0 | 55.8 | 0.3 | |
| WC−2A | 8.0 | 3.4 | 52.5 | 3.0 | 60.0 | 0.3 | |
| WC−3 | 8.0 | 4.1 | 48.2 | 4.0 | 56.0 | 0.3 | |
| WC−3L | 8.0 | 4.1 | 78.5 | 4.0 | 86.0 | 0.5 | |
| WC−6 | 8.0 | 3.4 | 52.3 | 3.0 | 60.0 | 0.5 | |

## 电线固定片 LOCKING CABLE CLAMP — 14-6-2

- MATERIAL: SPTE
- ADHESIVE TAPE: 3M

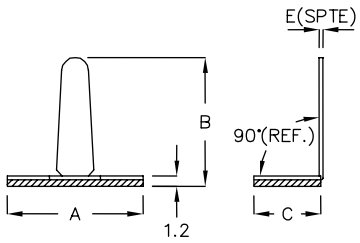


| PART NO | A | B | C | E | PACKAGE |
|---|---|---|---|---|---|
| JFW−4L | 15.1 | 14.3 | 7.7 | 0.4 | 500 |

## 电线固定片 LOCKING CABLE CLAMP — 14-6-3

- MATERIAL: SPTE+SPONGE
- ADHESIVE TAPE: 3M




| PART NO | A | PACKAGE |
|---|---|---|
| JFW−7 | 18.5 | 500 |

## 接地线夹 GROUNDING CABLE CLAMP — 14-6-4

- MATERIAL: SPTE




| PART NO | A | B | C | E | F | G | H | CABLE DIA | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| FN−010 | 8.6 | 20.0 | 11.3 | ø4.2 | 0.6 | ø4.2 | 5.0 | ø5.8 | 500 |
| FN−011 | 8.5 | 18.7 | 11.0 | ø4.2 | 0.3 | ø4.2 | 5.0 | ø4.8 | |





提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 接地线夹 GROUNDING CABLE CLAMP 14-7-1

- MATERIAL: SPCC (FN-005,FN-007)
- MATERIAL: STEEL (FN-017)
- PLATING: NICKEL

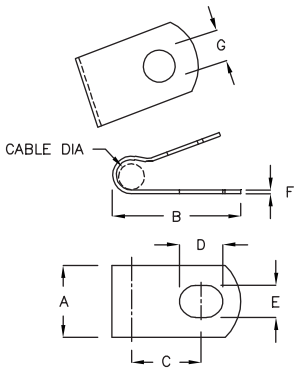


| PART NO | A | B | C | D | E | F | G | CABLE DIA | PACKAGE |
|---|---|---|---|---|---|---|---|---|---|
| FN-005 | 10.1 | 18.4 | 10.25 | 6.0 | ø4.5 | 0.5 | ø4.4 | ø3.0~ø2.8 | 500 |
| FN-007 | 9.8 | 18.5 | 10.0 | 6.0 | ø4.5 | 0.5 | ø4.4 | ø3.7~ø3.9 | |



## 接地端子 GROUNDING CONNECTOR 14-7-2

- MATERIAL: PHOSPHOR BRONZE
- PLATING: TIN

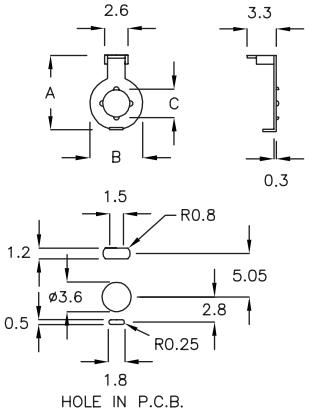


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| JG-6L | 8.5 | ø5.9 | ø3.1 | 2000 |
| JG-06A | 8.5 | ø5.9 | ø3.6 | |

## 电晶体固定片 TRANSISTOR CLIP 14-7-3

- MATERIAL: SUS301

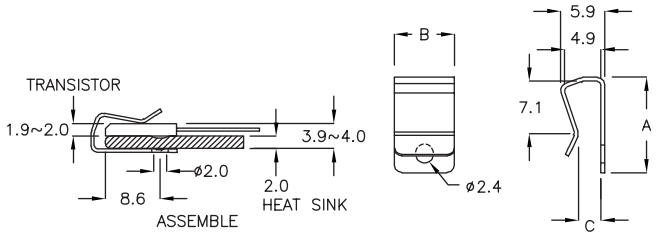


| PART NO | A | B | C | PACKAGE |
|---|---|---|---|---|
| IRK-12H | 12.7 | 8.0 | 3.0 | 1000 |



提醒：本公司产品之材料、尺寸、规格、公差及配合件要求，以产品承认书为主。
All the material, dimension, spec., tolerance and assembled method are mainly based on DATA SHEET issued by PINGOOD.

## 品基电子(东莞)有限公司

**广东省东莞市塘厦镇果岭路1号**

No.1, GUO LING RD., TANG XIA,
DONGGUAN, GUANGDONG, CHINA
TEL: 86-769-87910231 FAX: 86-769-87910232
E-MAIL: pj@pingood.com.cn

## 苏州品基电子科技有限公司

**江苏省苏州市吴中区横泾街道天鹅荡路2986号**

SUZHOU FACTORY:
No.2986, TIAN EDANG RD., HENGJING TOWN,
WUZHONG, SUZHOU JIANGSU PROVINCE, CHINA
TEL: 86-512-65629123 FAX: 86-512-65611221
E-MAIL: spj@pingood.com.cn

## 品固企业股份有限公司

**115027 台北市南港区八德路四段768巷1弄8号**

No.8, ALLEY 1, LANE 768, SEC 4, PATEH RD.,
NANGAN DIST., TAIPEI, 115027 TAIWAN
TEL: 886-2-27885767 FAX: 886-2-27885768
E-MAIL: sales@pingood.com.tw
http://www.pingood.com.tw

## 中坜工厂

**320023 桃园市中坜区东园路21号**

ZHONGLI FACTORY:
No.21, DONGYUAN RD., ZHONGLI DIST.,
TAOYUAN CITY, 320023 TAIWAN

## SINGAPORE BRANCH

UNITRONIC COMPONENTS PTE.LTD
TEL: 65-62847555 FAX: 65-62842877

## PINGOOD (THAILAND) CO., LTD NEW

147, Moo.1, Chonburi-Ban Bueng Road., Map Phai,
Ban Buen District, Chonburi 20170

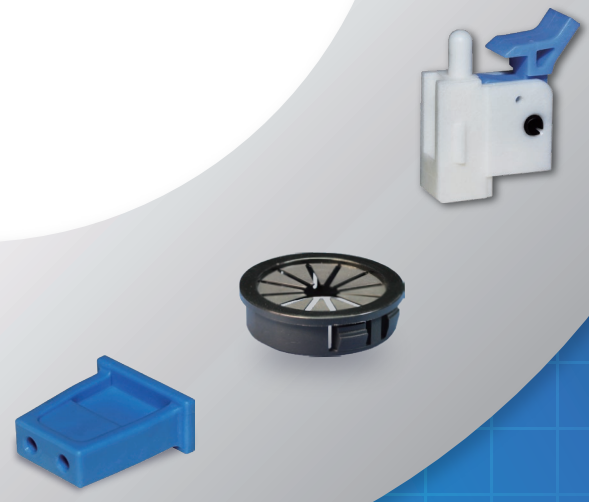





**www.pingood.com.tw**