


◎ HOLE IN P.C.B.: $\phi 4.0^{+0.05}_{-0}$ mm
◎ P.C.B. THICKNESS: $1.6^{+0}_{-0.05}$ mm

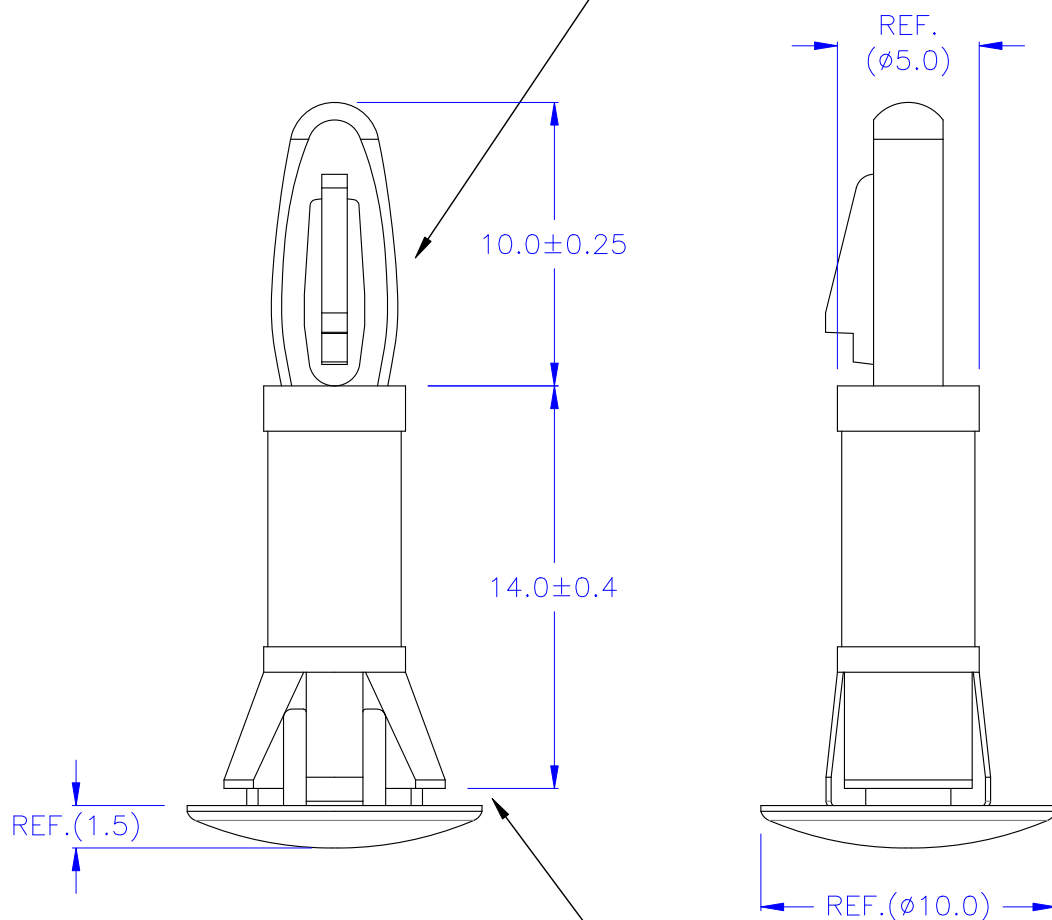

◎ HOLE IN P.C.B.: $\phi 6.0^{+0.05}_{-0}$ mm
◎ P.C.B. THICKNESS: 0.8~1.2 mm

◎ Halogen Free 低鹵
◎ RoHS Compliant

DRAW NO. PGAS045237

GJS

PLASTIC TOLERANCE:

$L \leq 10 \pm 0.2$
 $10 < L \leq 30 \pm 0.3$
 $30 < L \leq 50 \pm 0.5$
 $50 < L \leq 100 \pm 0.7$
 $100 < L \leq 250 \pm 1.2$
ABOVE 250 ± 1.5

網頁圖示供參考,最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: PA66(N66) V0 or EQUIVALENT

COLOR: NATURAL



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
東莞市鉗隆商貿有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:


P.C. 板間隔柱
SPACER SUPPORT

PART NO:

SCD-14K-NOW

A
SIZE

VERSION



UNIT
mm

SCALE