


◎ HOLE IN P.C.B.: $\phi 4.0^{+0.05}_0$ mm

◎ P.C.B. THICKNESS: 1.2~1.6 mm

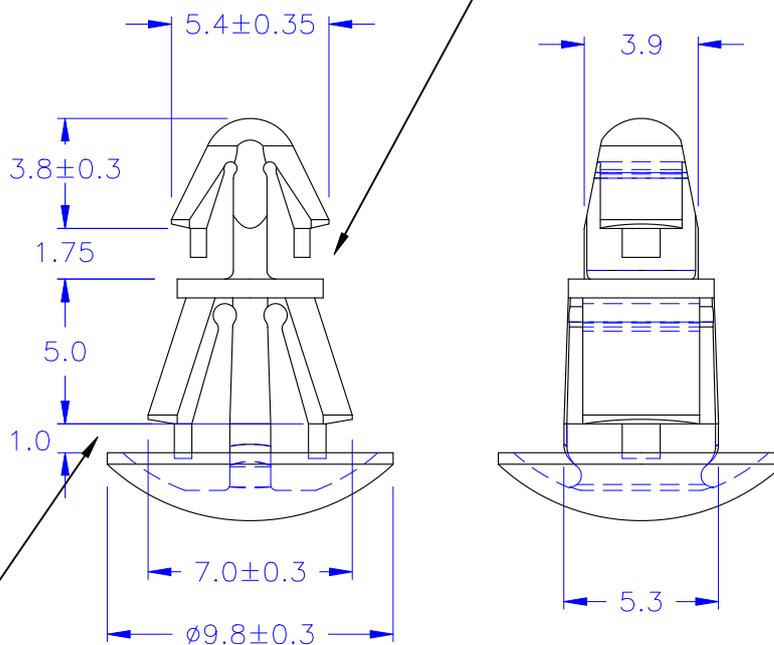

◎ HOLE IN P.C.B.: $\phi 5.5^{+0.05}_0$ mm

◎ P.C.B. THICKNESS: 1.4~2.0 mm

◎ Halogen Free 低鹵

◎ ROHS 2.0

◎ ROHS 六項 compliant

DRAW NO. PGAS029710

GJS

PLASTIC TOLERANCE:

$L \leq 10$ ± 0.2

$10 < L \leq 30$ ± 0.3

$30 < L \leq 50$ ± 0.5

$50 < L \leq 100$ ± 0.7

$100 < L \leq 250$ ± 1.2

ABOVE 250 ± 1.5

網頁圖示供參考, 最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: N66 V2 or EQUIVALENT

COLOR: NATURAL



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
東莞市鑽隆商貿有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:

P.C. 板間隔柱
SPACER SUPPORT

A

SIZE

VERSION

1

PART NO:

SCT-05-N2W

SHEET 1 OF 1

UNIT	SCALE
mm	

表單號碼QF135