


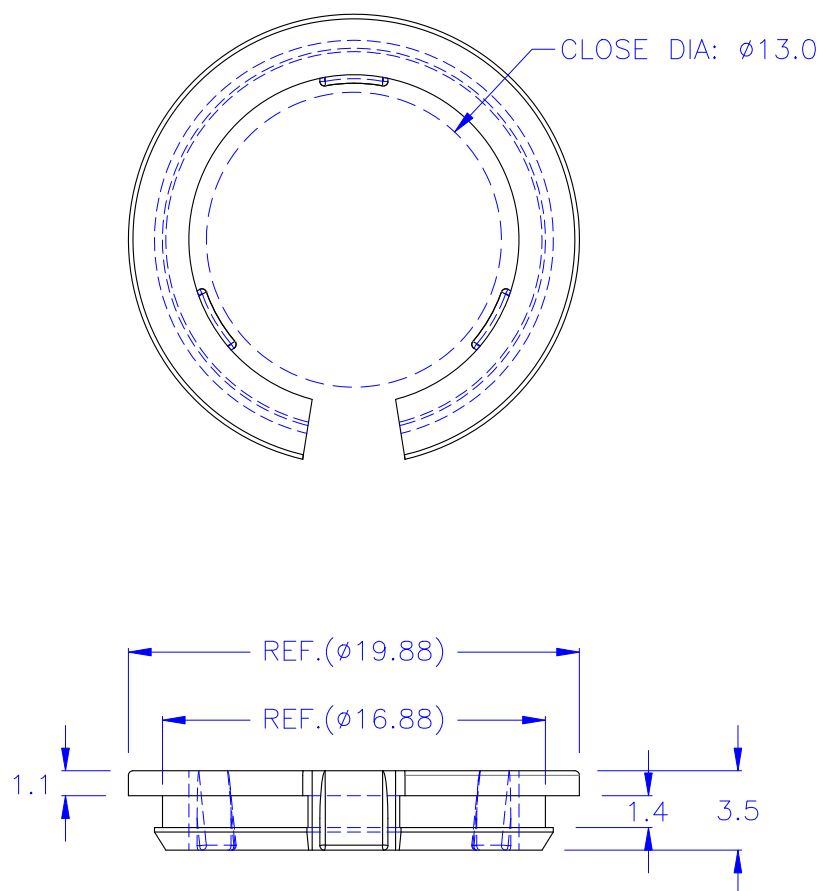

◎ HOLE IN CHASSIS: $\phi 16.0^{+0.05}_{-0}$ mm

◎ CHASSIS THICKNESS: $1.0^{+0}_{-0.05}$ mm

◎Halogen Free 低鹵

◎ROHS 2.0

◎ROHS 六項 compliant

DRAW NO. PGAS042121

GJS

PLASTIC TOLERANCE:

$L \leq 10 \pm 0.2$

$10 < L \leq 30 \pm 0.3$

$30 < L \leq 50 \pm 0.5$

$50 < L \leq 100 \pm 0.7$

$100 < L \leq 250 \pm 1.2$

ABOVE 250 ± 1.5

網頁圖示供參考,最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: N66 V0 or EQUIVALENT

COLOR: BLACK



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
東莞市品隆商貿有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:


開口式護線環
OPEN CLOSED BUSHING

PART NO:

SYB-1316C-NOB

A
SIZE

VERSION



UNIT
mm

SCALE
1:1