



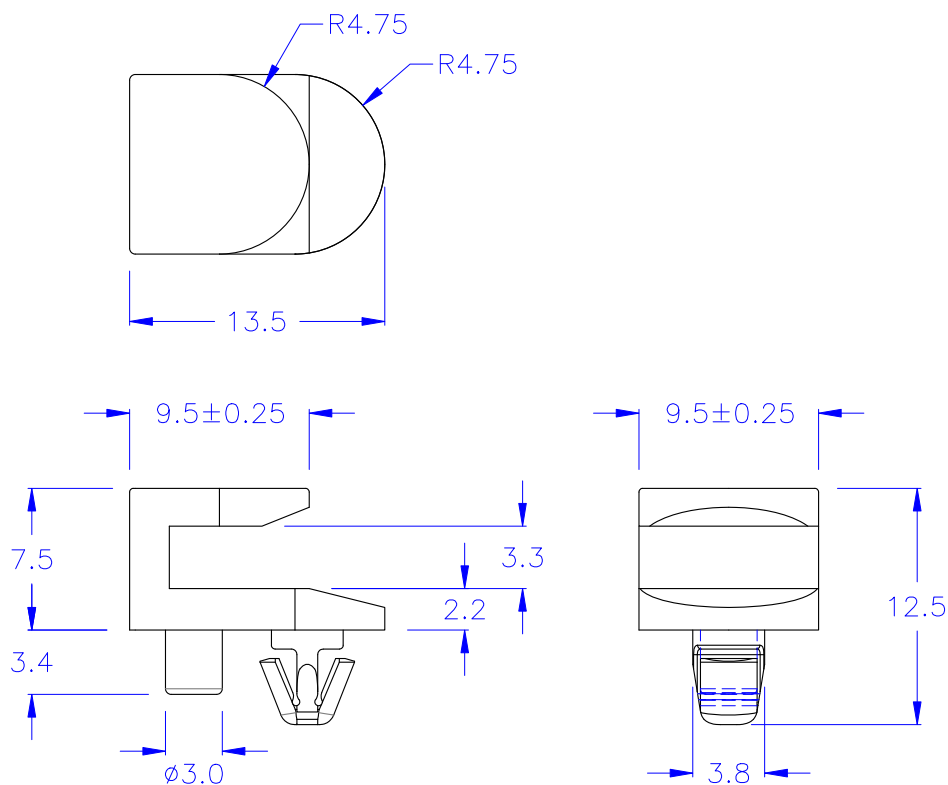

◎ HOLE IN CHASSIS:

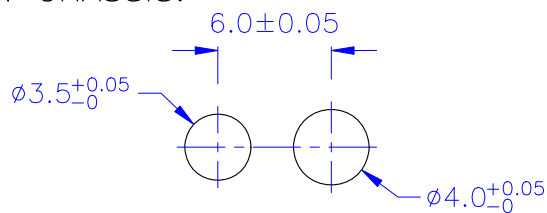

◎ MAXIMUM THICKNESS:  $1.3 \pm 0.05$  mm

◎Halogen Free 低鹵  
◎ROHS 2.0  
◎ROHS 六項 compliant

DRAW NO. PGAS042484

GJS

PLASTIC TOLERANCE:

$L \leq 10 \pm 0.2$

$10 < L \leq 30 \pm 0.3$

$30 < L \leq 50 \pm 0.5$

$50 < L \leq 100 \pm 0.7$

$100 < L \leq 250 \pm 1.2$

ABOVE 250  $\pm 1.5$

網頁圖示供參考,最終以品固公司正式圖面為主

The plastic tolerance is just for your reference; all the measurements and dimensions are according to the "DATA SHEET" issued by PINGOOD.

MATERIAL: N66 V2 or EQUIVALENT

COLOR: NATURAL



品固企業股份有限公司  
品基電子(東莞)有限公司  
蘇州品基電子科技有限公司  
東莞市品基商貿有限公司  
鑽隆有限公司  
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:


P.C. 板間隔柱  
SPACER SUPPORT

PART NO:

UB-02C-N2W

A  
SIZE

VERSION



UNIT  
mm

SCALE